
AutoMate Help



You Are Here: Home > Task Builder > Actions & Activities > Registry > Registry

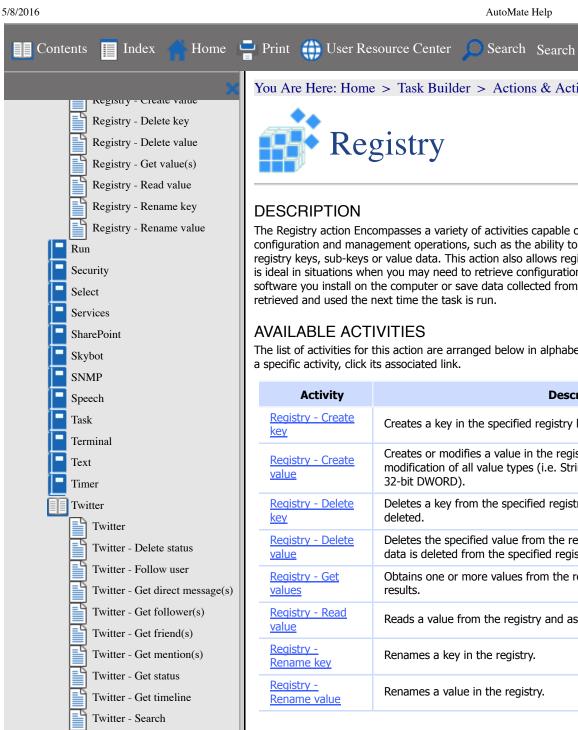

The Registry action Encompasses a variety of activities capable of automating many common registry configuration and management operations, such as the ability to create, manipulate, rename and delete registry keys, sub-keys or value data. This action also allows registry values to be read and stored, which is ideal in situations when you may need to retrieve configuration data, for instance, to keep track of the software you install on the computer or save data collected from an external application so that it can be retrieved and used the next time the task is run.

AVAILABLE ACTIVITIES

The list of activities for this action are arranged below in alphabetical order. For more information about a specific activity, click its associated link.

Activity	Description
Registry - Create key	Creates a key in the specified registry location.
Registry - Create value	Creates or modifies a value in the registry. This activity supports creation or modification of all value types (i.e. String, Multi-String, Expandable String, 32-bit DWORD).
Registry - Delete key	Deletes a key from the specified registry location. Any sub-keys will also be deleted.
Registry - Delete value	Deletes the specified value from the registry. Both value name and value data is deleted from the specified registry key.
Registry - Get values	Obtains one or more values from the registry and populates a dataset with results.
Registry - Read value	Reads a value from the registry and assigns the value to a variable.
Registry - Rename key	Renames a key in the registry.
Registry - Rename value	Renames a value in the registry.

Twitter - Send direct message Twitter - Stop following user