

# COM S 352 Homework 2


Alec Meyer

February 10, 2021

## Question 1

First, the kernel saves the context of the old process in its PCB and loads the saved data of the new process.

## Question 2

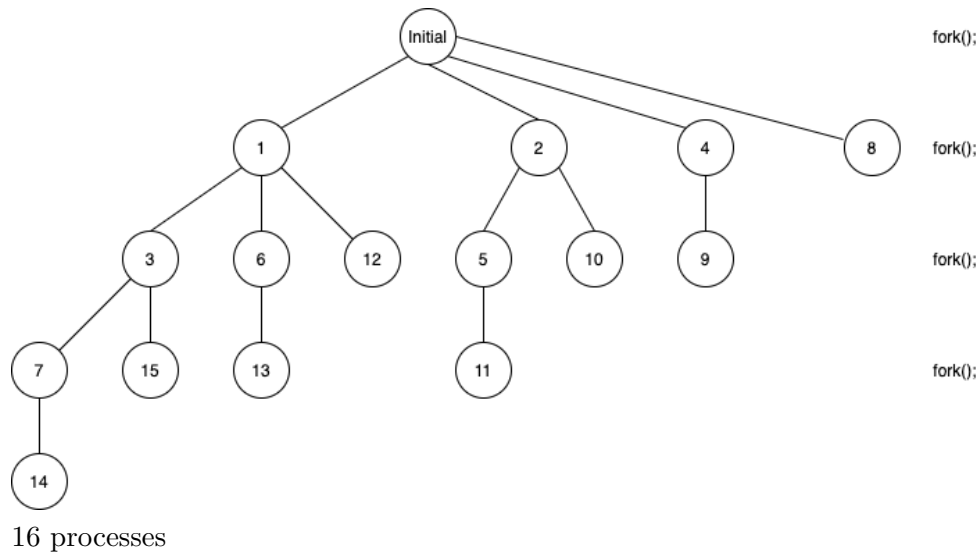

## Question 3

## Question 4

parent C: pid = 32259

parent D: pid1 = 32257

child A: pid = 0  
child B: pid1 = 32259

**Question 5**

**Question 6**

**Question 7**