DEVOPS

LEKHA P
25/02/2026

Created EC2 instance

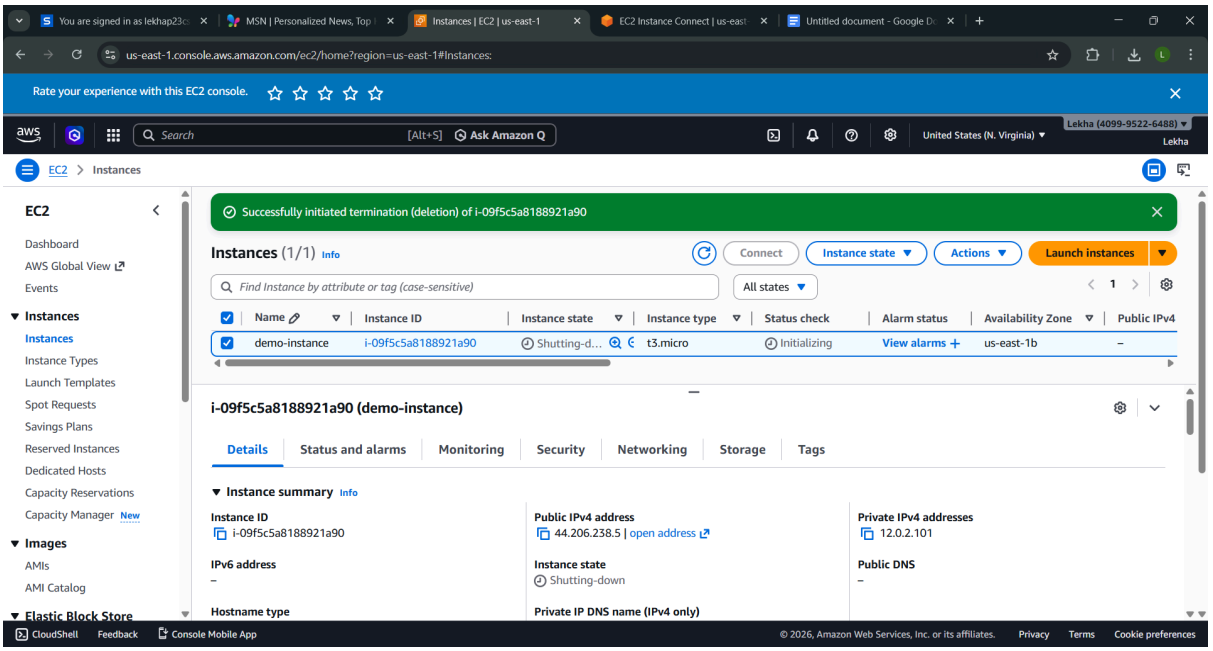

Created VPC Server

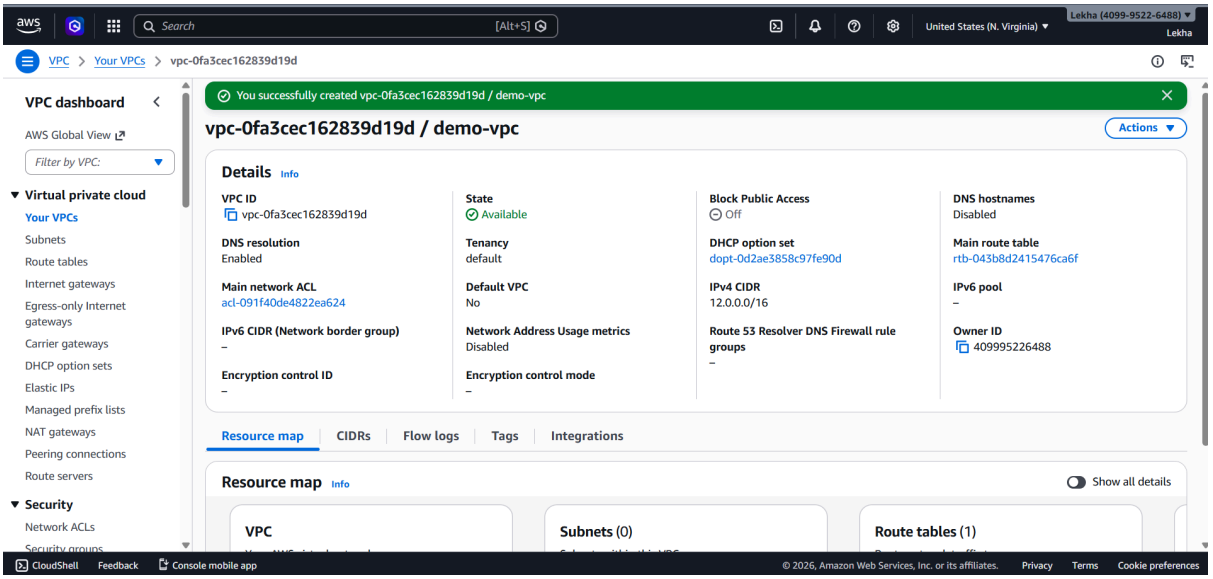

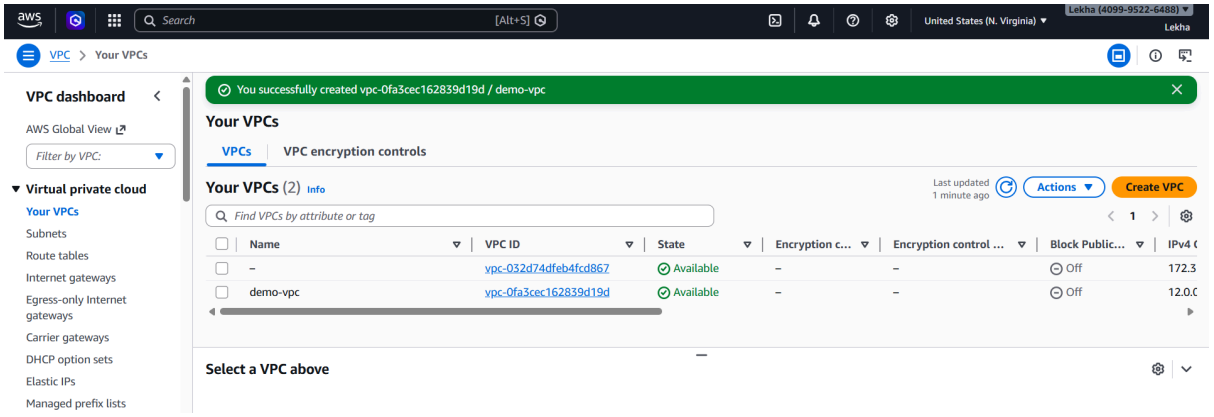

Creating Subnet

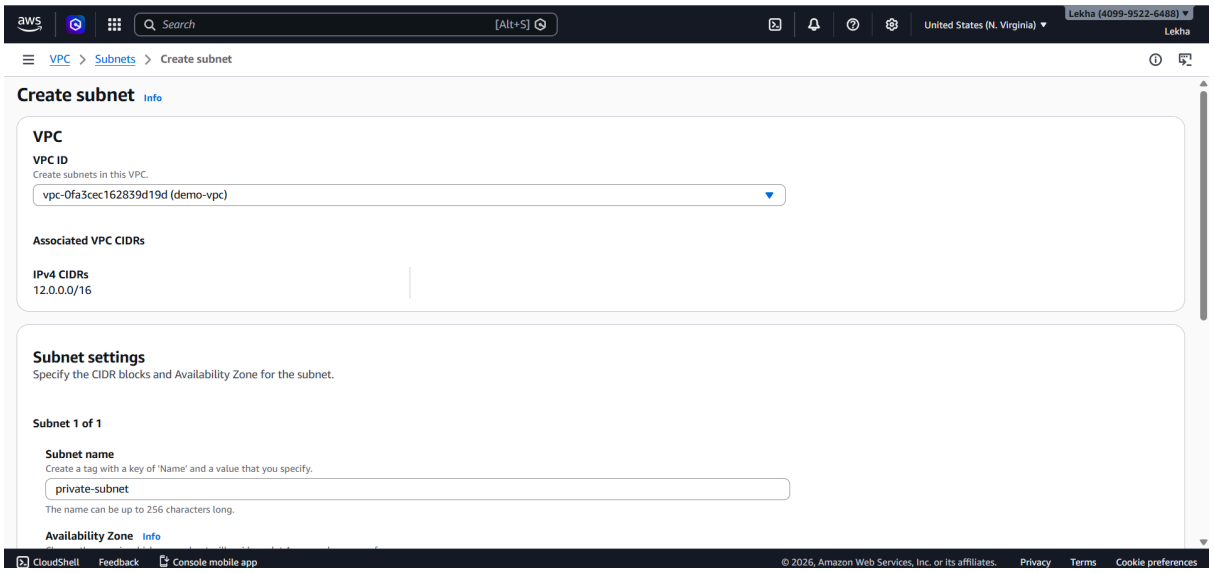

Private subnet (subnet 1)

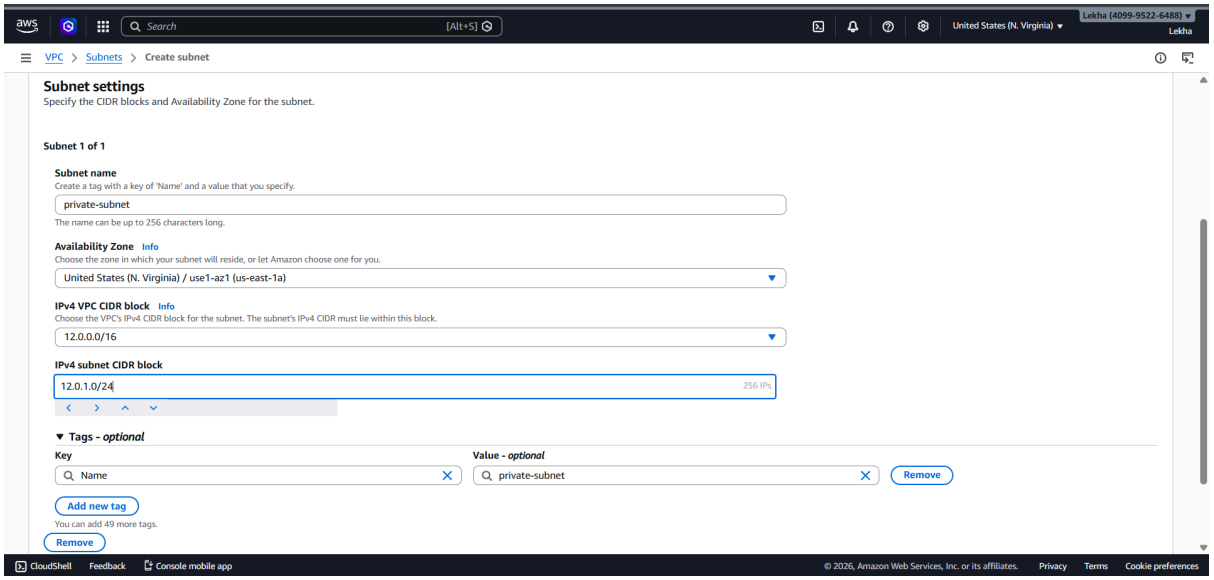

Public subnet (subnet 2)

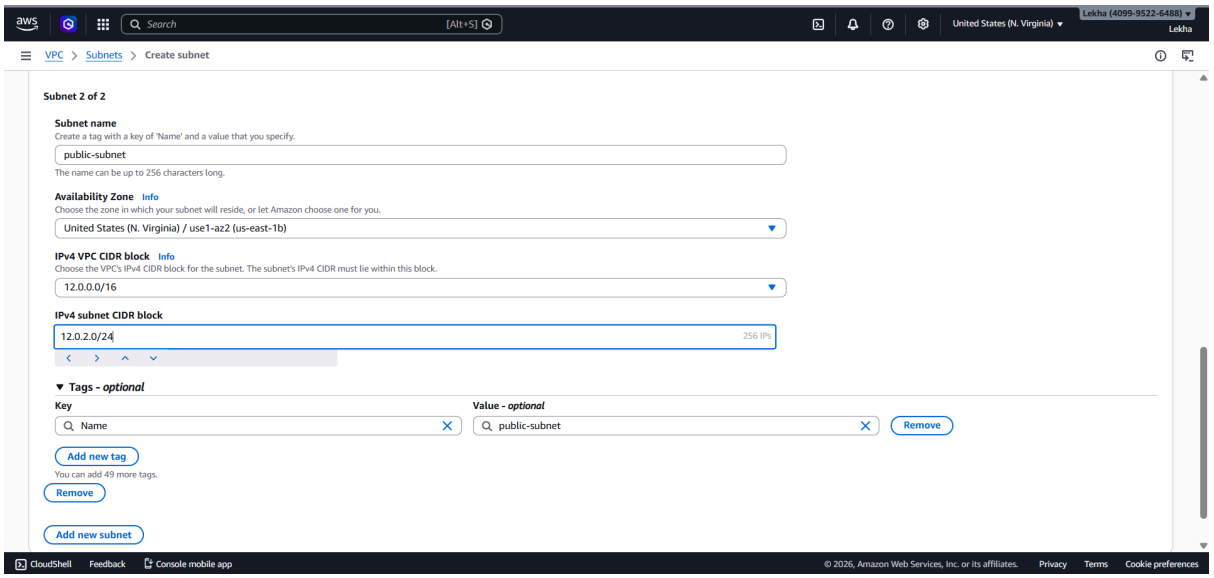

Created Subnet

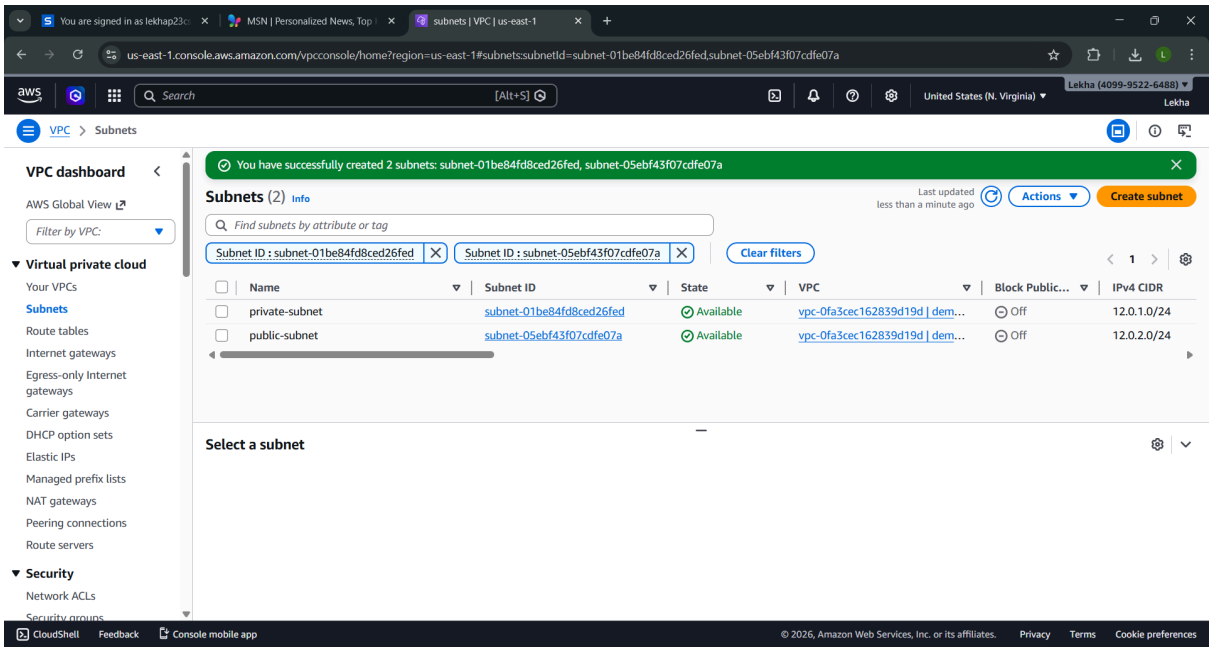

Internet Gateway Created

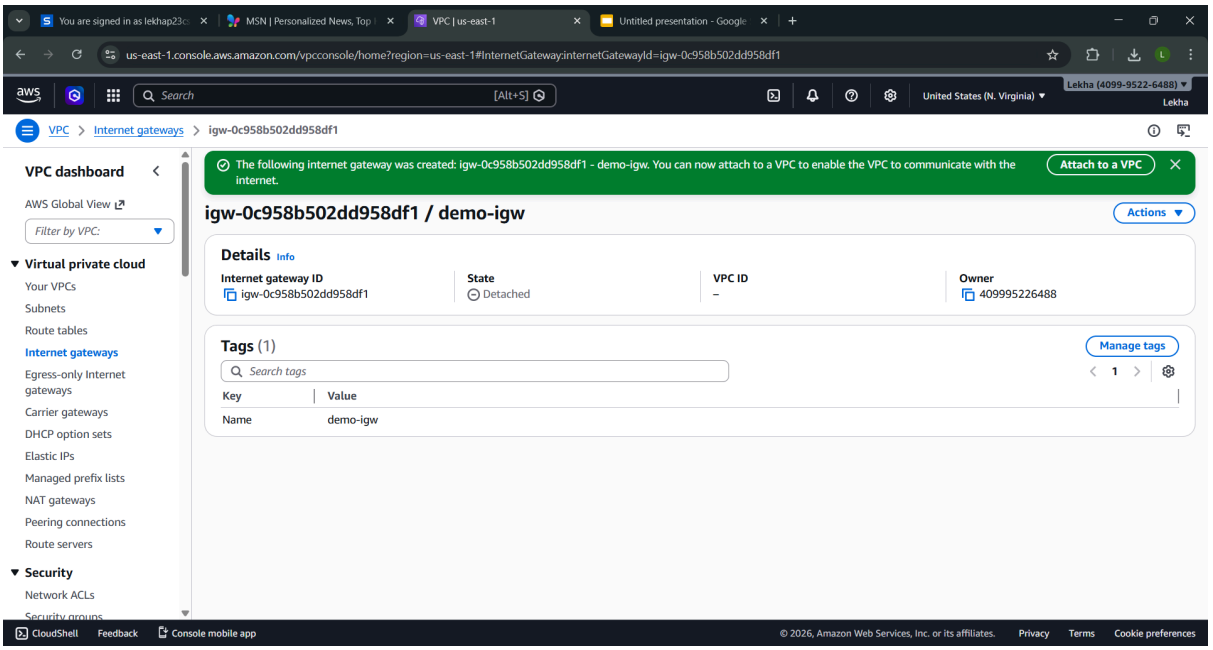

Route Table Created

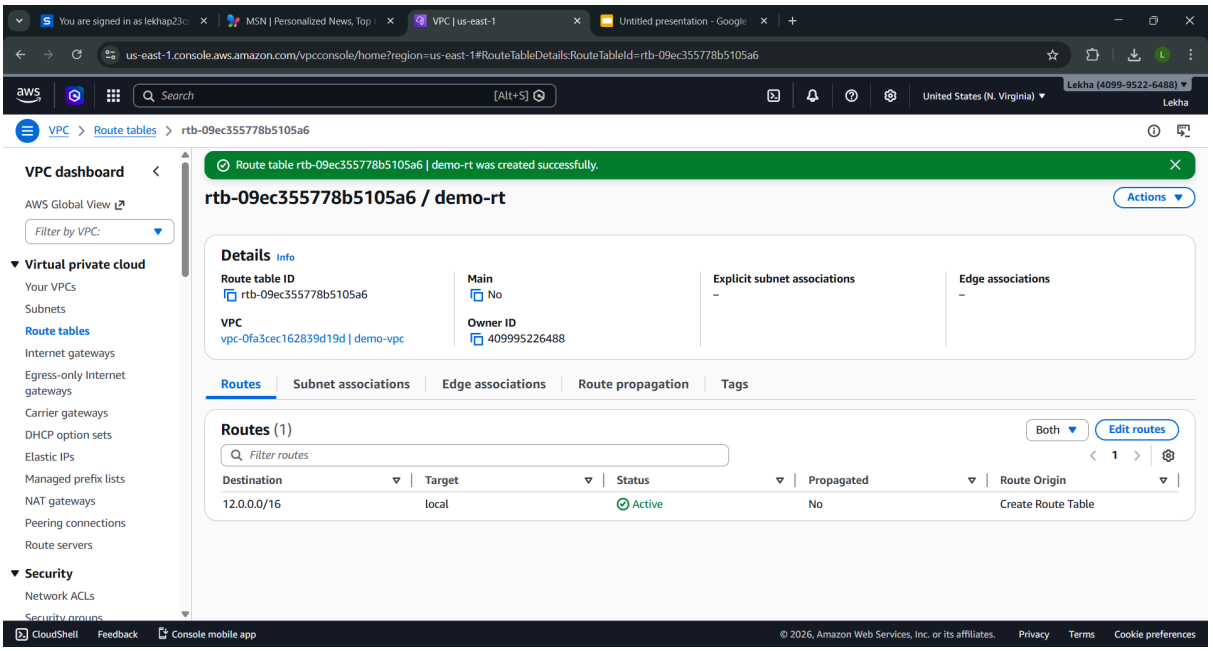

Subnet Association

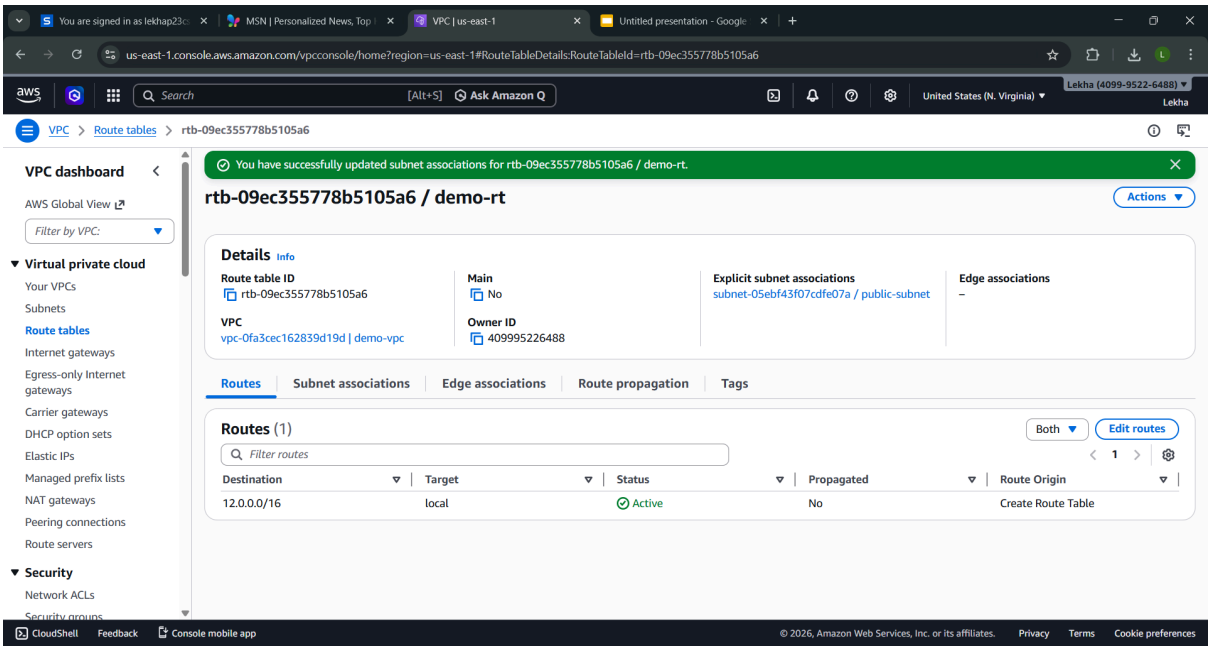

Internet Gateway is connected to VPC

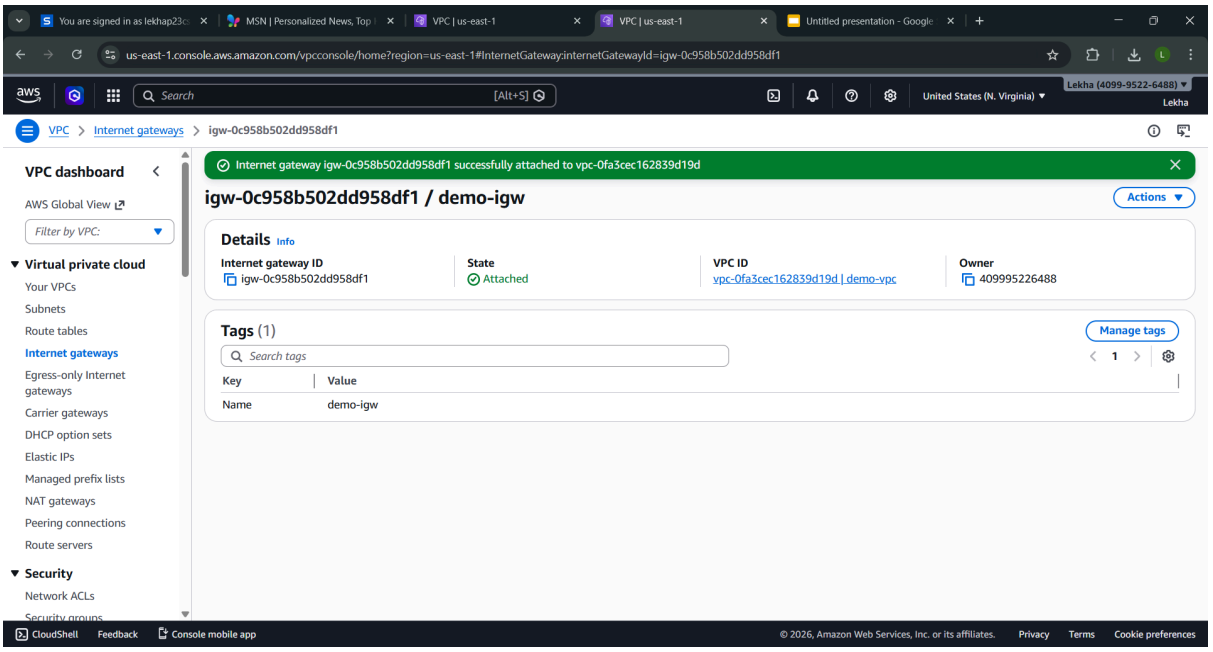

Internet Gateway is connected to public subnet

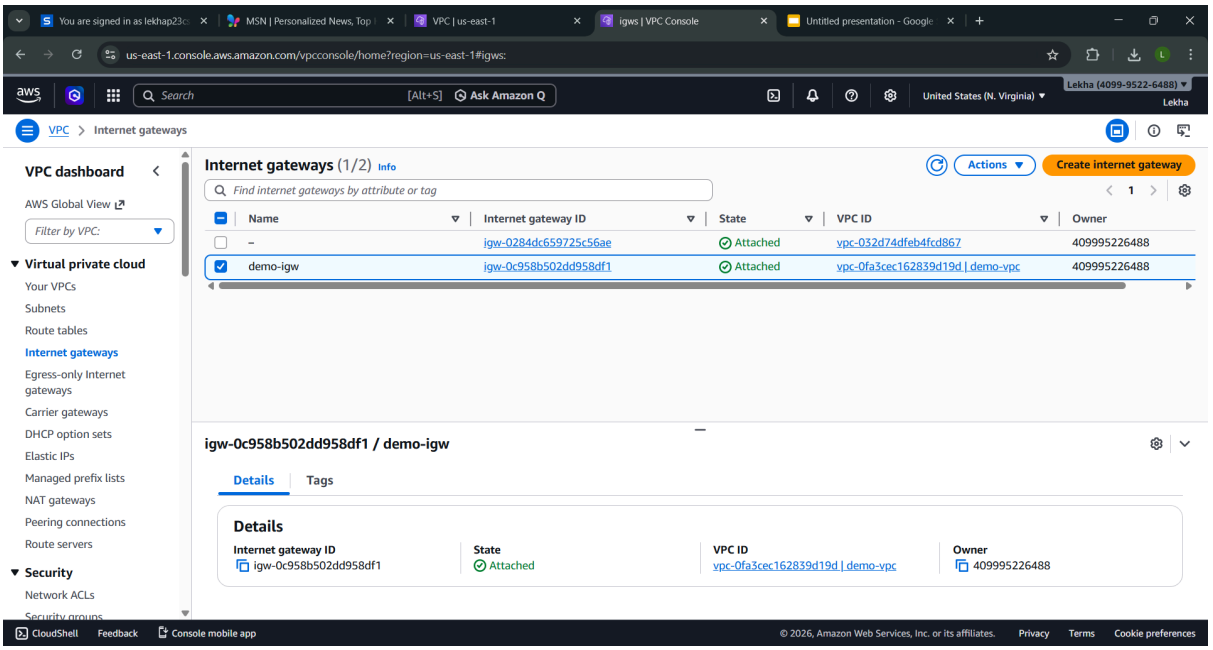

Route table is connected with internet gateway

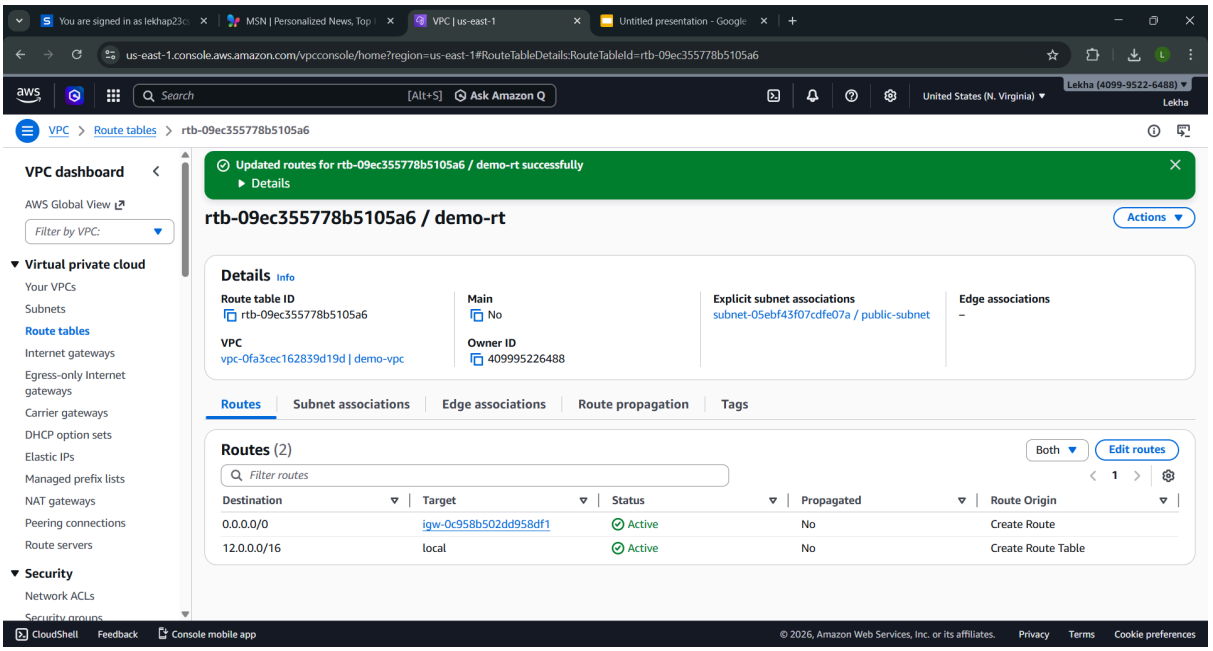

Creating EC2 instance with connection to VPC

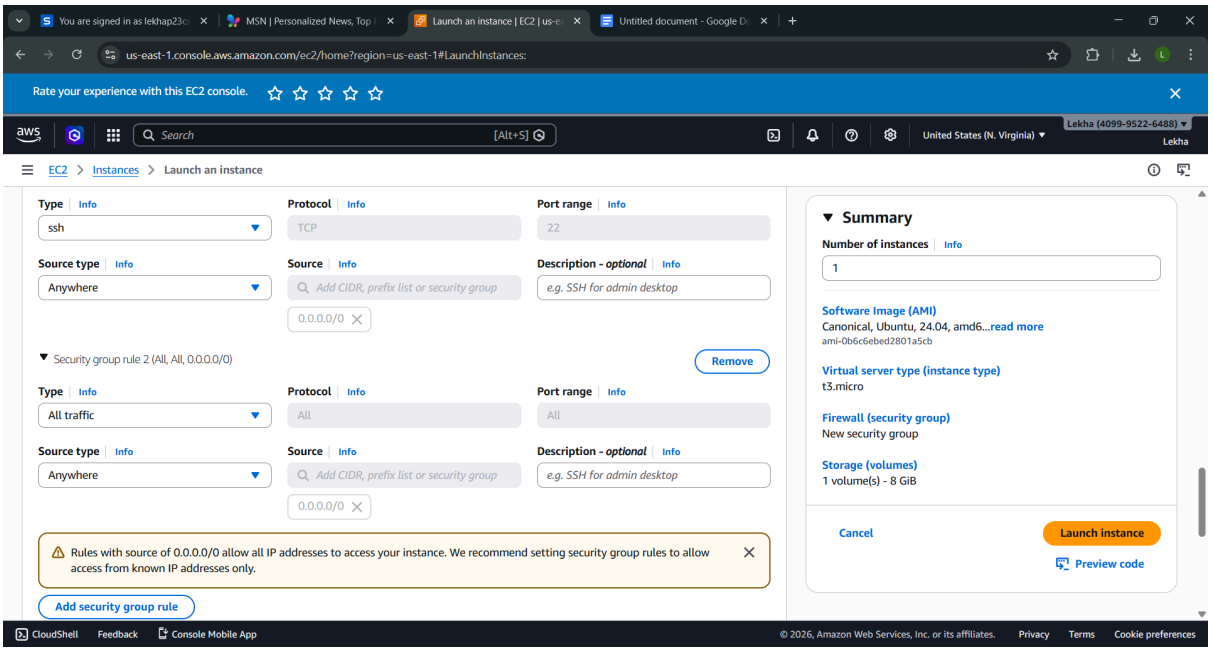

EC2 instance is created

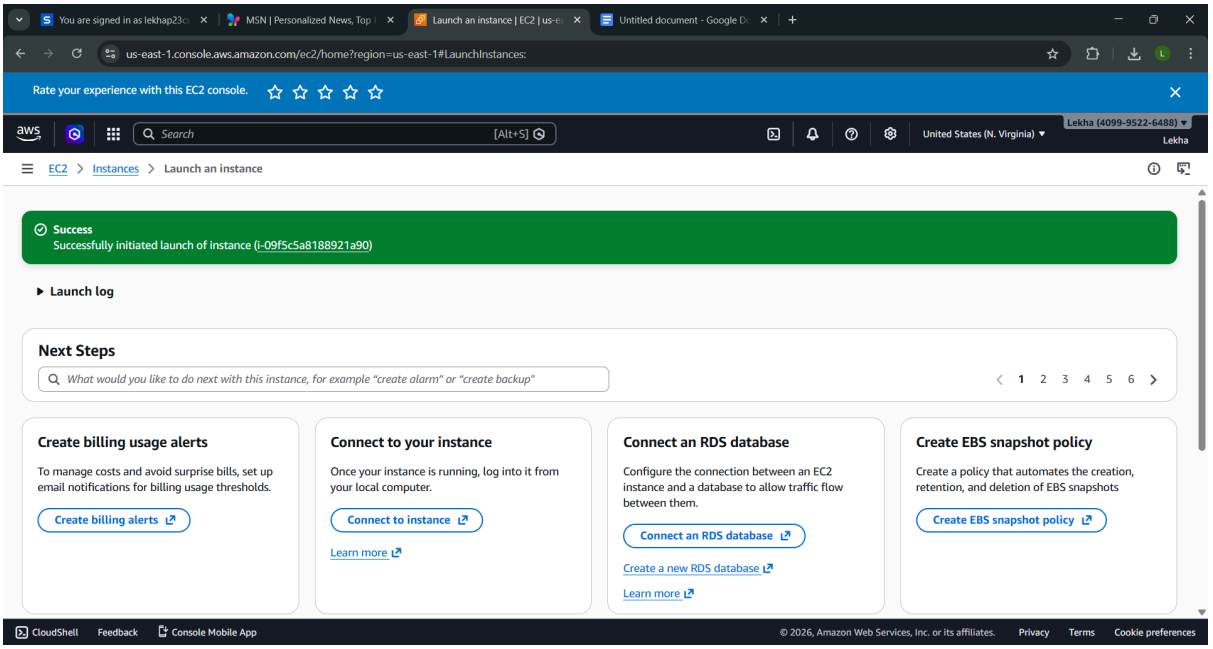

Connect the instance to open the server terminal

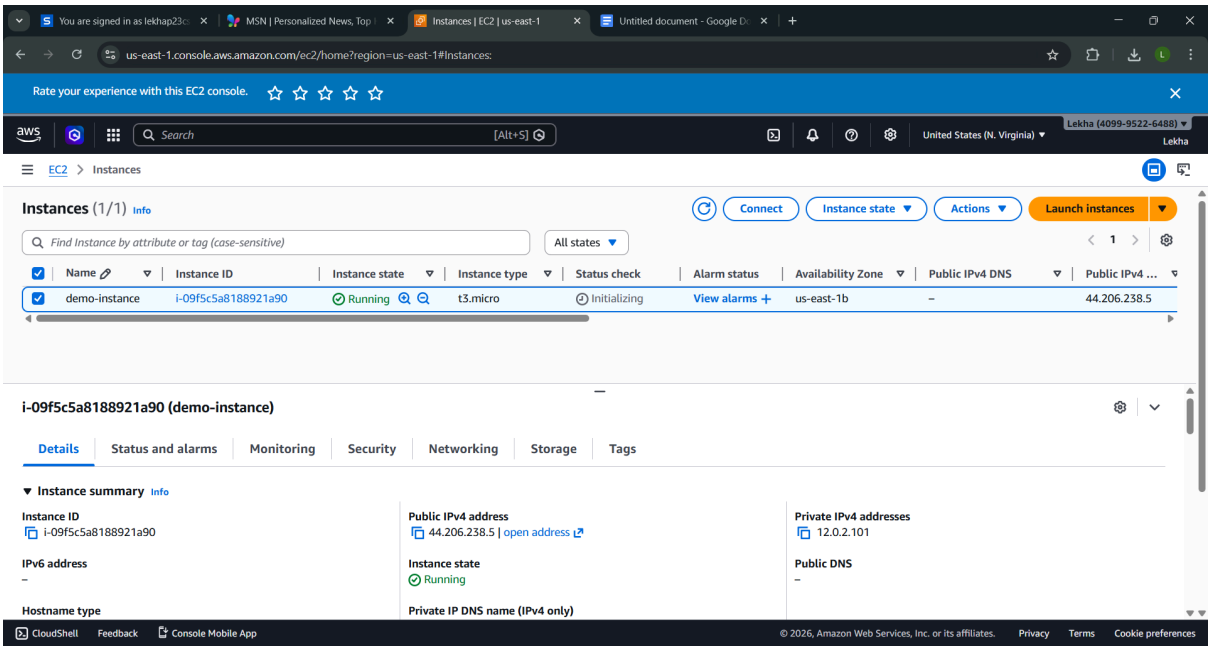

Server terminal is opened

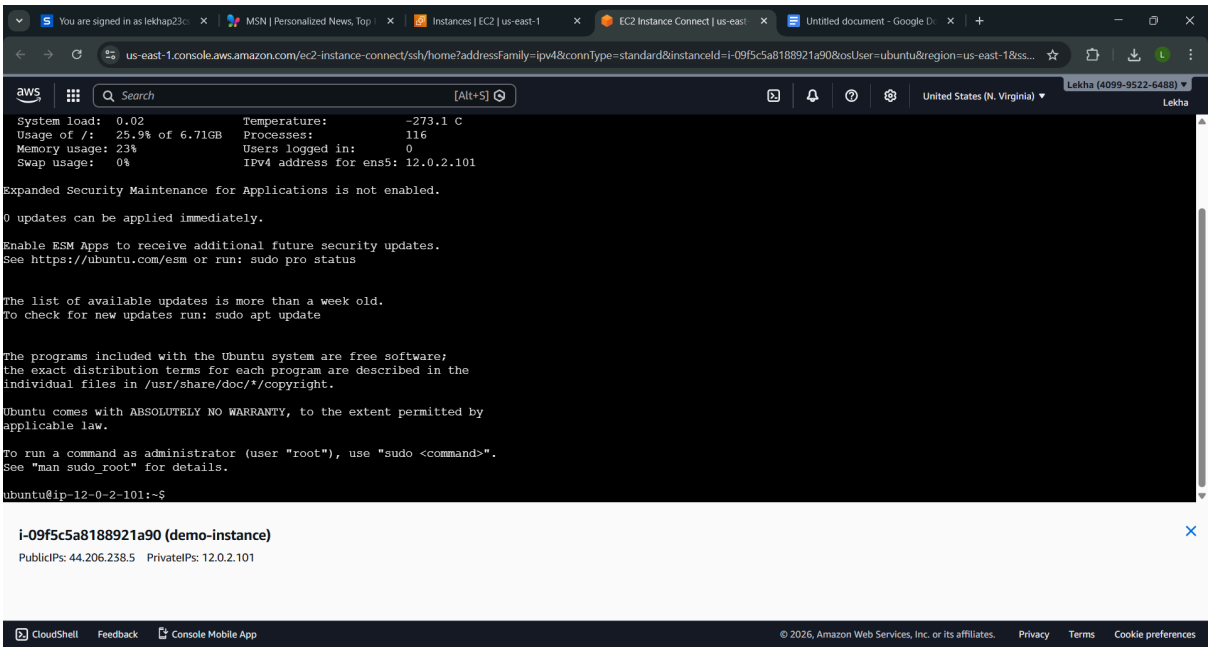

E2 instance is created with VPC connection

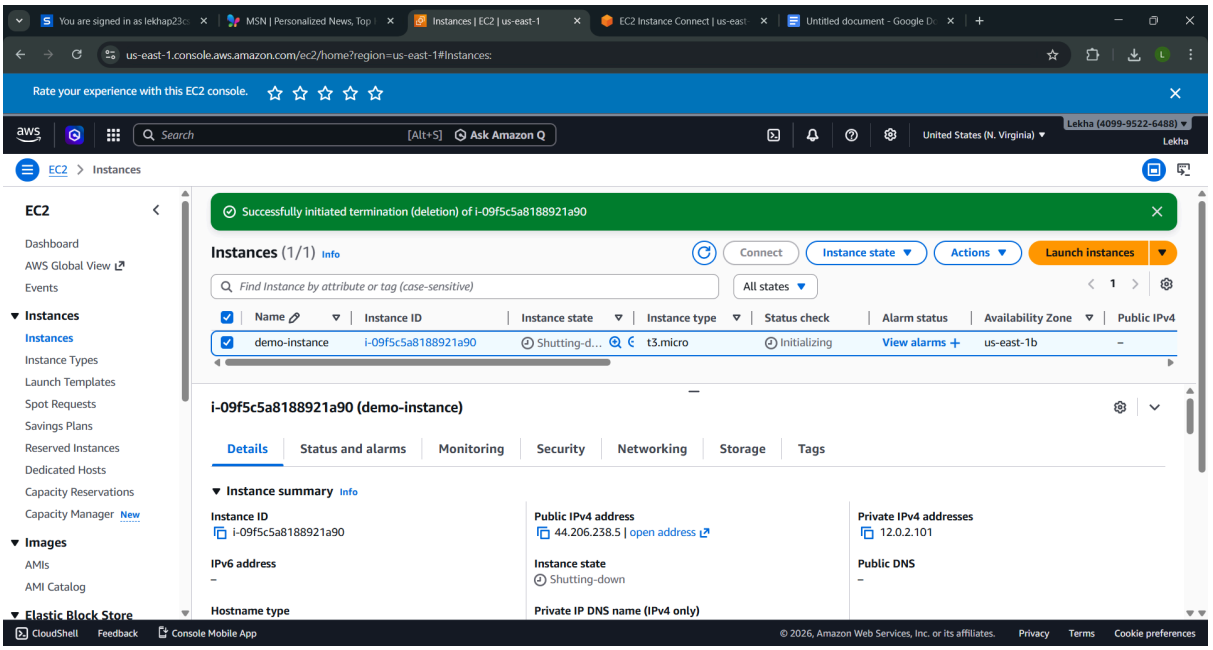

Sudo -i command is used to become root user

Then, the apt update command is used to update the ubuntu

```
ubuntu@ip-12-0-2-156:~$ sudo -i
root@ip-12-0-2-156:~# apt update
```

Then, the apache is installed

```
root@ip-12-0-2-156:~# apt install apache2 -y
```

Move to apache server config file (root path)

```
root@ip-12-0-2-156:~# cd /var/www/html
root@ip-12-0-2-156:/var/www/html#
```

The command ls is used to list the file inside the root path

rm => remove command is used to remove the file

```
root@ip-12-0-2-156:~# cd /var/www/html
root@ip-12-0-2-156:/var/www/html# ls
index.html
root@ip-12-0-2-156:/var/www/html# rm index.html
root@ip-12-0-2-156:/var/www/html# ls
root@ip-12-0-2-156:/var/www/html#
```

vi => is used to create a new file and open it

```
root@ip-12-0-2-156:~# cd /var/www/html
root@ip-12-0-2-156:/var/www/html# ls
index.html
root@ip-12-0-2-156:/var/www/html# rm index.html
root@ip-12-0-2-156:/var/www/html# ls
root@ip-12-0-2-156:/var/www/html# vi index.html
```

Click i => INSERT (then insert the file content)
After that press esc key to get out from insert
:wq => used to save and quit the file
cat index.html (file name) used to show the content of the file

systemctl status apache2 => this command is used to check the status of the apache (server => enable & active => active (running))

systemctl enable apache2 => used to enable the apache server

systemctl start apache2 => used to make the status of apache active

history => command used to view the history in the server terminal