DEVOPS - 20-03-2026

JENKINS

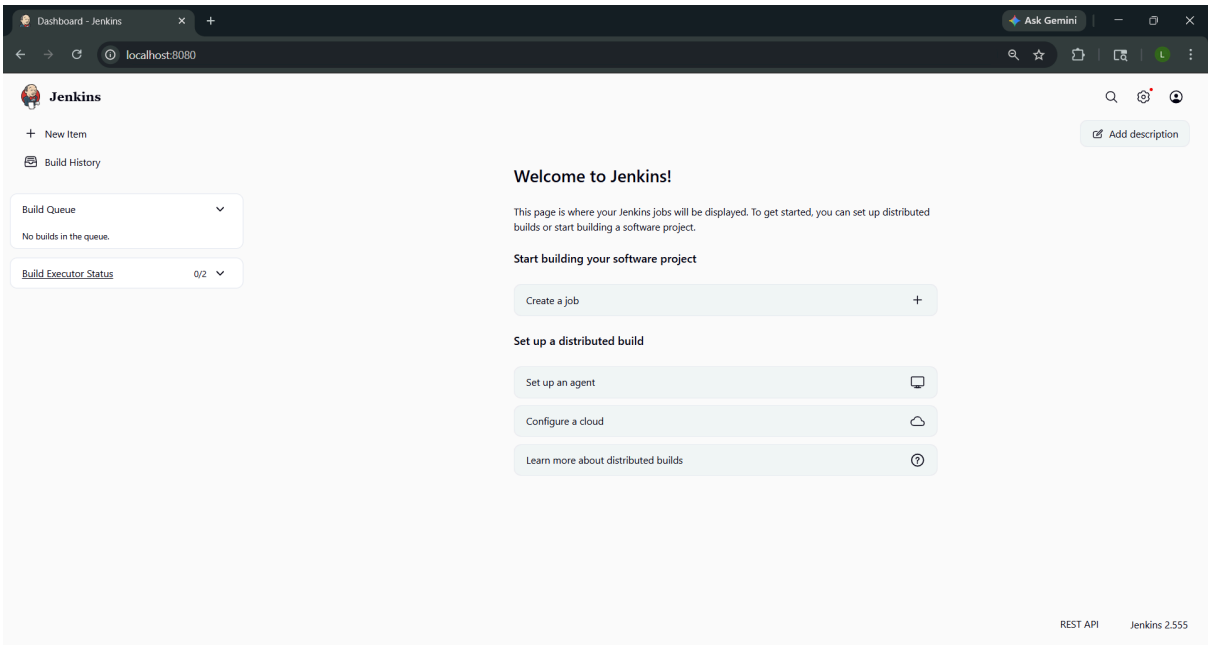

Creating a new item (siet-firstjob)

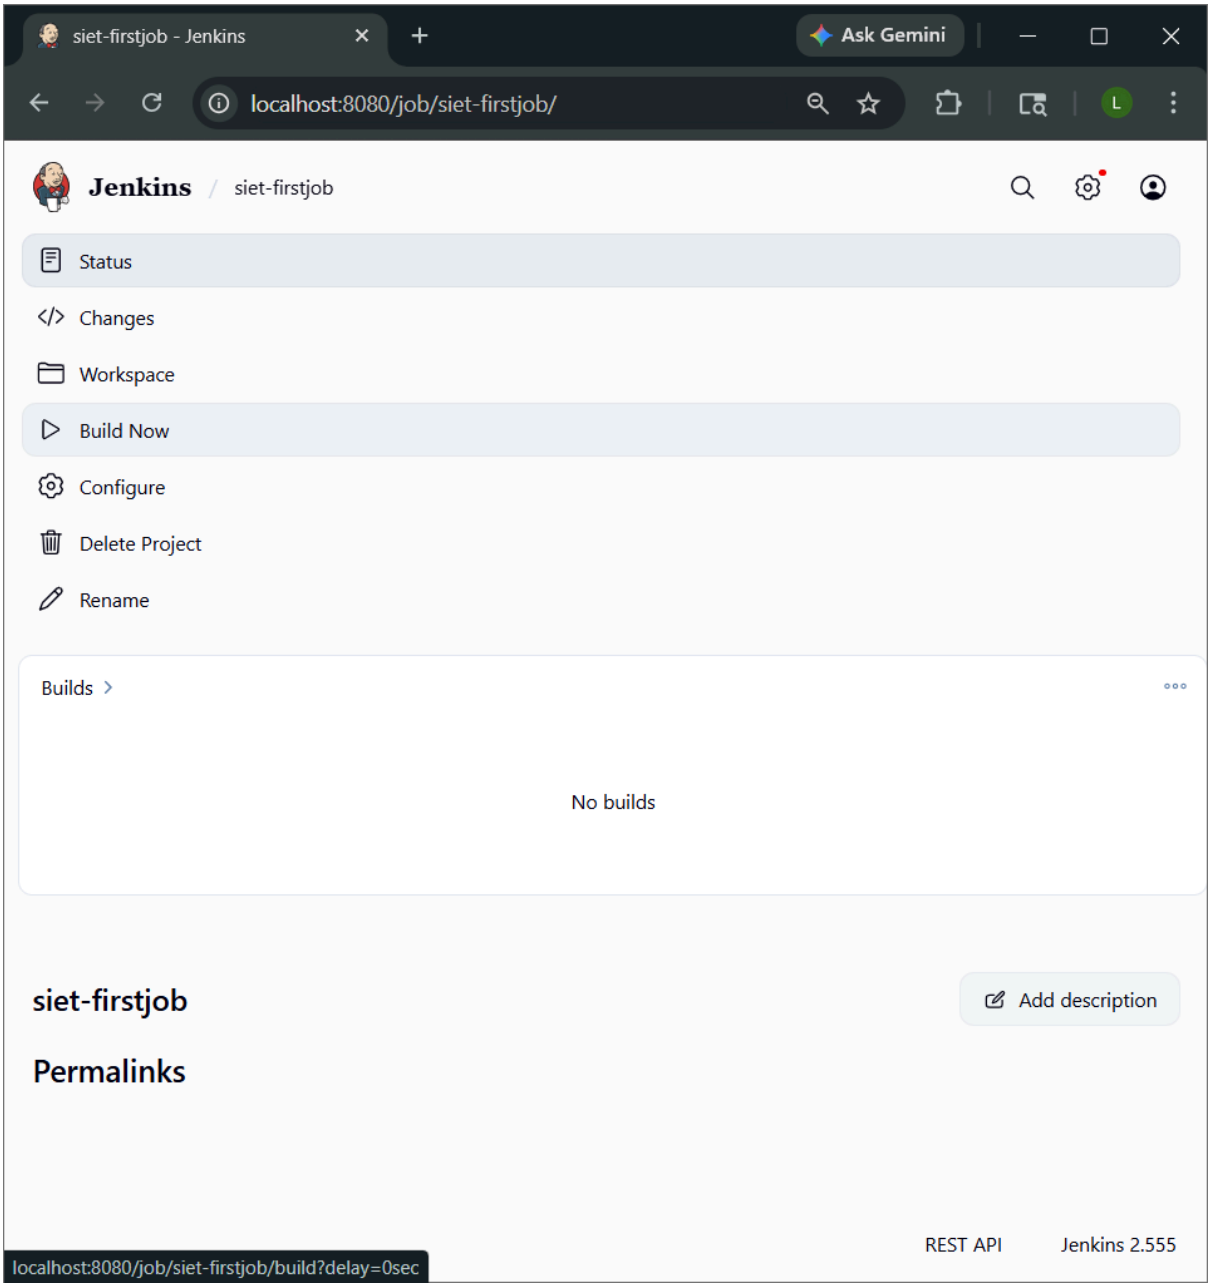

Using build now => building a item

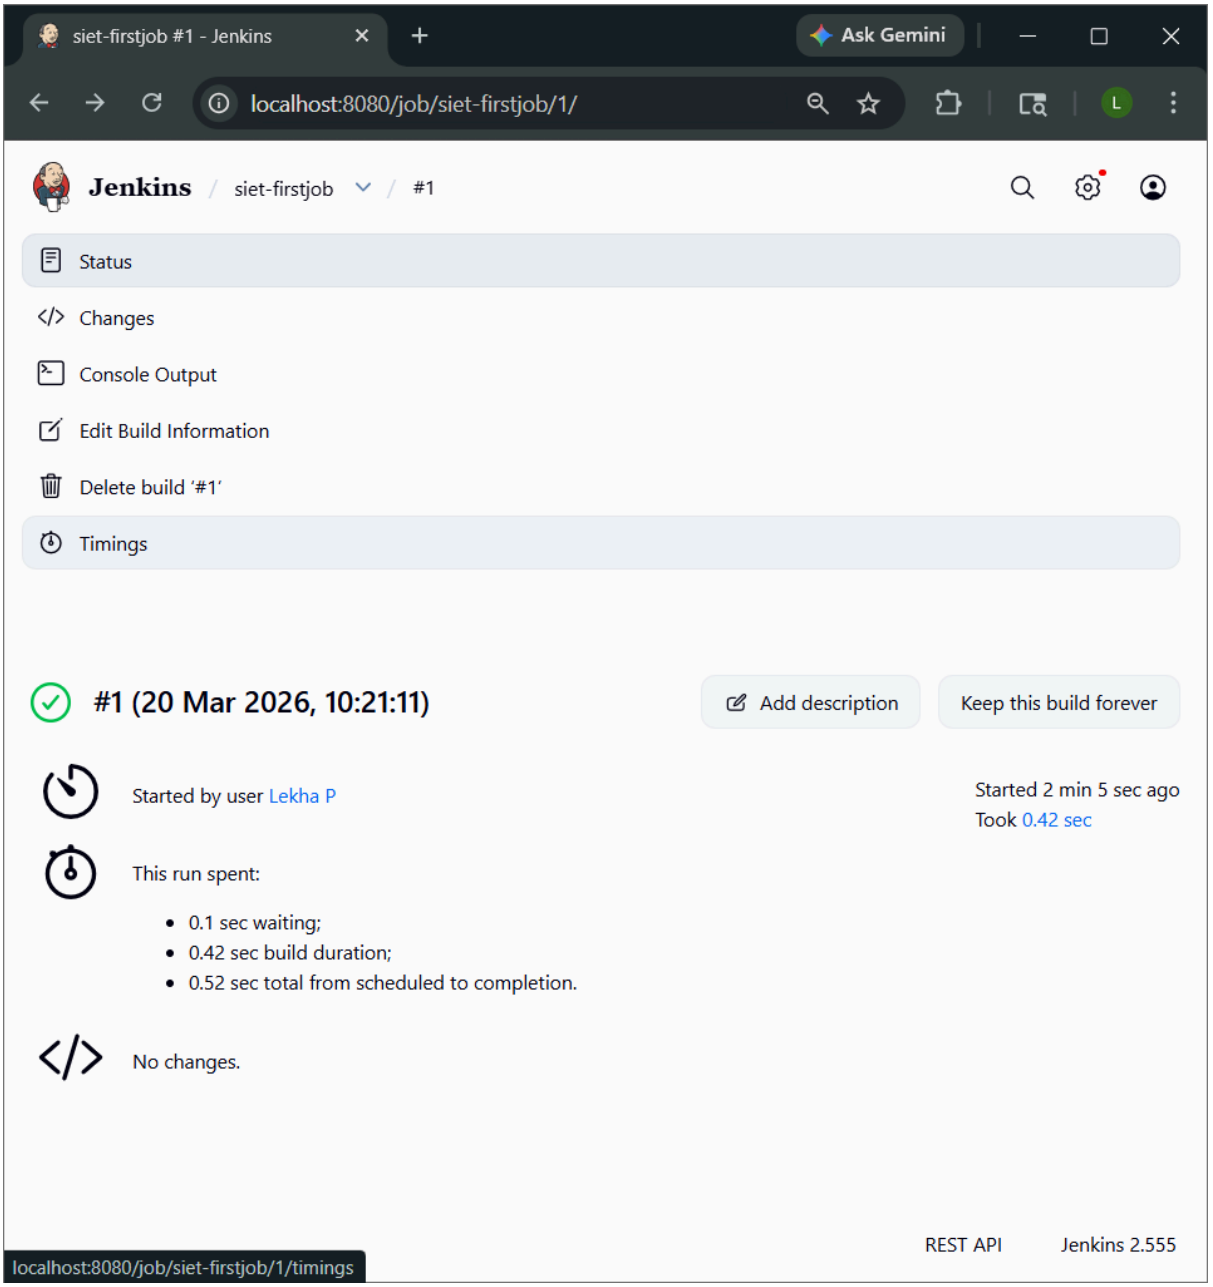

Console output

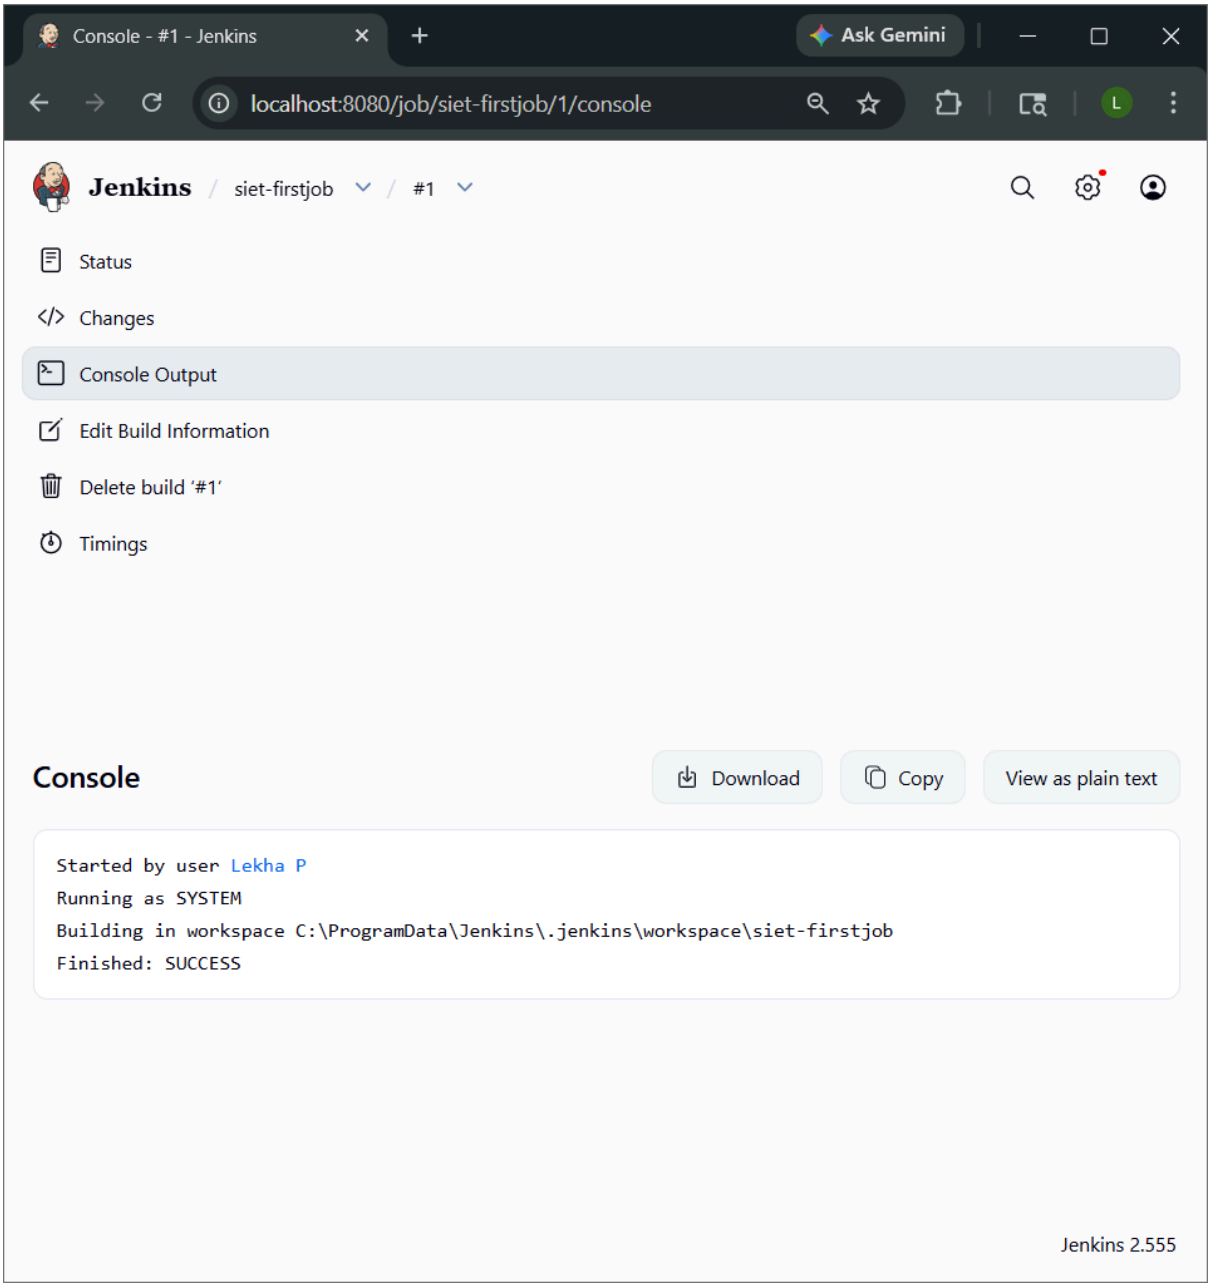

Home page => where the item created is shown

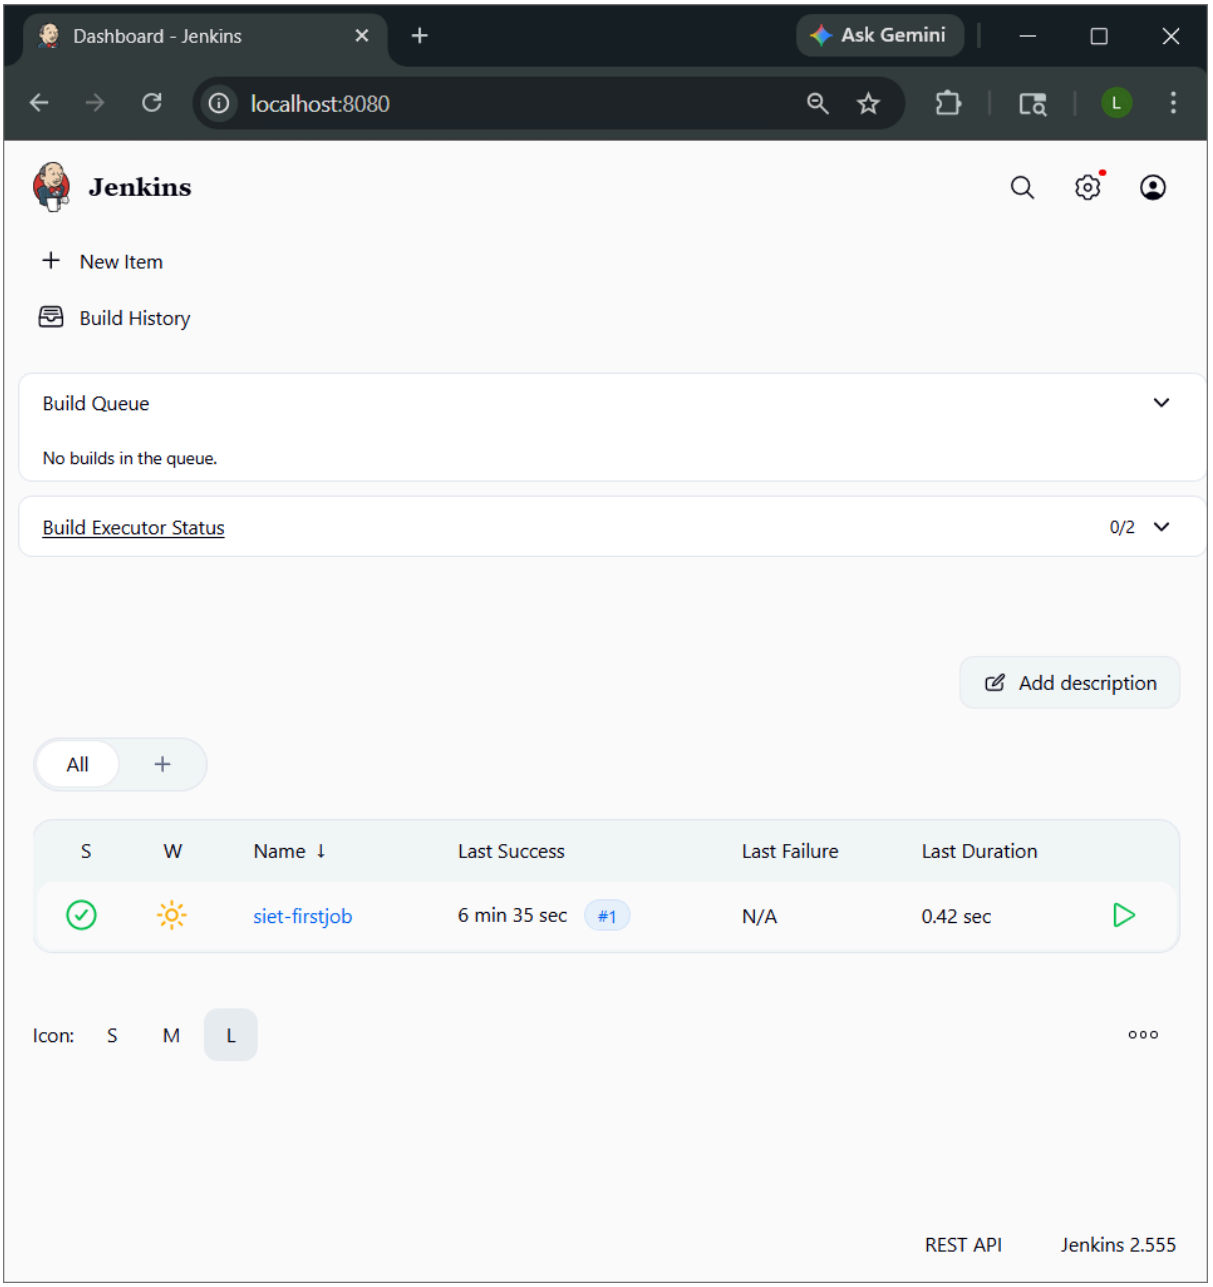

Manage jenkins => scroll dowm => move security

Manage Jenkins - Jenkins

Ask Gemini

localhost:8080/manage/

Jenkins / Manage Jenkins

Manage Jenkins

Search settings /

Building on the built-in node can be a security issue. You should set up distributed builds. See the documentation.

Set up agent | Set up cloud | Dismiss

Jenkins can enforce Content Security Policy (CSP). CSP tells web browsers what they are allowed to do while rendering a web page. This limits or even eliminates the impact of vulnerabilities like cross-site scripting (XSS). CSP is disabled by default for backward compatibility, but it is recommended to enable it, if possible.

Learn more | Dismiss

System Configuration

System
Configure global settings and paths.

Tools
Configure tools, their locations and automatic installers.

Plugins
Add, remove, disable or enable plugins that can extend the functionality of Jenkins.

Nodes
Add, remove, control and monitor the various nodes that Jenkins runs jobs on.

Clouds
Add, remove, and configure cloud instances to provision agents on-demand.

Appearance
Configure the look and feel of Jenkins

Security

Security

Credentials

localhost:8080/manage/configure

Security

Security
Secure Jenkins; define who is allowed to access/use the system.

Credentials
Configure credentials

Credential Providers
Configure the credential providers and types

Users
Create/delete/modify users that can log in to this Jenkins.

Add two roles => students, talents

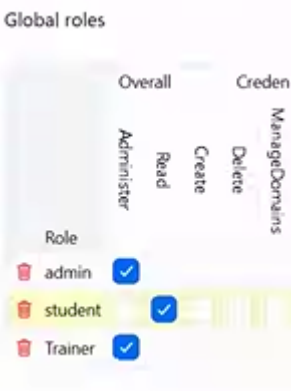

Global roles

Role	Overall	Credentials				Agent								Job						Run			View			SCM		Metrics		
	Administer	Read	Create	Delete	ManageDomains	Update	View	Build	Configure	Connect	Create	Delete	Disconnect	Provision	Build	Cancel	Configure	Create	Delete	Discover	Move	Read	Workspace	Delete	Replay	Update	Configure	Create	Delete	Read	Tag	HealthCheck	ThreadDump	View
admin	✓																																	
student		✓																				✓								✓				✓
Trainer	✓																																	

Role	Pattern	Template	Create	Delete	ManageDomains	Update	View	Build	Cancel	Configure	Create	Delete	Discover	Move	Read	Workspace	Delete	Replay	Update	Configure	Create	Delete	Read	Tag
Dev-team	".*dev.*"							✓	✓	✓	✓	✓		✓	✓									

Role to add

Dev-team

Global roles

Role	Overall	Credentials				Agent								Job						Run			View			SCM		Metrics		
	Administer	Read	Create	Delete	ManageDomains	Update	View	Build	Configure	Connect	Create	Delete	Disconnect	Provision	Build	Cancel	Configure	Create	Delete	Discover	Move	Read	Workspace	Delete	Replay	Update	Configure	Create	Delete	Read	Tag	HealthCheck	ThreadDump	View
Employee		✓																				✓								✓				
admin	✓																																	

Assign Roles

Global roles

User/Group	Employee	admin
Anonymous		
Authenticated Users		
Crown G K Srinivas		✓
SIET-DEMO	✓	

Add User Add Group

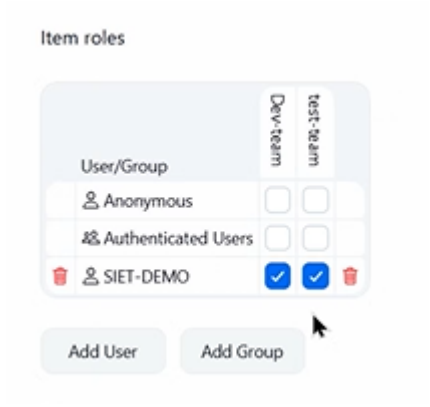

Item roles give only for Dev-team

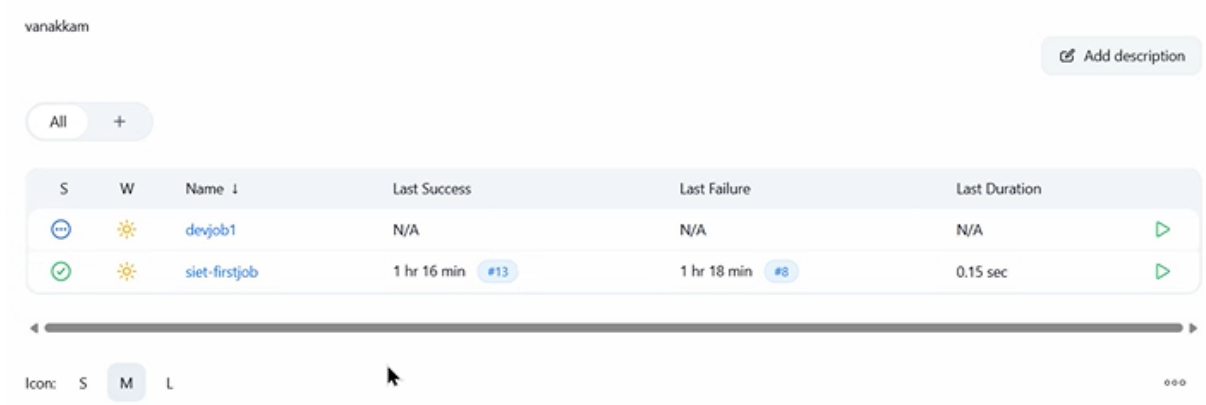

JENKINS documentation
https://www.jenkins.io/doc/book/

BUILD TRIGER:

up stream

down stream

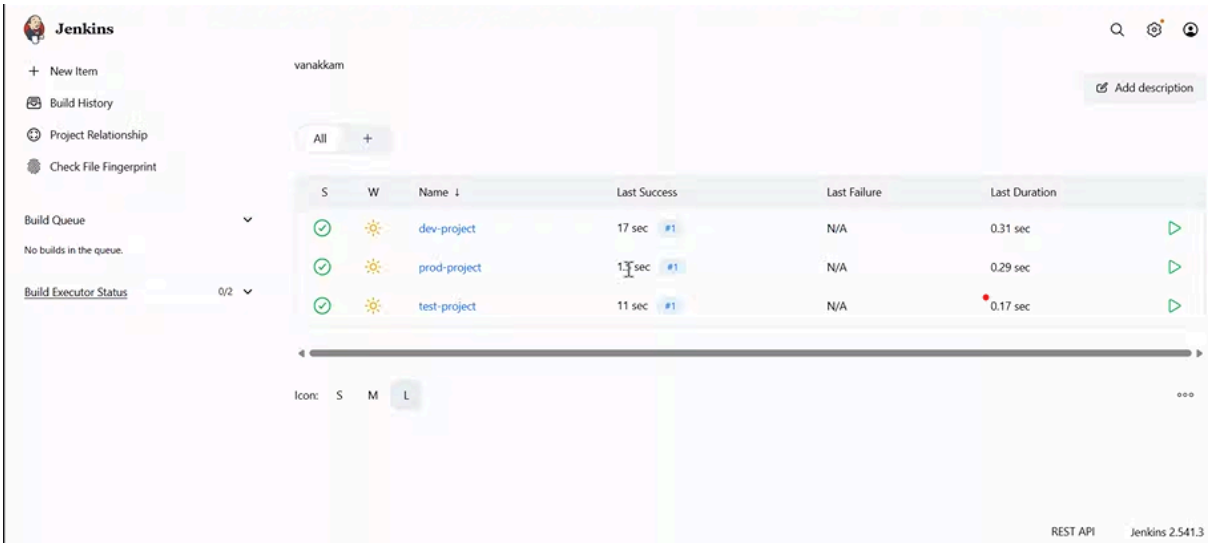

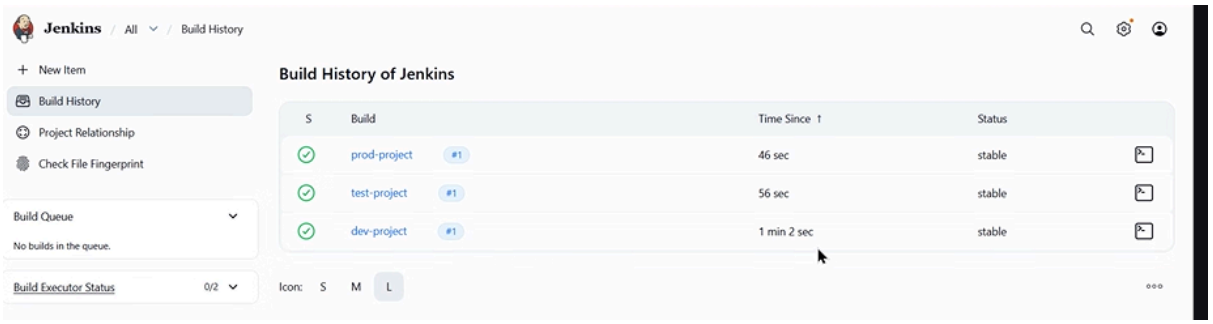

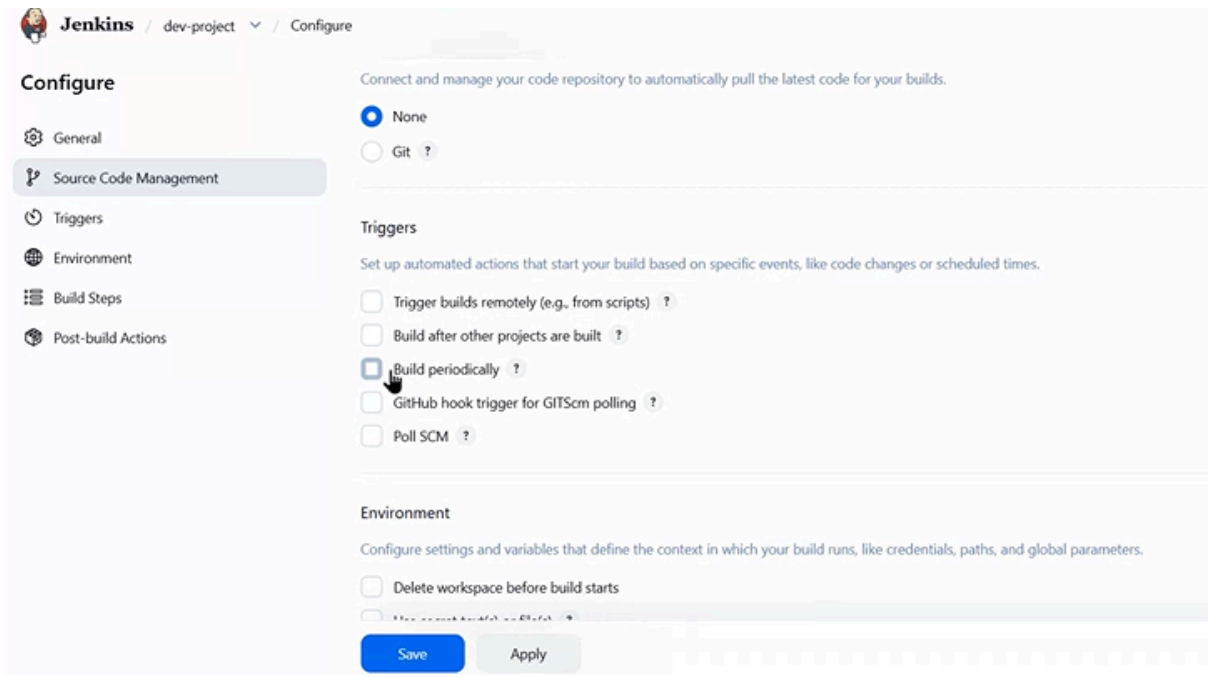

CRONTAB GURU:

Link:
https://crontab.guru/

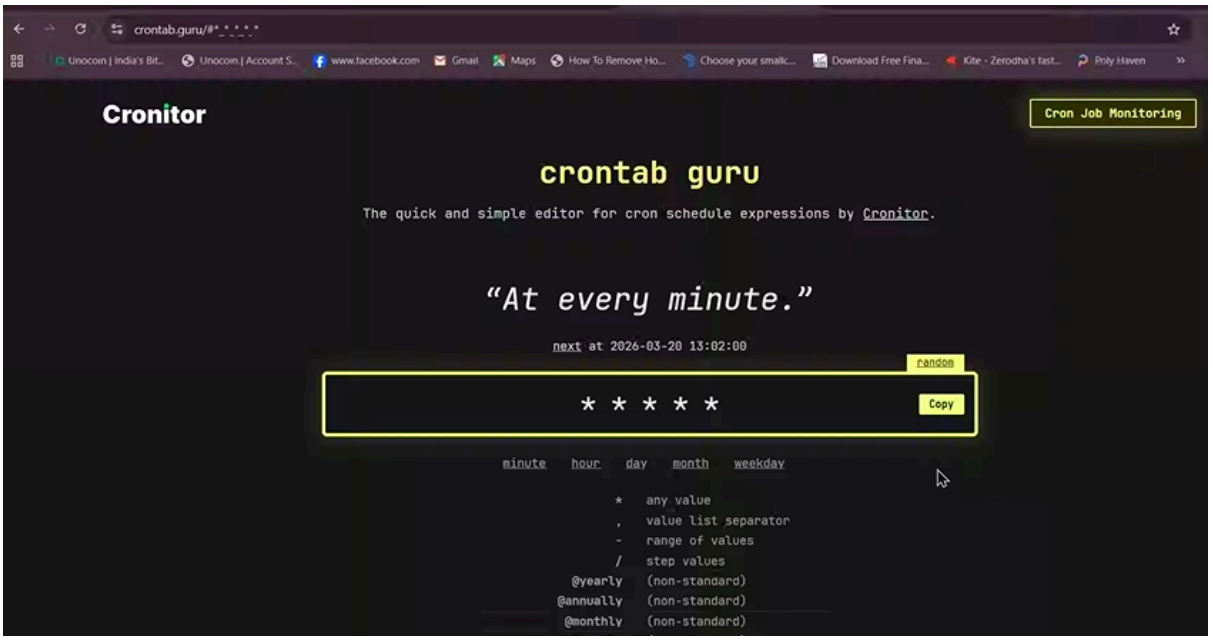

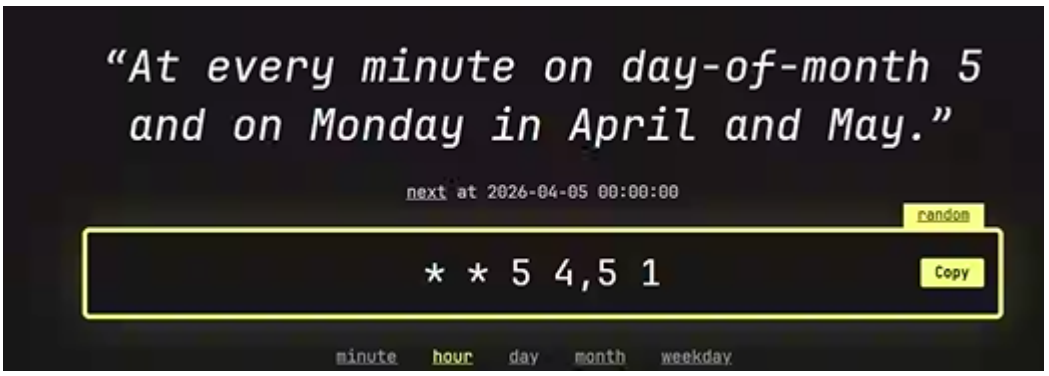

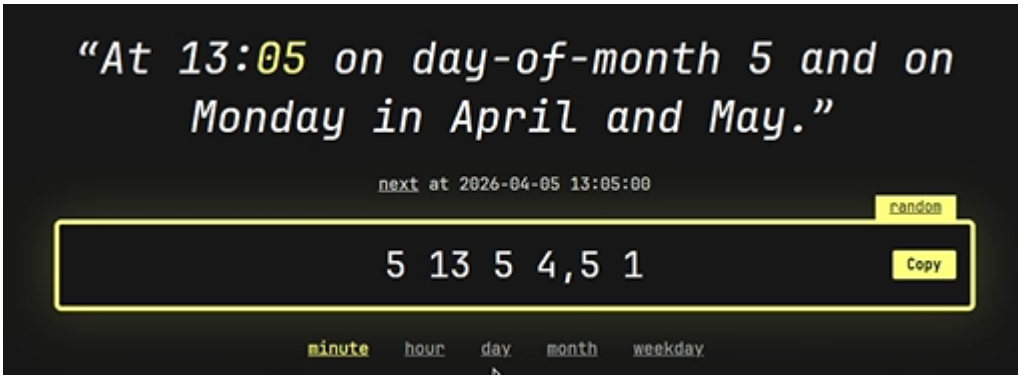

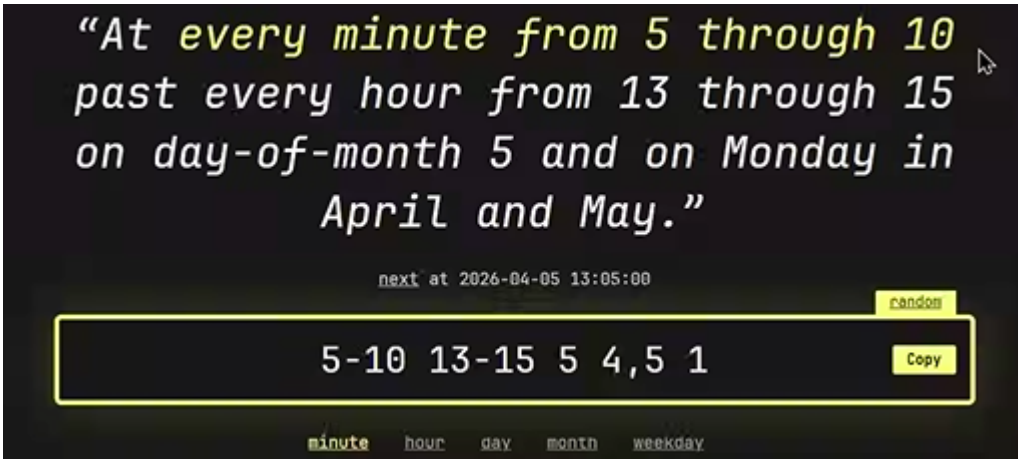

Question:
All even months every 15-20 date mrng 12 am - noon 12 pm and every 30 min task run aganum

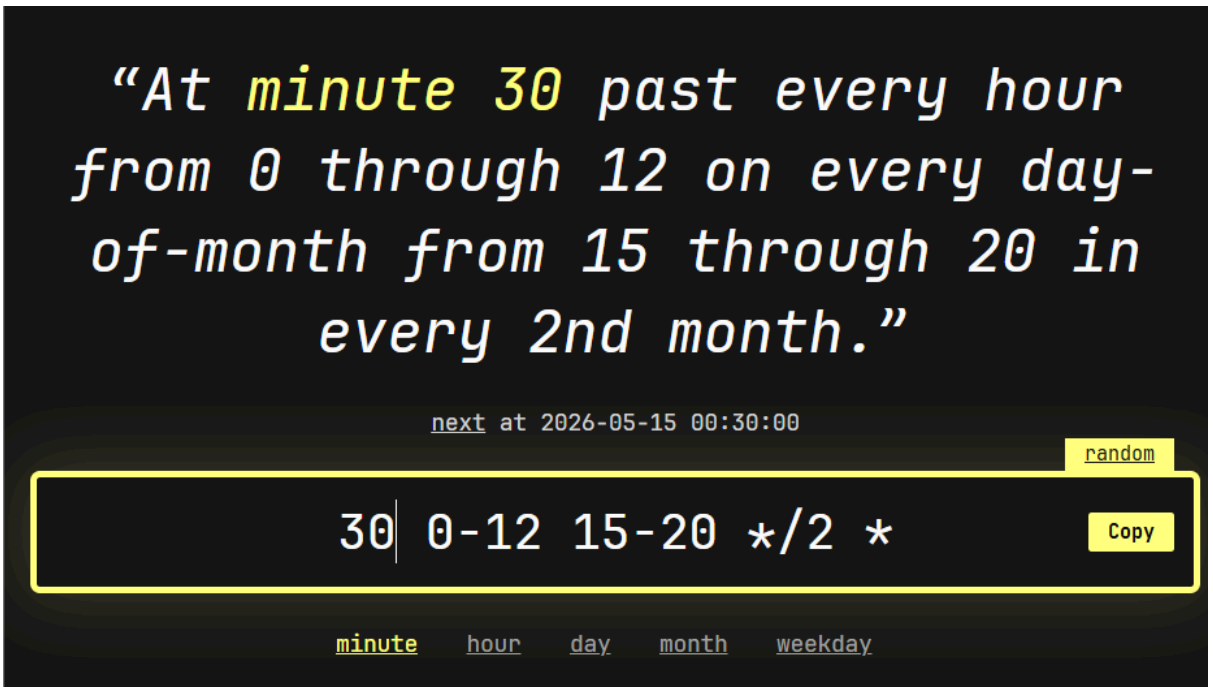

Correct answer

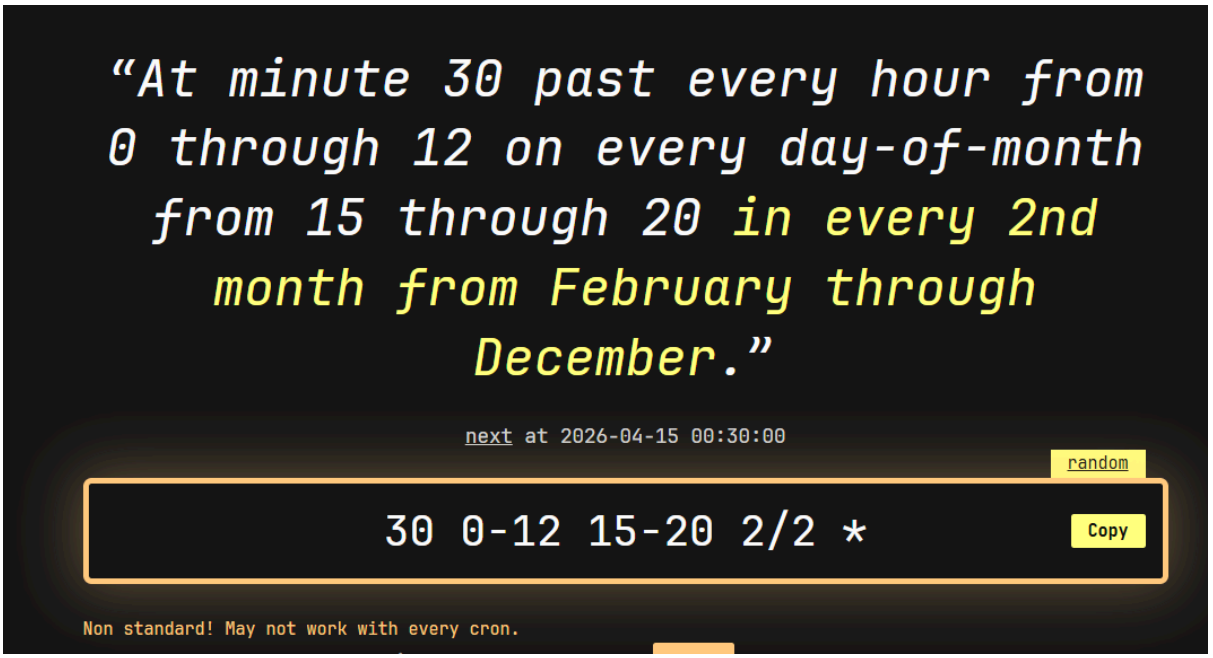

cron is a time-based job scheduler. A scheduled job is known as a cron job. Although typically used to automate system maintenance and administration it can be used to automate any task. cron is most suitable for scheduling repetitive tasks as scheduling a one-time task can be accomplished via at.

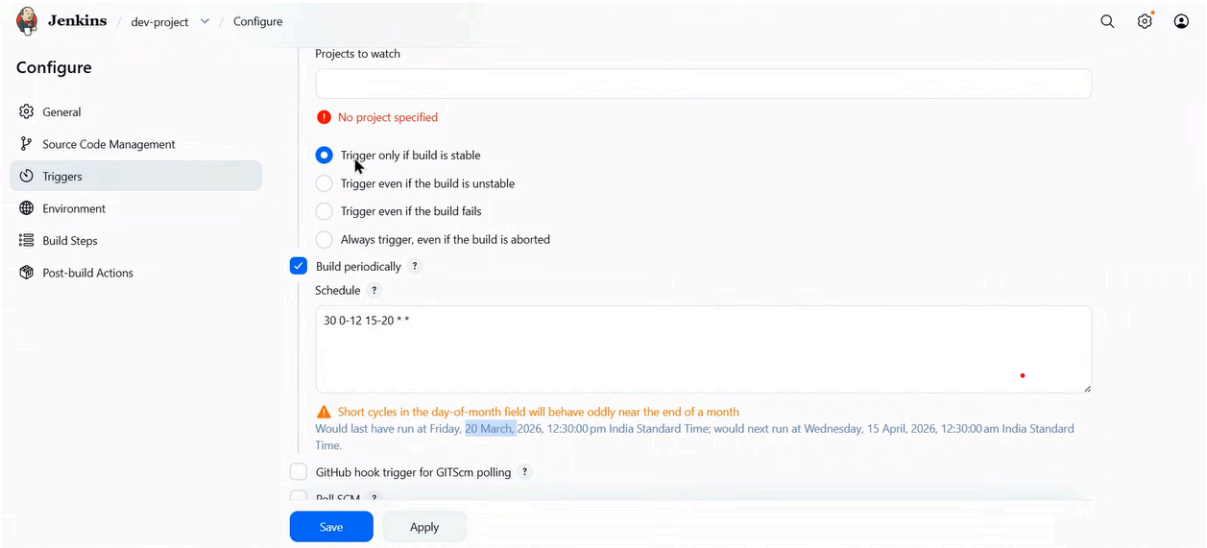

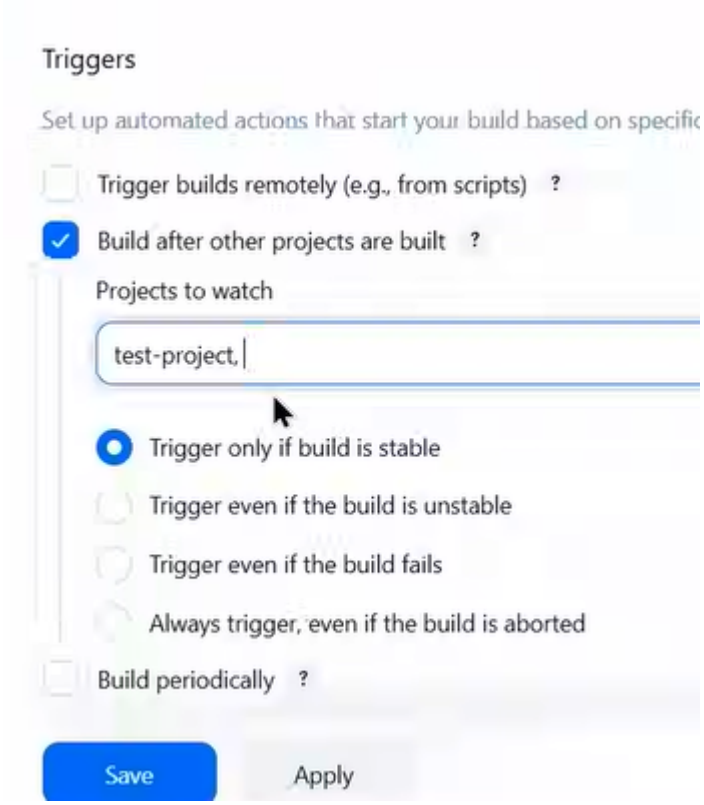

GIT CONFIGURATION:

Jenkins / All / New Item

New Item

Enter an item name

git-test

Select an item type

Pipeline
Build, test, and deploy using pipelines. Supports stages, parallel work, and running on multiple agents.

Freestyle project
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.

Multi-configuration project
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.

Folder
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.

Multibranch Pipeline
Creates a set of Pipeline projects according to detected branches in one SCM repository.

OK

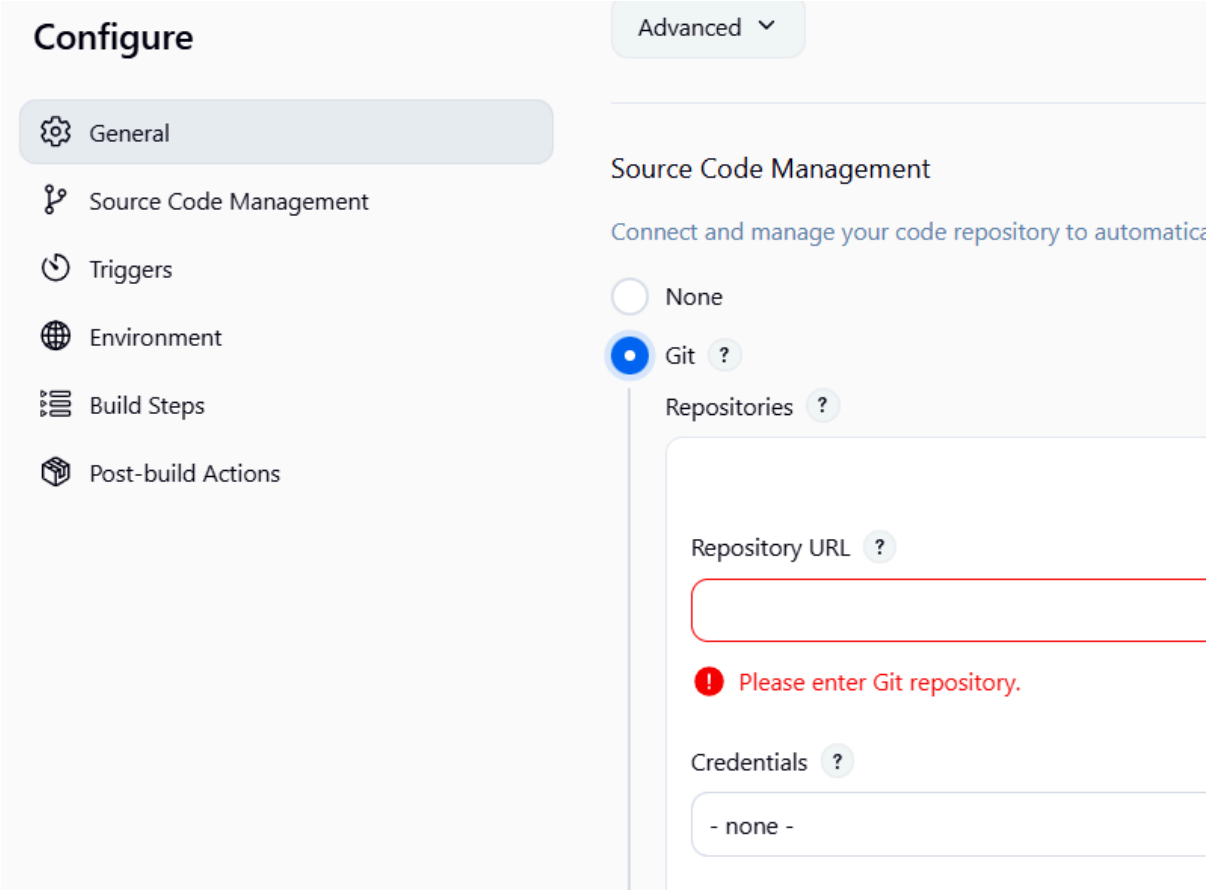
Configure
General
Source Code Management
Triggers
Environment
Build Steps
Post-build Actions
Advanced
Source Code Management
Connect and manage your code repository to automatica
None
Git
Repositories
Repository URL
Please enter Git repository.
Credentials
- none -

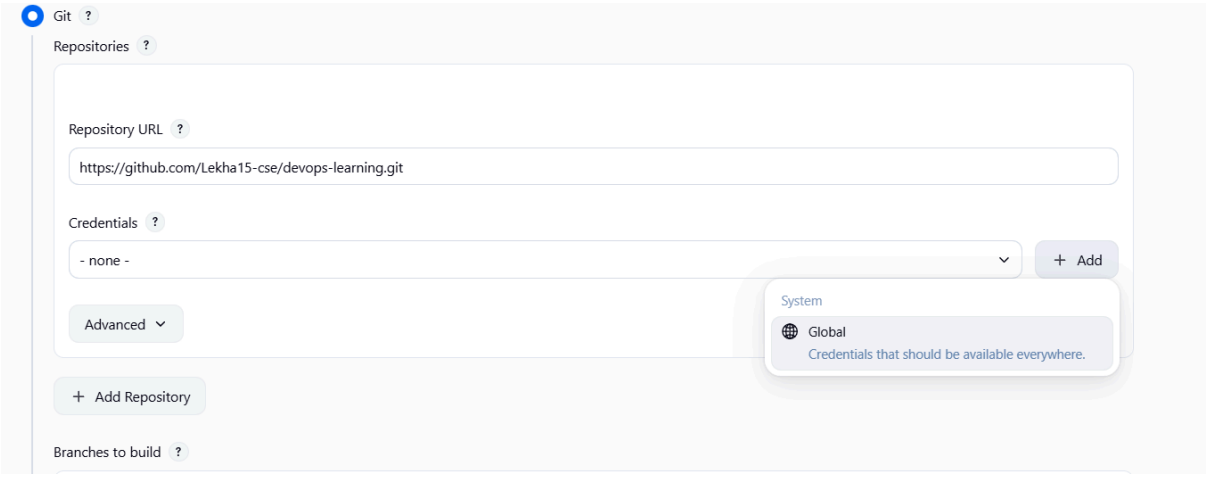
Git
Repositories
Repository URL
https://github.com/Lekha15-cse/devops-learning.git
Credentials
- none -
Add
Advanced
System
Global
Credentials that should be available everywhere.
Add Repository
Branches to build

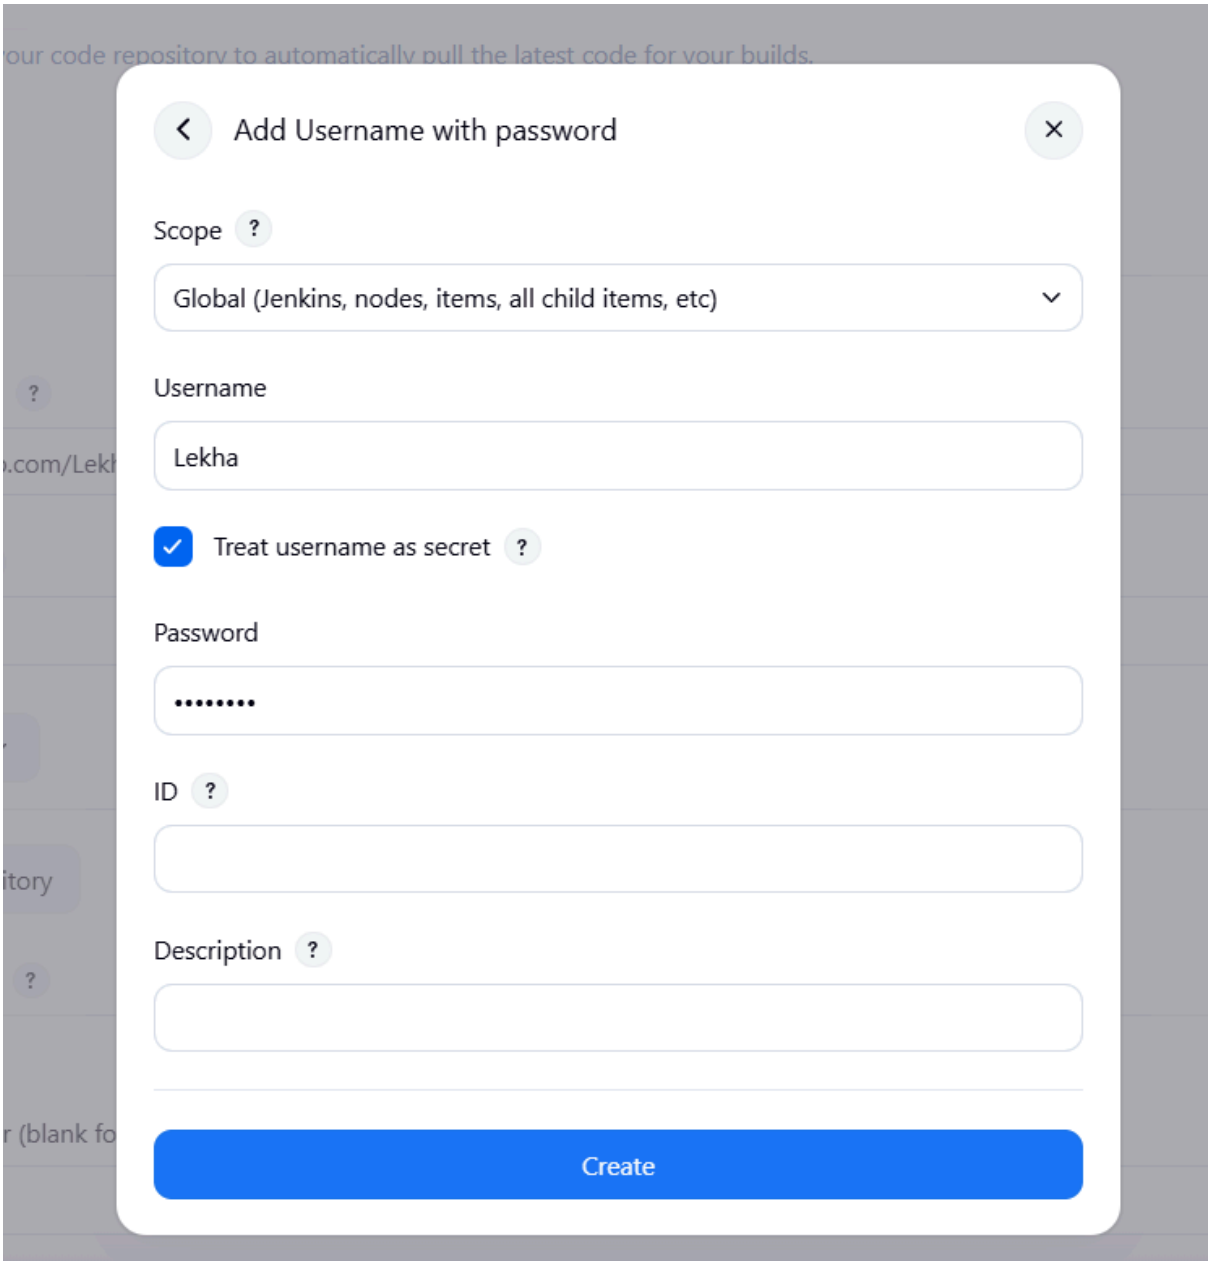
Add Username with password
Scope
Global (Jenkins, nodes, items, all child items, etc)
Username
Lekha
Treat username as secret
Password
ID
Description
Create

Repository URL ?

https://github.com/Lekha15-cse/devops-learning.git

Credentials ?

ecbe51cb-3fd4-4d33-b28d-84b098860385

Advanced

+ Add Repository

Branches to build ?

Branch Specifier (blank for 'any') ?

*/main

+ Add Branch

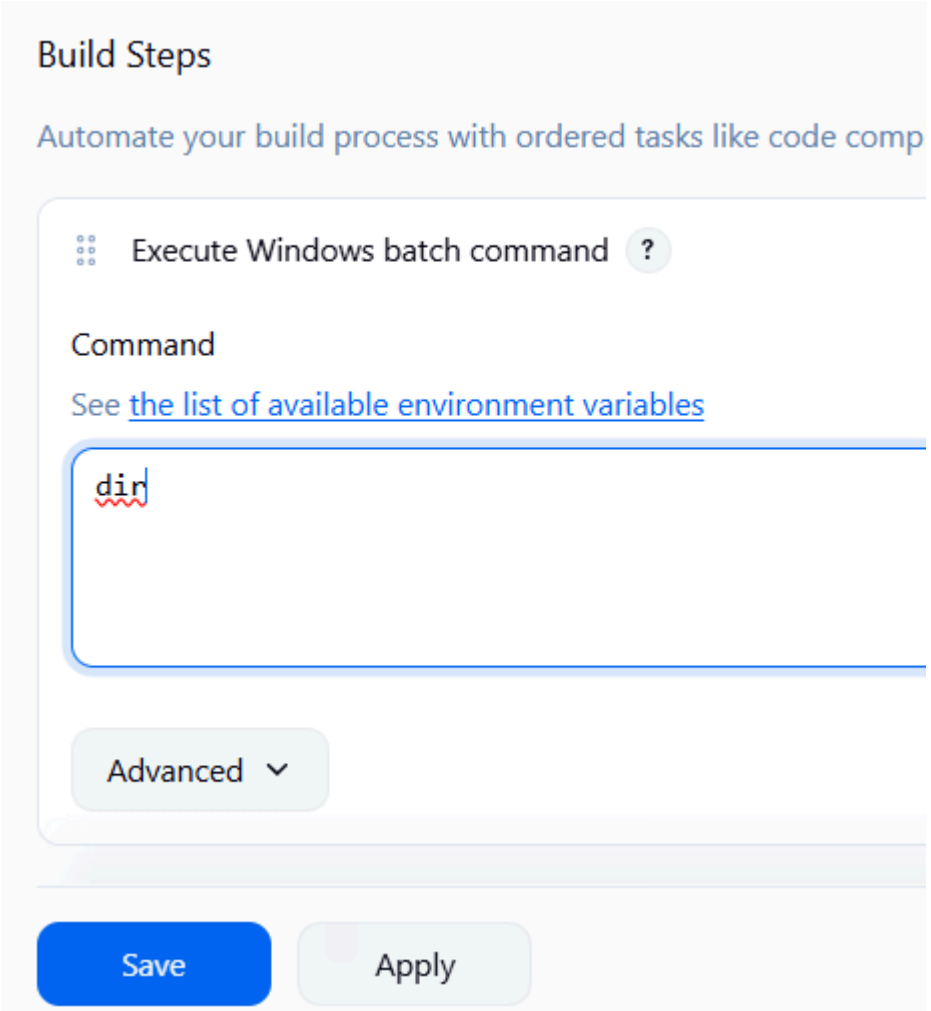
Build Steps
Automate your build process with ordered tasks like code comp
Execute Windows batch command
?
Command
See the list of available environment variables
dir
Advanced
Save
Apply

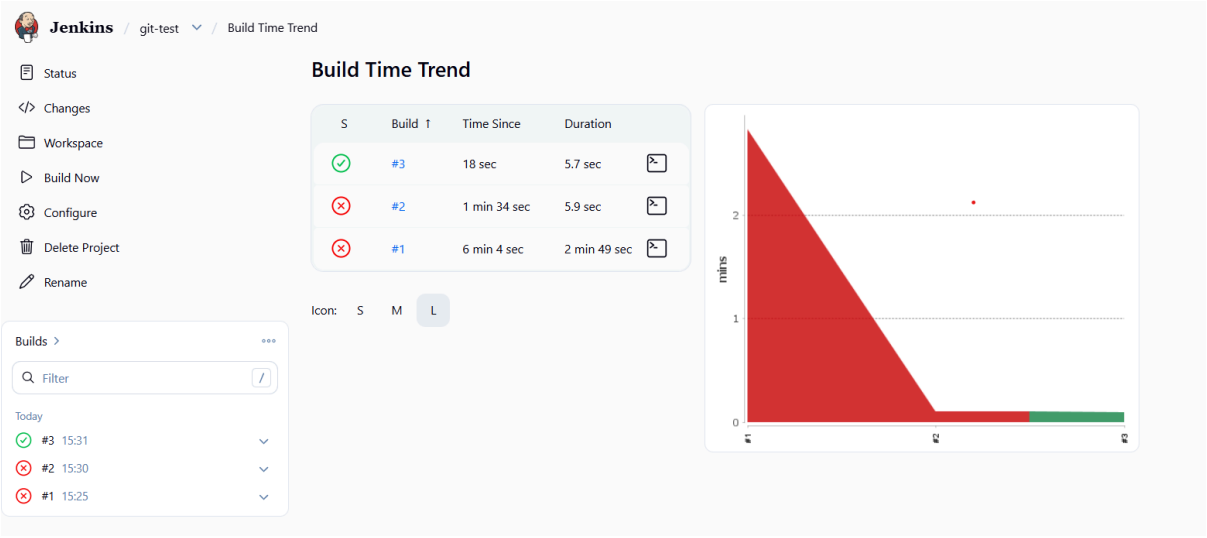
Jenkins
git-test
Build Time Trend
Status
Changes
Workspace
Build Now
Configure
Delete Project
Rename
Builds
Filter
Today
#3 15:31
#2 15:30
#1 15:25
Build Time Trend
S
Build
Time Since
Duration
#3
18 sec
5.7 sec
#2
1 min 34 sec
5.9 sec
#1
6 min 4 sec
2 min 49 sec
Icon:
S
M
L
mins
2
1
0
#1
#2
#3