


AFM: INFORMATICA

AMMINISTRAZIONE, FINANZA E MARKETING



PRIMO ANNO

STRUMENTI BASE PER LA PRODUTTIVITÀ

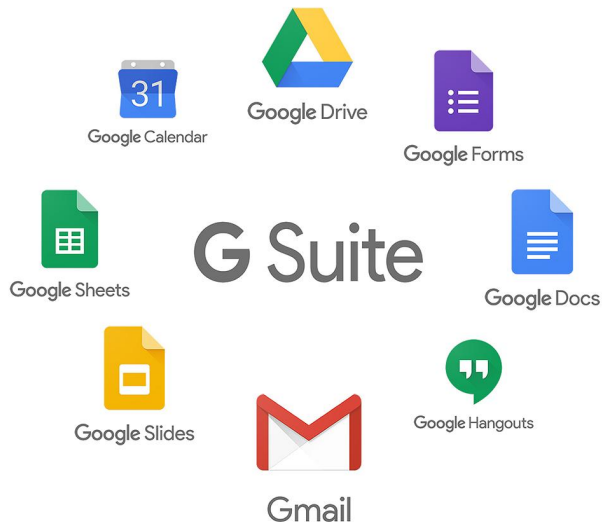


SECONDO ANNO

ALGORITMI E VIDEOGIOCHI

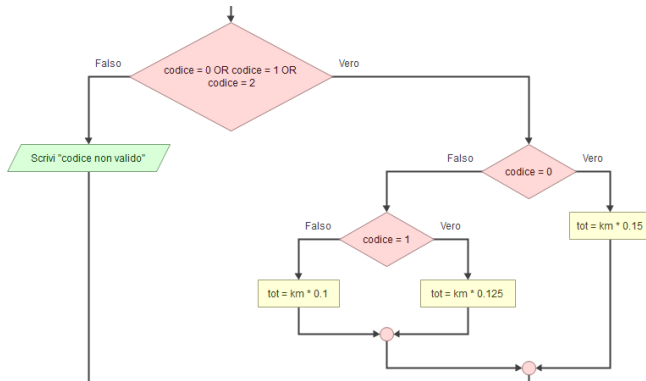

TERZO ANNO

```
class BigFile:
2   def __init__(self, datadir, ndims):
3       idfile = os.path.join(datadir, "id.txt")
4       self.names = [x.strip() for x in str.split(open(idfile).read()) if x.strip()]
5       self.name2index = dict(zip(self.names, range(len(self.names))))
6       self.ndims = ndims
7       self.featurefile = os.path.join(datadir, "feature.bin")
8       print "[BigFile] %d features, %d dimensions" % (len(self.names), self.ndims)
9       print "        binary: %s" % self.featurefile
10      print "        txt: %s" % idfile
11
12      def read(self, requested, isname=True):
13          if isname:
14              index_name_array = [(self.name2index[x], x) for x in requested if x in self.names]
15          else:
16              assert(min(requested) >= 0)
17              assert(max(requested) < len(self.names))
18              index_name_array = [(x, self.names[x]) for x in requested]
19              index_name_array.sort()
20
21              vecs = seq_read(self.featurefile, self.ndims, [x[0] for x in index_name_array])
22              return [x[1] for x in index_name_array], vecs
23
24      def shape(self):
25          return [len(self.names), self.ndims]
```

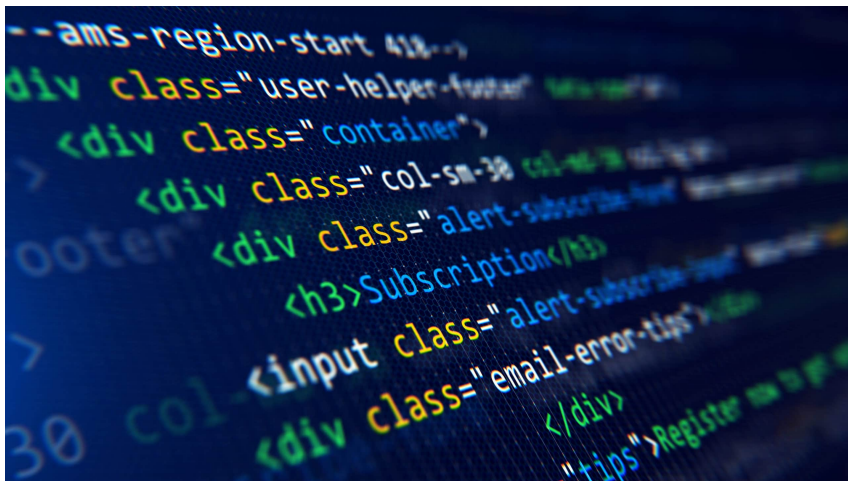


```
--ams-region-start 418-->


4/6


```

QUARTO ANNO

PROGETTAZIONE DATABASE

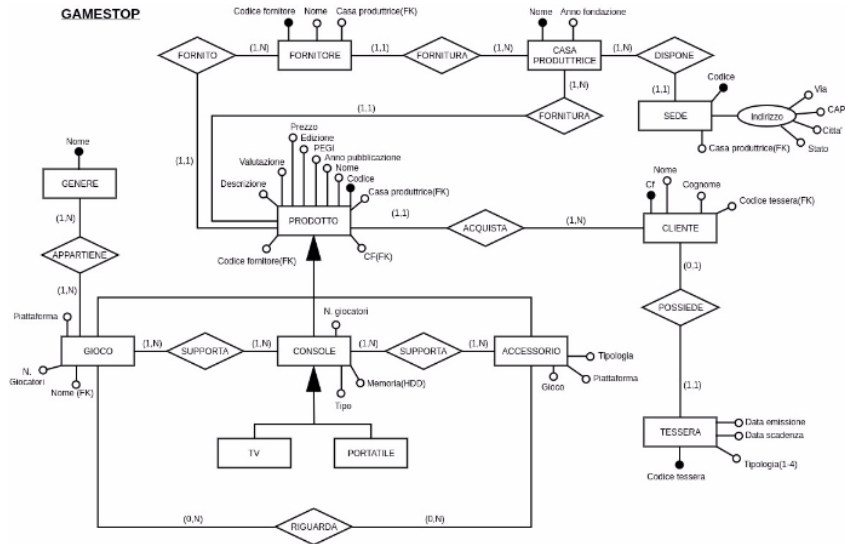

The screenshot displays the SQL Server Enterprise Manager interface. On the left, the 'EXPLORER' pane shows the 'AdventureWorks' database structure, including tables like 'SalesOrderDetail.sql' and 'SalesLT/Tables'. The right pane shows the SQL script for the 'SalesOrderDetail' table, which includes a 'CREATE TABLE' statement with various columns and constraints, followed by a 'CREATE NONCLUSTERED INDEX' statement.

```

SalesLT > Tables > SalesOrderDetail.sql
1 CREATE TABLE [SalesLT].[SalesOrderDetail] (
2     [SalesOrderID] INT NOT NULL,
3     [SalesOrderDetailID] INT IDENTITY(1,1) NOT NULL,
4     [OrderQty] SMALLINT NOT NULL,
5     [ProductID] INT NOT NULL,
6     [UnitPrice] MONEY NOT NULL,
7     [UnitPriceDiscount] MONEY CONSTRAINT [DF_SalesOrderDetail
8     [rowguid] UNIQUEIDENTIFIER CONSTRAINT [DF_SalesOrderDetail
9     [ModifiedDate] DATETIME CONSTRAINT [DF_SalesOrderDetail
10    CONSTRAINT [PK_SalesOrderDetail_SalesOrderID_SalesOrderDetailID] PRIM
11    CONSTRAINT [CK_SalesOrderDetail_OrderQty] CHECK ([OrderQty]>(0)),
12    CONSTRAINT [CK_SalesOrderDetail_UnitPrice] CHECK ([UnitPrice]>=(0.00))
13    CONSTRAINT [CK_SalesOrderDetail_UnitPriceDiscount] CHECK ([UnitPriceD
14    CONSTRAINT [FK_SalesOrderDetail_Product_ProductID] FOREIGN KEY ([Prod
15    CONSTRAINT [FK_SalesOrderDetail_SalesOrderHeader_SalesOrderID] FOREIGN
16    CONSTRAINT [AK_SalesOrderDetail_rowguid] UNIQUE NONCLUSTERED ([rowgui
17 );
18
19
20 GO
21
22 CREATE NONCLUSTERED INDEX [IX_SalesOrderDetail_ProductID]
23 ON [SalesLT].[SalesOrderDetail] ([ProductID] ASC);
24
25
26 GO
  
```