

Harmonise MCP

1. Compute & Resource Requirements

To ensure sub-second latency for Claude's tool calls, use the following specifications:

- **Primary Hosting: Azure Container Apps (Standard SKU)** is preferred.
 - **Minimum Specs:** 2 vCPU and 4 GB RAM (Standard D2s v4 equivalent).
 - **Scaling:** Set autoscale rules to trigger at **70% CPU usage**; cap at 10 replicas.
 - **Ingress:** Enable External Ingress on **Port 3000** with Transport set to **Auto/HTTP/2** (to support SSE).
 - **State Store: Azure Cache for Redis** (Basic or Standard tier).
 - Used for session management and stateful tool interactions.
 - Connection string must be provided to the app as `HTH_REDIS_URL`.
-

2. Security & Secret Configuration

The connection between [Claude.ai](#) and the Azure server is secured via **TLS** and a **Static Bearer Token**.


- **Secret Storage:** Store all sensitive values in **Azure Key Vault**.
- **Key Secrets to Store:**
 - `HTH_MCP_BEARER_TOKEN` : The unique key Claude will use to authenticate.
 - `HTH_REDIS_URL` : The Redis connection string.
 - `CLOUD_HARMONISE_*` : Relevant API credentials.
- **App Integration:** Reference the Key Vault secrets in the Container App environment variables using the syntax:

```
@Microsoft.KeyVault(SecretUri=https://<vault-name>.vault.azure.net/secrets/<secret-name>/)
```

- **Network Security:** Ensure "HTTPS Only" is toggled **ON** in the Azure Ingress settings.
-

3. Architecture Diagram

This diagram visualizes the flow between [Claude.ai](#), the MCP server, and the supporting Azure infrastructure.

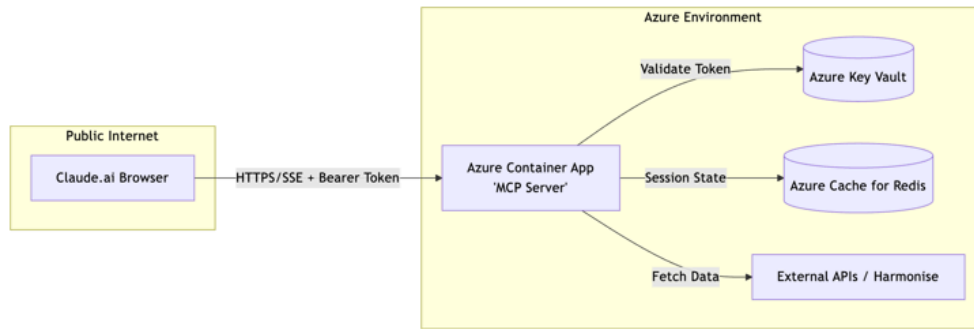

Logical Flow

Summary Checklist

1. Provision **Container App** (2 vCPU / 4 GB RAM).
2. Provision **Azure Cache for Redis**.
3. Store the **Bearer Token** in **Key Vault**.
4. Inject secrets into the Container App via **Key Vault references**.
5. Provide the public endpoint URL (e.g., `https://mcp-app.azurewebsites.net/mcp`) and the Token to the user for [Claude.ai](#) configuration.