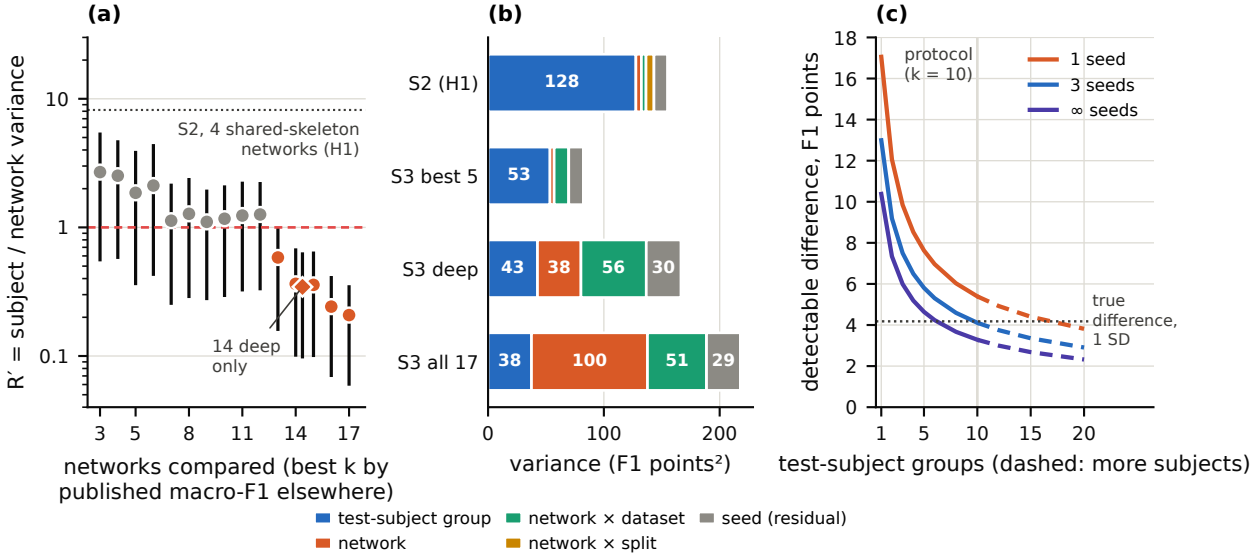
(a)
R′ = subject / network variance
10
1
0.1
S2, 4 shared-skeleton networks (H1)
14 deep only
3
5
8
11
14
17
networks compared (best k by published macro-F1 elsewhere)
(b)
S2 (H1)
S3 best 5
S3 deep
S3 all 17
128
53
43
38
56
30
38
100
51
29
0
100
200
variance (F1 points²)
(c)
detectable difference, F1 points
protocol (k = 10)
1 seed
3 seeds
∞ seeds
true difference, 1 SD
18
16
14
12
10
8
6
4
2
0
1
5
10
15
20
test-subject groups (dashed: more subjects)
test-subject group
network
network × dataset
network × split
seed (residual)