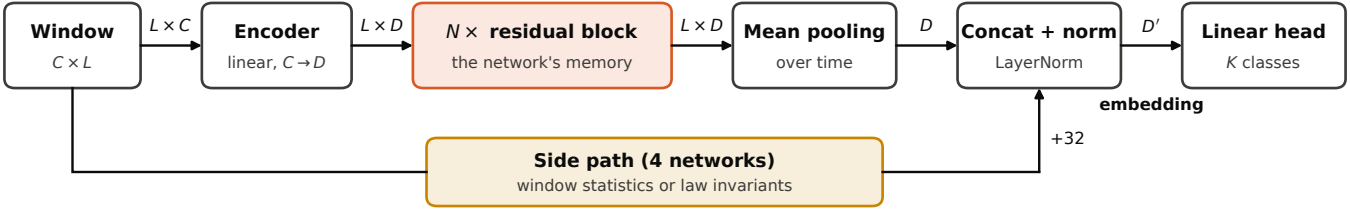
Window
$C \times L$
$L \times C$
Encoder
linear, $C \to D$
$L \times D$
$N \times$ residual block
the network's memory
$L \times D$
Mean pooling
over time
D
Concat + norm
LayerNorm
D'
Linear head
K classes
embedding
+32
Side path (4 networks)
window statistics or law invariants