

A PYTHON PROGRAM TO IMPLEMENT K-MEANS MODEL

Ex.No:9B

Date of Experiment: 25/10/2024

AIM:-

To implement a python program using a K-Means Algorithm in a model.

ALGORITHM:-

Step1: Import all the other necessary libraries(numpy as np, matplotlib.pyplot as plt and sklearn.tree,pandas as pd and seaborn as sns).

Step2: Select the number K to decide the number of clusters.

Step3: Select random K points or centroids. (It can be different from the input dataset). Step4:

Assign each data point to their closest centroid, which will form the predefined K clusters. Step5:

Calculate the variance and place a new centroid of each cluster.

Step6: Repeat the fourth steps, which means assign each datapoint to the new closest centroid of each cluster.


Step7: If any reassignment occurs, then go to step-5 else go to FINISH.

Step8: Train the model and plot the graph using scatterplot() function.

IMPLEMENTATION:-

```
data = pd.read_csv('../input/k-means-clustering/KNN (3).csv')
```

```
data.head(5)
```

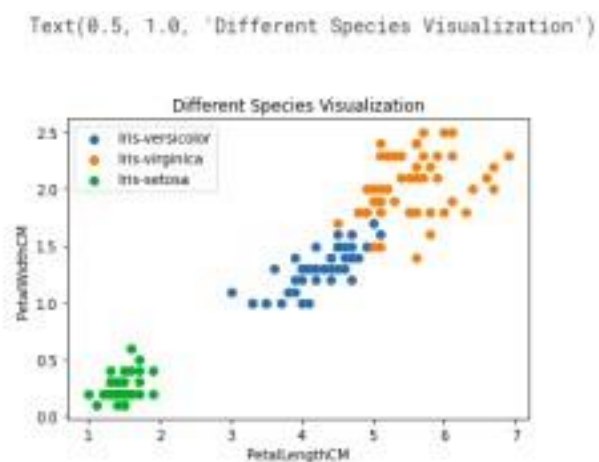

```
req_data = data.iloc[:,1:]
```

```
req_data.head(5)
```

	Sepal.Length.Cm	Sepal.Width.Cm	Petal.Length.Cm	Petal.Width.Cm	Species
0	5.1	3.5	1.4	0.2	Iris-setosa
1	4.9	3.0	1.4	0.2	Iris-setosa
2	4.7	3.2	1.3	0.2	Iris-setosa
3	4.6	3.1	1.5	0.2	Iris-setosa
4	5.0	3.6	1.4	0.2	Iris-setosa

```

shuffle_index = np.random.permutation(req_data.shape[0]) #shuffling the
row index of our dataset req_data = req_data.iloc[shuffle_index]
req_data.head(5)

```

	SepalLengthCm	SepalWidthCm	PetalLengthCm	PetalWidthCm	Species
45	4.8	3.0	1.4	0.3	Iris-setosa
50	7.0	3.2	4.7	1.4	Iris-versicolor
135	7.7	3.0	6.1	2.3	Iris-virginica
49	5.0	3.3	1.4	0.2	Iris-setosa
89	5.5	2.5	4.0	1.3	Iris-versicolor

```

train_size = int(req_data.shape[0]*0.7)

```

```

train_df =

```

```

req_data.iloc[:train_size,:]

```

```

test_df =

```

```

req_data.iloc[train_size:,:] train

```

```

= train_df.values test =

```

```

test_df.values y_true = test[:,-

```

```

1] print('Train_Shape:

```

```

',train_df.shape)

```

```

print('Test_Shape:

```

```

',test_df.shape)

```

```

Train_Shape: (105, 5)

```

```

Test_Shape: (45, 5)

```

```

from math import sqrt

def euclidean_distance(x_test, x_train):
    distance = 0
    for i in range(len(x_test)-1):
        distance += (x_test[i]-x_train[i])**2
    return sqrt(distance)

def get_neighbors(x_test, x_train, num_neighbors):
    distances = []
    data = []
    for i in x_train:
        distances.append(euclidean_distance(x_test, i))
        data.append(i)
    distances = np.array(distances)
    data = np.array(data)
    sort_indexes = distances.argsort() #argsort() function returns indices by sorting distances
    data = data[sort_indexes] #modifying our data based on sorted indices, so that we can get the
    nearest neighbors
    return data[:num_neighbors]

def prediction(x_test, x_train, num_neighbors):
    classes = []
    neighbors = get_neighbors(x_test, x_train, num_neighbors)
    for i in neighbors:
        classes.append(i[-1])

```

```
predicted = max(classes, key=classes.count) #taking the most repeated class  
return predicted
```

```
def predict_classifier(x_test):  
    classes = []  
    neighbors = get_neighbors(x_test, req_data.values, 5)  
    for i in neighbors:  
        classes.append(i[-1])  
    predicted = max(classes,  
key=classes.count) print(predicted)  
    return predicted
```

```
def accuracy(y_true, y_pred):  
    num_correct = 0  
    for i in range(len(y_true)):  
        if y_true[i]==y_pred[i]:  
            num_correct+=1  
    accuracy =  
    num_correct/len(y_true) return  
    accuracy
```

```
y_pred = []  
for i in test:
```

```
y_pred.append(prediction(i, train, 5))  
y_pred
```

```
['Iris-virginica',  
 'Iris-versicolor',  
 'Iris-versicolor',  
 'Iris-setosa',  
 'Iris-virginica',  
 'Iris-setosa',  
 'Iris-setosa',  
 'Iris-setosa',  
 'Iris-virginica',  
 'Iris-versicolor',  
 'Iris-setosa',  
 'Iris-versicolor',  
 'Iris-versicolor',  
 'Iris-virginica',  
 'Iris-setosa',  
 'Iris-setosa',  
 'Iris-versicolor',  
 'Iris-virginica',  
 'Iris-virginica',  
 'Iris-setosa',  
 'Iris-virginica',  
 'Iris-versicolor',  
 'Iris-setosa',  
 'Iris-setosa',  
 'Iris-versicolor',  
 'Iris-setosa',  
 'Iris-setosa',  
 'Iris-versicolor',  
 'Iris-virginica',  
 'Iris-versicolor',  
 'Iris-virginica',  
 'Iris-versicolor',  
 'Iris-versicolor',  
 'Iris-virginica',  
 'Iris-virginica',  
 'Iris-versicolor',  
 'Iris-virginica',  
 'Iris-setosa',  
 'Iris-setosa',  
 'Iris-virginica',  
 'Iris-virginica',  
 'Iris-setosa',  
 'Iris-versicolor',  
 'Iris-virginica',  
 'Iris-versicolor']
```

```
accuracy = accuracy(y_true, y_pred)
```

accuracy

0.9555555555555556

test_df.sample(5)

	SepalLengthCm	SepalWidthCm	PetalLengthCm	PetalWidthCm	Species
113	5.7	2.5	5.0	2.0	Iris-virginica
125	7.2	3.2	6.0	1.8	Iris-virginica
149	5.9	3.0	5.1	1.8	Iris-virginica
94	5.6	2.7	4.2	1.3	Iris-versicolor
99	5.7	2.8	4.1	1.3	Iris-versicolor

RESULT:-

Thus the python program to implement the K-Means model has been successfully implemented and the results have been verified and analyzed.