
>
 Catalogs > C Event Triggers > Extensions > Foreign Data Wrappers > Languages Schemas (1) ✓ ♠ public > AL Collations > n Domains > FTS Configurations > TA FTS Dictionaries > Aa FTS Parsers > FTS Templates > III Foreign Tables > (a) Functions > Materialized Views > () Procedures > 1..3 Sequences ▼ Tables (1) → I student ▼ ☐ Columns (5) student_id first_name last_name email phone > \ Constraints

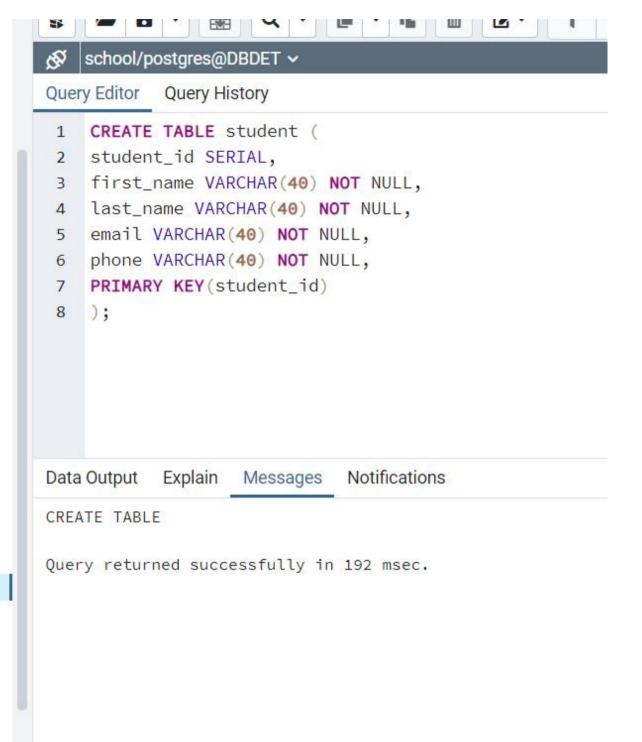

school/postgres@DBDET ▼


Query Editor Query History


```
1   CREATE TABLE student_exams (
2   exam_id SERIAL,
3   exam_date VARCHAR(40) NOT NULL,
4   modulea VARCHAR(40) NOT NULL,
5   grade DECIMAL(3,1) NOT NULL,
6   student_id INT NOT NULL,
7   PRIMARY KEY(exam_id),
8   FOREIGN KEY (student_id) REFERENCES student(student_id)
9  );
```

Data Output Explain Messages Notifications

CREATE TABLE

Query returned successfully in 109 msec.

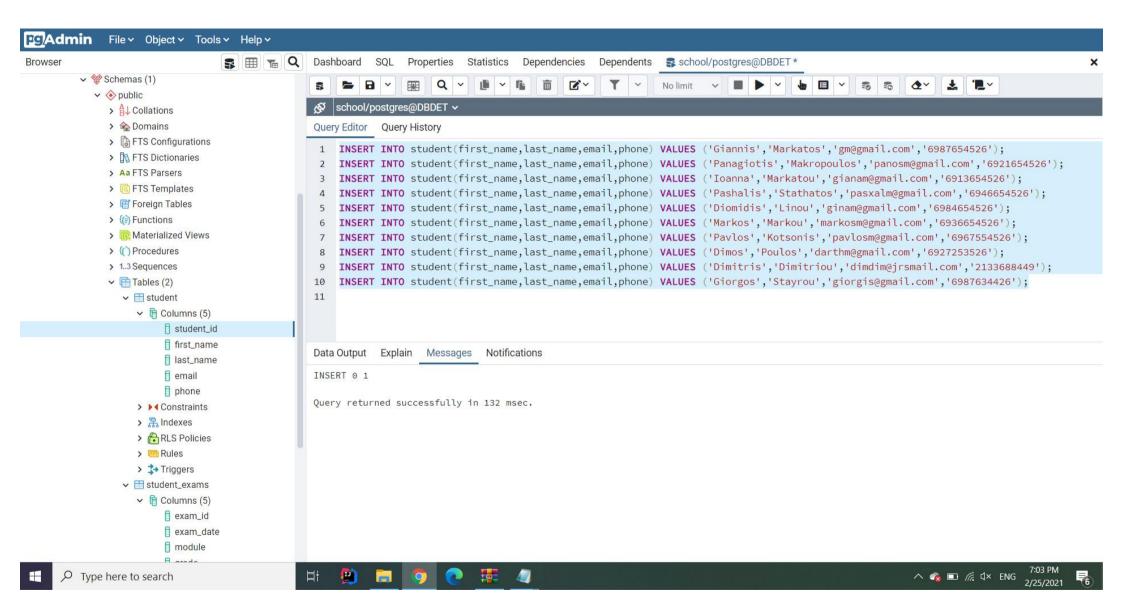

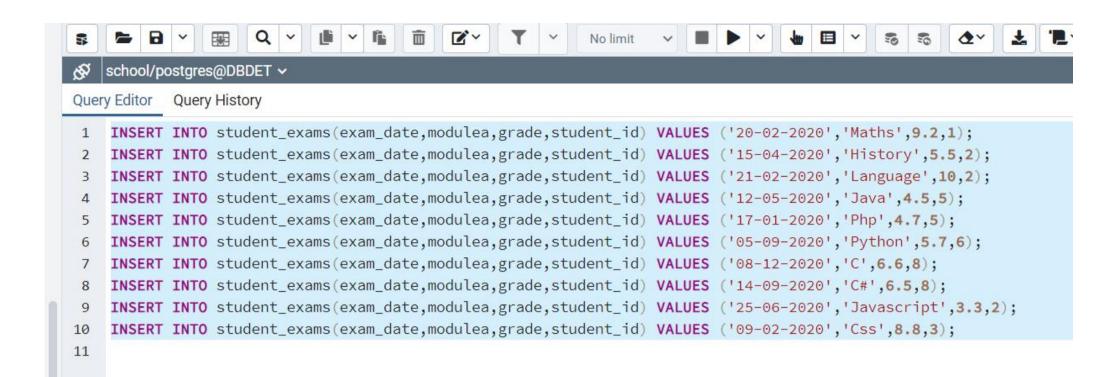

Data Output Explain Messages Notifications

INSERT 0 1

Query returned successfully in 115 msec.