# American Samoa Model Checks


Meg Oshima


2022-08-16

This is a summary report for the LERU base model run.

### **Model Output**

### Input Data

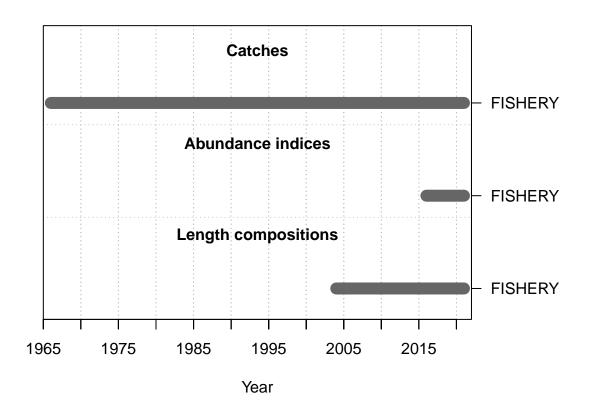

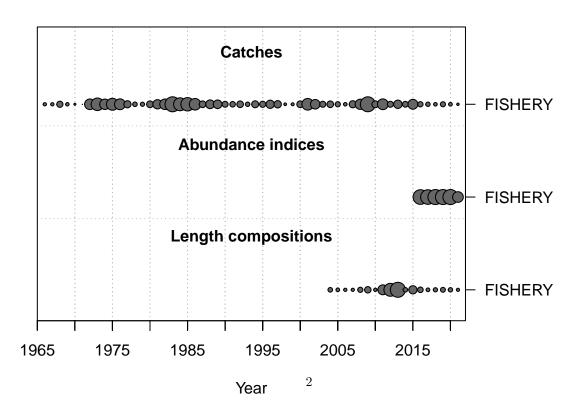

#### Convergence Check

Converged

```
## [1] "1 NOTE: Max data length bin: 38.5 < max pop len bins: 43; so will accumulate larger pop len b
## [2] "2 parameter init value is greater than parameter max 0.8 > 0.6 for parm: 14; search for <now c
## [3] " N parameters are on or within 1% of min-max bound: 1; check results, variance may be suspect"
## [4] "N warnings: 2"
```

#### Fit to Model


#### **CPUE**

## 1

##
## Running Runs Test Diagnosics for Index
## Plotting Residual Runs Tests


MaxGrad

TRUE 6.28301e-05

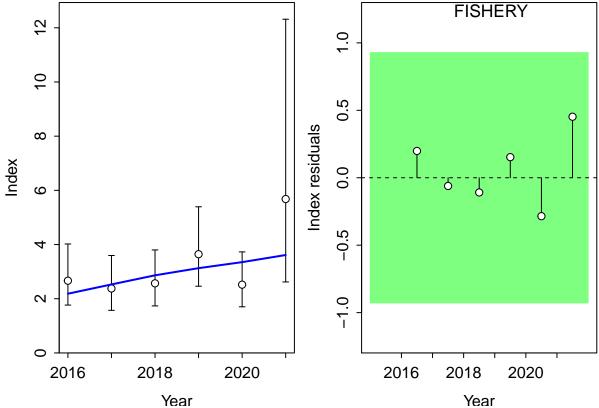

```
##
## Runs Test stats by Index:
## Plotting JABBA residual plot
## Warning in simpleLoess(y, x, w, span, degree = degree, parametric = parametric, : Chernobyl! trL>n 6
```

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric = parametric, : Chernobyl! trL>n 6

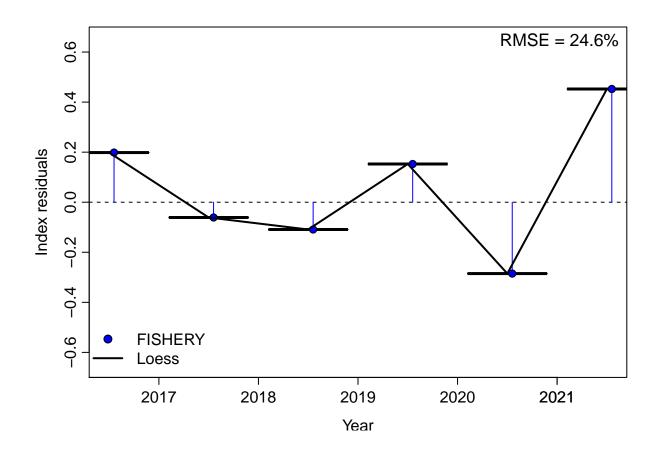


##
## RMSE stats by Index:

#### Length Comp


#Factor	Fleet	$New\_Var\_adj$	Type	Name
4	1	0.095952	len	FISHERY


```
##
## Running Runs Test Diagnosics for Mean length
## Plotting Residual Runs Tests


##
## Runs Test stats by Mean length:
## Index runs.p test sigma3.lo sigma3.hi type
## 1 FISHERY 0.028 Failed -0.03546265 0.03546265 len
## Plotting JABBA residual plot
```

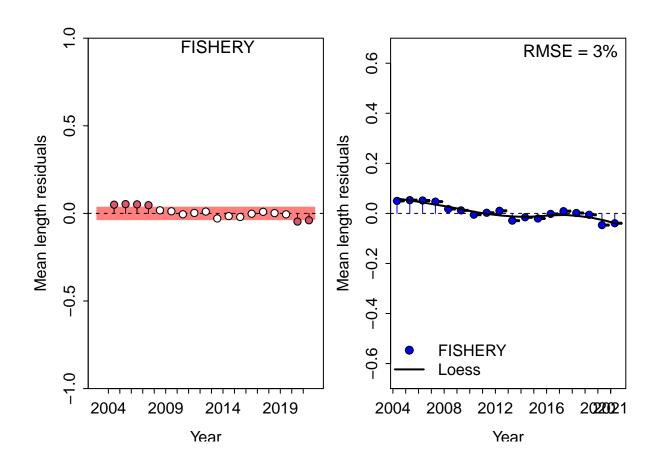

## RMSE stats by Index:

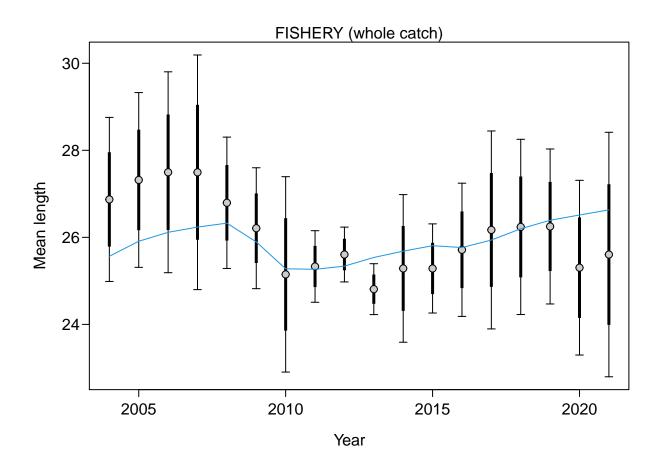

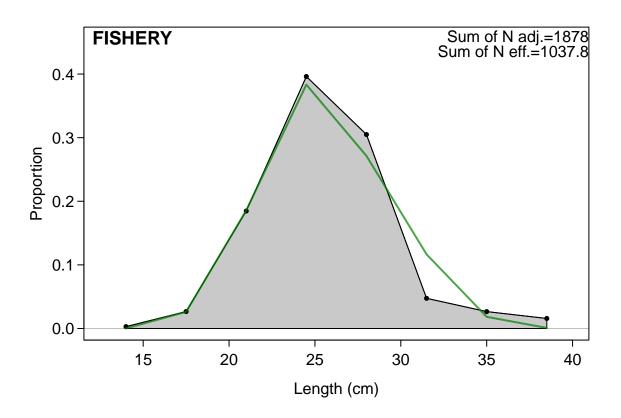

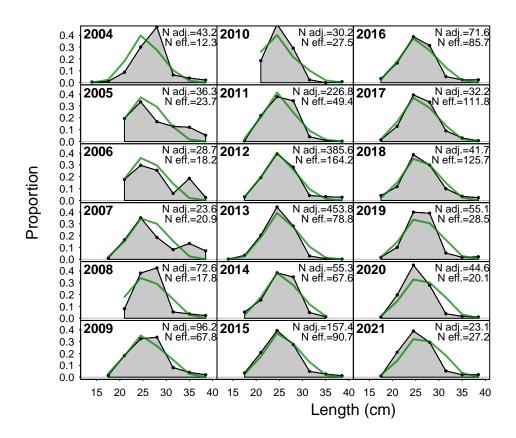

#### Retrospective and Hindcasting


#### Retrospective

## Plotting Retrospective pattern

##

## Mohn's Rho stats, including one step ahead forecasts:

## Plotting Retrospective pattern

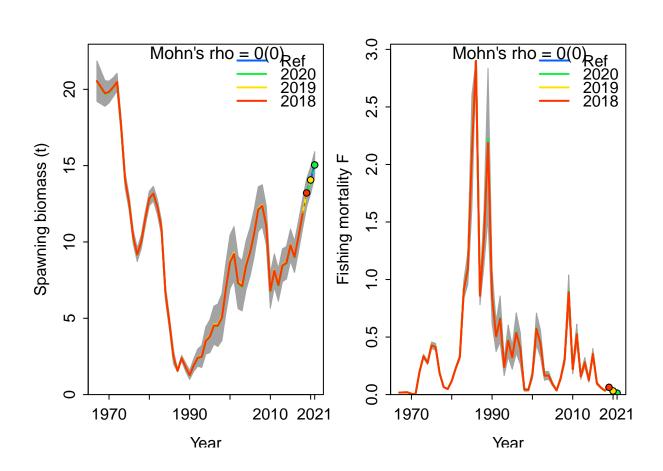


## Mohn's Rho stats, including one step ahead forecasts:

```
## type peel Rho ForecastRho
## 1 F 2020 0.0070382545 0.0065463402
## 2 F 2019 -0.0003916954 -0.0001545829
## 3 F 2018 -0.0010833321 -0.0011071713
## 4 F Combined 0.0018544090 0.0017615286
```


#### Hindcasting

```
## Plotting Hindcast Cross-Validation (one-step-ahead)
##
## Computing MASE with only 2 of 3 prediction residuals for Index FISHERY
##
```

## Warning: Unequal spacing of naive predictions residuals may influence the interpretation of MASE

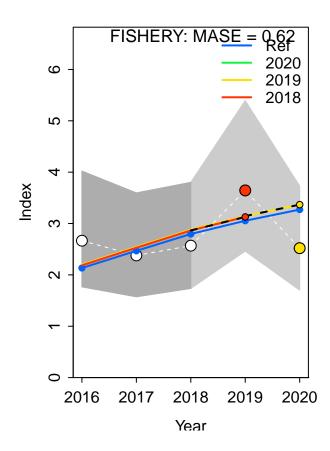

```
##
## MASE stats by Index:
## Plotting Hindcast Cross-Validation (one-step-ahead)
##
## Computing MASE with only 2 of 3 prediction residuals for Index FISHERY
##
## Warning: Unequal spacing of naive predictions residuals may influence the interpretation of MASE
##
## MASE stats by Index:
```

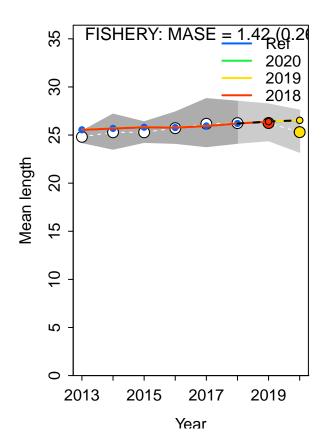

#### **Recruitment Deviations**

## Skipped SSplotrecdevs - no rec devs estimated

#### Likelihood Profile

- ## [1] "SR\_LN"
- ## Parameter matching profile.string=SR\_LN: SR\_LN(R0)
- ## Parameter values (after subsetting based on input 'models'): 3, 3.2, 3.4, 3.6, 3.8, 4, 4.2, 4.4, 4.6
- ##
- ## Likelihood components showing max change as fraction of total change.
- ## To change which components are included, change input 'minfraction'.

##		frac_change	include	label
##	TOTAL	1.0000	TRUE	Total
##	Catch	0.0941	TRUE	Catch
##	Equil_catch	0.0005	FALSE	Equilibrium catch
##	Survey	0.0127	TRUE	Index data
##	Length_comp	0.9007	TRUE	Length data
##	Recruitment	0.0000	FALSE	Recruitment

```
## InitEQ_Regime
                              0.0000
                                       FALSE Initital equilibrium recruitment
## Forecast_Recruitment
                              0.0000
                                       FALSE
                                                          Forecast recruitment
## Parm_priors
                              0.0000
                                       FALSE
                                                                        Priors
## Parm_softbounds
                              0.0000
                                       FALSE
                                                                   Soft bounds
## Parm_devs
                              0.0000
                                       FALSE
                                                          Parameter deviations
## Crash_Pen
                              0.0000
                                       FALSE
                                                                 Crash penalty
```

## Parameter matching profile.string = 'SR\_LN': 'SR\_LN(R0)


## Parameter values (after subsetting based on input 'models'): 3, 3.2, 3.4, 3.6, 3.8, 4, 4.2, 4.4, 4.6

## Fleet-specific likelihoods showing max change as fraction of total change.


## To change which components are included, change input 'minfraction'.

## frac\_change include

## prof.table....c.1.3.. 1 TRUE

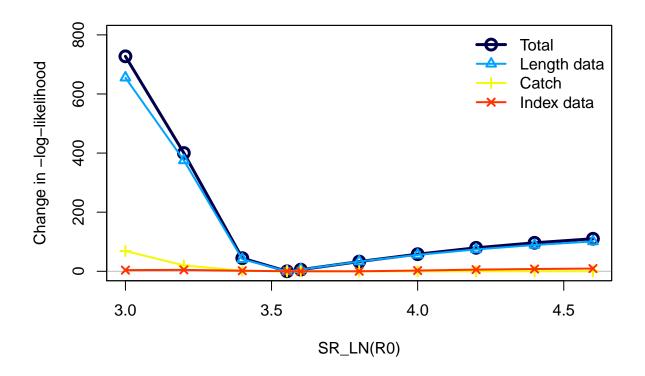


# Changes in survey likelihood by fleet

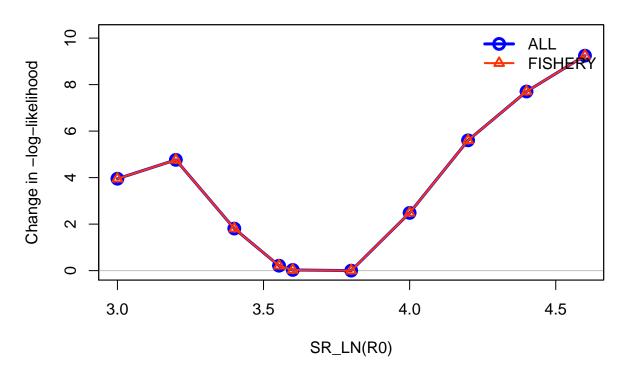


### Management Quantities


```
##
## starter.sso with Bratio: SSB/SSBMSY and F: _abs_F
##
```

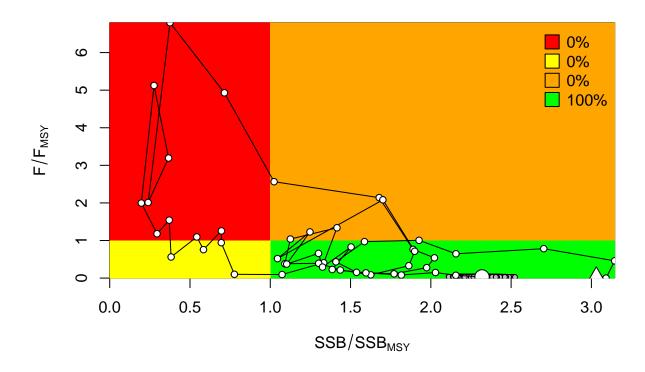


##
## Plot Comparison of stock

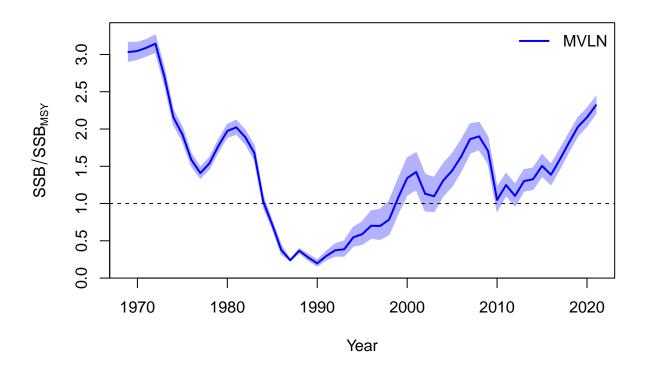


## Plot Comparison of harvest

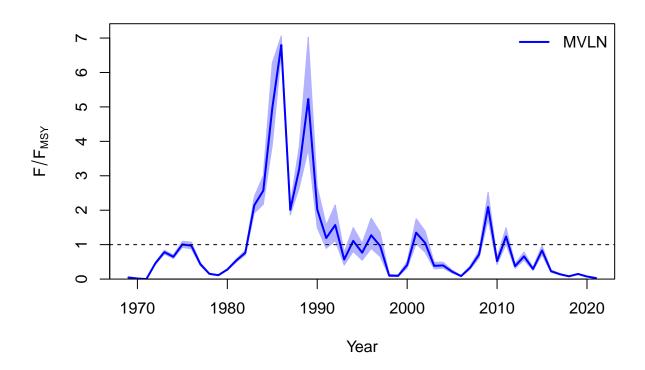

##
## Plot Comparison of SSB

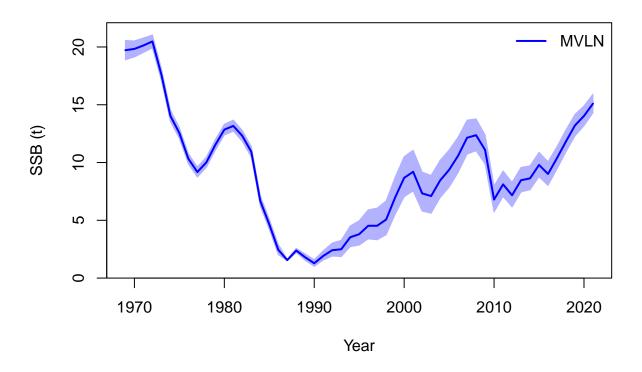

## Plot Comparison of F

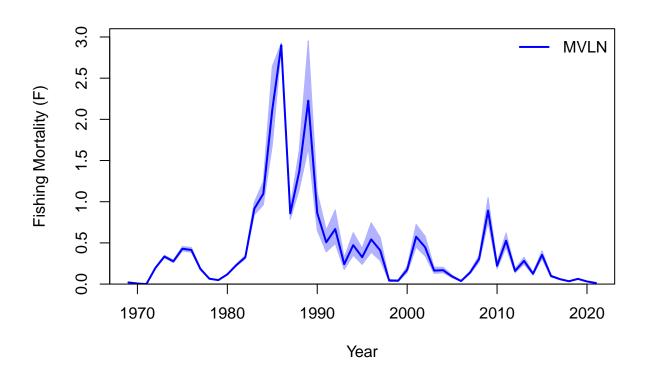

## RStudioGD ## 2

# Jitter

