American Samoa Model Checks


Meg Oshima


2022-08-11

This is a summary report for the APVI base model run.

Model Output

Input Data

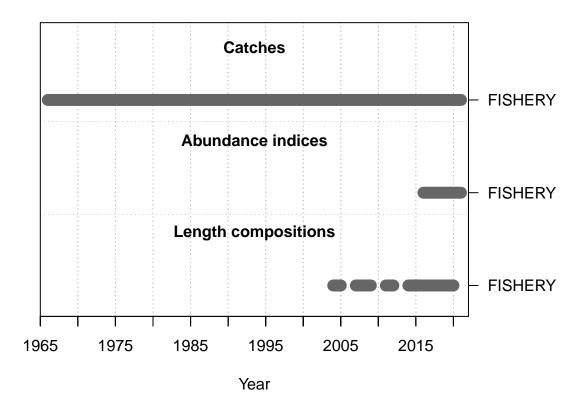

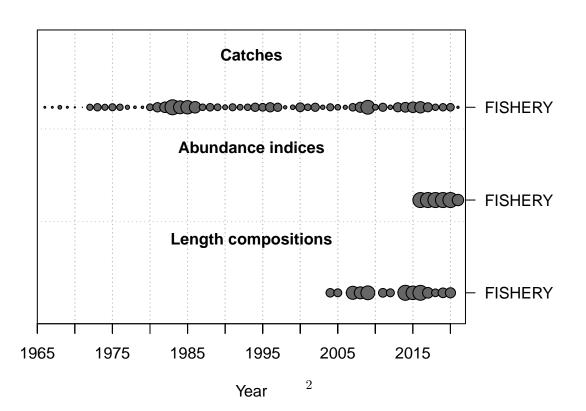

Convergence Check

Converged

```
## 1 TRUE 8.10227e-05

## [1] "1 NOTE: Max data length bin: 85 < max pop len bins: 94; so will accumulate larger pop len bin
## [2] "2 warning: poor convergence in Fmsy, final dy/dy2= -0.00679373"


## [3] " N parameters are on or within 1% of min-max bound: 2; check results, variance may be suspect"
## [4] "N warnings: 2"</pre>
```

Fit to Model

CPUE


##
Running Runs Test Diagnosics for Index
Plotting Residual Runs Tests

MaxGrad

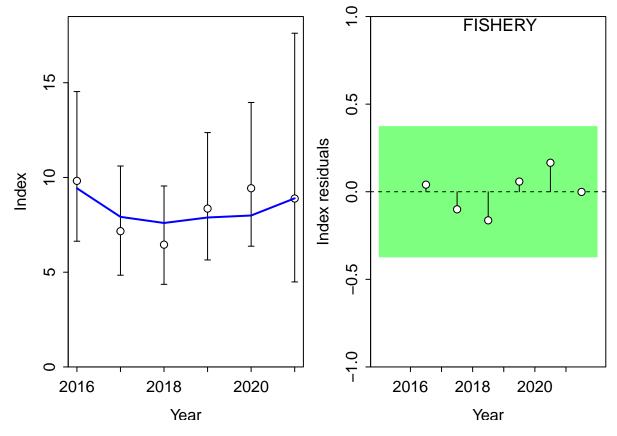

```
##
## Runs Test stats by Index:
## Plotting JABBA residual plot
## Warning in simpleLoess(y, x, w, span, degree = degree, parametric = parametric, : Chernobyl! trL>n 6
```

Warning in simpleLoess(y, x, w, span, degree = degree, parametric = parametric, : Chernobyl! trL>n 6

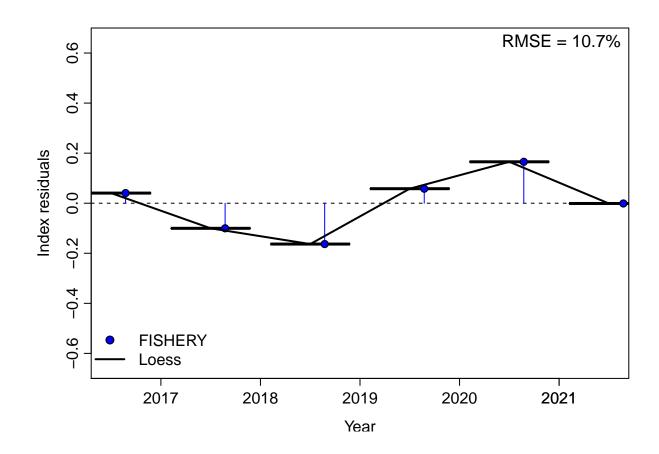

##
RMSE stats by Index:

Length Comp

##


#Factor	Fleet	New_Var_adj	Type	Name
4	1	0.337891	len	FISHERY

```
## Running Runs Test Diagnosics for Mean length
## Plotting Residual Runs Tests


##
## Runs Test stats by Mean length:


## Index runs.p test sigma3.lo sigma3.hi type
## 1 FISHERY 0.397 Passed -0.09771302 0.09771302 len


## Plotting JABBA residual plot
```

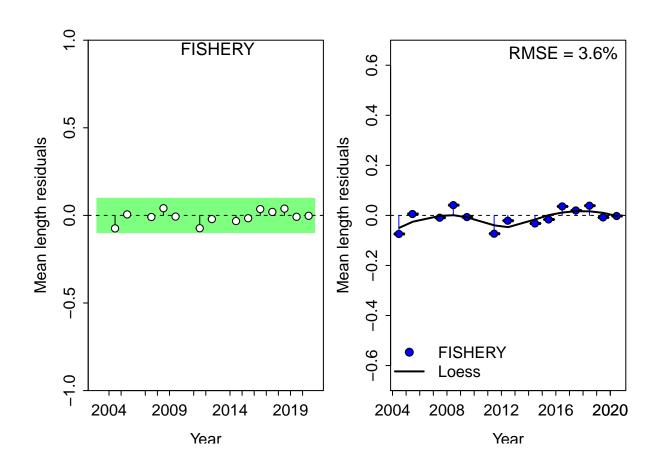

##
RMSE stats by Index:

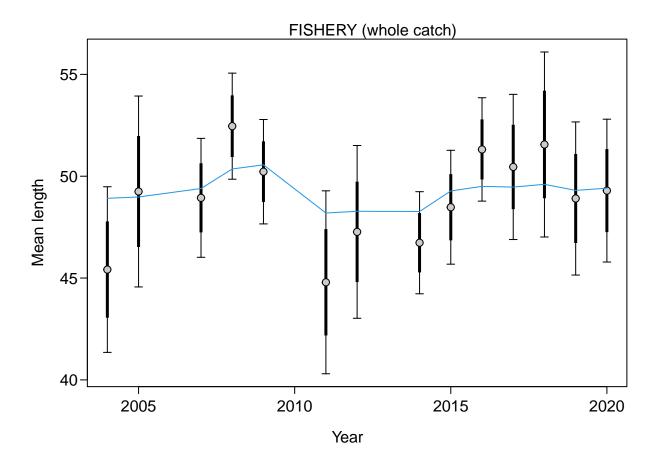

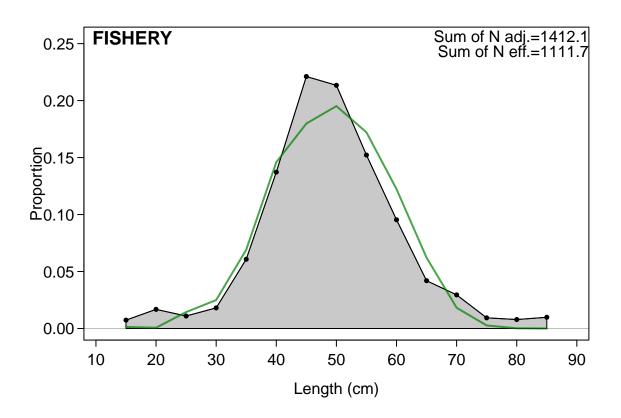

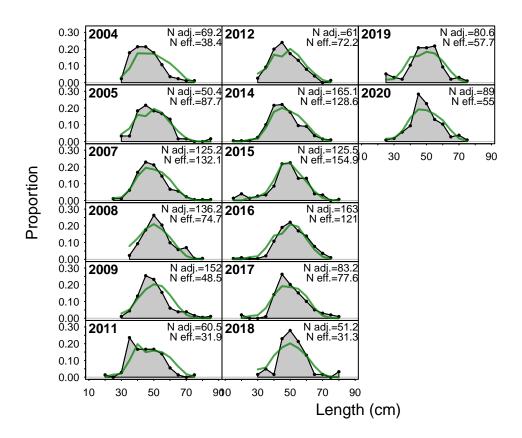

Retrospective and Hindcasting


Retrospective

Plotting Retrospective pattern

##

 $\mbox{\tt \#\#}$ Mohn's Rho stats, including one step ahead forecasts:

Plotting Retrospective pattern

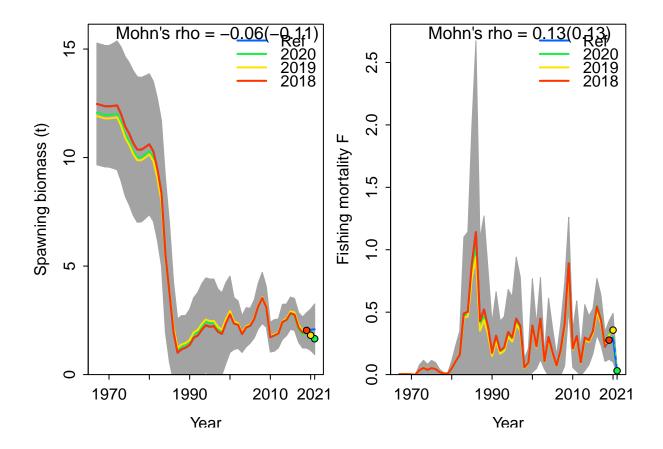


Mohn's Rho stats, including one step ahead forecasts:

```
## type peel Rho ForecastRho
## 1 F 2020 0.2465893979 0.1839975312
## 2 F 2019 0.1422917022 0.2023916404
## 3 F 2018 0.0001074484 0.0001594833
## 4 F Combined 0.1296628495 0.1288495516
```


Hindcasting

```
## Plotting Hindcast Cross-Validation (one-step-ahead)
##
## Computing MASE with only 2 of 3 prediction residuals for Index FISHERY
##
```


Warning: Unequal spacing of naive predictions residuals may influence the interpretation of MASE

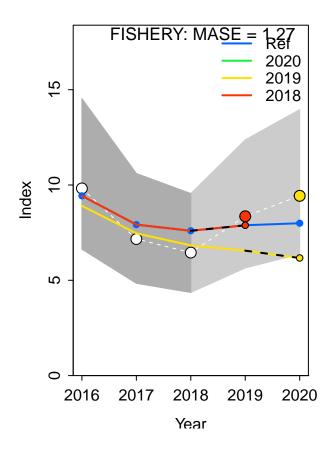


```
##
## MASE stats by Index:
## Plotting Hindcast Cross-Validation (one-step-ahead)
##
## Computing MASE with only 2 of 3 prediction residuals for Index FISHERY
##
## Warning: Unequal spacing of naive predictions residuals may influence the interpretation of MASE
##
## MASE stats by Index:
```

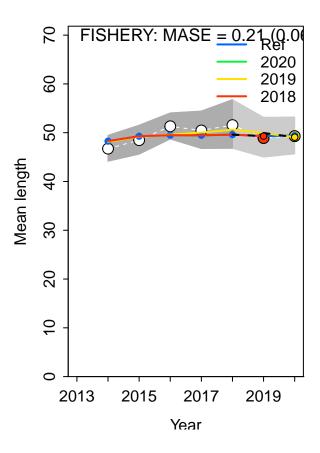

Recruitment Deviations

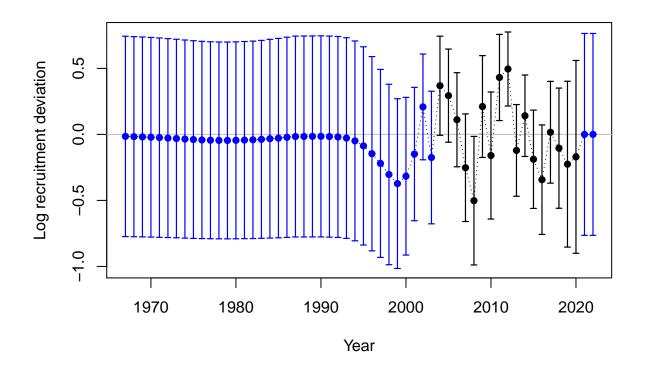


Recruitment deviation variance

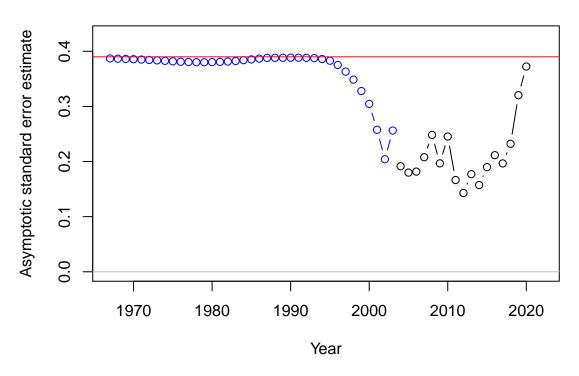


Likelihood Profile

```
## [1] "SR LN"
## Parameter matching profile.string=SR_LN: SR_LN(R0)
## Parameter values (after subsetting based on input 'models'): 0.2, 0.4, 0.6, 0.8, 1, 1.2, 0.707016
## Likelihood components showing max change as fraction of total change.
## To change which components are included, change input 'minfraction'.
##
                        frac_change include
                                                                       label
## TOTAL
                            1.0000
                                      TRUE
                                                                       Total
## Catch
                            0.6398
                                      TRUE
                                                                      Catch
## Equil_catch
                            0.0000
                                    FALSE
                                                           Equilibrium catch
## Survey
                            0.2118
                                     TRUE
                                                                 Index data
## Length comp
                            0.3022
                                      TRUE
                                                                Length data
## Recruitment
                            0.2871
                                      TRUE
                                                                Recruitment
                            0.0000 FALSE Initital equilibrium recruitment
## InitEQ_Regime
## Forecast_Recruitment
                          0.0000 FALSE
                                                       Forecast recruitment
## Parm_priors
                            0.0000 FALSE
                                                                     Priors
                            0.0000 FALSE
                                                                Soft bounds
## Parm_softbounds
                            0.0000 FALSE
## Parm devs
                                                       Parameter deviations
## Crash_Pen
                            0.0000
                                    FALSE
                                                               Crash penalty
## Parameter matching profile.string = 'SR_LN': 'SR_LN(RO)
## Parameter values (after subsetting based on input 'models'): 0.2, 0.4, 0.6, 0.8, 1, 1.2, 0.707016,
## Fleet-specific likelihoods showing max change as fraction of total change.
## To change which components are included, change input 'minfraction'.
                        frac_change include
## prof.table....c.1.3..
```

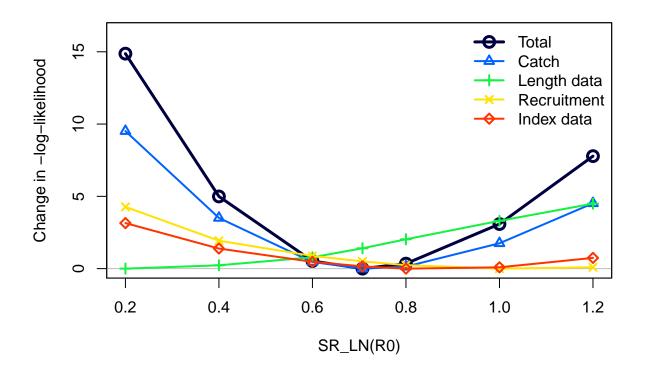


Changes in survey likelihood by fleet

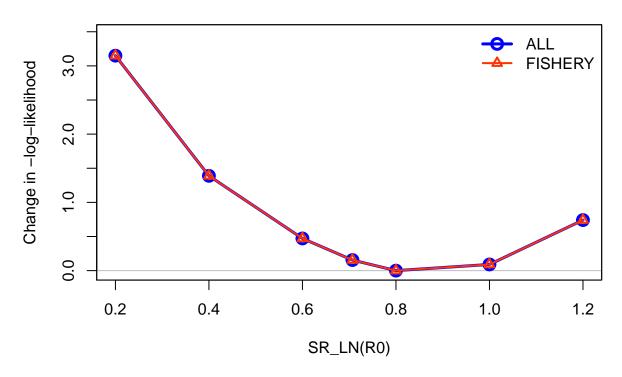


Management Quantities


```
##
## starter.sso with Bratio: SSB/SSBMSY and F: _abs_F
##
```

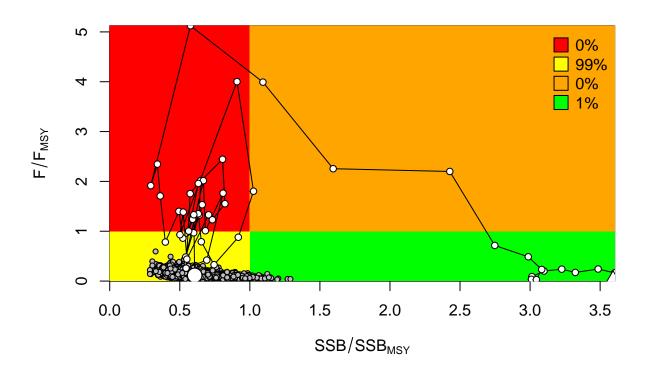


##
Plot Comparison of stock

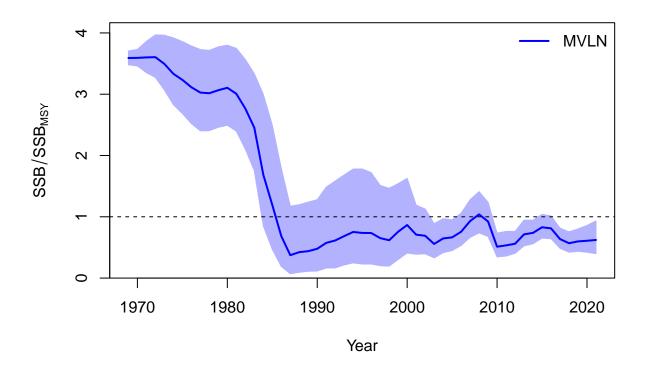


Plot Comparison of harvest

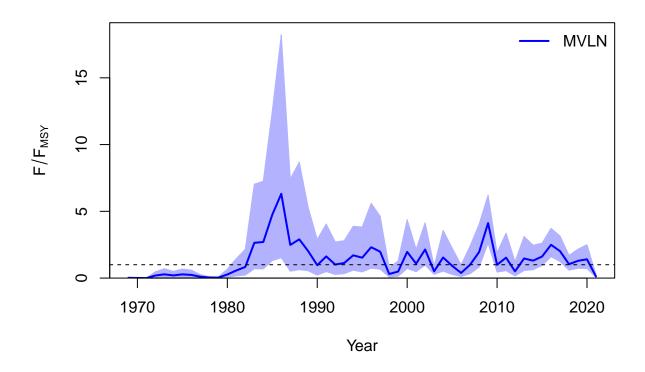

##
Plot Comparison of SSB

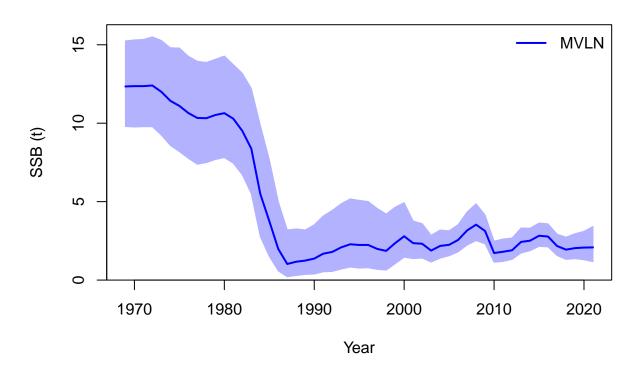

Plot Comparison of F

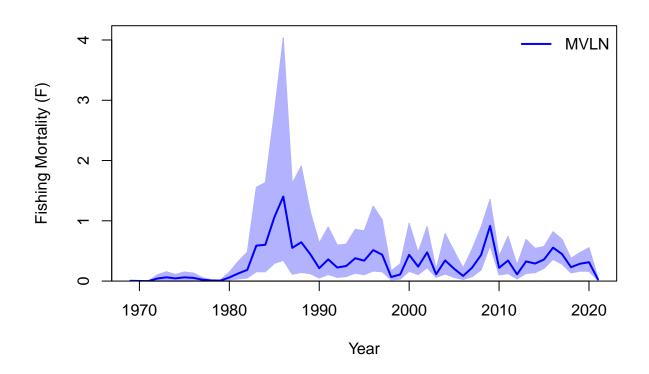

RStudioGD ## 2

Jitter

