American Samoa Model Checks

Meg Oshima

2022-08-16

This is a summary report for the LUKA base model run.

Model Output

Input Data

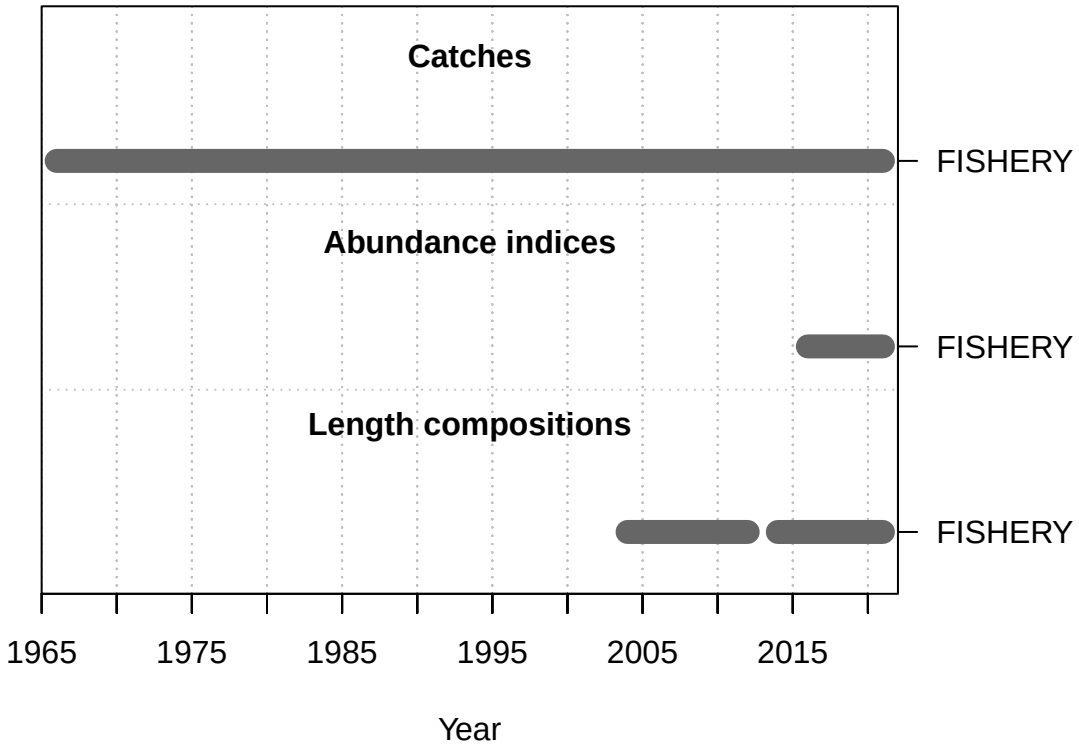

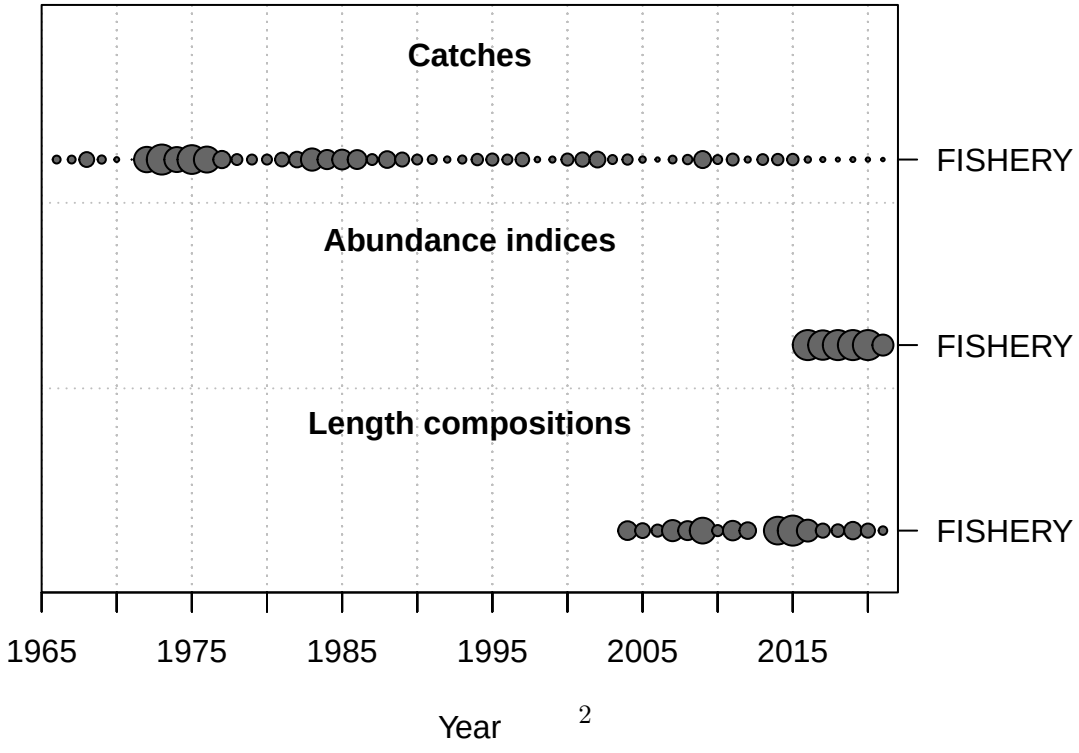

Convergence Check

```
##   Converged     MaxGrad
## 1      TRUE 5.89582e-06
```

```
## [1] "1 NOTE:  Max data length bin: 28  < max pop len bins: 31; so will accumulate larger pop len bins
## [2] "2 parameter init value is greater than parameter max 11.2 > 10 for parm: 2 ; search for <now ch
## [3] "3 warning: poor convergence in Fspr search 0.4 0.421746"
## [4] "4 warning: Fmult = 40 cannot get high enough to achieve low SPR target: 0.4; SPR achieved is: 0
## [5] "5 warning: poor convergence in Fmsy, final dy/dy2= -0.0488636"
## [6] "6 Forecast F capped by max possible F from control file: 2.9"
## [7] "7 Forecast F capped by max possible F from control file: 2.9"
## [8] "N warnings: 7"
```

Fit to Model

CPUE

```
##
##  Running Runs Test Diagnosics for Index
## Plotting Residual Runs Tests
```

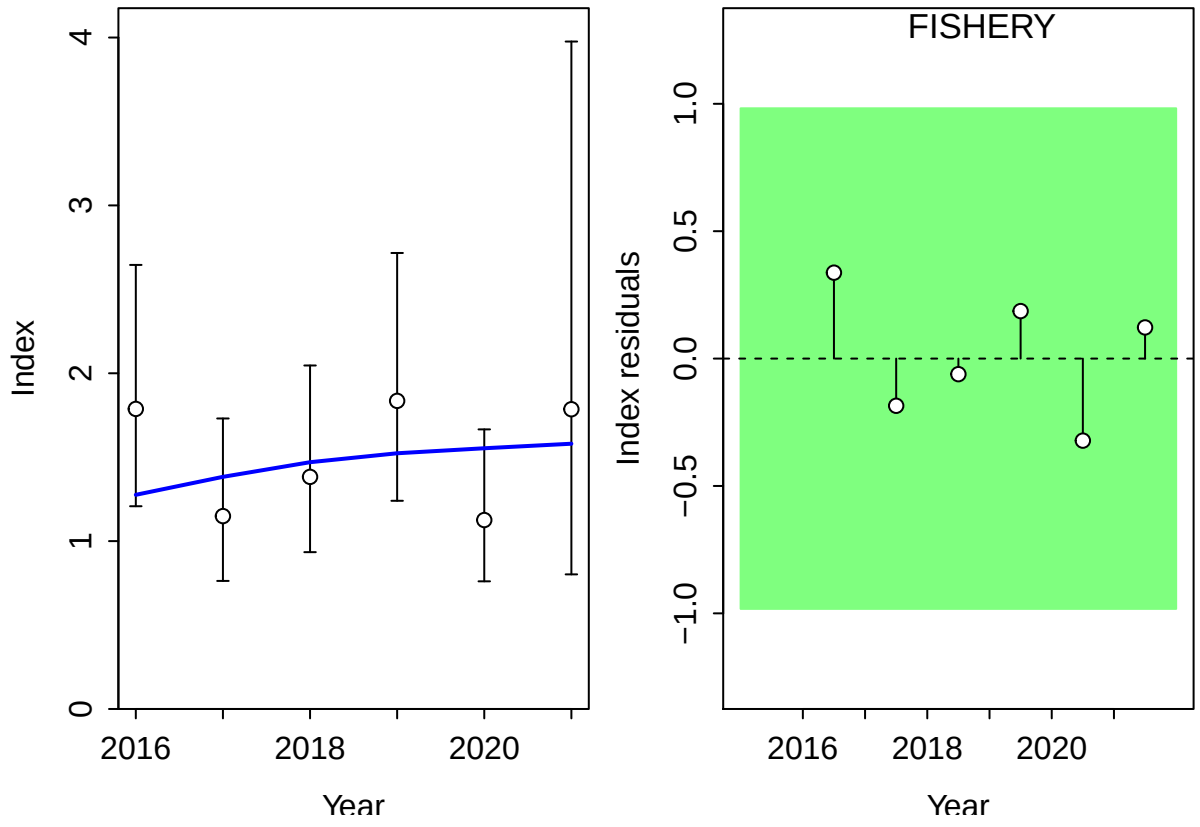


```
##
## Runs Test stats by Index:
## Plotting JABBA residual plot
```

```
## Warning in simpleLoess(y, x, w, span, degree = degree, parametric = parametric, : Chernobyl! trL>n 6

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric = parametric, : Chernobyl! trL>n 6

## Warning in sqrt(sum.squares/one.delta): NaNs produced
```

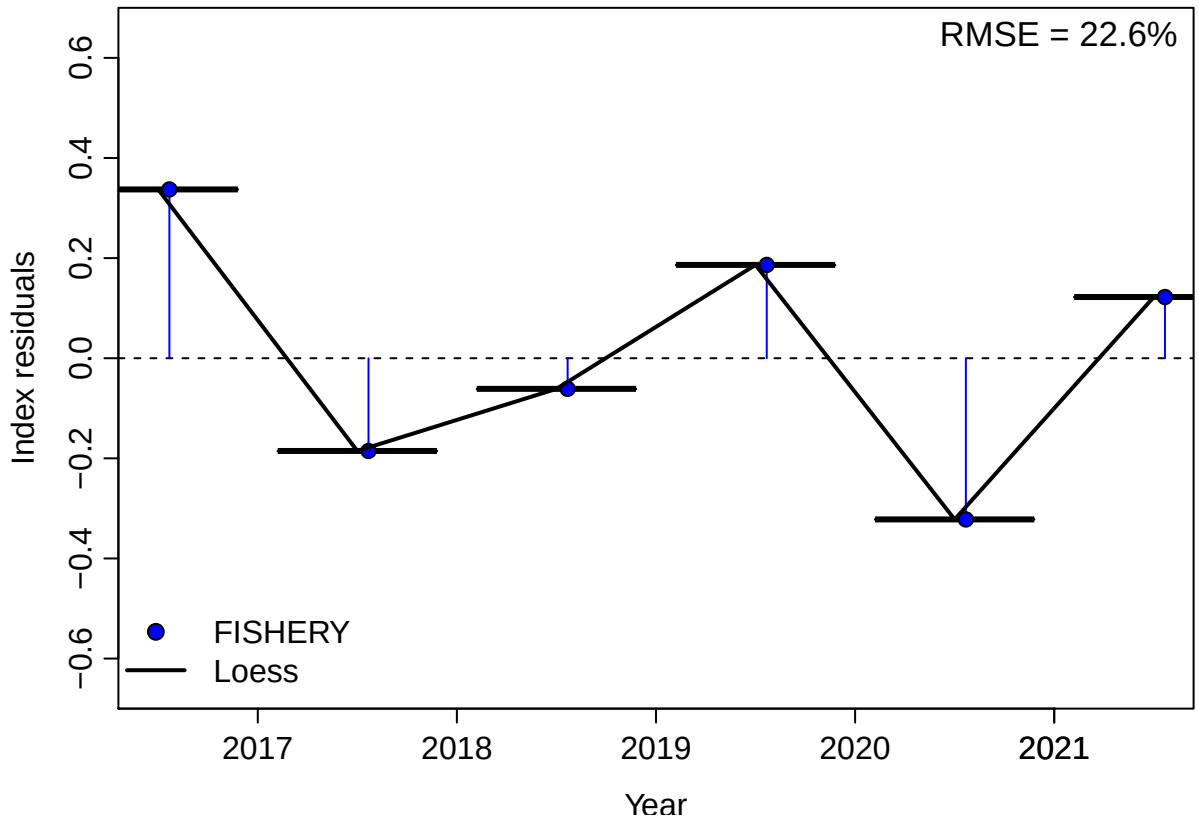


```
##
## RMSE stats by Index:
```

Length Comp

#Factor	Fleet	New_Var_adj	Type	Name
4	1	0.351796	len	FISHERY

```
##
##  Running Runs Test Diagnosics for Mean length
## Plotting Residual Runs Tests

##
## Runs Test stats by Mean length:

##     Index runs.p   test   sigma3.lo  sigma3.hi type
## 1 FISHERY  0.962 Passed -0.02942583 0.02942583  len
```

```
## Plotting JABBA residual plot
```

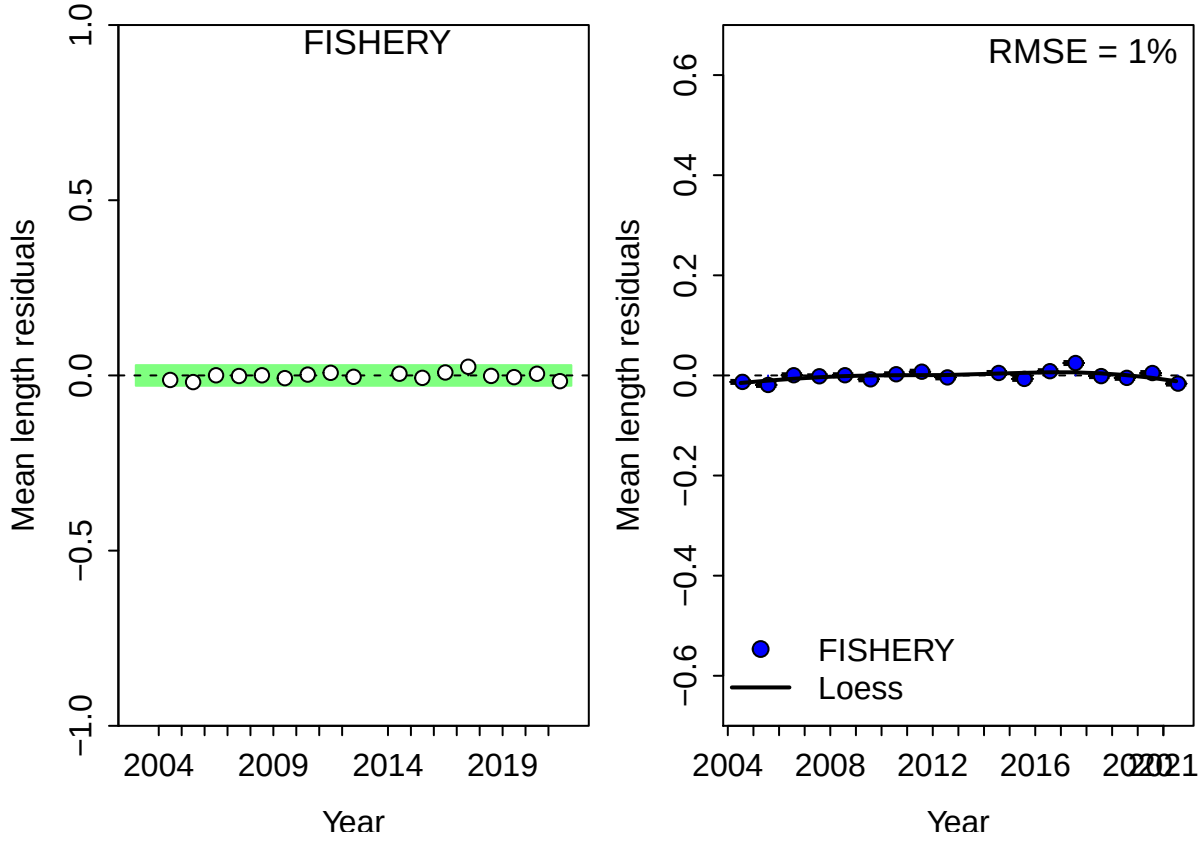


```
##
## RMSE stats by Index:

##    indices RMSE.perc nobs
## 1  FISHERY         1   17
## 2 Combined         1   17
```

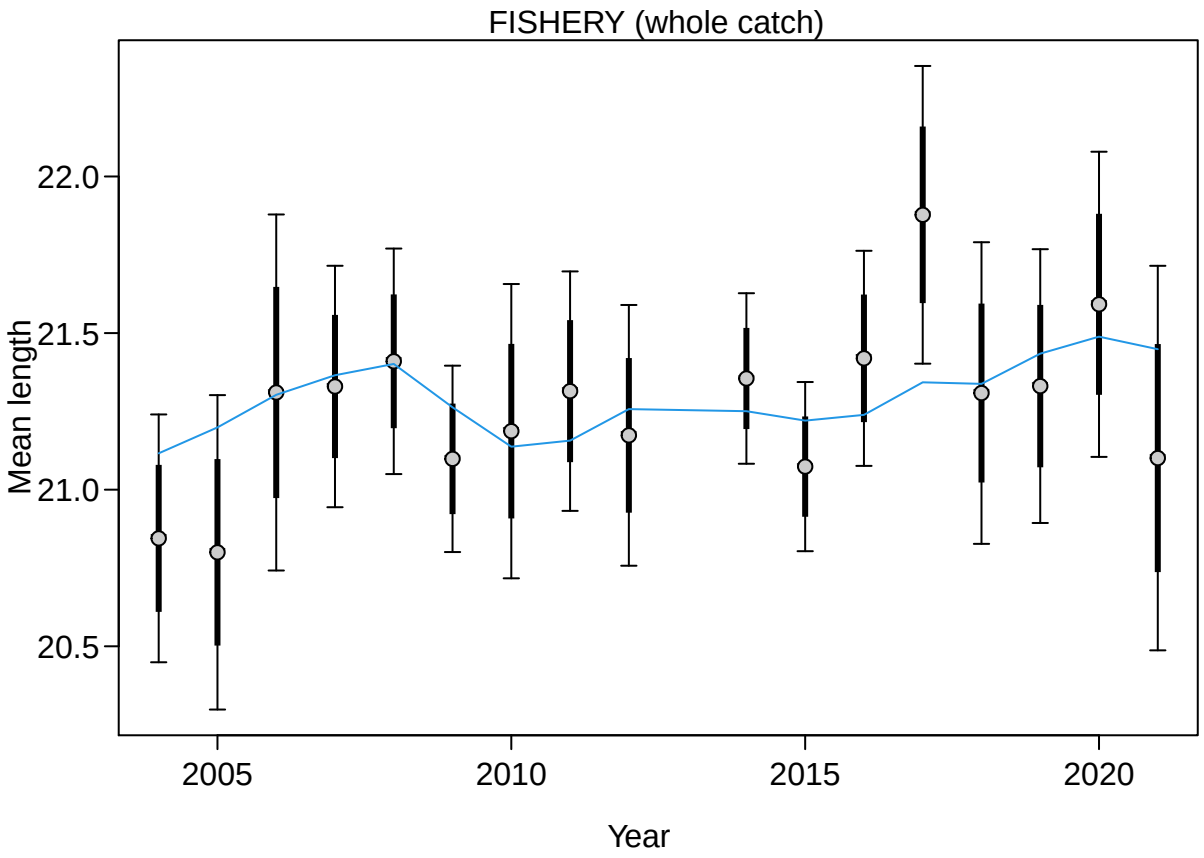
FISHERY (whole catch)
Mean length
22.0
21.5
21.0
20.5
2005
2010
2015
2020
Year

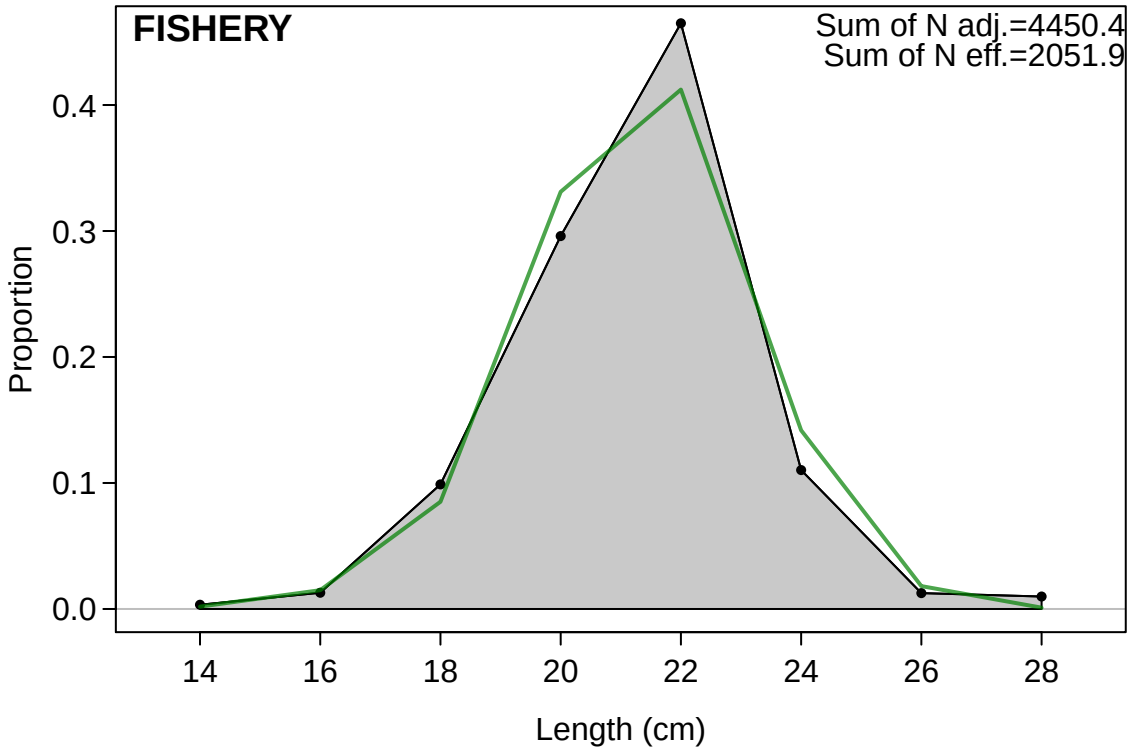
FISHERY
Sum of N adj.=4450.4
Sum of N eff.=2051.9
Proportion
0.0
0.1
0.2
0.3
0.4
14
16
18
20
22
24
26
28
Length (cm)

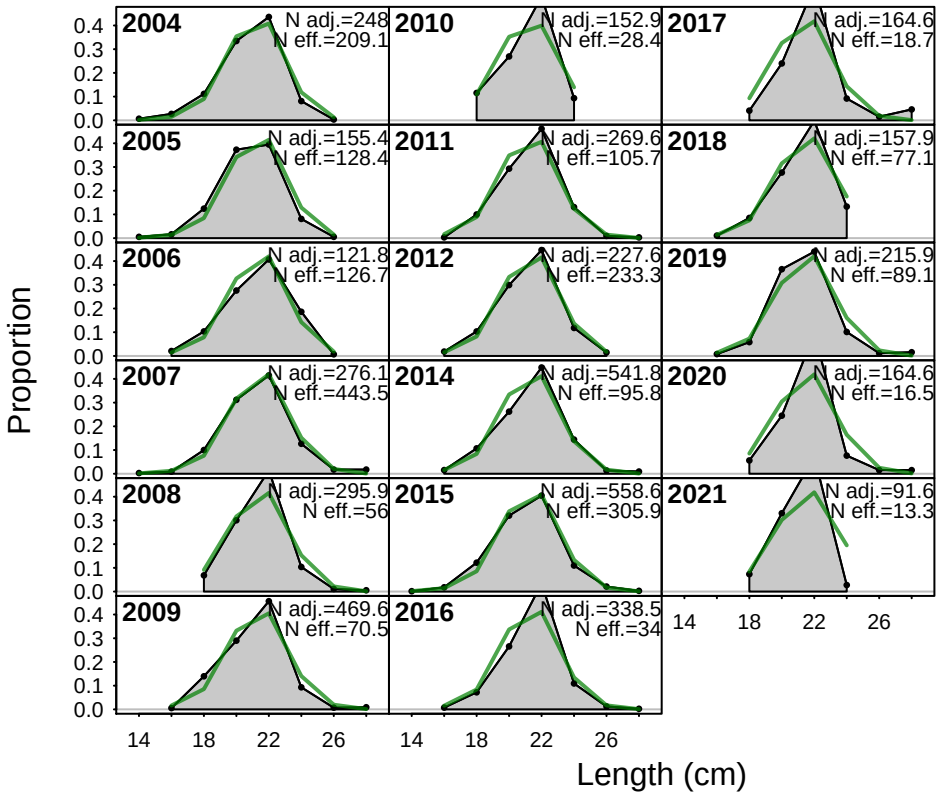

Retrospective and Hindcasting

Retrospective

```
## Plotting Retrospective pattern
```

```
##
## Mohn's Rho stats, including one step ahead forecasts:
## Plotting Retrospective pattern
```

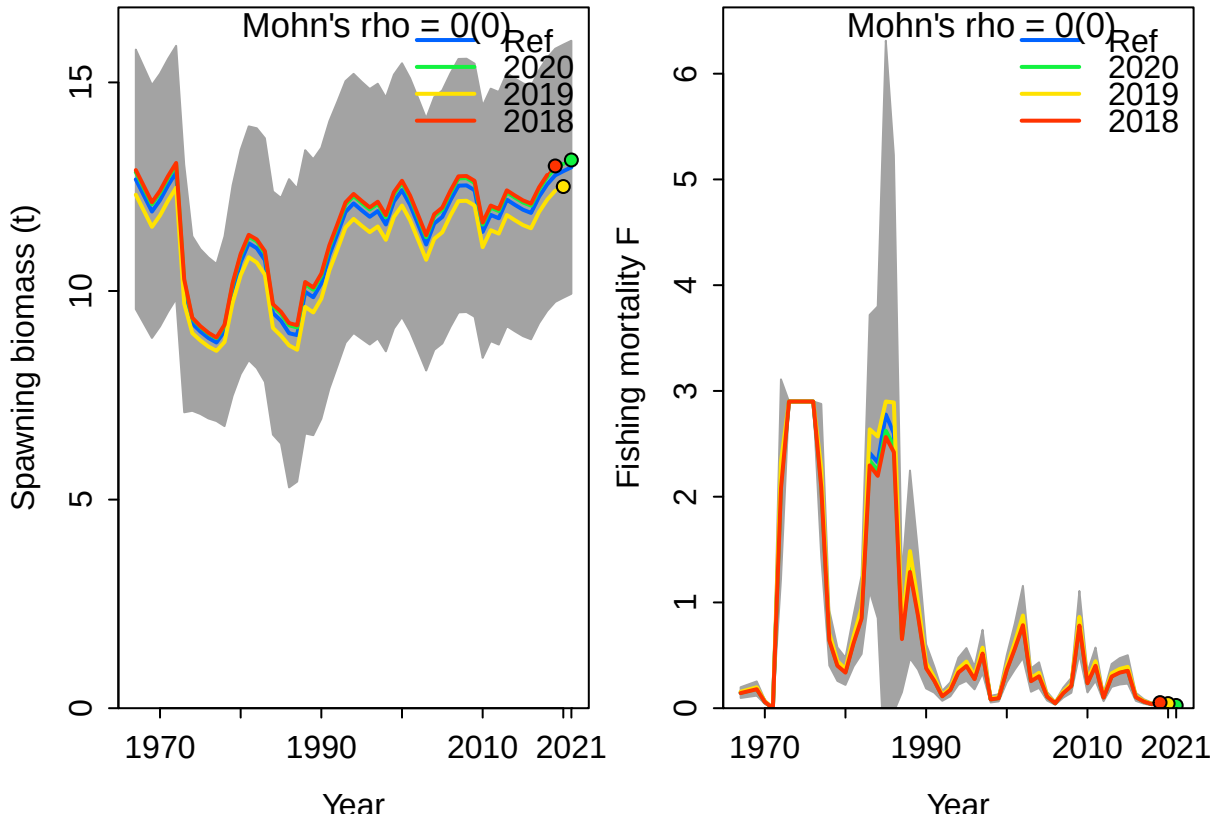


```
##
## Mohn's Rho stats, including one step ahead forecasts:

##   type     peel          Rho  ForecastRho
## 1    F     2020 -0.014941823 -0.014678237
## 2    F     2019  0.056892046  0.055987532
## 3    F     2018 -0.031180429 -0.030333389
## 4    F Combined  0.003589931  0.003658635
```

Hindcasting

```
## Plotting Hindcast Cross-Validation (one-step-ahead)
##
##  Computing MASE with only 2 of 3  prediction residuals for Index FISHERY
##
##  Warning:  Unequal spacing of naive predictions residuals may influence the interpretation of MASE
```

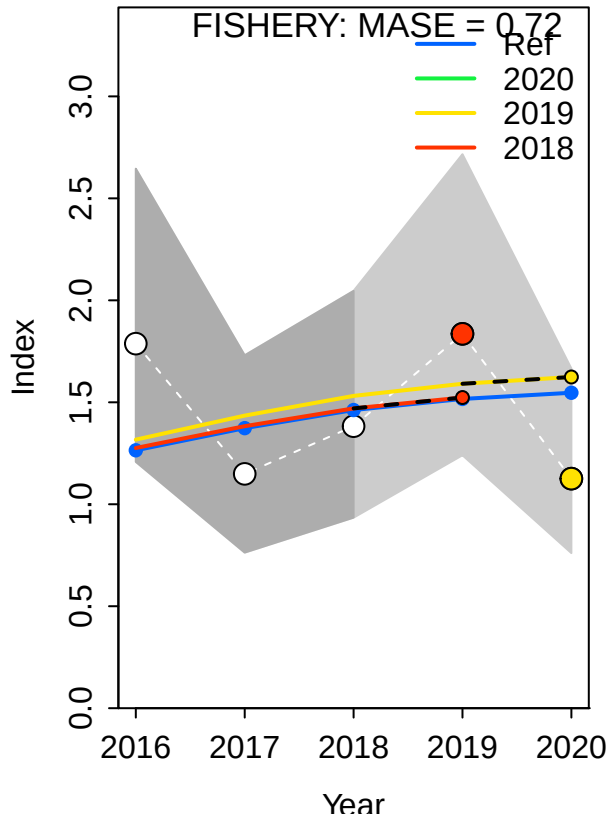


```
##
## MASE stats by Index:
## Plotting Hindcast Cross-Validation (one-step-ahead)
##
##  Computing MASE with only 2 of 3  prediction residuals for Index FISHERY
##
##  Warning:  Unequal spacing of naive predictions residuals may influence the interpretation of MASE

##
## MASE stats by Index:
```

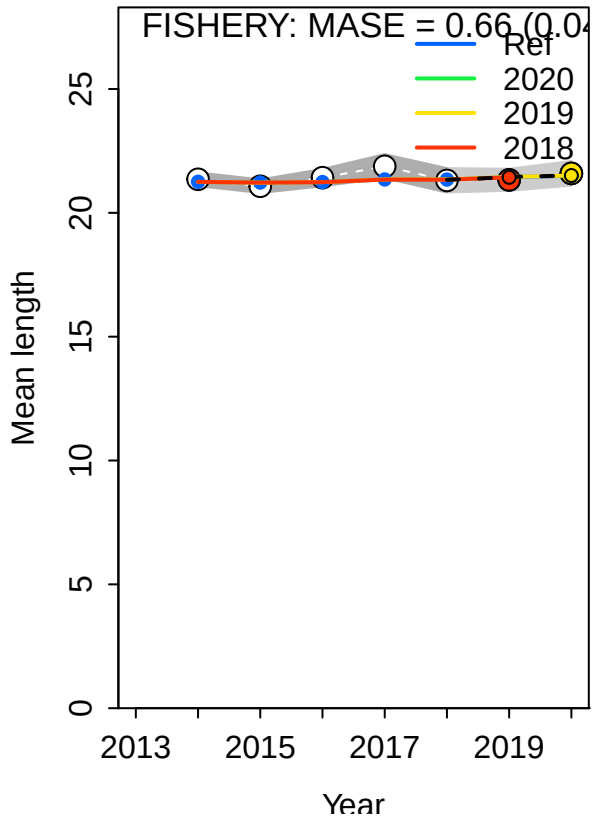

Recruitment Deviations

```
## Skipped SSplotrecdevs - no rec devs estimated
```

Likelihood Profile

```
## [1] "SR_LN"
```

```
## Parameter matching profile.string=SR_LN: SR_LN(R0)
```

```
## Parameter values (after subsetting based on input 'models'): 5, 5.2, 5.4, 5.6, 5.8, 6, 6.2, 6.4, 6.6
```

```
##
## Likelihood components showing max change as fraction of total change.
## To change which components are included, change input 'minfraction'.
```

```
##                      frac_change include                          label
## TOTAL                     1.0000    TRUE                          Total
## Catch                     0.5891    TRUE                          Catch
## Equil_catch               0.0004   FALSE              Equilibrium catch
## Survey                    0.0363    TRUE                     Index data
## Length_comp               0.4010    TRUE                   Length data
## Recruitment               0.0000   FALSE                   Recruitment
```

```
## InitEQ_Regime             0.0000   FALSE Initital equilibrium recruitment
## Forecast_Recruitment      0.0000   FALSE             Forecast recruitment
## Parm_priors               0.0000   FALSE                           Priors
## Parm_softbounds           0.0000   FALSE                      Soft bounds
## Parm_devs                 0.0000   FALSE             Parameter deviations
## Crash_Pen                 0.0000   FALSE                    Crash penalty
```

```
## Parameter matching profile.string = 'SR_LN': 'SR_LN(R0)
## Parameter values (after subsetting based on input 'models'): 5, 5.2, 5.4, 5.6, 5.8, 6, 6.2, 6.4, 6.6
```

```
## Fleet-specific likelihoods showing max change as fraction of total change.
## To change which components are included, change input 'minfraction'.
##                         frac_change include
## prof.table....c.1.3..             1    TRUE
```

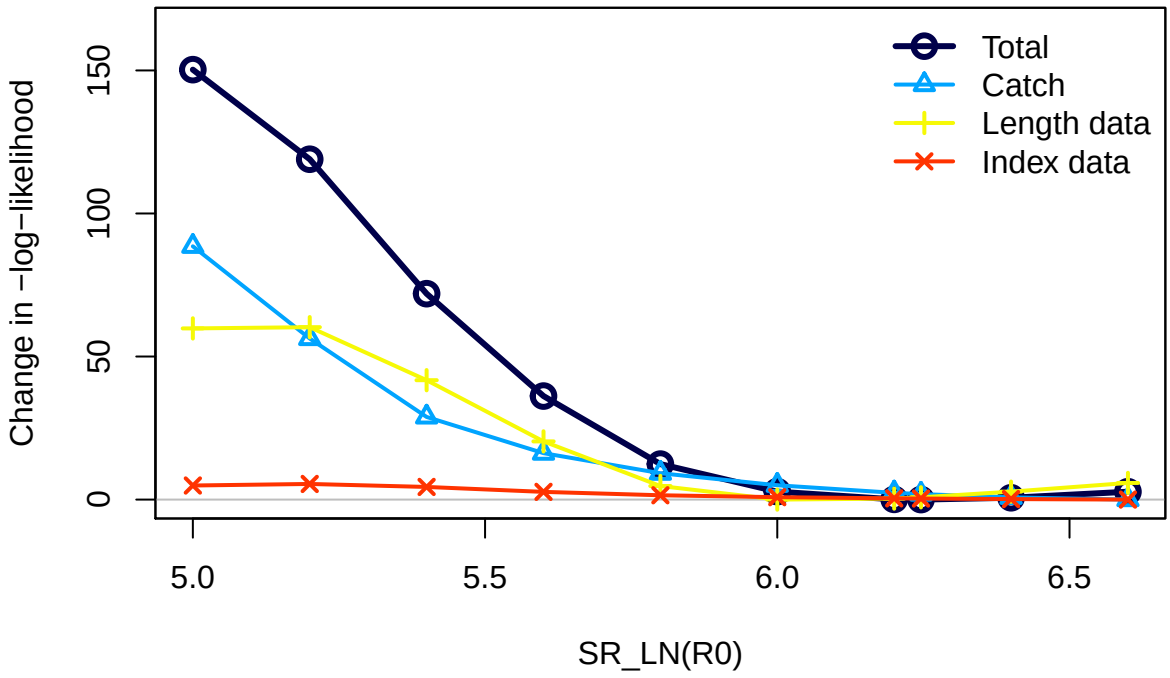

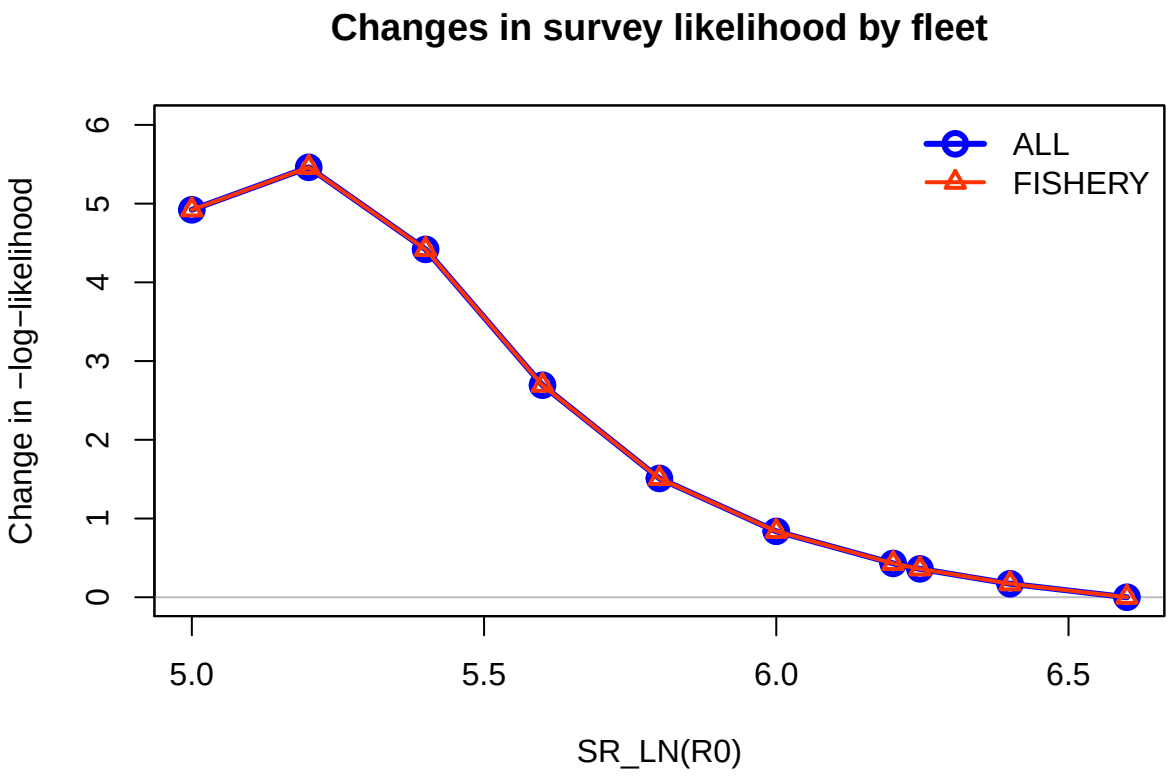

Management Quantities

```
##
##  starter.sso with Bratio: SSB/SSBMSY and F: _abs_F
##
```

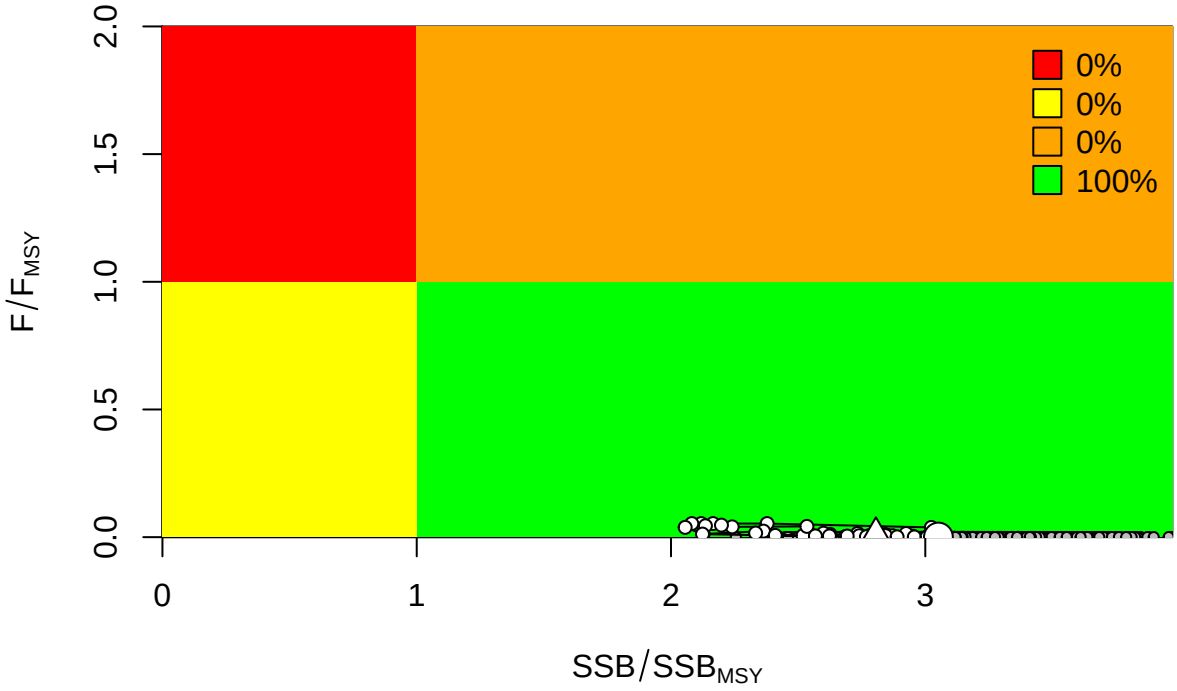


```
##
## Plot Comparison of stock
```

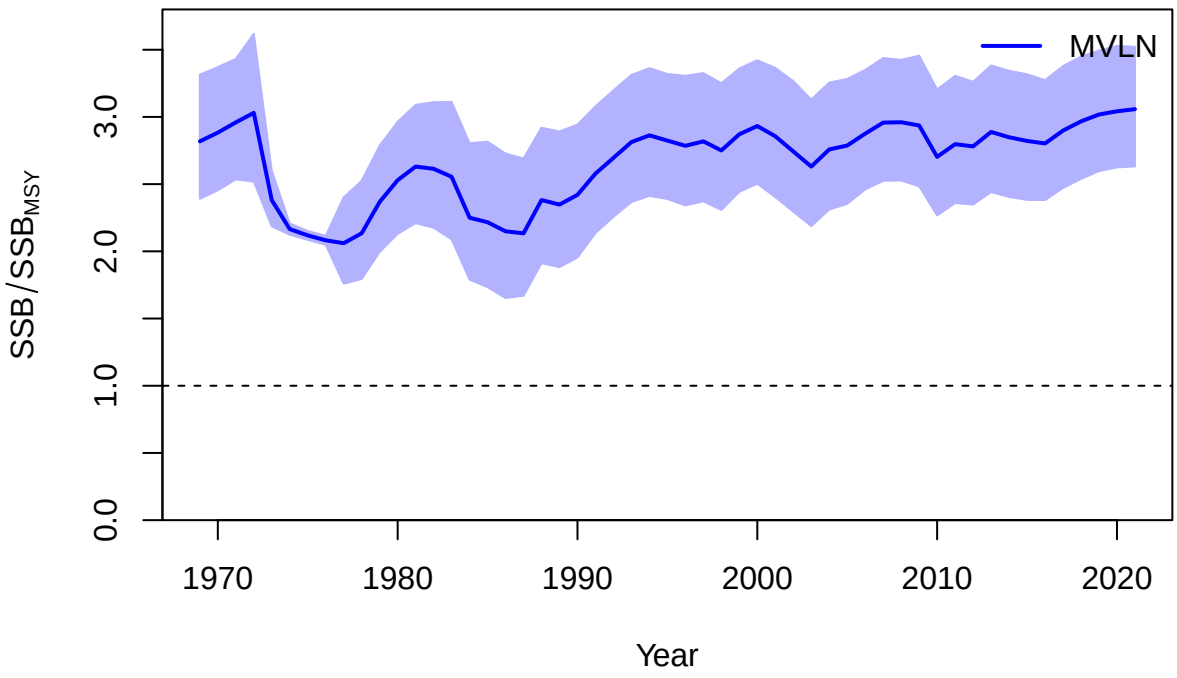


```
##
## Plot Comparison of harvest
```

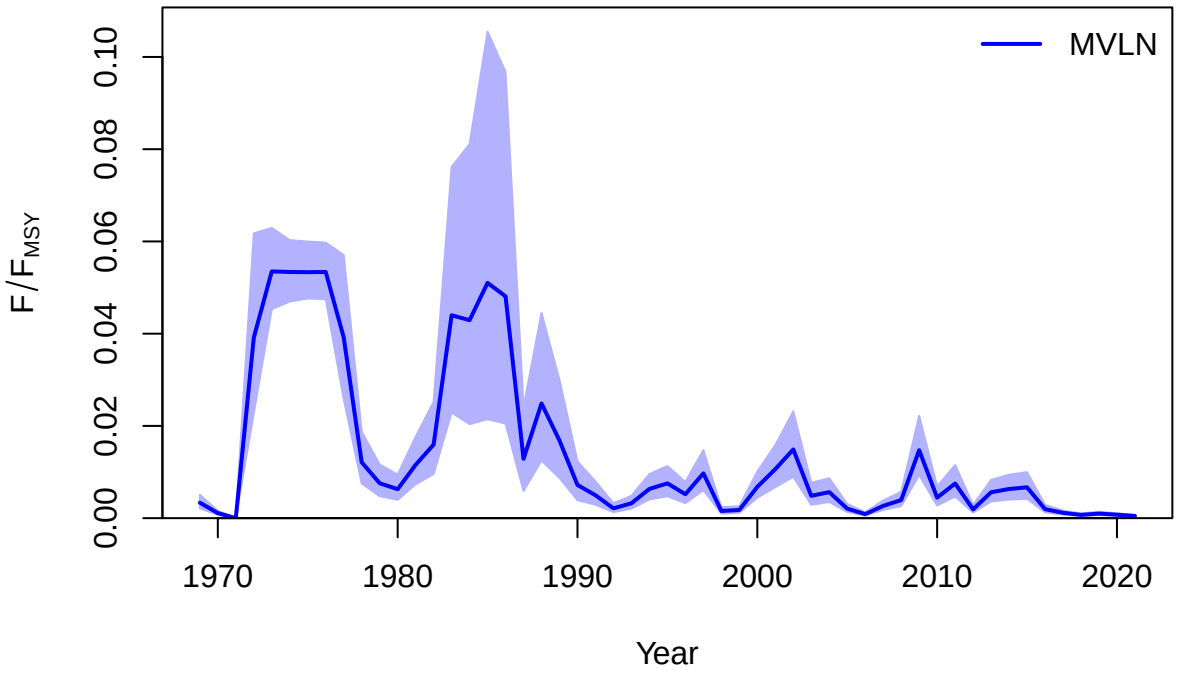


```
##
## Plot Comparison of SSB
```

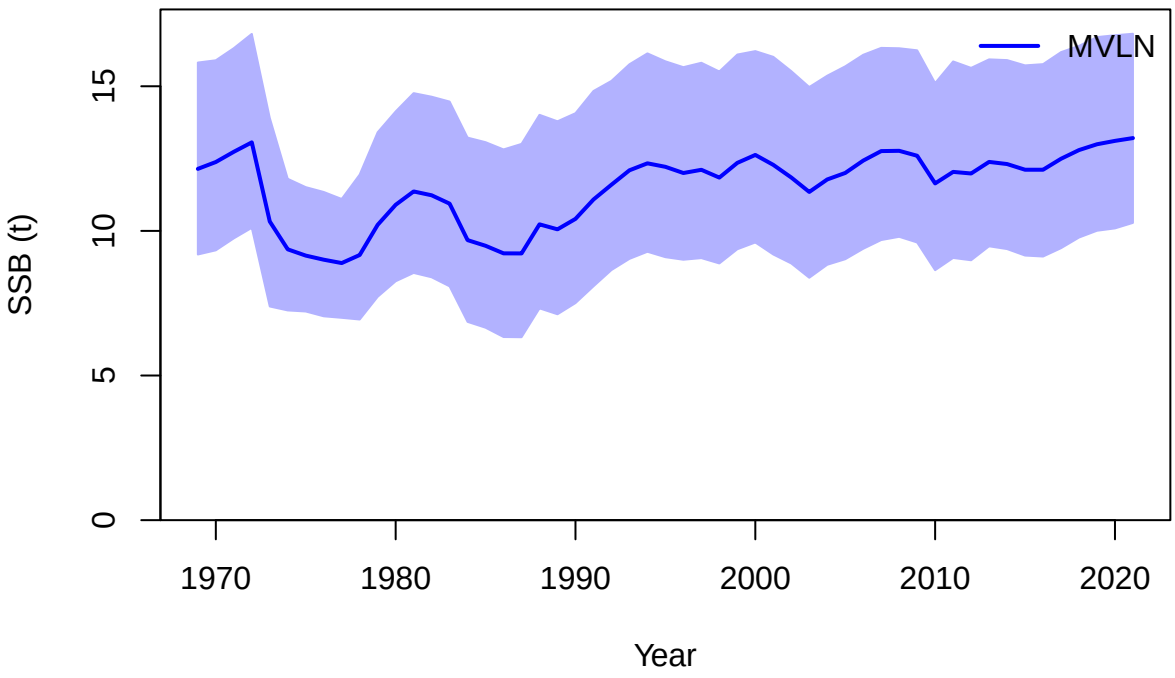


```
##
## Plot Comparison of F
```

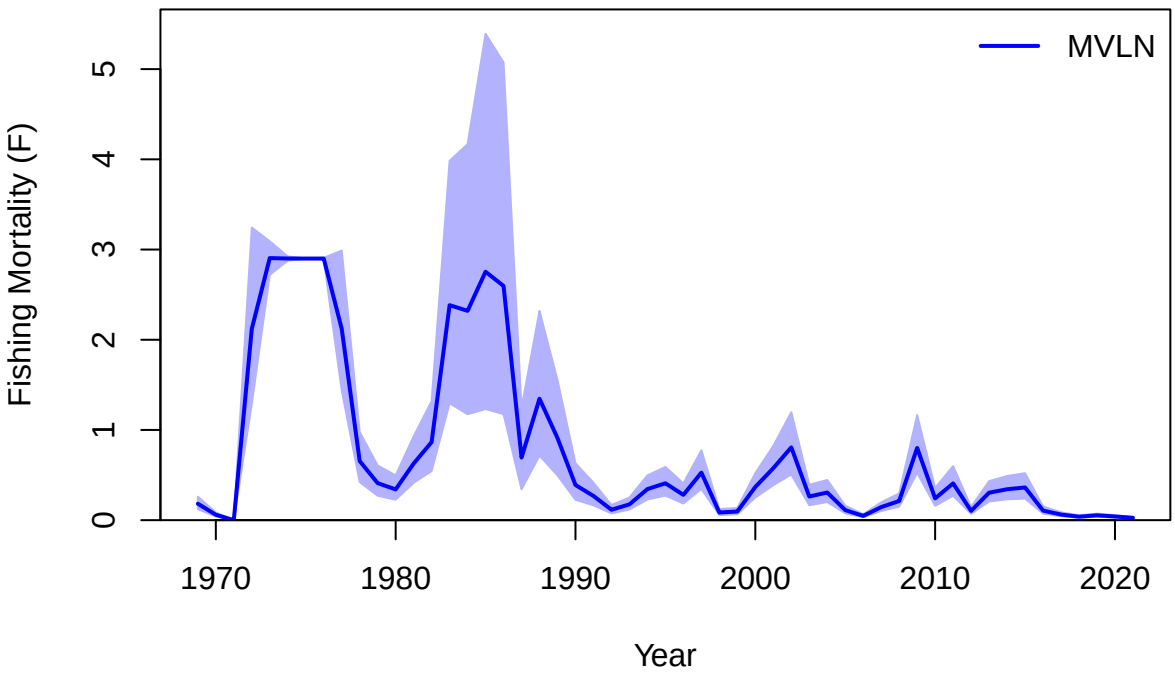
MVLN
Fishing Mortality (F)
0
1
2
3
4
5
1970
1980
1990
2000
2010
2020
Year

```
## RStudioGD
##         2
```

Jitter

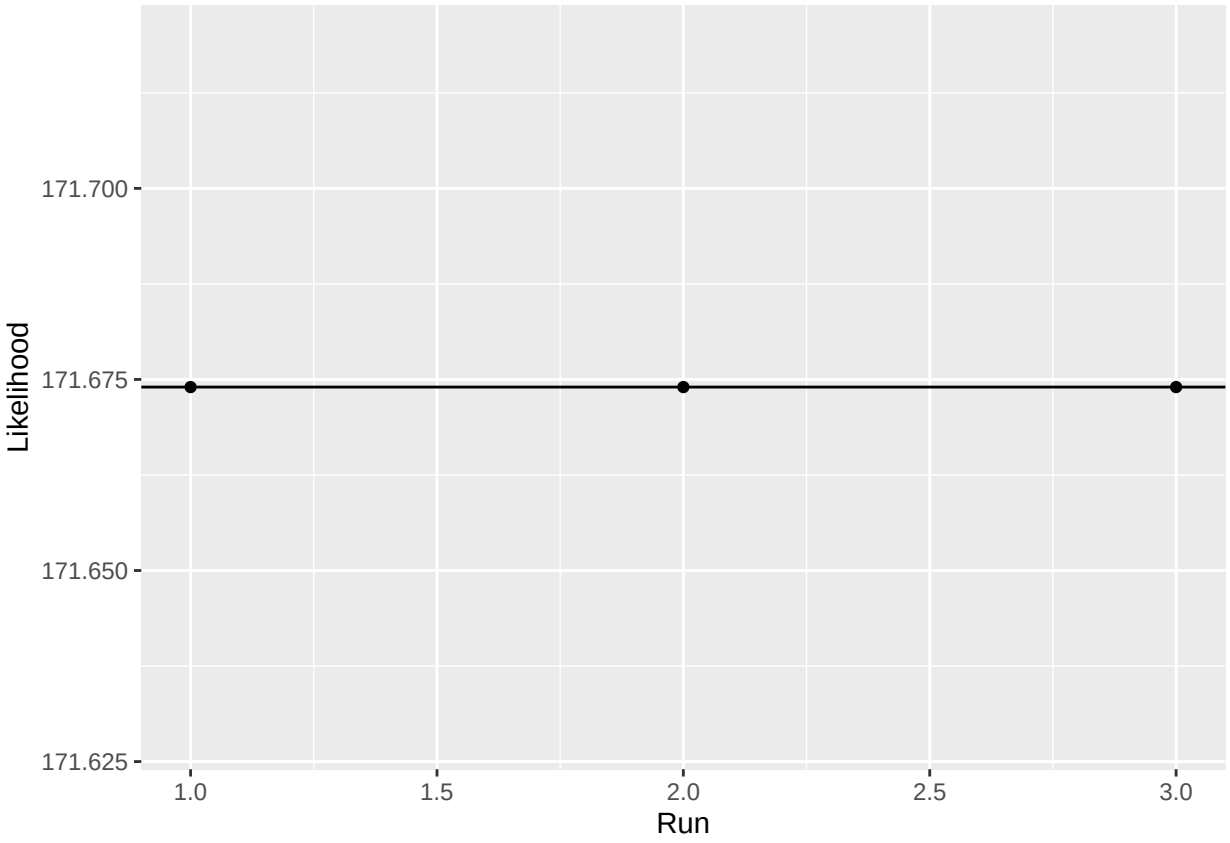

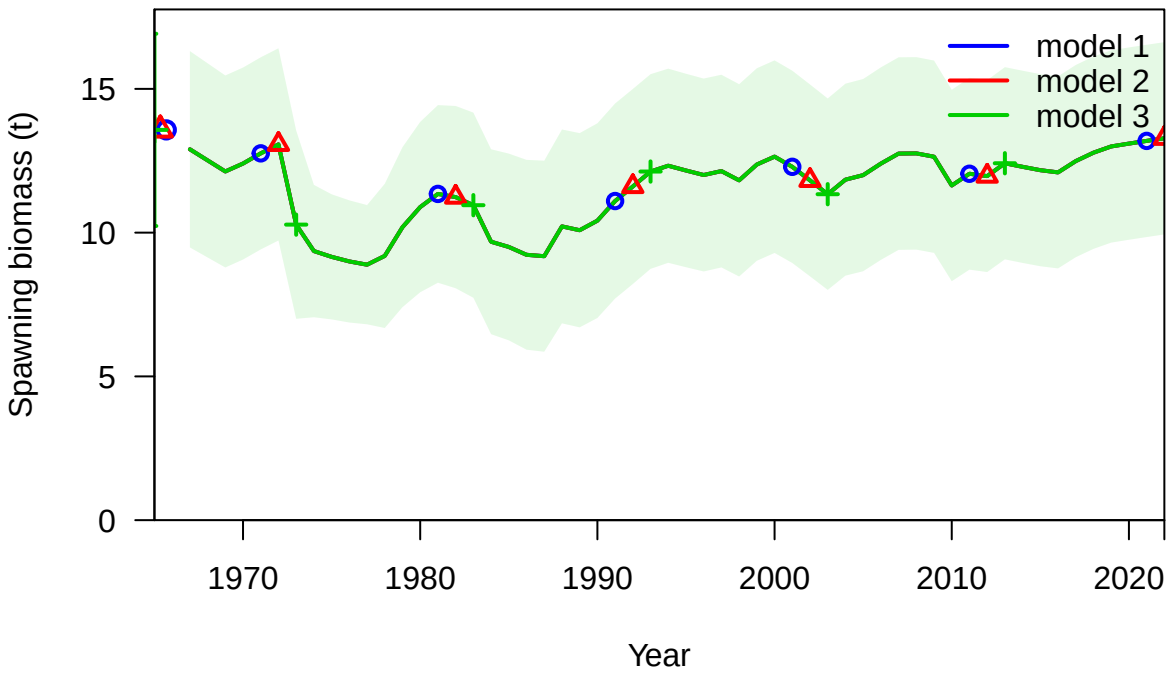
model 1
model 2
model 3
Spawning biomass (t)
0
5
10
15
1970
1980
1990
2000
2010
2020
Year

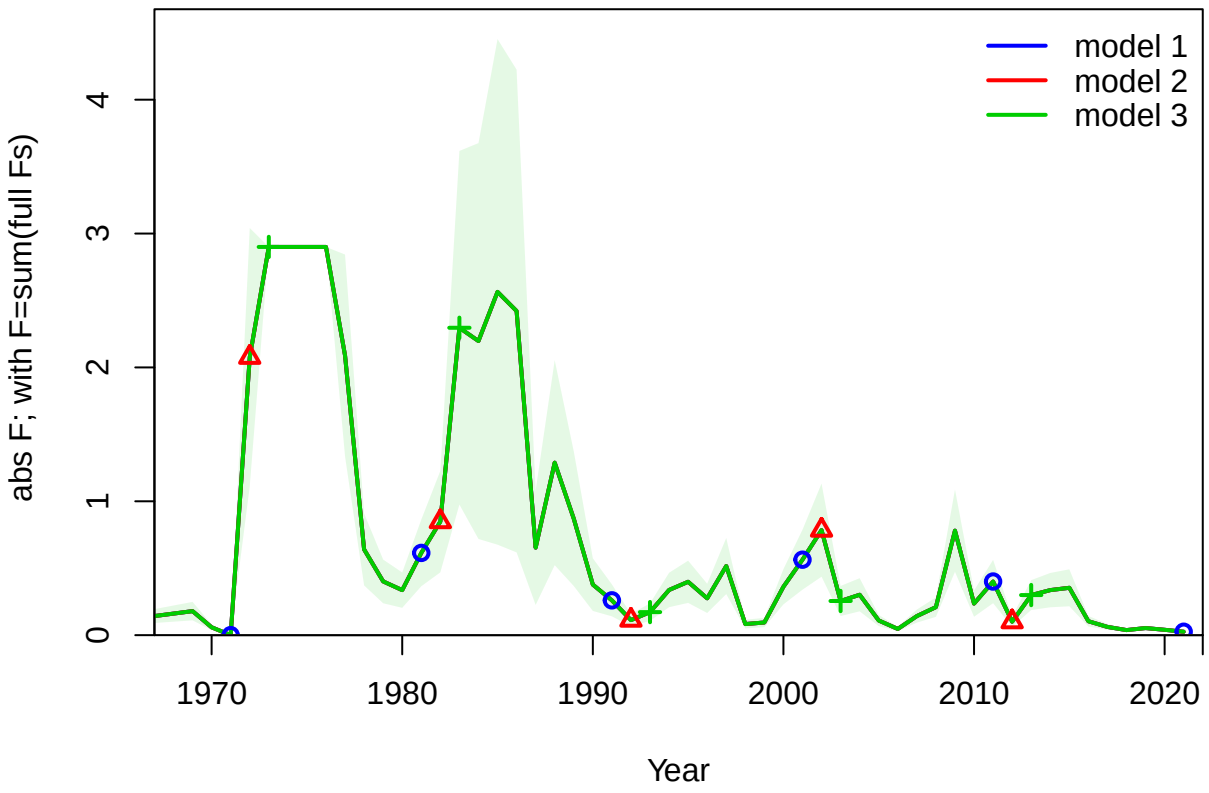
model 1
model 2
model 3
abs F; with F=sum(full Fs)
0
1
2
3
4
1970
1980
1990
2000
2010
2020
Year

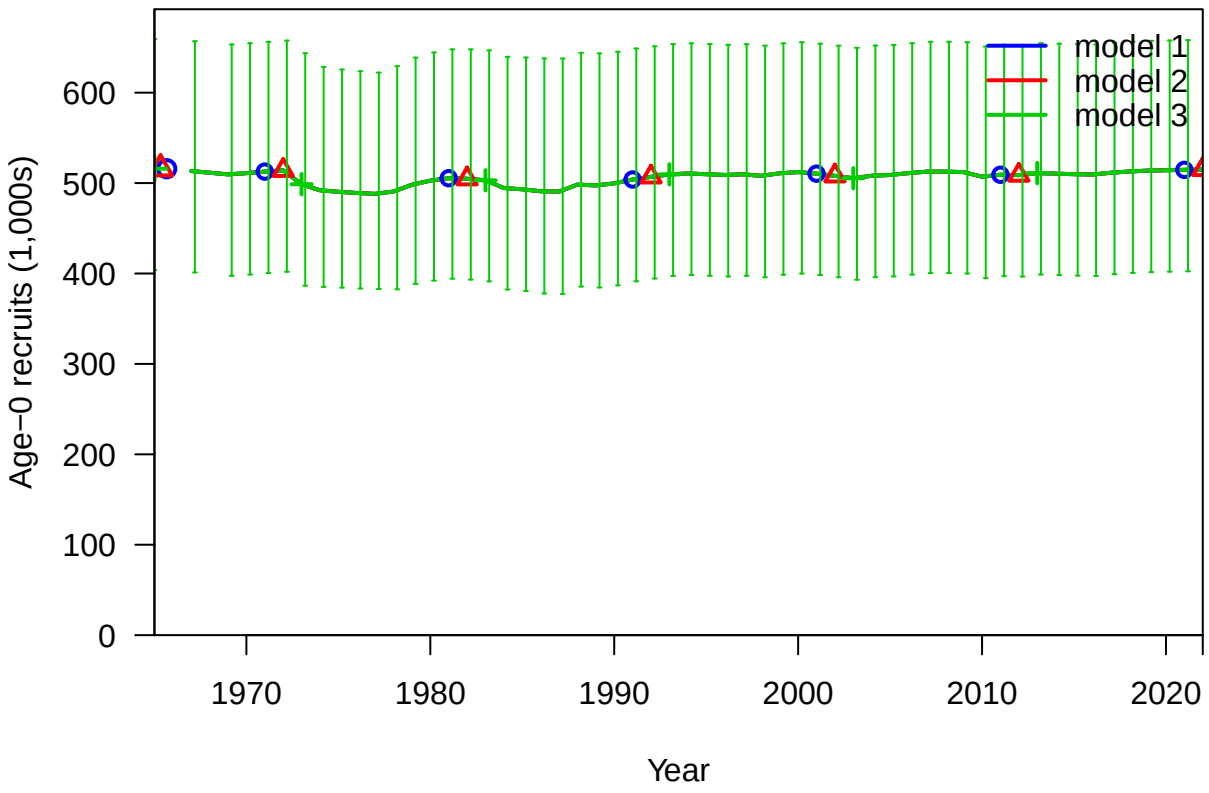
model 1
model 2
model 3
Age−0 recruits (1,000s)
0
100
200
300
400
500
600
1970
1980
1990
2000
2010
2020
Year