# American Samoa Model Checks


Meg Oshima


2022-08-12

This is a summary report for the ETCO base model run.

# **Model Output**

### Input Data

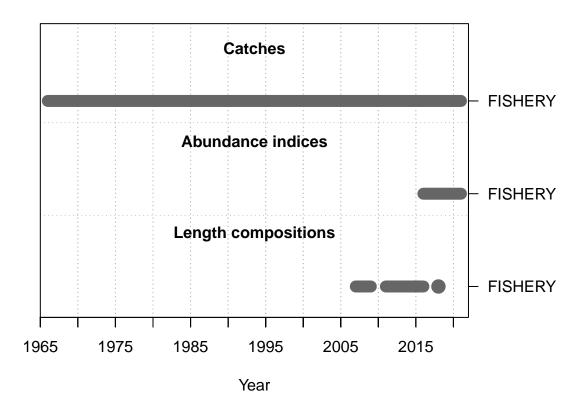

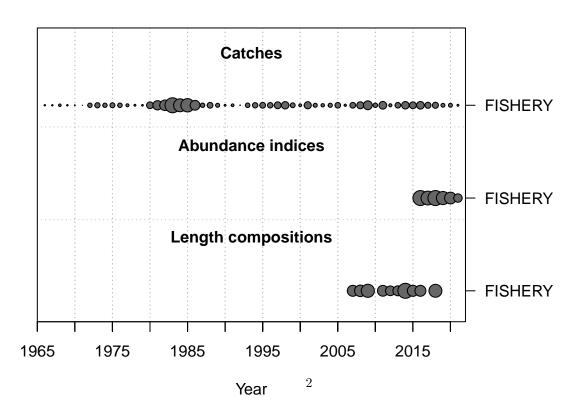

#### Convergence Check

Converged

```
## 1 TRUE 2.81355e-05


## [1] "1 NOTE: Max data length bin: 90 < max pop len bins: 100; so will accumulate larger pop len bins
## [2] " N parameters are on or within 1% of min-max bound: 2; check results, variance may be suspect"
## [3] "N warnings: 1"</pre>
```

#### Fit to Model

#### **CPUE**


##
## Running Runs Test Diagnosics for Index
## Plotting Residual Runs Tests

MaxGrad

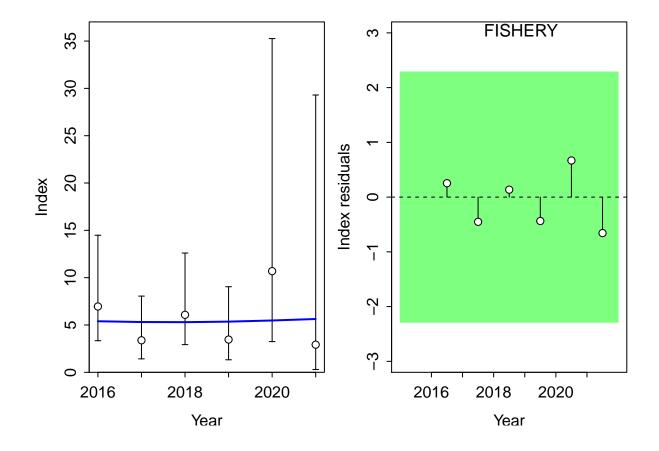

```
##
## Runs Test stats by Index:
## Plotting JABBA residual plot

## Warning in simpleLoess(y, x, w, span, degree = degree, parametric = parametric, : Chernobyl! trL>n 6
```

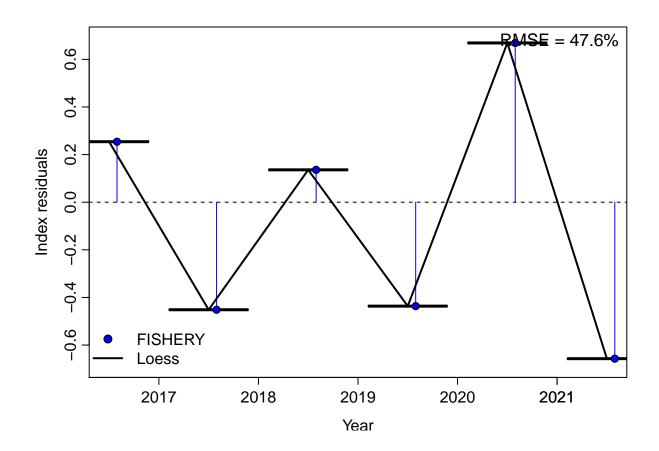

##
## RMSE stats by Index:

#### Length Comp

##


#Factor	Fleet	$New\_Var\_adj$	Type	Name
4	1	0.292875	len	FISHERY

```
## Running Runs Test Diagnosics for Mean length
## Plotting Residual Runs Tests


##
## Runs Test stats by Mean length:


## Index runs.p test sigma3.lo sigma3.hi type
## 1 FISHERY 0.251 Passed -0.1863844 0.1863844 len


## Plotting JABBA residual plot
```

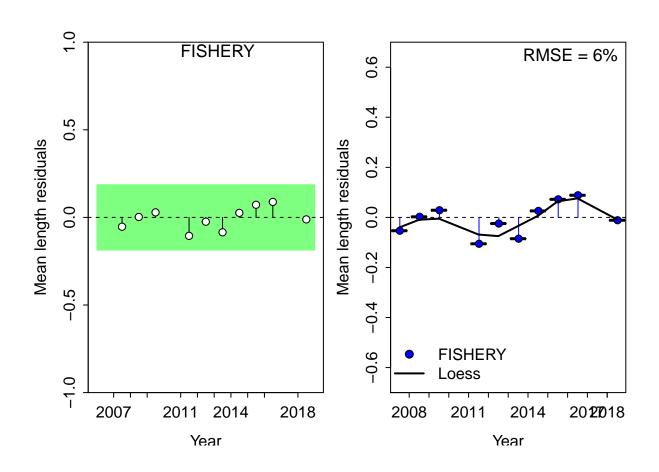

##
## RMSE stats by Index:

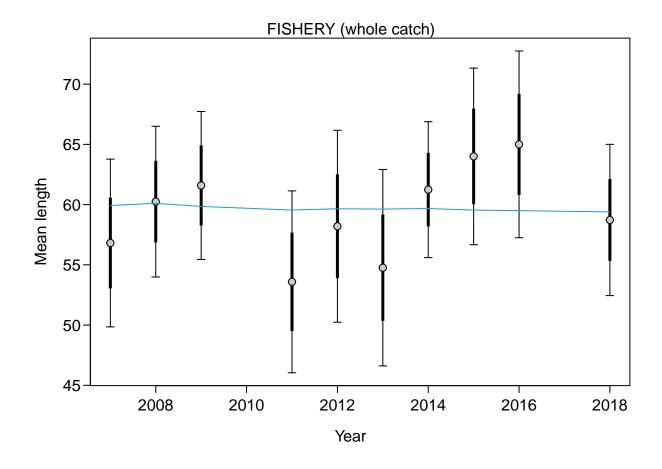

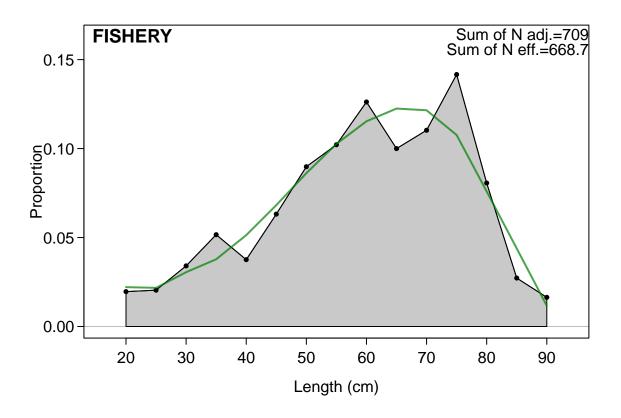

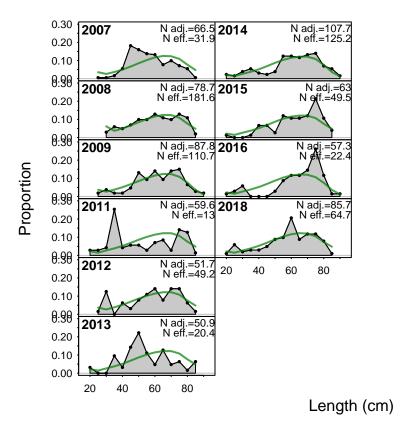

### Retrospective and Hindcasting


#### Retrospective

## Plotting Retrospective pattern

##

 $\mbox{\tt \#\#}$  Mohn's Rho stats, including one step ahead forecasts:

## Plotting Retrospective pattern

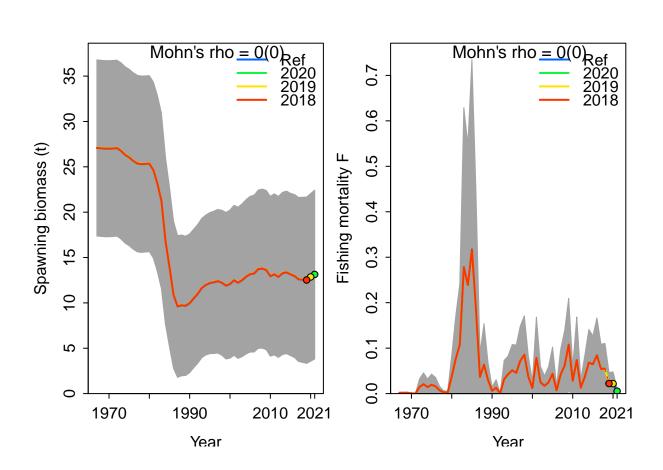

## Mohn's Rho stats, including one step ahead forecasts:

```
## type peel Rho ForecastRho
## 1 F 2020 0.000236611 -0.001984534
## 2 F 2019 -0.003410244 -0.002347909
## 3 F 2018 -0.001583049 -0.001574306
## 4 F Combined -0.001585561 -0.001968916
```

#### Hindcasting

```
## Plotting Hindcast Cross-Validation (one-step-ahead)
##
## Computing MASE with only 2 of 3 prediction residuals for Index FISHERY
##
```

## Warning: Unequal spacing of naive predictions residuals may influence the interpretation of MASE

```
##
## MASE stats by Index:
## Plotting Hindcast Cross-Validation (one-step-ahead)
##
## No observations in evaluation years to compute prediction residuals for Index FISHERY
##
## MASE stats by Index:
```

#### Recruitment Deviations

## Skipped SSplotrecdevs - no rec devs estimated

#### Likelihood Profile

```
## [1] "SR_LN"


## Parameter matching profile.string=SR_LN: SR_LN(R0)

## Parameter values (after subsetting based on input 'models'): 0.5, 0.7, 0.9, 1.1, 1.3, 0.807831


## 
## Likelihood components showing max change as fraction of total change.

## To change which components are included, change input 'minfraction'.
```

```
frac_change include
                                                                         label
##
## TOTAL
                              1.0000
                                        TRUE
                                                                         Total
## Catch
                              0.3293
                                        TRUE
                                                                         Catch
## Equil_catch
                              0.0001
                                       FALSE
                                                             Equilibrium catch
## Survey
                              0.0259
                                        TRUE
                                                                    Index data
## Length_comp
                              0.8300
                                        TRUE
                                                                   Length data
## Recruitment
                              0.0000
                                       FALSE
                                                                   Recruitment
## InitEQ_Regime
                              0.0000
                                       FALSE Initital equilibrium recruitment
## Forecast_Recruitment
                              0.0000
                                       FALSE
                                                          Forecast recruitment
## Parm_priors
                              0.0000
                                       FALSE
                                                                        Priors
## Parm_softbounds
                              0.0001
                                       FALSE
                                                                   Soft bounds
## Parm_devs
                                       FALSE
                                                          Parameter deviations
                              0.0000
## Crash_Pen
                              0.0000
                                       FALSE
                                                                 Crash penalty
## Parameter matching profile.string = 'SR_LN': 'SR_LN(RO)
## Parameter values (after subsetting based on input 'models'): 0.5, 0.7, 0.9, 1.1, 1.3, 0.807831,
## Fleet-specific likelihoods showing max change as fraction of total change.
## To change which components are included, change input 'minfraction'.
                         frac_change include
## prof.table....c.1.3..
                                    1
                                         TRUE
```

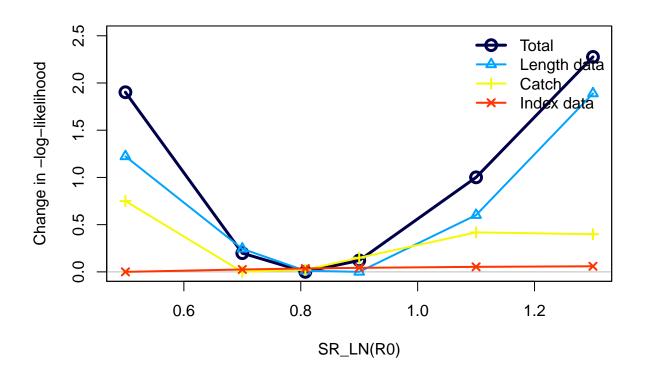


# Changes in survey likelihood by fleet

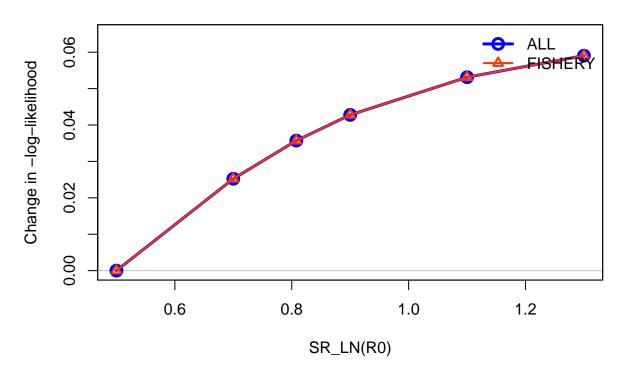


# Management Quantities


```
##
## starter.sso with Bratio: SSB/SSBMSY and F: _abs_F
##
```

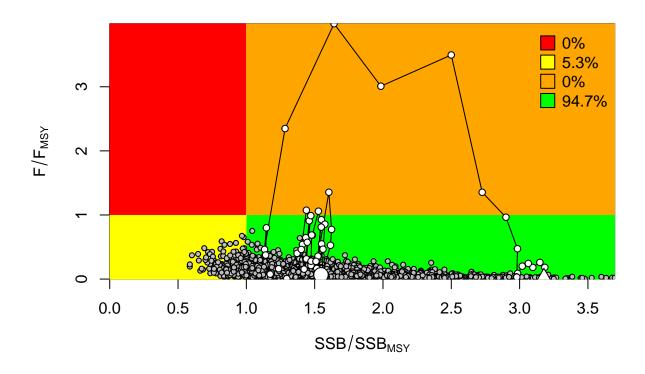


##
## Plot Comparison of stock

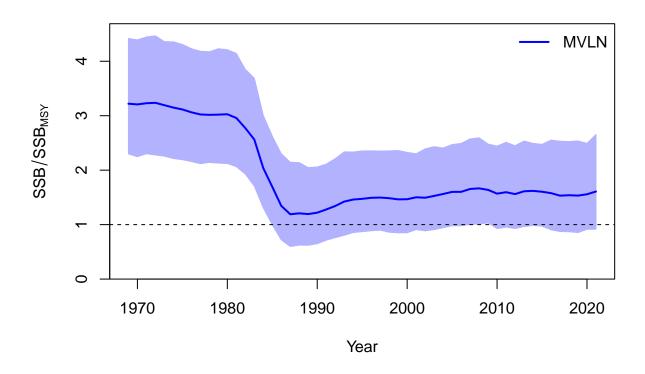


##
## Plot Comparison of harvest

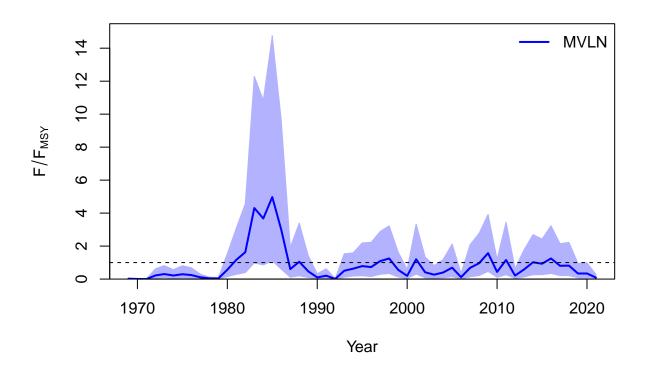

## Plot Comparison of SSB

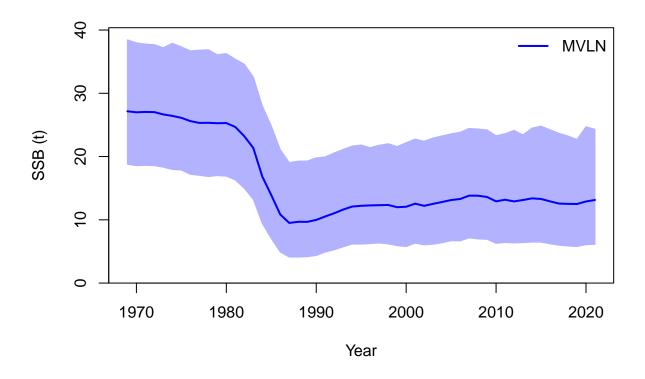

## Plot Comparison of F

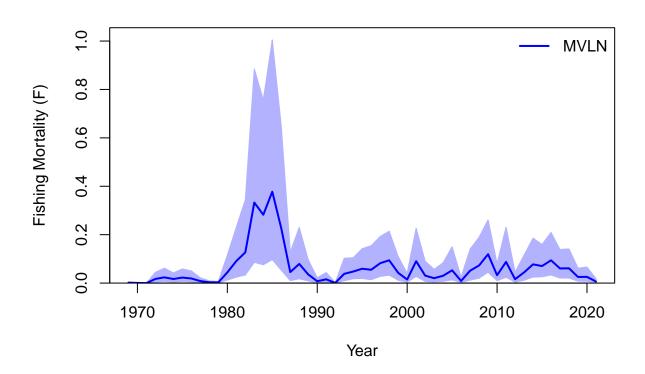

## RStudioGD ## 2

# Jitter

