



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

NUMERO DOCUMENTO: **C000CMP01STP01**

REVISIONE: **08.00**

DATA: **20/06/2025**

CAGE CODE: **A0069**

Digital Security
Secure Cloud Management Platform
Secure Cloud Management Platform



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Firme

| | |
|--|------------------------------|
| Autore: Product Owner IPT di Sviluppo R. Cloud Product Digital Systems & Engineering Technologies Engineering | Carmelo Sciuto |
| Verifica: PEM IPT di Prodotto R. Digital Systems & Engineering Technologies Engineering | Andrea Giorgio Busà |
| Verifica: PAM IPT Sviluppo Quality Cyber Security, Intelligence & Digital Solutions | Simonetta De Biase |
| Approvazione: IPT Leader IPT di Sviluppo R. Digital Platform Digital Systems & Engineering Technologies Engineering | Daniele Leone |
| Approvazione: Technical Authority Solution Architects LoB Public Admin., Defence & Inter. Agencies | Susanna Fortunato |
| Autorizzazione: Product Manager IPT Prodotto Product Management Digital Trasformation Product Management | Fabio Russo |

Contatti

| | |
|---|---|
| Carmelo Sciuto Product Owner IPT di Sviluppo R. Cloud Product Digital Systems & Engineering Technologies Engineering | Leonardo S.p.A. Via A. Agosta SNC 95121 Catania |
|---|---|

Lista delle Revisioni

| Rev. | Numero Modifiche | Data | Descrizione | Autore |
|-------------|-------------------------|-------------|----------------------------------|---------------|
| 01.00 | - | 24/01/2022 | Prima emissione | D. Leone |
| 02.00 | DCN222372 | 29/07/2022 | Integrazione Rilascio SCMP 2.0.0 | D. Leone |
| 03.00 | DCN222981 | 20/12/2022 | Integrazione Rilascio SCMP 3.0.0 | D. Leone |
| 04.00 | DCN230550 | 30/06/2023 | Integrazione Rilascio SCMP 4.0.0 | D. Leone |
| 05.00 | DCN231199 | 22/12/2023 | Integrazione Rilascio SCMP 5.0.0 | D. Leone |
| 06.00 | DCN240480 | 28/07/2024 | Integrazione Rilascio SCMP 6.0.0 | D. Leone |
| 07.00 | DCN240891 | 20/12/2024 | Integrazione Rilascio SCMP 7.0.0 | D. Leone |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Super Project Documentation (EN)

☒ Installation and Deploy

Getting Started

The Secure Cloud Management Platform solution, in line with Gartner's definition indicated in the Reference Documents, is an operational platform that enables the governance, lifecycle management, brokering, and automation of resources managed in a cloud environment.

Requirements

The SCMP solution is designed to run exclusively in Kubernetes environments compliant with the supported versions indicated in the section Supported Kubernetes Versions.

Installation requires the availability of an existing Kubernetes cluster (upstream or managed service) or OpenShift Container Platform, equipped with the necessary resources to host the platform's core components.

In OpenShift environments, it is possible to leverage the benefits of Red Hat certified operators. Alternatively, it is possible to use upstream or managed Kubernetes clusters (EKS, AKS, GKE) with Helm v3.

Recommended Sizing

To ensure optimal performance, it is recommended that the Kubernetes cluster has nodes with the following minimum characteristics:

| Type | Role | #qty | vCPU | Memory (GB) | Disk (GB) | Notes |
|------|---------------|------|------|-------------|-----------|---|
| Node | Control Plane | 3 | 8 | 16 | 128 | Respect native Kubernetes HA |
| Node | Infra | 3 | 12 | 24 | 628 | For ingress, logging, monitoring services |
| Node | Worker | 4 | 8 | 32 | 128 | For SCMP modules and user workloads |

⚠ Note: Node quantities and sizes may vary based on environment size, number of SCMP modules installed, and workloads to be managed.

Other Requirements

- **Helm v3** installed and configured.
- Access to Helm repositories and container registries indicated in the next section.
- Outbound network connectivity (port 443) to the Internet and APIs/consoles of supported cloud providers.
- Persistent Storage available via `StorageClass` compatible with Kubernetes `PersistentVolumeClaim` (NFS, Ceph, Portworx, EBS, Azure Disk, etc.).



The SCMP platform is supported on Kubernetes and OpenShift in the following versions:

| Platform | Supported Version(s) | Notes |
|--|----------------------|--|
| OpenShift Container Platform (OCP) | ≥ 4.14 | Recommended to use versions ≥ 4.14 to ensure compatibility with certified operators |
| Kubernetes Upstream | ≥ 1.25 | Supported with Helm v3; recommended to use versions ≥ 1.26 |
| Amazon EKS (Elastic Kubernetes Service) | ≥ 1.25 | Validated support for managed EKS environments |
| Azure AKS (Azure Kubernetes Service) | ≥ 1.25 | Validated for managed AKS environments |
| Google GKE (Google Kubernetes Engine) | ≥ 1.25 | Validated for managed GKE environments |

To perform the installation correctly, access to the following repositories is required:

- Repository Leonardo
- repository charts k8s

Furthermore, it is necessary to verify that the environment can make requests to the consoles and APIs provided by the providers that will be used.

Storage Considerations

Network Connectivity

Components

In this section, we define all the components necessary for the SCMP to function. The "required" elements must be installed before the various SCMP modules as explained in the "Installation" section.

PREREQUISITES

- Nginx Ingress Controller
- Cert Manager
- Minio Operator
- Strimzi Operator
- MongoDB Operator
- Vault AutoUnseal



MODULES

Common Ports & Requirements

Communication Data

To update data, the SCMP uses a series of cron-jobs, divided by reference provider and relevant module. Specifically, we can identify:

| Type | Launched every | Activity performed |
|------------|----------------|--|
| Inventory | 1 hour | Retrieves all inventory resources available on the provider |
| Costs | 24 hours | Retrieves costs for the last 2 days for resources available on the provider (multiple days are retrieved to validate data) |
| Monitoring | 24 hours | Retrieves monitoring information for the provider's resources |
| Catalog | 24 hours | Retrieves catalog resources/SKUs from the provider, allowing their use in the SCMP |
| Security | 24 hours | Retrieves compliance and security information for available providers |

Supported Locales

Currently, the languages supported by SCMP are:

- Italian
- English

It is possible to change the language used by following these steps

Installation

In this section, you can find the order and the necessary steps to perform a complete and functional installation.

Installation Overview

1. Log in to the necessary Helm registries using this code: `helm registry login leonardocharts.azurecr.io --username leonardocharts --password $PASSWORD`
2. Install the prerequisites



3. Install a MongoDB instance (if not available, "MongoDB Operator" can be used)
4. Configure the necessary parameters for the Leonardo vault-autounseal chart as indicated in the code section.

```
global:  
  OpenShift: true  
  imagePullSecrets:  
    - name: acr-secret-cs  
      credentials: # specify the credentials for the image registry if you want to create the pull secret automatically  
      - registry: $DOCKER_REGISTRY  
        username: $DOCKER_REGISTRY_USERNAME  
        password: $DOCKER_REGISTRY_PASSWORD  
        email: ignorethis@email.com  
  # The `namespace` key is needed by the official Vault chart in order to load the resources in the appropriate namespace  
  # and it has to adhere to our naming scheme '<tenant>-<suffix_namespace>'  
  namespace: scmp-vault  
  tenant: scmp  
  suffix_namespace: vault
```

5. Install the newly configured Leonardo vault-Autounseal chart using the code. helm install vault-autounseal vault-autounseal
6. **After the completion of the vault-autounseal installation (i.e., when vault-prod pods are already available in the cluster), configure the SCMP installation parameters as in the code.

```
global:  
  tenant: scmp  
  imagePullSecrets:  
    - name: acr-secret-cs  
      credentials: # specify the credentials for the image registry if you want to create the pull secret automatically  
      - registry: $DOCKER_REGISTRY  
        username: $DOCKER_REGISTRY_USERNAME  
        password: $DOCKER_REGISTRY_PASSWORD  
        email: ignorethis@email.com  
  minio:  
    accesskey: "minioadmin"  
    password: "minioadmin123!"
```

7. Launch the SCMP installation using the newly modified chart; to launch it, we can use: helm install scmp scmp/

Perform Configurations

After the installation, configuration steps are required, as described in the Appliance Setup section.

Upgrades & Maintenance



Additional Configuration Options

Load Balancer Configuration

Proxies

SSL Certificates

Data Encryption

Initial Appliance Setup

Appliance Setup

Network Configuration

- Enable the ingress controller to expose services on the network.
- (optional) Create a DNS name to facilitate connection to the system.

Keycloak Setup

- Configure Realm theme on Keycloak
- Create client 'microfe' on Keycloak Realm:
- Enable 'Implicit Flow'
- Set 'Valid Redirect URIs' to:
 - `http://localhost:3000/*`
 - SCMP host domain

Content Management

- Upload micro frontends in singlespa bucket
- *Alternatively:* Use minio-uploader utility chart
- Upload micro frontends config in singlespa-config bucket
- *Alternatively:* Use minio-uploader utility chart

Access Control

- Set anonymous read-only access on Minio buckets:
- singlespa
- singlespa-config



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

- config
- Configure IAM users and roles, as indicated in the IAM User Creation section.

WIP

This page is being updated, the information has not yet been validated

2 Authentication

The "Authentication" functionality allows interaction with the IAM to modify user profiling.

For preliminary configurations, refer to the specifications indicated in document DI-IPSC-81443, included in the reference documents table.

The menu is accessible from the button at the top right, as shown below.

Specifically, to access user profiling, the menu is "Authentication".

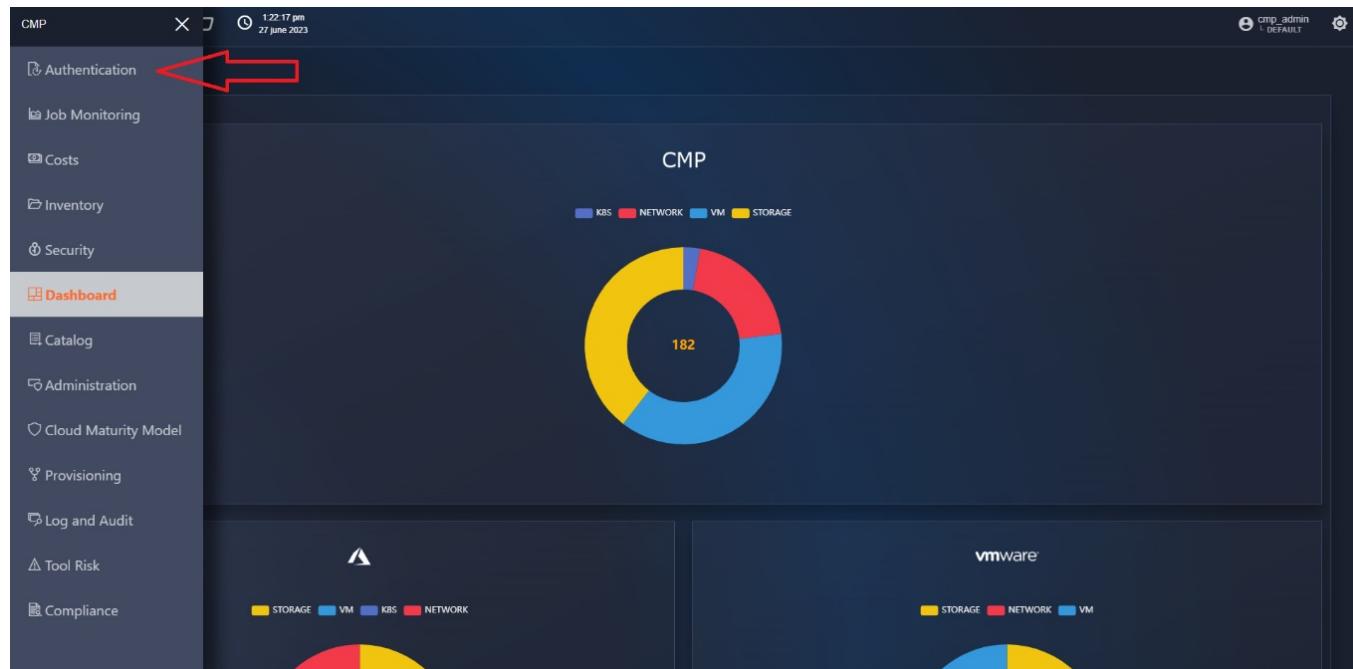


Figura 1 – Access to Authentication functionality

Dashboard view for user profiling:



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the IAM Dashboard with the following sections:

- Entities:** Sub-options include Users, Groups, Roles, Applications, Modules, Components, Features, Fields, Data Filters, and Fields Container.
- Associations:** Sub-options include Feature X User/Group, DataFilter X User/Group, Field X User/Group, and GroupUserTree.
- Validations List:** Sub-options include Validations.
- Administrations:** Sub-options include User Management X Pages, Pages Management, App X User/Group, and Supports.

Figura 2 – IAM Dashboard

2.0.1 Groups

To simplify the assignment of menu attributes and authorizations, user groups can be used. Click the "Groups" menu in the "Entities" section of the IAM dashboard.

The screenshot shows the IAM Dashboard with the "Groups" option highlighted in the "Entities" section by a red arrow. The other options in the "Entities" section are: Users, Roles, Applications, Modules, Components, Features, Resources, Data Filters, and Resources Container.

Figura 3 – Access to Group management



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Once the link is clicked, the user will be shown the list of all available groups on the portal with their respective configuration buttons.

The screenshot shows a dark-themed web interface for managing groups. At the top, there's a header bar with the Leonardo logo, the date (25 march 2024), and a user session (admin admin). Below the header, a navigation bar includes links for Dashboard, Entities, Associations, Validations List, Administration, IAM, Entities, and Groups. The 'Groups' tab is currently selected. A prominent red '+' button is located in the top right corner of the main content area. The main content area displays a table of groups with columns for Group Name and Actions. Each group entry has a row of icons for search, edit, delete, and other operations. The table includes entries like 'IamAdministrators', 'CmpTenantsAdmin', 'CmpAdministrator', etc. At the bottom left, there's a dropdown menu set to '10'. On the right side of the table, there's a 'Search Group' input field.

Figura 4 – List of configured groups

2.0.1.1 Group Creation

To create a new group within the system, click the "+" button in the top right. A group creation form will be displayed.

This screenshot is identical to Figure 4, showing the list of configured groups. However, a large red arrow points to the red '+' button located in the top right corner of the main content area. This indicates where the user should click to start creating a new group.

Figura 5 – Adding a new Group



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Enter the group name and click the "Add Group" button to add it to the system. Once pressed, the system will take us to the list of available groups where we can find the newly created group.

The screenshot shows the 'Add Group' page. At the top, there's a header with the Leonardo logo and navigation links for Dashboard, Entities, Associations, Validations List, and Administration. Below the header, the IAM section is selected. Under Entities, 'Groups' is chosen, and 'Add Group' is the active sub-page. A large input field labeled 'Name' contains the placeholder 'Insert Name'. At the bottom of the page are two buttons: a grey 'BACK' button and a white 'ADD GROUP' button with a plus sign. The overall interface has a dark blue theme.

Figura 6 – Group entry parameters

2.0.1.2 Management of Assigned Users and Attributes

To assign users to a group, from the list of available groups, click the "people" icon on the row corresponding to the group of interest. The user will be redirected to the "Members" page where it is possible to view all users assigned to the group and their basic information.

The screenshot shows the 'Groups' page. At the top, there's a header with the Leonardo logo and navigation links for Dashboard, Entities, Associations, Validations List, and Administration. Below the header, the IAM section is selected. Under Entities, 'Groups' is chosen. A search bar labeled 'Search Group' is present. The main area displays a list of groups with their names and actions. The 'Actions' column includes icons for search, edit, delete, and user assignment. A red arrow points to the user assignment icon for the 'IamAdministrators' group. Other groups listed include CmpTenantsAdmin, CmpAdministrator, CmpViewer, IamUsers, ETD-x2030, CmpProvisioner, ant_istanze_handler, Qualicer Admin, and IamUsersAdministrator. At the bottom, there's a 'EXPORT LIST TO .CSV' button and a dropdown menu for page size.

Figura 7 – Access to user assignment management



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

We can add a user to the group by clicking the "+" button at the top right (1). Once pressed, a new row (2) will be created in the list of assigned users where a user can be selected from the list of available users (3).

| User | First Name | Last Name | Username | Email | Actions |
|------------------|------------------|------------------|------------------|----------------------------|---------|
| cmp_tenant_admin | cmp_tenant_admin | cmp_tenant_admin | cmp_tenant_admin | cmp_tenant_admin@email.com | |
| iam_admin | | | | | |
| cmp_admin | | | | | |
| cmp_api_test | | | | | |
| andrea.caruso | | | | | |
| cmp_otp | | | | | |
| expertise_admin | | | | | |
| andrea.buso | | | | | |
| cmn_admin | | | | | |

Figura 8 – Assign a user to the group

Similarly, it is possible to remove users from the group by clicking the "Trash" button corresponding to the user to be removed.

After adding all users to the group, click the "Save" button at the bottom left to save the changes. A save confirmation modal will be displayed.

We can assign attributes to the group that will be automatically used by the assigned users. To do this, select the "Attributes" tab at the top of the page (1), then using the "+" button at the top right (2), it is possible to add an attribute. In the left part, the key must be entered (3) and in the white part on the right, its value must be entered (4). During entry, we will see a dropdown below the field where clicking will allow saving the entered value (5).

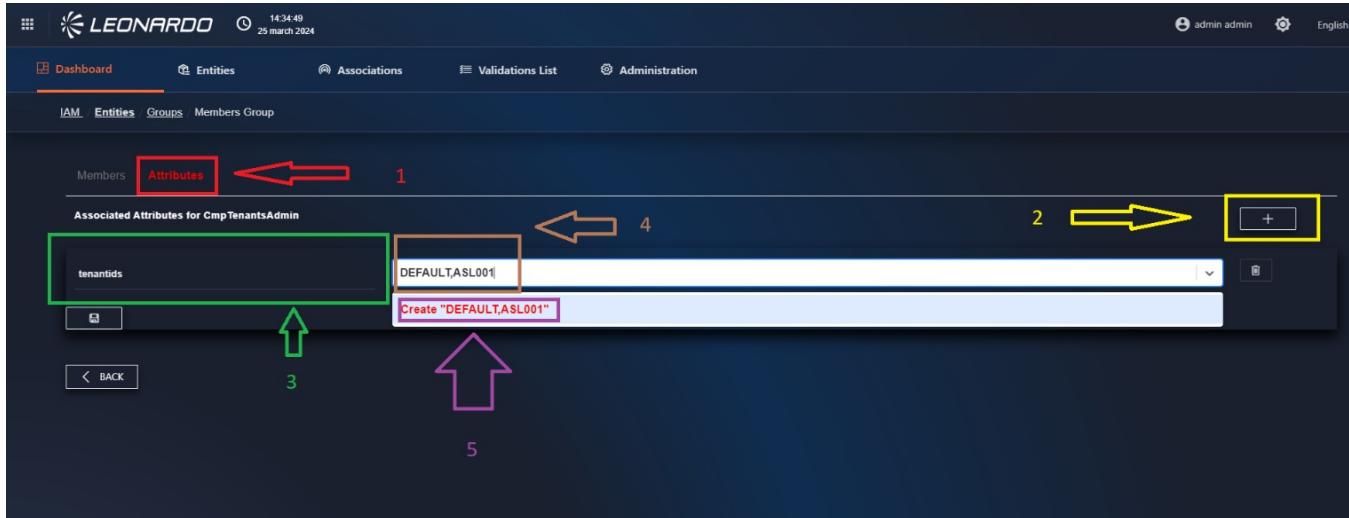


Figura 9 – Enter Attributes

Once all necessary attributes have been entered, changes can be saved using the "Save" button at the bottom.

To return to the list of available Groups, click the "Back" button present on each page.

2.0.1.3 Viewing, Modifying, and Deleting a Group

From the list of available Groups, a series of buttons are available for each group:

- "Magnifying glass": allows viewing group information (indicated by a red arrow in the image);
- "Pencil": allows modifying the group's basic information (indicated by a yellow arrow in the image);
- "Trash": allows deleting the group after clicking "confirm" in the displayed modal (indicated by a purple arrow in the image).



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the SCMP IAM dashboard with the 'Entities' tab selected. The main area displays a list of user groups, each with a set of control icons. The groups listed are: lamiAdministrators, CmpTenantsAdmin, CmpAdministrator, CmpViewer, lamiUsers, ETD-x2030, CmpProvisioner, ant_istanze_handler, Qualiezer Admin, and lamiUsersAdministrator. At the top right, there is a search bar labeled 'Search Group'. A red box highlights the search bar and the first few groups in the list. A yellow box highlights the 'Search Group' text. A purple box highlights the 'Search Group' icon.

Figura 10 – Control buttons

2.0.2 Users

For an account to access and use the system, it must be appropriately configured. Below, we will see the process of creating and managing a user within the SCMP using IAM as an access control application.

To access User management, click the "Users" menu in the "Entities" section of the IAM dashboard.



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform dashboard. At the top, there is a header with the Leonardo logo, the date (10.30.17, 26 march 2024), and user information (admin admin). Below the header, there is a navigation bar with tabs: Dashboard, Entities, Associations, Validations List, Administration, and IAM. The 'Dashboard' tab is selected. On the left, there is a sidebar titled 'Entities' with options: Users (highlighted with a red box and arrow), Groups, Roles, Applications, Modules, Components, Features, Resources, Data Filters, and Resources Container. To the right, there are four main sections: 'Associations' (Feature X User/Group, DataFilter X User/Group, Resources X User/Group), 'Validations List' (empty), and 'Administrations' (User Management X Pages, Pages Management, App X User/Group, Supports).

Figura 11 – Access to User management

Once the link is clicked, the user will be shown the list of all available groups on the portal with their respective configuration buttons.

The screenshot shows the 'Users' section of the Leonardo Secure Cloud Management Platform. At the top, there is a header with the Leonardo logo, the date (10.31.59, 26 march 2024), and user information (admin admin). Below the header, there is a navigation bar with tabs: Dashboard, Entities, Associations, Validations List, Administration, and IAM. The 'Entities' tab is selected. On the left, there is a sidebar with 'Users' selected. In the center, there is a table titled 'Users' with columns: Username, Last Name, First Name, Email, and Actions. The table lists several users with their details and actions. At the bottom, there is a pagination bar showing page 1 of 3.

| Username | Last Name | First Name | Email | Actions |
|-------------------|-----------|-------------|---------------|---------|
| iam_admin | admin | admin | iam_@com | |
| cmp_admin | | cmp_admin | | |
| cmp_api_test | testing | api e upath | giamr@y.com | |
| andrea.caruso | Caruso | Andrea | an@com | |
| cmp_otp | otp | otp | giamr@com | |
| expertise_admin | Admin | Expertise | ex@com | |
| andrea.buso | Andrea | Busà | and@iny...com | |
| cmm_admin | admin | cmm | cmm@com | |
| cmp_administrator | admin | cmp | cmp@.com | |
| cmpdemo | DEMO | Utente | cmg@com | |

Figura 12 – List of configured users



Leonardo Cyber & Security Solutions

21 Nov 2025
08.00

Secure Cloud Management Platform

2.0.2.1 New User Creation

To create a new user within the system, click the "+" button at the top right. A user creation form will be displayed.

| Username | Last Name | First Name | Email | Actions |
|-------------------|-----------|--------------|---|---------|
| iam_admin | admin | admin | iam_admin@gmail.com | |
| cmp_admin | | cmp_admin | | |
| cmp_api_test | testing | api e uipath | giammarco.piccoli.ext2@leonardocompany.com | |
| andrea.caruso | Caruso | Andrea | andrea.caruso@leonardo.com | |
| cmp_otp | cmp | otp | giammarco.piccoli.ext@leonardo.com | |
| expertise_admin | Admin | Expertise | expertiseadmin@leonardo.com | |
| andrea.busà | Andrea | Busà | andrea.busà@cybersecurity.leonardocompany.com | |
| cmm_admin | admin | cmm | cmm@leonardo-cmm.com | |
| cmp_administrator | admin | cmp | cmp@leonardo.com | |
| cmpdemo | DEMO | Utente | cmpdemo@email.com | |

Figura 13 – New user creation

The new user creation form will be displayed. Fill in the mandatory fields in the list:

- E-mail: the user's valid e-mail address.
- Username: the username to be used as the account for portal access.
- First Name: User's first name.
- Last Name: User's last name.
- Password: Password of at least 8 characters to be used for access.
- Max concurrent connections: Maximum number of simultaneous connections enabled for the user.
- Default Language: the basic language to be displayed in the system.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a user interface for creating a new user. At the top, there's a header bar with the Leonardo logo, the date (26 march 2024), and a timestamp (10:34:50). On the right side of the header, there are user profile icons and language selection (English). Below the header, a navigation menu includes links for Dashboard, Entities, Associations, Validations List, Administration, IAM, Entities, Users, and Add User. The main content area is titled "User creation form". It contains several input fields: "Email" (placeholder: Insert Email), "Username" (placeholder: Insert Username), "First Name" (placeholder: Insert First Name), "Last Name" (placeholder: Insert Last Name), "Data access level" (placeholder: Insert Data access level), "Organization" (placeholder: Insert Organization), and "Assigned role" (placeholder: Insert Assigned role). Each field has a small descriptive label above it.

Figura 14 – User creation form

Once all mandatory fields are entered, click the "+ Add user" button to complete the entry.

A confirmation message will be displayed, and the page will reset to allow the entry of a new user.

To view the newly created user, return to the page containing the list of users.

2.0.2.2 Role and Attribute Assignment

To manage users, you can click the "Groups" button corresponding to the row of the user to be modified.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Username | Last Name | First Name | Email | Actions |
|-------------------|-----------|--------------|---|---------|
| iam_admin | admin | admin | iam_admin@gmail.com | |
| cmp_admin | | cmp_admin | | |
| cmp_api_test | testing | api e uipath | giammarco.piccoli.ext2@leonardocompany.com | |
| andrea.caruso | Caruso | Andrea | andrea.caruso@leonardo.com | |
| cmp_otp | cmp | otp | giammarco.piccoli.ext1@leonardo.com | |
| expertise_admin | Admin | Expertise | expertiseadmin@leonardo.com | |
| andrea.busà | Andrea | Busà | andrea.busà@cybersecurity.leonardocompany.com | |
| cmm_admin | admin | cmm | cmm@leonardo-cmm.com | |
| cmp_administrator | admin | cmp | cmp@leonardo.com | |
| cmpdemo | DEMO | Utente | cmpdemo@email.com | |

Figura 15 – Access to user management

Once the button is pressed, the page refreshes to show the "Groups" page where one or more groups can be assigned to or removed from the user.

To add a new group to the user, you must select the group to be assigned to the user in the left section (1) and then, by clicking the "Associate" button in the center of the page (2), the group will automatically move to the right section and the changes will be saved automatically.



The screenshot shows the 'Associations' section of the Leonardo platform. On the left, a list of groups for the user 'cmp_api_test' is shown, with 'CmpTenantsAdmin' selected and highlighted by a red box. On the right, a 'User Groups' section shows 'CmpAdministrator' with a priority of 1. A yellow box highlights the 'Associa' button in the center, which is used to associate the user with the selected group.

Figura 16 – Associate a user to the group

Similarly, it is possible to remove the user from the group by first clicking the group to be removed in the right section and then the "Disassociate" button in the center of the page. The changes will be saved automatically.

The screenshot shows the 'Associations' section of the Leonardo platform. On the left, a list of groups for the user 'cmp_api_test' is shown, with 'CmpTenantsAdmin' selected and highlighted by a red box. On the right, a 'User Groups' section shows 'CmpAdministrator' with a priority of 1. A yellow box highlights the 'Dissocia' button in the center, which is used to disassociate the user from the selected group.

*Figura 17 – Disassociate a user from
the group*

Furthermore, using the buttons in the right section, corresponding to each group, it is possible to modify the priority of the various groups.

For users, it is also possible to assign custom attributes. To do this, select the "Attributes" tab at the top of the page (1), then using the "+" button at the top right (2), it is possible to add an attribute. In the left part, the key must be entered (3) and in the white part on the right, its value must be entered (4). During entry, we will see a dropdown below the field where clicking will allow saving the entered value (5).

The list of available attributes is in the paragraph.

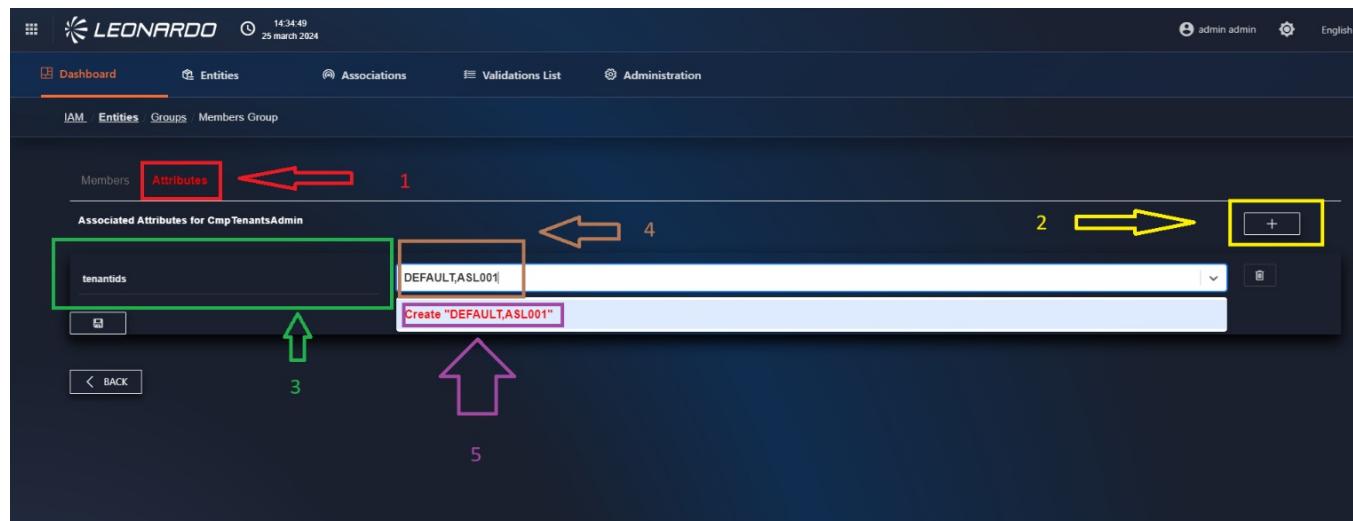


Figura 18 – Enter Attributes

Once all necessary attributes have been entered, changes can be saved using the "Save" button at the bottom.

2.0.2.3 Credential Reset

As a user administrator, it is possible to reset passwords. To do this, click on the "Credentials" tab displayed at the top of the page. In this tab, you can enter a new password for the user and configure it as "Temporary". The temporary password must be changed by the user after the first login. A password validity period, expressed in days, can also be defined.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed web interface for managing user credentials. At the top, there's a header with the Leonardo logo, the date '26 march 2024', and a timestamp '12:01:52'. Below the header, a navigation bar includes links for Dashboard, Entities, Associations, Validations List, and Administration. Under the Associations link, it says 'Group User Tree'. The main content area has tabs for Groups, Roles, Attributes, and Credentials, with 'Credentials' currently selected. A modal window is open, titled 'Password User cmp_api_test'. It contains fields for 'Temporary' and 'Expiration (days)', and a large 'EDIT PASSWORD' button at the bottom.

Figura 19 – Modifying the user's password

2.0.2.4 Viewing, Modifying, and Deleting a User

From the list of available users, a series of buttons are available for each group:

- "Magnifying glass": allows viewing user info (indicated by a red arrow in the image).
- "Pencil": allows modifying the user's basic information (indicated by a yellow arrow in the image).
- "Trash": allows deleting the user after clicking "confirm" in the displayed modal (indicated by a purple arrow in the image).



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a list of groups on the 'Groups' tab of the IAM dashboard. Each group entry includes a 'Search Group' icon, followed by edit and delete icons. The groups listed are: IamAdministrators, CmpTenantsAdmin, CmpAdministrator, CmpViewer, IamUsers, ETD-x2030, CmpProvisioner, ant_istanze_handler, Qualiezer Admin, and IamUsersAdministrator. A red arrow points to the 'Search Group' icon for the first group.

Figura 20 – Control buttons

2.0.3 Management of Menus Enabled per User/Group

The IAM system integrated into the SCMP also allows the management of menu elements available to various users and groups. To access this functionality, simply click the "User management X Pages" link available in the "Administration" section of the IAM dashboard.

The screenshot shows the 'Administration' section of the IAM dashboard. On the right, under 'User Management X Pages', the 'Pages Management' link is highlighted with a red box and a red arrow pointing to it. Other links in this section include 'App X User/Group' and 'Supports'. The other sections visible are 'Entities', 'Associations', 'Validations List', and 'Validations'.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 21 – Access to menu management

At the top of the page, there are two dropdown menus: the left dropdown allows selecting a single user, and the right one allows selecting a group.

The screenshot shows a dark-themed web interface for managing users and groups. At the top, there's a header with the Leonardo logo, the date (26 march 2024), and a timestamp (14:19:50). Below the header, a navigation bar includes links for Dashboard, Entities, Associations, Validations List, Administration, IAM, Administration, and User Management X Pages. The main content area is titled 'Administration'. On the left, there are two search input fields: 'Search User' and 'Search Group'. The 'Search Group' field has a dropdown menu open, displaying a list of group names: IamAdministrators, CmpTenantsAdmin, CmpAdministrator, CmpViewer, IamUsers, ETD-x2030, CmpProvisioner, and ant_istanze_handler. The background of the interface is dark blue, and the overall design is modern and professional.

Figura 22 – Selection of user/group to modify

After selecting an account, the page will update to show all "STREAM" available on the application. It is possible to click the "+" button corresponding to each row to view the available "MODULES" and "COMPONENT".

The displayed component lists are automatically generated by the system using the configurations performed during installation.

For each component present, by clicking the dropdown menu on the corresponding row, it is possible to indicate its visibility (or lack thereof) to the user/group we previously selected.

The selectable values are:

- Enabled and default: only one default can be indicated per module. Selecting this option makes the selected page the main one; thus, upon clicking the menu, the user will be redirected to this page.
- Enabled: Indicates that the menu is visible and usable by the user/group.
- Disabled: Indicates that the menu will not be enabled and will not be visible to the user/group.

- N.D: not defined (the menu is disabled and will not be visible).

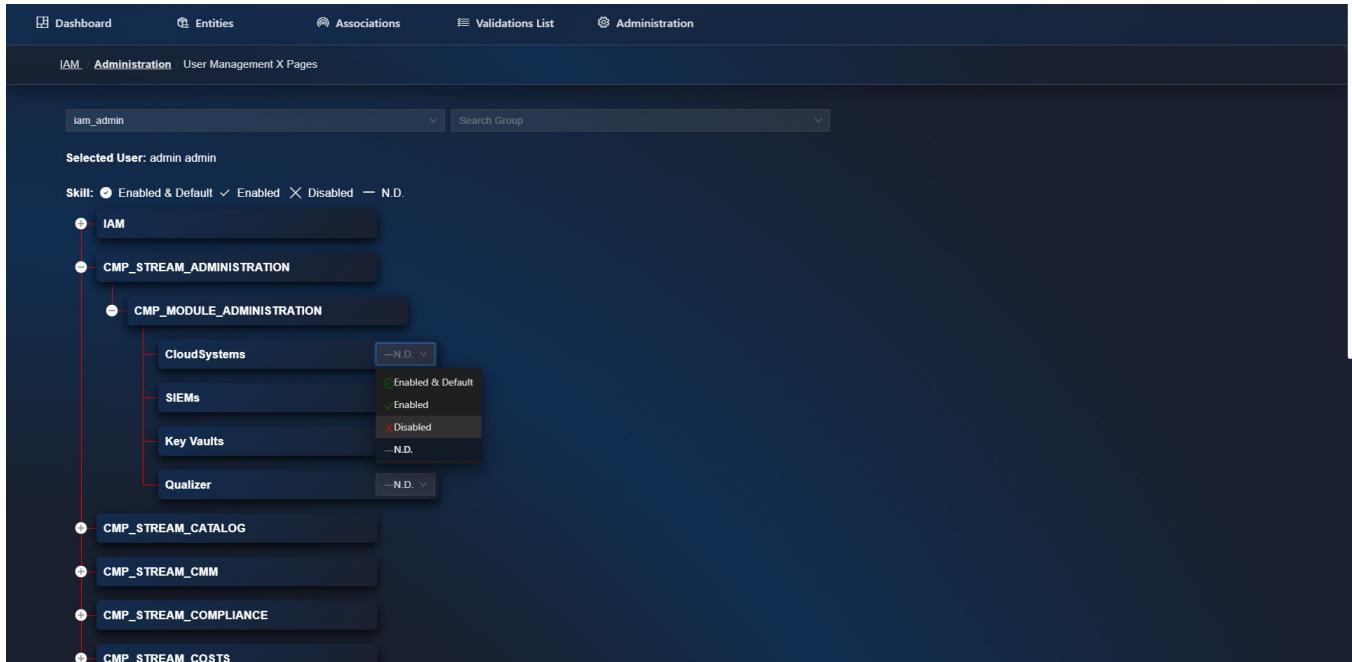


Figura 23 – Menu authorization management

2.0.4 User Profile Lists and Attributes

This section highlights the different types of users who can access and use the described product.

For each of them, a list of functionalities the user has been enabled for and can interact with is provided.

All attributes that can be assigned to Users and Groups are also indicated here.

2.0.4.1 Attributes

| Attribute | Acceptable Values | Type | Description |
|------------|---------------------|--------------|--|
| Monitoring | Default, AS01, mase | String array | Enter the list of enabled tenants for the user, separated by commas between each tenant name. |
| Costs | true / false | Boolean | By enabling the attribute, we specify that the user can perform searches by TAG instead of using the tenant as a discriminant. |



| Attribute | Acceptable Values | Type | Description |
|-----------|-------------------|-------------|--|
| Inventory | ADMIN / LIMITED | Enumeration | By entering ADMIN as the value, the user will be able to view both costs received from the provider and costs calculated by the SCMP. By entering LIMITED, only costs calculated by the SCMP will be viewable. |
| Inventory | Zona1 | String | Mandatory parameter for tools used by IAM. |

2.0.4.2 Administrator

| Functionality | Create | Read | Undo | Delete |
|-----------------------|--------|------|------|--------|
| Monitoring | x | x | x | x |
| Costs | x | x | x | x |
| Inventory | x | x | x | x |
| Security | x | x | x | x |
| Dashboard | x | x | x | x |
| Catalog | x | x | x | x |
| Authentication | x | x | x | x |
| Administration | x | x | x | x |
| Cloud Maturity model | x | x | x | x |
| Provisioning | x | x | x | x |
| Tenant Management | | | | |
| Service Detail Design | | | | |

2.0.4.3 Service Manager

| Functionality | Create | Read | Undo | Delete |
|---------------|--------|------|------|--------|
| Monitoring | | | | |
| Costs | | | | |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Functionality | Create | Read | Undo | Delete |
|-----------------------|--------|------|------|--------|
| Inventory | | | | |
| Security | | | | |
| Dashboard | | | | |
| Catalog | | | | |
| Authentication | x | x | x | x |
| Administration | | | | |
| Cloud Maturity model | | | | |
| Provisioning | | | | |
| Tenant Management | x | x | x | x |
| Service Detail Design | x | x | x | x |

2.0.4.4 Viewer

| Functionality | Create | Read | Undo | Delete |
|----------------------|--------|------|------|--------|
| Monitoring | x | x | | |
| Costs | x | x | | |
| Inventory | x | x | | |
| Security | | x | | |
| Dashboard | | x | | |
| Catalog | | x | | |
| Authentication | | | | |
| Administration | | | | |
| Cloud Maturity model | | x | | |
| Provisioning | | | | |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Functionality | Create | Read | Undo | Delete |
|-----------------------|--------|------|------|--------|
| Tenant Management | | | | |
| Service Detail Design | | | | |

2.0.4.5 Authorized


| Functionality | Create | Read | Undo | Delete |
|-----------------------|--------|------|------|--------|
| Monitoring | x | x | x | x |
| Costs | x | x | x | x |
| Inventory | x | x | x | x |
| Security | | | | |
| Dashboard | x | x | x | x |
| Catalog | x | x | x | x |
| Authentication | | | | |
| Administration | x | x | x | x |
| Cloud Maturity model | | | | |
| Provisioning | x | x | x | x |
| Tenant Management | | | | |
| Service Detail Design | | | | |

Tenants

SCMP has been developed as a Multi-Tenant solution, which offers greater security, customization, flexibility, and scalability, with more efficient administration and reduced costs.

To allow the user to manage the tenants present in the infrastructure, the "Tenant" functionality has been made available, a feature not available to everyone but only to users enabled for Service Management.

To access the functionality, click on the bento button in the top left. Afterwards, click on "Tenant".

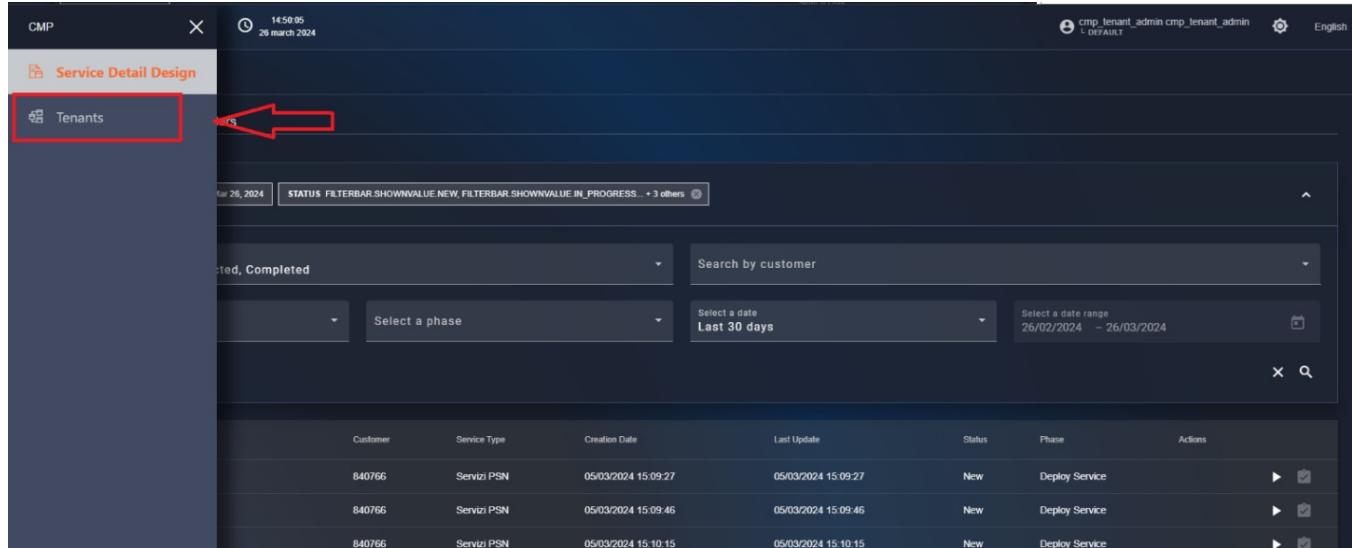

The screenshot shows the SCMP interface with a dark blue header. In the top-left corner, there's a small 'CMP' icon followed by an 'X'. To its right is a clock icon with the text '14:50 05' and '29 march 2024'. Further right are icons for 'cmp_tenant_admin' and 'cmp_tenant_admin', a gear icon, and the word 'English'. Below the header, a navigation bar has 'Service Detail Design' selected. The main content area is titled 'Tenants'. At the top of this section, there's a date range '26 26, 2024' and a status filter 'STATUS FILTERBAR.SHOWNVALUE.NEW, FILTERBAR.SHOWNVALUE_IN_PROGRESS... + 3 others'. Below these are several dropdown menus: 'Status' (set to 'Selected, Completed'), 'Search by customer', 'Select a phase', 'Select a date' (set to 'Last 30 days'), and 'Select a date range' (set to '26/02/2024 - 26/03/2024'). At the bottom of the tenant list, there are buttons for 'Actions'. The table lists three entries:

| Customer | Service Type | Creation Date | Last Update | Status | Phase | Actions | |
|----------|--------------|---------------------|---------------------|--------|----------------|---------|--|
| 840766 | Servizi PSN | 05/03/2024 15:09:27 | 05/03/2024 15:09:27 | New | Deploy Service | | |
| 840766 | Servizi PSN | 05/03/2024 15:09:46 | 05/03/2024 15:09:46 | New | Deploy Service | | |
| 840766 | Servizi PSN | 05/03/2024 15:10:15 | 05/03/2024 15:10:15 | New | Deploy Service | | |

Figura 24 – Access to Tenant
management

Creation of a new tenant

At this point, the user is inside the "Tenant" tab page, which contains the list of tenants configured on the system. To add a new tenant, click the "menu" available in the top right and select the "+ Add" item.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed web interface for managing tenants. At the top, there's a header with the LEONARDO logo and some status information. Below it, a navigation bar has 'Tenants' selected. The main area is titled 'Tenants List' and displays a table with one row of data. The columns are 'Tenant ID', 'Name', and 'Description'. The data row contains 'test', 'Tenant1', and 'edited'. To the right of the table is an 'Add' button, which is highlighted with a red box and a red arrow pointing towards it.

Figura 25 – Add new tenant

Once pressed, the new tenant configuration page is displayed, divided into three sections:

The screenshot shows a 'Create tenant' dialog box divided into three main sections. Section A (yellow border) contains fields for 'Tenant ID *', 'Tenant Name *', 'Description *', and 'Marketplace Subscription ID (optional)'. Section B (pink border) contains a section for 'Data persistence (in days)' with four tabs: Inventory (730), Cost (730), Monitoring (730), and Security (730). Section C (red border) contains 'Init catalog:' options ('Empty catalog', 'Copy catalog from default tenant', 'Copy catalog from another tenant') and a 'Items to copy:' dropdown menu with checkboxes for 'Copy CMP Catalog', 'Copy Services', 'Copy Custom Services', and 'Copy Blueprints'. Arrows point from labels A, B, and C to their respective sections in the dialog.

Figura 26 – New tenant creation form



1. General parameters:

| Name | Description | Required |
|-----------------------------|--|----------|
| Tenant ID | Unique ID of the new tenant | x |
| Tenant Name | Name of the tenant that will be displayed to the user | x |
| Description | A description of the tenant | x |
| MarketPlace Subscription ID | the ID received from the Azure marketplace upon service subscription | |

1. Data persistence:

| Name | Description | Required |
|------------|--|----------|
| Inventory | Indicates the number of days for which inventory data will be retained in the collections present in the DB | x |
| Cost | Indicates the number of days for which cost data will be retained in the collections present in the DB | x |
| Monitoring | Indicates the number of days for which monitoring data will be retained in the collections present in the DB | x |
| Security | Indicates the number of days for which security data will be retained in the collections present in the DB | x |

1. Init Catalog

In this section, you can select the catalog items that will be automatically copied to the new tenant.

The initial section (1) allows choosing only one option from:

- Empty Catalog: leave the catalog empty without copying any information.
- Copy Catalog from Default Tenant: indicates that the tenant from which to retrieve information to copy is the Default tenant.
- Copy Catalog from other Tenant: if selected, a new field containing the list of available tenants will be displayed in the section below, allowing the selection of the tenant from which to retrieve information to copy.

Subsequently, you can fill in the next section (2) by entering the non-mandatory fields:

- **Providers:** list of providers configured in the source tenant; selecting one or more providers will copy their catalog items to the new tenant.
- **Copy SCMP Catalog:** if activated, all elements present in the SCMP catalog will be added to the new tenant.
- **Copy Services:** if activated, all elements present in the SCMP catalog will be added to the new tenant.

- **Copy Custom Services:** if activated, custom services available on the tenant will be added to the new tenant.
- **Copy Blueprints:** if activated, all available Blueprints will be added to the new tenant.
- Association Catalog

In this section, you can select the flag to enable the tenant to use the "Common" price lists analyzed later. By selecting this field, it will no longer be necessary to define a specific catalog for the tenant; it will inherit the common price lists.

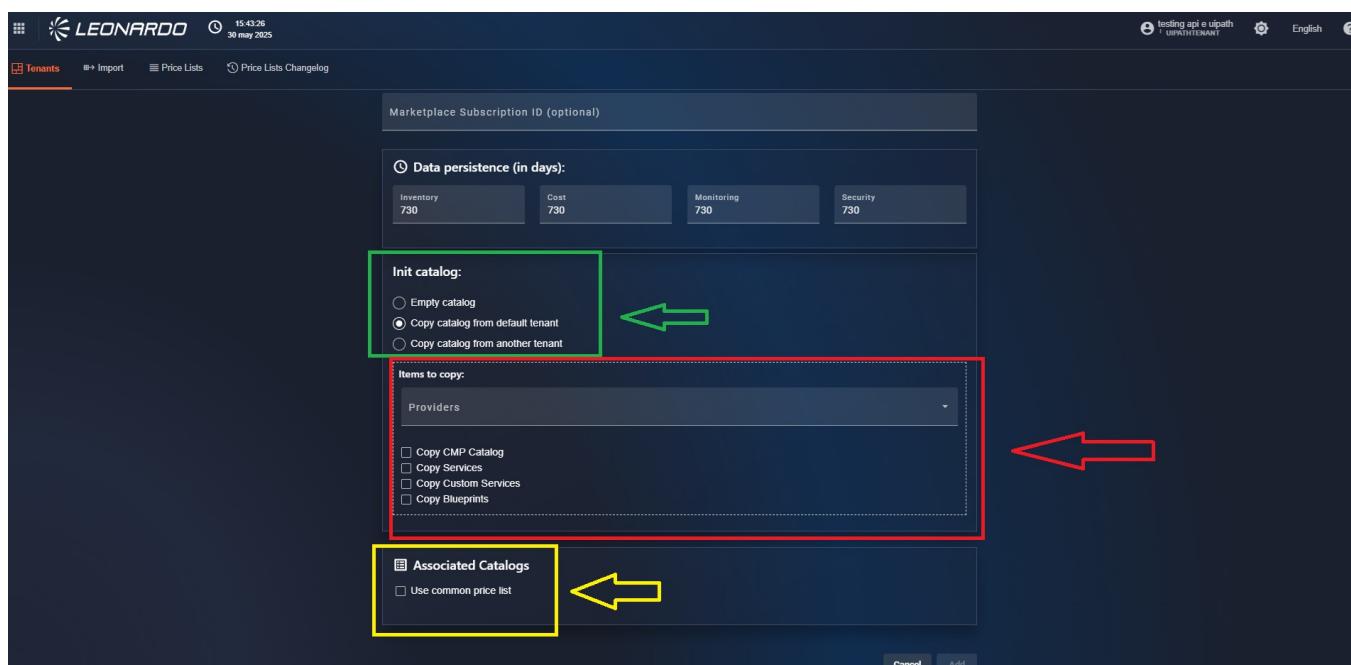


Figura 27 – Catalog initialization section

To confirm the creation of the new tenant, click the "Save" button in the bottom right. After waiting for loading, a creation confirmation message will be displayed, and the user will be returned to the tenant list where the newly created tenant will be present.

Viewing, Modifying, and Deleting a tenant

In the tenant list, next to each result, there is a "menu" with three buttons:

- "Show": allows viewing tenant information (indicated with a red arrow in the image).
- "Edit": allows modifying basic tenant information (indicated with a yellow arrow in the image).
- "Delete": allows deleting the user after clicking "confirm" in the displayed modal (indicated with a purple arrow in the image).



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Tenant ID | Name | Description |
|----------------|-----------------------|-------------|
| Tenant1 | Tenant1 | Tenant1 |
| UniPath Tenant | UniPath Tenant edited | edited |
| test | test | test |

Figura 28 – Control buttons

Automated tenant and subsystem creation

The user is given the possibility to automate the import of tenants and subsystems to speed up "onboarding" operations. To access the functionality, click the "import" tab available at the top of the "Tenants" functionality.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed web application interface. At the top, there's a header with the Leonardo logo, a timestamp (11:27:31 08 April 2025), and user information (testing api e uipath, L DEFAULT, English). Below the header, the breadcrumb path 'Tenants / Import' is visible. A red arrow points from the 'Import' link in the breadcrumb to the 'Import' button in the top navigation bar. The main content area has a title 'Import Tenants and/or Subsystems' and a subtitle explaining it allows for importing data through Excel files. It features two tabs: 'Tenants' (selected) and 'Subsystems'. Below the tabs are two sections: '1. Upload import file' (with a 'Click here to upload a file' button) and '2. Configure parameters' (which includes a section for 'Data persistence (in days)' with four input fields: Inventory 730, Cost 730, Monitoring 730, and Security 730, and a 'Init catalog:' section with three options: 'Empty catalog' (selected), 'Copy catalog from default tenant', and 'Copy catalog from another tenant').

Figura 29 – Tenant import functionality

In the center of the page, there is a contextual menu that allows selecting the import type (Tenant or subsystems).

Let's analyze the 2 pages in detail.

Tenant Import

The functionality consists of 2 sections:

1. The "upload file" section where you can insert a file in .xlsx format (of which an example can be downloaded using the dedicated button) {in red in the figure}
2. The "configuration" section where it is possible to select the parameters shared between tenants (in yellow in the figure), as described in the section (Creation of a new tenant).

Once all information has been entered, you can click the "import" button (in green in the figure) to validate the uploaded file and start the import process.



Leonardo Cyber & Security Solutions

21 Nov 2025
08.00

Secure Cloud Management Platform

Figura 30 – Tenant configuration parameters

After a few minutes, you can use the "Results" button (in pink in the image) to view the details of the operations performed by the SCMP.

| Run list | | | | | |
|-------------------|---------------------|------------------|--|--------|-----------|
| Span ID | Start time | Name | monitoringMessage | status | Duration |
| 83f62b819fd57041 | 2025-04-08 17:11:47 | IMPORT - SYSTEMS | IMPORT NOT STARTED - Authorization failed for system error | | 2.35 mins |
| c6a8ff65d472aad8 | 2025-04-08 17:06:55 | IMPORT - SYSTEMS | IMPORT NOT STARTED - Authorization failed for system error | | 2.52 mins |
| c657c61a61a227bd6 | 2025-04-08 17:03:05 | IMPORT - SYSTEMS | Import completed. Successfully imported 100/100 systems. | ok | 1.92 mins |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 31 – Results of performed imports

Subsystem Import

To access the subsystem import functionality, you need to click on the "subsystems" tab available on the "import" page.

The screenshot shows the 'Import' page in the Leonardo Secure Cloud Management Platform. At the top, there are tabs for 'Tenants' and 'Import'. The 'Import' tab is selected and highlighted with a red box. Below the tabs, there is a sub-tab 'Subsystems' which is also highlighted with a red box and has an arrow pointing to it from the left. The main content area is titled 'Import Tenants and/or Subsystems' and contains instructions: 'This page allows you to speed up the insertion of tenants and subsystems by importing data through Excel files.' There are two main sections: '1. Upload import file' (with a 'Click here to upload a file' button) and '2. Select subsystems provider' (with a dropdown menu showing 'Provider' and 'VCloudDirector'). At the bottom right of the form, there are 'Reset' and 'Import' buttons.

Figura 32 – Subsystem import functionality

The functionality consists of 2 sections:

1. The "upload file" section where you can insert a file in .xlsx format (of which an example can be downloaded using the dedicated button).
2. The selection of the provider type to import.

Once files are inserted and it's verified that the provider is compatible, you can click the "import" button (in green in the figure) to validate the uploaded file and start the import process.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 33 – Tenant and subsystem import functionality

After a few minutes, you can use the "Results" button (in pink in the image) to view the details of the operations performed by the SCMP.

| Span ID | Start time | Name | monitoringMessage | status | Duration |
|-------------------|---------------------|------------------|--|--------|-----------|
| 83f62b819fd57041 | 2025-04-08 17:11:47 | IMPORT - SYSTEMS | IMPORT NOT STARTED - Authorization failed for system error | | 2.35 mins |
| c6a8ff65d472aad8 | 2025-04-08 17:06:55 | IMPORT - SYSTEMS | IMPORT NOT STARTED - Authorization failed for system error | | 2.52 mins |
| c657c61a61a227bd6 | 2025-04-08 17:03:05 | IMPORT - SYSTEMS | Import completed. Successfully imported 100/100 systems. | ok | 1.92 mins |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 34 – Results of performed imports

"Common" Catalogs

The user is given the possibility to import a series of catalogs for SKUs or resources, which will then be used by all tenants that have the enabled flag.

To proceed with price list entry, you can access the "Price list" page available on the tenant administration module.

The screenshot shows the Leonardo Tenant Administration interface. At the top, there's a header with the Leonardo logo, the date (15/04/23, 30 may 2025), and some user information (testing api e uppath, English). Below the header, the main navigation bar has tabs for 'Tenants', 'Import' (with a plus icon), 'Price Lists' (which is highlighted with a red box and has an upward arrow pointing to it from the explanatory text), and 'Price Lists Changelog'. The current page is 'Tenants / Price Lists'. There are filtering options at the top: 'Filtering by: TENANT Common to all tenants, YEAR 2025'. Below these filters, there are dropdown menus for 'Tenant' (set to 'Common to all tenants'), 'Provider' (with a note 'This field is required.'), and 'Year' (set to '2025'). A large central area contains the message 'Enter the required filters to view the price lists.'

Figura 35 – Access to catalog import

Once inside the page, to view the data, we can use the "Provider" filter to select the type of provider for which to check the status of price lists.



The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links for 'Tenants', 'Import', 'Price Lists' (which is currently selected), and 'Price Lists Changelog'. Below this, a timestamp '15:58:05 30 may 2025' is displayed. The main content area is titled 'Tenants / Price Lists'. It features a 'Filtering by' section with three dropdowns: 'PROVIDER AZURE', 'TENANT Common to all tenants', and 'YEAR 2025'. A red box highlights the 'Provider' dropdown, and a red arrow points to it from the top of the page. Below these filters is a 'Tenant' dropdown set to 'Common to all tenants'. To the right of the tenant dropdown is another 'Year' dropdown set to '2025'. Further down, there are three monthly calendars for January, February, and March 2025, each showing specific dates highlighted in blue. To the right of the calendar is a 'Current Price Lists:' table:

| Price List | Start Date | End Date | Actions |
|---|------------|------------|---------|
| Listino Azure con Metriche - 20250109_OnDemand_aprile-middle.xlsx | 01/11/2024 | 30/11/2024 | ⋮ |
| Listino Azure con Metriche - 20250109_OnDemand_aprile.xlsx | 01/12/2024 | 31/01/2025 | ⋮ |
| Listino Azure con Metriche - 20250109_OnDemand_maggio.xlsx | 01/02/2025 | 31/03/2025 | ⋮ |
| Listino Azure con Metriche - 20250109_OnDemand_marzo.xlsx | 01/04/2025 | 30/04/2025 | ⋮ |

Figura 36 – Filter by provider

We can use the other filters on the page to:

- View data for a specific year ("Date" filter)
- View specific catalogs for the selected tenant ("tenant" filter)

To view the data, it is necessary to select only one type of provider, in order to display the calendar and the list of price lists applied for a given year to the specified tenant and/or common.

Inside the page, you will find the list of imported price lists with their validity period. For each row, a color is also indicated; this color helps identify the price list in the graphic section on the left. This calendar facilitates the identification of periods not covered by the price list.

The list of "inactive" price lists that have been previously replaced is also displayed.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Current Price Lists: | | | | | | | | | | | |
|---|------------|------------|---------|--|--|--|--|--|--|--|--|
| Price List | Start Date | End Date | Actions | | | | | | | | |
| Listino Azure con Metriche - 20250109_OnDemand_aprile-middle.xlsx | 01/11/2024 | 30/11/2024 | ⋮ | | | | | | | | |
| Listino Azure con Metriche - 20250109_OnDemand_aprile.xlsx | 01/12/2024 | 31/01/2025 | ⋮ | | | | | | | | |
| Listino Azure con Metriche - 20250109_OnDemand_maggio.xlsx | 01/02/2025 | 31/03/2025 | ⋮ | | | | | | | | |
| Listino Azure con Metriche - 20250109_OnDemand_marzo.xlsx | 01/04/2025 | 15/07/2025 | ⋮ | | | | | | | | |
| Listino Azure con Metriche - 20250408 complessivo tot (1).xlsx | 01/08/2025 | 31/08/2025 | ⋮ | | | | | | | | |

| Inactive Price Lists: | | | | | | | | | | | |
|-----------------------|---------|--|--|--|--|--|--|--|--|--|--|
| Price List | Actions | | | | | | | | | | |
| az edit 1.xlsx | ⋮ | | | | | | | | | | |

Figura 37 – Inactive price lists

New price list entry

To enter a new price list, you need to click the "hamburger menu" available in the top right of the catalog resources page and select "Import Catalogue".

| Current Price Lists: | | | | | | | | | | | |
|---|------------|------------|---------|--|--|--|--|--|--|--|--|
| Price List | Start Date | End Date | Actions | | | | | | | | |
| Listino Azure con Metriche - 20250109_OnDemand_aprile-middle.xlsx | 01/11/2024 | 30/11/2024 | ⋮ | | | | | | | | |
| Listino Azure con Metriche - 20250109_OnDemand_aprile.xlsx | 01/12/2024 | 31/01/2025 | ⋮ | | | | | | | | |
| Listino Azure con Metriche - 20250109_OnDemand_maggio.xlsx | 01/02/2025 | 31/03/2025 | ⋮ | | | | | | | | |
| Listino Azure con Metriche - 20250109_OnDemand_marzo.xlsx | 01/04/2025 | 15/07/2025 | ⋮ | | | | | | | | |
| Listino Azure con Metriche - 20250408 complessivo tot (1).xlsx | 01/08/2025 | 31/08/2025 | ⋮ | | | | | | | | |

Figura 38 – Access to "Scheduled Catalog Import"

Three parameters are present in the modal:

- Tenant: select the tenant on which to perform the upload.
- Provider: Select the provider related to the price list to be entered.
- Valid From: it is possible to indicate a start date for the price list's validity. On the day indicated in this variable, the system will automatically update the catalog resources to match the new price list.

If necessary, the user can enter a "common to all tenants" price list which will be used by all configured tenants containing systems from the reference provider.

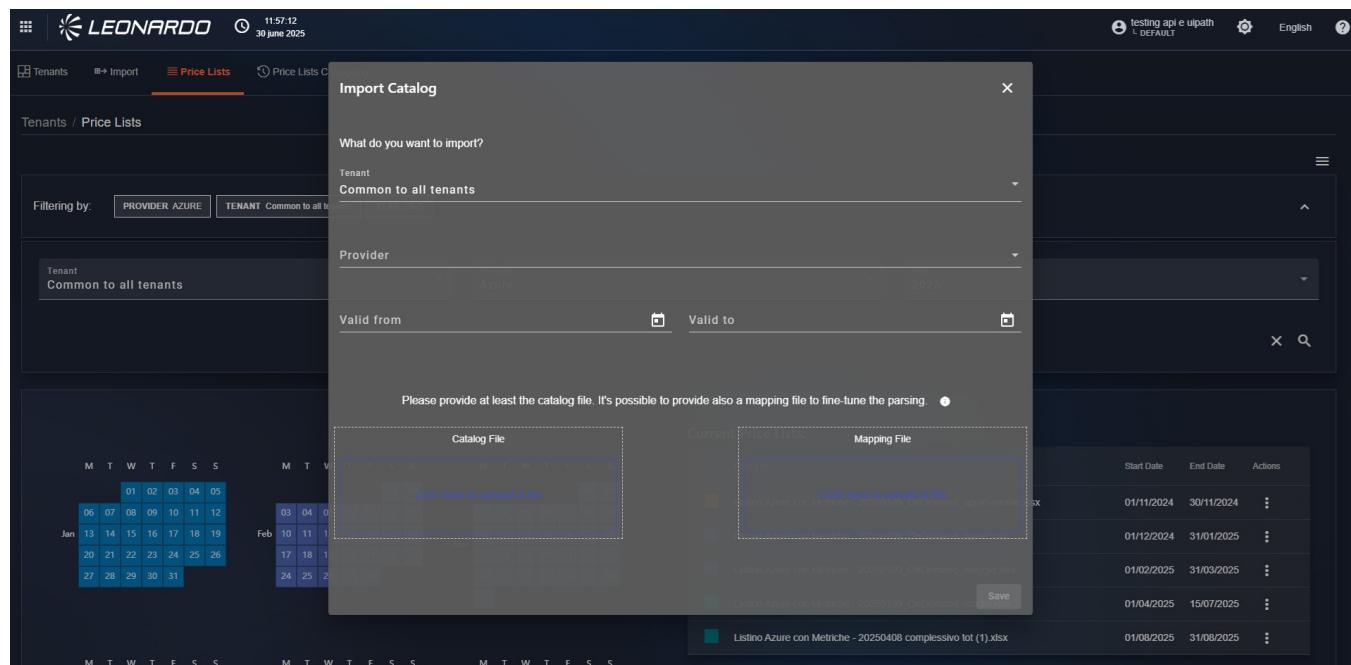


Figura 39 – Required fields for import

Additionally, below the parameters, there are two sections for file upload. By clicking on the first square on the left, you can select an "XLS" file containing all resources to be mapped. By clicking on the second square, you can insert a mapping file, following the information shown in the "Help" section indicated by a "Question Mark" icon. Clicking on it will open a box below the upload sections that contains all information related to the mapping file to be inserted.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Import Catalog

Please provide at least the catalog file. It's possible to provide also a mapping file to fine-tune the parsing.

Catalog File

Mapping File

Upload File

Upload File

Mapping file has to be a csv and must contain the following columns of the catalog:

- name
- providerCode
- description
- price
- unit
- serviceName

Put a column in every row and specify which column of the catalog matches using a ';' as separator. For example:
unit;Unità di Misura

Figura 40 – Help message for Mapping file

After entering all parameters, you can click the save button at the bottom, and you will be returned to the previous page which, after the import, will display the new price list.

Modifying validity and deleting price lists

To modify a price list, it is necessary to click the menu corresponding to the table row containing the price list, as indicated in the figure. Subsequently, select the edit item to display the modification mask.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Price List | Start Date | End Date | Actions |
|---|------------|------------|---------------------|
| Listino Azure con Metriche - 20250109_OnDemand_aprile-middle.xlsx | 01/11/2024 | 30/11/2024 | Edit |
| Listino Azure con Metriche - 20250109_OnDemand_aprile.xlsx | 01/12/2024 | 31/01/2025 | Edit |
| Listino Azure con Metriche - 20250109_OnDemand_maggio.xlsx | 01/02/2025 | 31/03/2025 | Delete |
| Listino Azure con Metriche - 20250109_OnDemand_marzo.xlsx | 01/04/2025 | 15/07/2025 | ⋮ |
| Listino Azure con Metriche - 20250408_complessivo_tot (1).xlsx | 01/08/2025 | 31/08/2025 | ⋮ |

Figura 41 – Edit a price list

Within the window, it is possible to modify the validity date of the price list, either to reduce or extend its duration. If the "Indefinite time" option is selected, the price list will remain valid until a new price list is entered. At that point, the price list with indefinite validity will be automatically deactivated and considered valid until the day the new price list is activated.

After the update, it is necessary to refresh the costs on the involved tenants, in order to correctly calculate the customer price based on the updated price lists.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Price List | Start Date | End Date | Actions |
|--|------------|------------|---------|
| 50109_OnDemand_aprile-middle.xlsx | 01/11/2024 | 30/11/2024 | ⋮ |
| 50109_OnDemand_aprile.xlsx | 01/12/2024 | 31/01/2025 | ⋮ |
| Listino Azure con Metriche - 20250109_OnDemand_maggio.xlsx | 01/02/2025 | 31/03/2025 | ⋮ |
| Listino Azure con Metriche - 20250109_OnDemand_marzo.xlsx | 01/04/2025 | 15/07/2025 | ⋮ |
| Listino Azure con Metriche - 20250408 complessivo tot (1).xlsx | 01/08/2025 | 31/08/2025 | ⋮ |

Figura 42 – Edit the validity of a price list

The user is also given the option to delete a price list. In this case, the period previously covered by that price list will remain uncovered, i.e., without an associated rate.

| Price List | Start Date | End Date | Actions |
|--|------------|------------|---------|
| Listino Azure con Metriche - 20250109_OnDemand_aprile.xlsx | 01/12/2024 | 31/01/2025 | ⋮ |
| Listino Azure con Metriche - 20250109_OnDemand_marzo.xlsx | 01/04/2025 | 15/07/2025 | ⋮ |
| Listino Azure con Metriche - 20250408 complessivo tot (1).xlsx | 01/08/2025 | 31/08/2025 | ⋮ |



Figura 43 – Price list deletion

Price list changes changelog

Using the "Price list changelog" tab available at the top of the "tenant administration" section, it is possible to view a list of operations performed on the price lists, with an indication of the dates used for import and the reference user who made the changes.

| Provider | File name | Date from ↑ | Date To | User | Success |
|----------|---|-------------|------------|------------------|---------|
| AZURE | Listino Azure con Metriche - 20250109_OnDemand_aprile-middle.xlsx | 01/11/2024 | 30/05/2025 | cmp_tenant_admin | ✓ |
| AZURE | Listino Azure con Metriche - 20250109_OnDemand_aprile.xlsx | 01/12/2024 | 30/05/2025 | cmp_tenant_admin | ✓ |
| AZURE | az edit 1.xlsx | 01/01/2025 | 28/05/2025 | cmp_api_test | ✓ |
| GOOGLE | gg edit1.xlsx | 01/01/2025 | 28/05/2025 | cmp_api_test | ✓ |
| GOOGLE | gg edit1.xlsx | 01/01/2025 | 17/06/2025 | cmp_tenant_admin | ✓ |
| AZURE | Listino Azure con Metriche - 20250109_OnDemand_maggio.xlsx | 01/02/2025 | 30/05/2025 | cmp_tenant_admin | ✓ |
| AZURE | Listino Azure con Metriche - 20250109_OnDemand_marzo.xlsx | 01/04/2025 | 30/05/2025 | cmp_tenant_admin | ✓ |
| AZURE | Listino Azure con Metriche - 20250109_OnDemand_marzo.xlsx | 01/04/2025 | 17/06/2025 | cmp_tenant_admin | ✓ |

Figura 44 – Error details

Using the filter available on the page, we can view data for only one selected tenant.

Reporting tools

The reporting functionality, specific to features, allows generating global reports of the information available for the various providers. Within the pages, the possibility will also be given to create files to facilitate information sharing.

To access the functionality, above the breadcrumb path, click on the "Reports" tab.

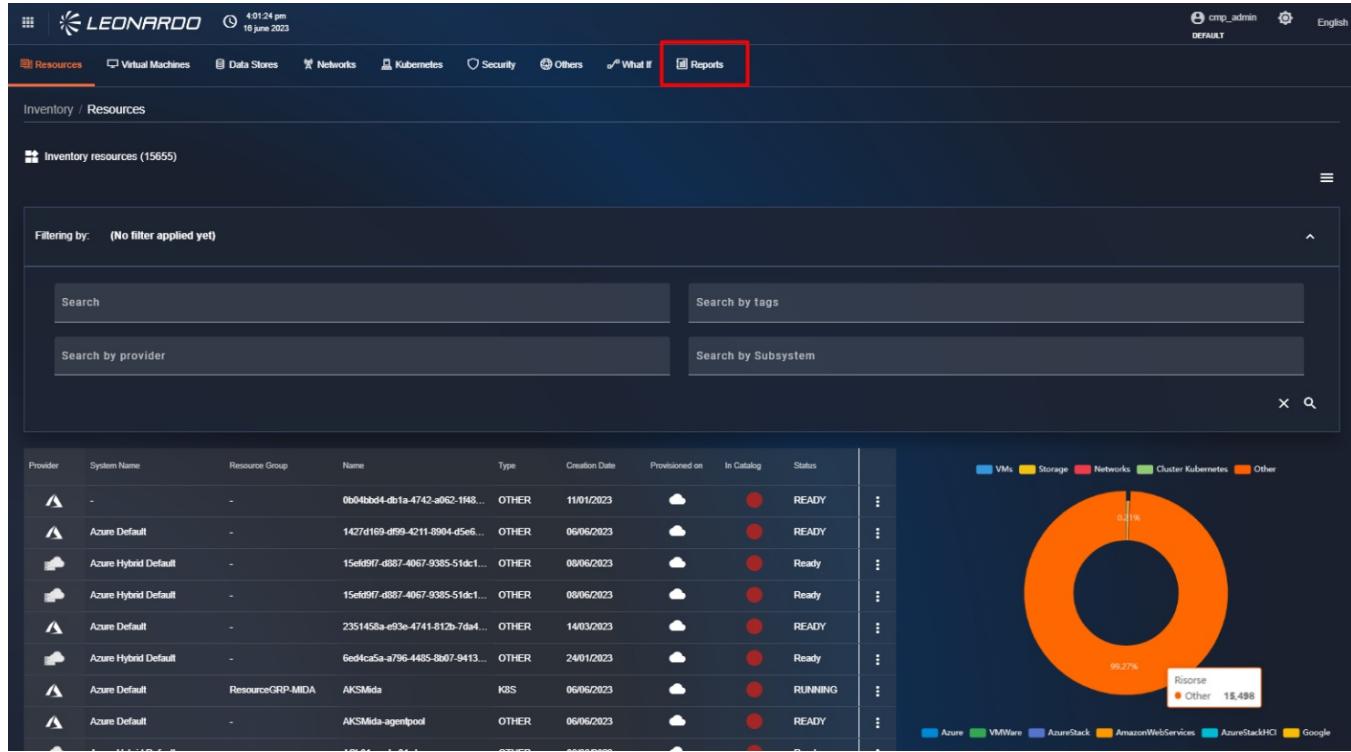


Figura 45 – Access to Catalog report

Available report types

- SKUs not in Price List** – List of SKUs that have generated costs (retrieved through the cost functionality for each provider) that are not present in the price list entered in the "price lists" section.

Report creation

In the top right of the page, we can click on the "New Report" button to start creating a report. Specifically, a modal is displayed containing the list of available report types.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 46 – New report creation

Once the report type is selected, click on the "Configure" button to select the providers to include in the report. In the newly opened window, you will find the "Provider" field that allows selecting one or more pre-existing providers in the system. Subsequently, you can select one or more subsystems to include in the report; if no providers are selected, no subsystems can be selected. Finally, there is a "tag" section to include only resources that have the entered tag.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 47 – Report configuration

To confirm the creation of a static report, verify that "One-Shot" has been selected for the "Report type" field and click the "Submit" button at the bottom.

After a loading period, the newly generated report will be visible in the list.

The screenshot shows a web-based management interface for Leonardo's Secure Cloud Management Platform. At the top, there is a header bar with the Leonardo logo, the date (12 June 2024), and some navigation links. Below the header, a breadcrumb navigation shows 'Inventory / Reports'. The main content area is titled 'Reports' and displays a table of generated reports. The table has columns for 'Sub Category', 'Provider', 'Creation Date', 'Status', and 'Actions'. There are two tabs at the top of the table: 'Ready' (which is selected) and 'Scheduled'. The table lists 12 entries, all of which are 'READY'. Each entry includes a timestamp (e.g., 12/06/2024 - 1:21 PM, 12/06/2024 - 12:29 PM, etc.) and a three-dot menu icon under the 'Actions' column. A 'New report' button is located in the top right corner of the table area.

| Sub Category | Provider | Creation Date | Status | Actions |
|--------------|--------------------------|-----------------------|--------|---------|
| SUMMARY | AZURE, GOOGLE | 12/06/2024 - 1:21 PM | READY | ⋮ |
| SUMMARY | AZURE | 12/06/2024 - 12:29 PM | READY | ⋮ |
| SUMMARY | AZURE | 12/06/2024 - 12:28 PM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 10:05 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 10:01 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 8:32 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/05/2024 - 8:20 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 12:30 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 07/06/2024 - 12:30 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 06/06/2024 - 12:29 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 05/06/2024 - 12:29 AM | READY | ⋮ |

Figura 48 – List of generated reports

4 Administration

The Administration functionality is the starting point for using the SCMP.

The providers configured within this functionality will be used by the system to retrieve all necessary information.

Within this functionality, it will be possible to:

- Configure cloud providers that can be used in the reference Tenant.
- Configure folders for various providers.
- Configure cloud SIEMs for various providers.
- Configure KeyVaults for various providers.
- Configure CommVaults for Backup and Disaster & Recovery for various providers.
- Configure Confidential Computing for various providers.

4.0.1 providers/subsystems

4.0.1.1 List of subsystems

To access the Administration functionality, click the bento button in the top left corner. Then, click "Administration".





Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 49 – Access to Administration

At this point, the user is on the "Cloud Systems" tab page, where general information about the subsystems can be viewed, such as the reference provider and the subsystem's creation date. It also indicates with a red checkmark if the system is On-Premise.

We can notice that the list contains "folders," which are containers for subsystems. Clicking on the "arrow" corresponding to the folder row displays the subsystems within it and their information.

| Name | Type | Creation Date | On-Premises | Status |
|----------------------------|------------|---------------------|-------------------------------------|--------------------------------------|
| CMP Managed Folder | GOOGLE | 16/12/2024 10:47:16 | <input type="checkbox"/> | ● |
| CMP Managed Azure Folder | AZURE | 16/12/2024 10:48:00 | <input type="checkbox"/> | ● |
| MAE Digital Transformation | AZURE | 16/12/2024 10:48:01 | <input type="checkbox"/> | ● |
| MAE CMP | AZURE | 16/12/2024 10:48:02 | <input type="checkbox"/> | ● |
| MAE OSP 2030 | AZURE | 16/12/2024 10:48:02 | <input type="checkbox"/> | ● |
| MAE LAB | AZURE | 16/12/2024 10:48:03 | <input type="checkbox"/> | ● |
| CMP-DEV3 CLUSTER | KUBERNETES | 16/12/2024 11:03:34 | <input type="checkbox"/> | ● |
| Cluster 02 | OPENSHIFT | 16/12/2024 11:10:56 | <input type="checkbox"/> | ● |
| VMware VMWareCMP | VMWARE | 16/12/2024 11:11:39 | <input checked="" type="checkbox"/> | ● |
| SA CMP | REDHATEDGE | 16/12/2024 13:00:37 | <input checked="" type="checkbox"/> | ● |

Figura 50 – List of subsystems and folders

Additionally, each subsystem has a status, represented by a colored "LED":

- Green: the subsystem functions correctly in the SCMP "status: ok".
- Red: the subsystem is no longer usable by the SCMP "status: failed".

The SCMP periodically performs connection tests on all configured subsystems. When a subsystem fails this check, its status is updated, and all information retrieval processes (costs, inventory, monitoring, security) are disabled.

This might happen, for example, when the secret or passwords used for connection expire and need to be renewed. By modifying the subsystem, it is possible to insert new connection parameters to re-establish its correct functioning, which will be confirmed by an "OK" status.

4.0.1.1.1 INFORMATION ON SUBSYSTEM CRON-JOBS



Each tenant performs various information retrieval operations for all configured subsystems throughout the day, allowing the user to view all necessary data using only the SCMP.

To view the outcome of these operations, click on the subsystem row and, within the modal, select the "Show discovery info" button.

In addition to the number of operations and their outcome, scrolling down reveals the list and relevant details by clicking the "arrow" next to the operation of interest.

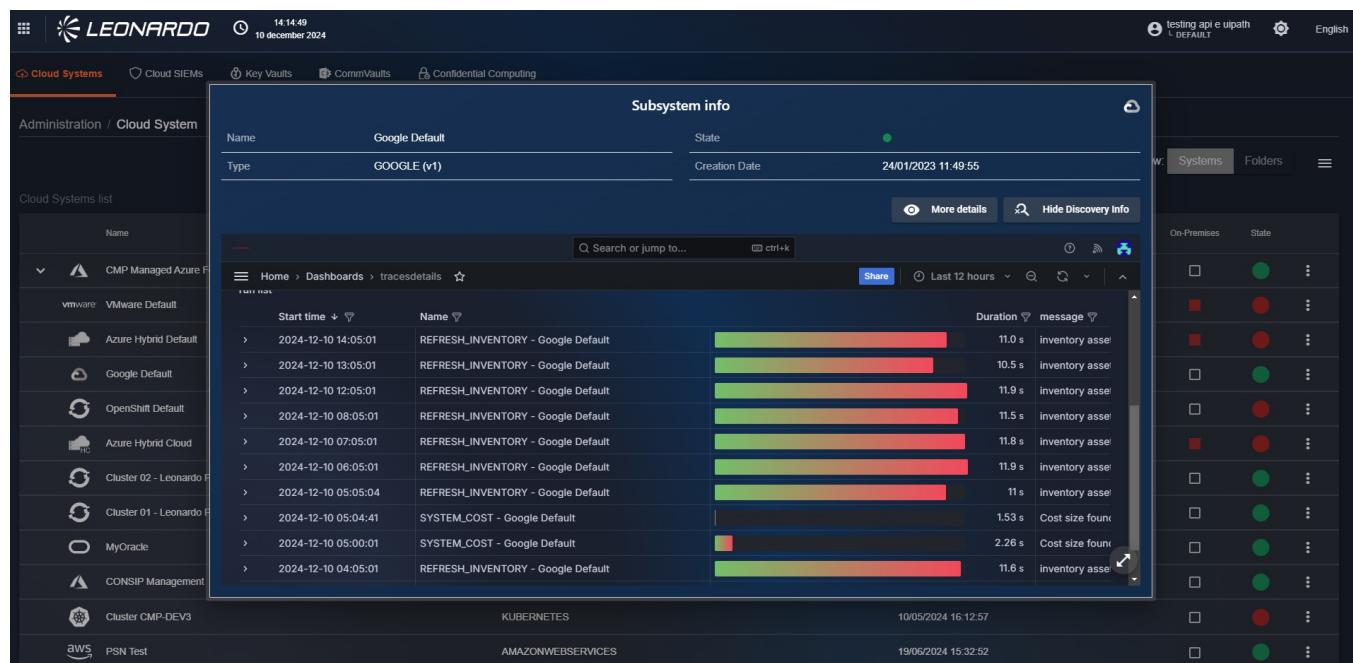


Figura 51 – Information on cron-job

4.0.1.1.2 VIEWING, MODIFYING, AND DELETING A SUBSYSTEM

To view the data of a Cloud Provider, within the list, click on the kebab menu corresponding to the Cloud Provider of interest and click "Show".



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Type | UUID | Creation Date | Actions |
|-------------------------|---------------|--------------------------------------|---------------------|---------|
| azure CMP | Azure | 0a09e549-dd39-4249-88e1-f2b216c25def | 14/06/2022 10:00:00 | ⋮ |
| Azure Default | Azure | 42b246e2-779c-400e-bcbf-e4a23f438f0a | 14/06/2022 10:00:00 | ⋮ |
| Azure X2030 | Azure | cc07be63-9b09-4343-a511-1d55d3fd0066 | 14/06/2022 10:00:00 | ⋮ |
| Google Basic | Google | 4ddb2191-043c-416f-b681-dca631d28d9e | 14/06/2022 10:00:00 | ⋮ |
| VMWare Default | VMWare | 314e832-7894-4690-976d-b13db99d3c7d | 14/06/2022 10:00:00 | ⋮ |
| Azure Stack Basic | AzureStack | 877fe922-f484-48d7-b7d3-4fa83de97926 | 22/06/2022 15:37:04 | ⋮ |
| Azure Stack HCI Default | AzureStackHCI | ec8edad9-c817-405d-9491-d7eeb1d3b610 | 08/07/2022 12:33:19 | ⋮ |

Figura 52 – Access to the Cloud Provider in viewing mode

On this page, you can view the Provider's configuration.

Cloud Provider's Name *
VMware Default

Type *
VMWare

Version *
7.0.0

Cloud Provider's ID
63b589b8f29c7a45f459bca1

Cloud Provider's UUID
57c6c237-d17d-4653-8852-e0b85e701a3e

Connection Parameters

Username *
Admin@vsphere.local
Type here your username

Password *
Type here your password

Figura 53 – Subsystem in display mode



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

If the provider is "ON-PREMISE", a table showing the usable capacities on the system and the list of resources already present in the subsystem will be visible below the configuration.

| | | | |
|--------------------------------------|--------------------------------------|-------------------|----------|
| Total Virtual CPU of the sub-system | | | |
| Total RAM Capacity * | | | |
| 64000 | | | |
| Total RAM of the sub-system | | | |
| Total Storage Size Capacity * | | | |
| 1000 | | | |
| Total storage size of the sub-system | | | |
| On-Premise System Info | | | |
| 4 | 43484 MB | 999 GB | |
| Available vCPUs | Available RAM | Available Storage | |
| Resource Type | Resource UUID | Property | Capacity |
| VM | 422c092a-d80c-8614-5885-6db39eed0ecc | vCPUs | 2 |
| VM | 422c092a-d80c-8614-5885-6db39eed0ecc | RAM | 4 MB |
| VM | 422c2a46-740b-e700-09e0-da161763b063 | vCPUs | 2 |
| VM | 422c2a46-740b-e700-09e0-da161763b063 | RAM | 4 MB |
| VM | 422cd039-440b-658a-cdf4-f868820ff404 | vCPUs | 2 |

Figura 54 – On-Premise machines

To return to the Cloud Provider page, click the "Close" button in the bottom left.

To modify the data of a Cloud Provider, within the list, click on the kebab menu corresponding to a Cloud Provider, and click "Edit".



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the 'Cloud Providers' page. At the top, there's a header bar with the Leonardo logo, user information ('cmp_admin'), and language ('English'). Below the header, the title 'Cloud Providers' is centered. Underneath, a table lists various cloud providers with columns for Name, Type, UUID, and Creation Date. The first provider listed is 'azure CMP'. On the right side of the table, a context menu is open for the first row, containing three options: 'Show', 'Edit', and 'Delete'. A red arrow points to the 'Edit' option.

| Name | Type | UUID | Creation Date | ⋮ |
|-------------------------|---------------|--------------------------------------|---------------------|---|
| azure CMP | Azure | 0a09e549-dd39-4249-88e1-f2b216c25def | 14/06/2022 10:00:00 | ⋮ |
| Azure Default | Azure | 42b246e2-779c-400e-bcbf-e4a23f438f0a | 14/06/2022 10:00:00 | ⋮ |
| Azure X2030 | Azure | cc07be63-9b09-4343-a511-1d55d3fd0066 | 14/06/2022 10:00:00 | ⋮ |
| Google Basic | Google | 4dd82191-043c-416f-b681-dca631d28d9e | 14/06/2022 10:00:00 | ⋮ |
| VMWare Default | VMWare | 314e2832-7894-4690-976d-b13db9d3c7d | 14/06/2022 10:00:00 | ⋮ |
| Azure Stack Basic | AzureStack | 877fe922-f484-48d7-b7d3-4fa83de97926 | 22/06/2022 15:37:04 | ⋮ |
| Azure Stack HCI Default | AzureStackHCI | ec8edad9-c817-405d-9491-d7eebd3b610 | 08/07/2022 12:33:19 | ⋮ |

Figura 55 – Access to the Cloud Provider in edit mode

After doing so, the user will be on the Cloud Provider page in "edit" mode, which allows data modification.

To return to the Cloud Provider page, click the "Save" button in the bottom left. At this point, the user will be on the Cloud Provider page.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Type | UUID | Creation Date | ⋮ |
|-------------------------|---------------|---------------------------------------|---------------------|---|
| azure CMP | Azure | 0a08e549-dd39-4249-88e1-f2b216c25def | 14/06/2022 10:00:00 | ⋮ |
| Azure Default | Azure | 42b246e2-779c-400e-bcbf-e4a23f438f0a | 14/06/2022 10:00:00 | ⋮ |
| Azure X2030 | Azure | cc07be63-9b09-4343-a511-1d55d3fd0066 | 14/06/2022 10:00:00 | ⋮ |
| Google Basic | Google | 4ddb2191-043c-416f-b681-dca631d28d9e | 14/06/2022 10:00:00 | ⋮ |
| VMWare Default | VMWare | 314e832-7894-4690-976d-b13db9d3c7d | 14/06/2022 10:00:00 | ⋮ |
| Azure Stack Basic | AzureStack | 877fe922-f484-48d7-b7d3-4fa83de97926 | 22/06/2022 15:37:04 | ⋮ |
| Azure Stack HCI Default | AzureStackHCI | ec8edad9-c817-405d-9491-d7eebfbd3b610 | 08/07/2022 12:33:19 | ⋮ |

*Figura 56 – Starting for the Elimination
of a Cloud Provider*

To delete a Cloud Provider, within the list, click on the kebab menu corresponding to a Cloud Provider, and click "Delete".

Remove resource

Do you really want to delete the system Azure Stack HCI Default?

Cancel Remove

Figura 57 – Confirm deletion of the Cloud Provider

After doing so, a modal will appear where you need to click the "Remove" button.

At this point, the Cloud Provider will no longer be present in the list, and the asset removal flow will be launched on the resource-manager.

4.0.1.1.3 COST MODEL FOR "ON-PREMISE" PROVIDERS


To manage resource usage costs for "On-Premise" providers, the ability to define a specific cost model per subsystem is provided.

The cost model allows configuring both "provider" costs (i.e., those actually incurred) and subsequently applying a discount or markup percentage to be applied to the customer.

Providers that use this functionality are:

- VMWare
- VCloud Director
- RedHat Edge
- OpenShift

To modify the model, click the "three dots" button next to a subsystem and select "Cost model".

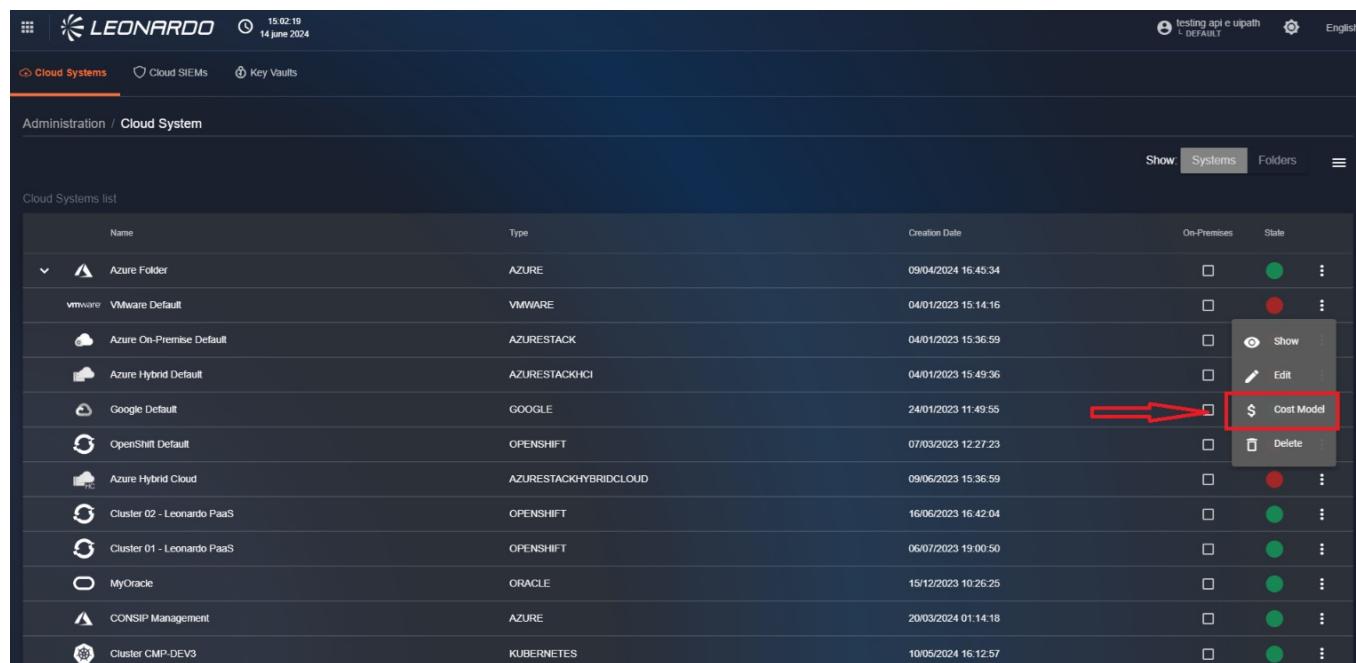

The screenshot shows the Leonardo Secure Cloud Management Platform interface. The top navigation bar includes the Leonardo logo, user information (testing api e upath, 14 June 2024), and language selection (English). Below the navigation is a breadcrumb trail: Administration / Cloud System. The main area displays a table titled "Cloud Systems list" with columns: Name, Type, Creation Date, On-Premises, and State. The table lists various cloud systems, including Azure Folder, VMware Default, Azure On-Premise Default, Azure Hybrid Default, Google Default, OpenShift Default, Azure Hybrid Cloud, Cluster 02 - Leonardo PaaS, Cluster 01 - Leonardo PaaS, MyOracle, CONSIP Management, and Cluster CMP-DEV3. To the right of the table is a context menu for a subsystem, with the "Cost Model" option highlighted by a red box and a red arrow pointing to it.

| Name | Type | Creation Date | On-Premises | State |
|----------------------------|-----------------------|---------------------|--------------------------|--------------------------------------|
| Azure Folder | AZURE | 09/04/2023 16:45:34 | <input type="checkbox"/> | ● |
| VMware Default | VMWARE | 04/01/2023 15:14:16 | <input type="checkbox"/> | ● |
| Azure On-Premise Default | AZURESTACK | 04/01/2023 15:36:59 | <input type="checkbox"/> | ● |
| Azure Hybrid Default | AZURESTACKHCI | 04/01/2023 15:49:36 | <input type="checkbox"/> | ● |
| Google Default | GOOGLE | 24/01/2023 11:49:55 | <input type="checkbox"/> | ● |
| OpenShift Default | OPENSHIFT | 07/03/2023 12:27:23 | <input type="checkbox"/> | ● |
| Azure Hybrid Cloud | AZURESTACKHYBRIDCLOUD | 09/06/2023 15:36:59 | <input type="checkbox"/> | ● |
| Cluster 02 - Leonardo PaaS | OPENSHIFT | 16/06/2023 16:42:04 | <input type="checkbox"/> | ● |
| Cluster 01 - Leonardo PaaS | OPENSHIFT | 06/07/2023 19:00:50 | <input type="checkbox"/> | ● |
| MyOracle | ORACLE | 15/12/2023 10:26:25 | <input type="checkbox"/> | ● |
| CONSIP Management | AZURE | 20/03/2024 01:14:18 | <input type="checkbox"/> | ● |
| Cluster CMP-DEV3 | KUBERNETES | 10/05/2024 16:12:57 | <input type="checkbox"/> | ● |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 58 – Access to the subsystem cost model

On the model page, we find a first generic section where it will be possible to configure the following fields:

- Currency: the reference currency to be used for the subsystem.
- Discount/Surcharge: a discount or markup percentage to be applied to customer costs.

The screenshot shows a web-based management interface for a cloud system. At the top, there's a header with the Leonardo logo, the date (07 February 2025), and some user information. Below the header, a navigation bar includes links for Cloud Systems, Cloud SIEMs, Key Vaults, CommVaults, and Confidential Computing. The main content area is titled "Administration / Cloud System / Modello Costi". A modal window is open, titled "Costs Model: VMWareCMP". Inside the modal, there's a brief description of what a rate is and how it's used to calculate on-premises costs based on CPU usage per hour. It also explains the "Discount / Surcharge" field. A note states that only one rate can be defined per metric type. The modal contains a form with a "Currency" dropdown set to "Euro", a "Discount / Surcharge" input field set to "0%", and a "Add Rate" button. Below the form is a table with three columns: Metric Type, Description, and Price. One row in the table shows "Ram" with "ram/h" as the unit and "0.20 € per GB-h" as the price. At the bottom of the modal, there are "Reset" and "Apply" buttons. The background of the main interface shows other navigation options like "Cloud Systems" and "Cloud SIEMs".

Figura 59 – Price model

Subsequently, clicking the "Add rate" button will open a modal where, after choosing a metric (specific to the provider) and its relative unit of measurement, the price to be applied to all elements of the subsystem will be entered. Finally, click the "Save" button to confirm the entry.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the 'Add Rate' dialog box open over the main application interface. The dialog box has a title 'Add Rate' and a note: 'Here you can define a new rate. Since it is possible to define only one rate per metric type, already set metric types will not be shown.' It contains fields for 'Description', 'Metric Type' (set to 'Ram'), 'Unit' (set to 'Hourly cost available RAM (GB-h)'), and 'Price' (set to '0,10 € per GB-h'). Below the dialog box, the main interface shows a table with two rows: 'Ram' and 'Vcpu'. The 'Ram' row has a price of '0,10 € per GB-h' and the 'Vcpu' row has a price of '1,00 € per vCPU-h'.

Figura 60 – Selection of the metric to be prepared

To confirm the changes to the model after entering all costs for each available component type, click the "Apply" button at the bottom.

The screenshot shows the 'Modello Costi' page with the 'Add Rate' dialog box closed. The main interface displays a table with two rows: 'Ram' and 'Vcpu'. The 'Ram' row has a price of '0,10 € per GB-h' and the 'Vcpu' row has a price of '1,00 € per vCPU-h'. A discount/surcharge of '20 €' is applied across the board.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 61 – Full cost model

4.0.1.1.4 MANUAL COST UPDATE

The user is given the possibility to perform a manual cost update if needed. This asynchronous operation can be requested individually per subsystem or globally for the entire tenant, which is automatically propagated to all available subsystems.

To request an update for a single subsystem, click the "three dots" button on the subsystem row and select "Refresh Cost".

The screenshot shows a list of cloud systems with columns for Name, Type, Creation Date, On-Premises, and State. A context menu is open over the 'Azure Hybrid Cloud' row, with the 'Refresh Costs' option highlighted. A green arrow points to the 'Refresh Costs' button in the menu.

| Name | Type | Creation Date | On-Premises | State |
|----------------------------|-----------------------|---------------------|-------------------------------------|--------------------|
| CMP Managed Azure Folder | AZURE | 04/10/2024 10:12:37 | <input type="checkbox"/> | Green |
| VMware Default | VMWARE | 04/01/2023 15:14:16 | <input checked="" type="checkbox"/> | Red |
| Azure Hybrid Default | AZURESTACKHCI | 04/01/2023 15:49:36 | <input checked="" type="checkbox"/> | Red |
| Google Default | GOOGLE | 24/01/2023 11:49:55 | <input type="checkbox"/> | Green |
| OpenShift Default | OPENSHIFT | 07/03/2023 12:27:23 | <input type="checkbox"/> | Green |
| Azure Hybrid Cloud | AZURESTACKHYBRIDCLOUD | 09/06/2023 16:36:59 | <input type="checkbox"/> | Green |
| Cluster 02 - Leonardo PaaS | OPENSHIFT | 16/06/2023 16:42:04 | <input type="checkbox"/> | Green |
| Cluster 01 - Leonardo PaaS | OPENSHIFT | 06/07/2023 19:00:50 | <input type="checkbox"/> | Green |
| MyOracle | ORACLE | 15/12/2023 10:26:25 | <input type="checkbox"/> | Green |
| CONSIP Management | AZURE | 20/03/2024 01:14:18 | <input type="checkbox"/> | Green |
| Cluster CMP-DEV3 | KUBERNETES | 10/05/2024 16:12:57 | <input checked="" type="checkbox"/> | Red |
| PSN Test | AMAZONWEBSERVICES | 19/06/2024 15:32:52 | <input type="checkbox"/> | Green |

Figura 62 – Manual cost update

Within the modal, we can specify for how many days, starting from today's date, the costs of the selected subsystem should be re-downloaded and re-confirmed. After confirmation, we can go to the "cron-job Info" section to confirm the operations.

Additionally, it is possible to request a cost update for the entire tenant: by first clicking the "hamburger menu" button available in the top left and selecting "refresh cost", the activity will be distributed across all available subsystems on the page.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Type | Creation Date | Actions |
|----------------------------|-----------------------|---------------------|--|
| CMP Managed Azure Folder | AZURE | 04/10/2024 10:12:37 | <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> |
| VMware Default | VMWARE | 04/01/2023 15:14:16 | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> |
| Azure Hybrid Default | AZURESTACKHCI | 04/01/2023 15:49:36 | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> |
| Google Default | GOOGLE | 24/01/2023 11:49:55 | <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> |
| OpenShift Default | OPENSSHIFT | 07/03/2023 12:27:23 | <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> |
| Azure Hybrid Cloud | AZURESTACKHYBRIDCLOUD | 09/06/2023 15:36:59 | <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> |
| Cluster 02 - Leonardo PaaS | OPENSSHIFT | 16/06/2023 16:42:04 | <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> |
| Cluster 01 - Leonardo PaaS | OPENSSHIFT | 06/07/2023 19:00:50 | <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> |
| MyOracle | ORACLE | 15/12/2023 10:26:25 | <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> |
| CONSIP Management | AZURE | 20/03/2024 01:14:18 | <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> |
| Cluster CMP-DEV3 | KUBERNETES | 10/05/2024 16:12:57 | <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> |
| PSN Test | AMAZONWEBSERVICES | 19/06/2024 15:32:52 | <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> |

Figura 63 – Updating costs on all tenant

Once a cost recovery is selected, it is possible to indicate the number of days to recover, and by selecting the "Reset the cost" box, the SCMP will first perform a data cleanup (for the selected range) and then perform the refresh.

Refresh Costs

Please specify the period (in number of days) for which you want to refresh the costs:

Number of days

Resets the costs of the indicated number of days

Cancel **Refresh**

Figura 64 – Configuration of refresh



costs

4.0.1.1.5 COST RECOVERY AND CALCULATION PROCESS

4.0.1.1.5.1 Cost recovery structure

The cost recovery process is performed by the "Abstraction Layer" module, which consists of:

- A sub-module of ABS called "layer" for each provider type (e.g., "CMP-ABS-VMWare-layer").
- ABS Gateway: this sub-module manages the communication and standardization of information retrieved from the various Layers of different providers and makes it available to other modules of the SCMP system.

The cost recovery process is performed by a cron-job, which is launched once per provider, automatically during nighttime hours.

For ON-Premise providers, usage values are automatically generated by the SCMP based on the quantity of resources available in inventory, using the same "ABS" modules. Subsequently, as with other providers, the usage values will be used to calculate costs via the cost model described in the Administration section.

In case of failure, the process is automatically scheduled up to 3 attempts. If the system fails to resolve automatically, manual intervention is required. Additionally, a manual cost update can be requested using the buttons available in the Administration section.

Below are the specific details by subsystem type.

4.0.1.1.5.2 Customer cost recovery and calculation for the Azure provider

Recovery methods:

- **"Standard" model:** The ABS module requests costs for the last 2 days via Azure's REST APIs, which are then saved in the SCMP database.
- **"Storage Account" model:** The ABS module retrieves a file containing cost extractions, divided by subsystem, which are then saved in the SCMP database.
- **"Billing storage" model:** The ABS module retrieves a file containing extractions of all subscriptions available in the "billing account"; the results are divided by subsystem and saved in the database.

Cost calculation per single resource:

1. The ABS module sends cost information and information about the resource that generated them to the cost module.
2. The cost module verifies the subsystem configuration to identify the "aggregation type". This parameter indicates which catalog to use (RESOURCES or SKUs) to correctly calculate the price.
3. The cost module checks if the resource identifier (UUID) is present in the SCMP catalog. If present, the system

multiplies the usage by the catalog cost.

4. If the resource is not present in the catalog (and therefore does not fall into the previous step), the SCMP will apply the discount/markup percentage configured in the subsystem.

4.0.1.1.5.3 Customer cost recovery and calculation for the AWS provider

- **"Standard" model:** The ABS module queries AWS Cost Explorer APIs to get costs for the last 2 days, saving the data into the SCMP database.
- **"ARN ROLE" model:** The ABS module assumes a specific IAM role (ARN ROLE) to access AWS billing data. Costs are extracted and divided by subsystem, then saved into the SCMP database.

Cost calculation per single resource:

1. The ABS module sends cost information and information about the resource that generated them to the cost module.
2. The cost module verifies the subsystem configuration to identify the "aggregation type". This parameter indicates which catalog to use (RESOURCES or SKUs) to correctly calculate the price.
3. The cost module checks if the resource identifier (UUID) is present in the SCMP catalog. If present, the system multiplies the usage by the catalog cost.
4. If the resource is not present in the catalog (and therefore does not fall into the previous step), the SCMP will apply the discount/markup percentage configured in the subsystem.

4.0.1.1.5.4 Customer cost recovery and calculation for the Google provider

- **"Standard" model:** The ABS module queries Google Cloud Billing APIs to get costs for the last 2 days, saving the data into the SCMP database.
- **"Dataset Export" model:** The ABS module accesses billing data exported from **BigQuery**. Costs are extracted, divided by subsystem, and saved into the SCMP database.

Cost calculation per single resource:

1. The ABS module sends cost information and information about the resource that generated them to the cost module.
2. The cost module verifies the subsystem configuration to identify the "aggregation type". This parameter indicates which catalog to use (RESOURCES or SKUs) to correctly calculate the price.
3. If the "Cost from USD" field has been selected, the system will use the price in USD (returned by the provider) for the calculation, to which a discount/markup percentage defined in the administration section is applied. Otherwise, the price already converted to EUR is used.
4. The cost module checks if the resource identifier (UUID) is present in the SCMP catalog. If present, the system multiplies the usage by the catalog cost.



5. If the resource is not present in the catalog (and therefore does not fall into the previous step), the SCMP will apply the discount/markup percentage configured in the subsystem.

4.0.1.1.5.5 Customer cost recovery and calculation for *Oracle*, *OracleEXAcc* providers

- **"Standard" model:** The ABS module queries ORACLE APIs to get costs for the last 2 days, saving the data into the SCMP database.

Cost calculation per single resource:

1. The ABS module sends cost information and information about the resource that generated them to the cost module.
2. The cost module verifies the subsystem configuration to identify the "aggregation type". This parameter indicates which catalog to use (RESOURCES or SKUs) to correctly calculate the price.
3. If the "Cost from USD" field has been selected, the system will use the price in USD (returned by the provider) for the calculation, to which a discount/markup percentage defined in the administration section is applied. Otherwise, the price already converted to EUR is used.
4. The cost module checks if the resource identifier (UUID) is present in the SCMP catalog. If present, the system multiplies the usage by the catalog cost.
5. If the resource is not present in the catalog (and therefore does not fall into the previous step), the SCMP will apply the discount/markup percentage configured in the subsystem.

4.0.1.1.5.6 Customer cost recovery and calculation for *Kubernetes*, *OpenShift*, *vcloudDirector*, *VMWare*, *Red Hat Edge* providers

- *Standard model:* The ABS module generates Usage data on a 24-hour basis for all resources available in the inventory, as the providers are On-premise and all resources are allocated to the customer.

Cost calculation per single resource:

1. The ABS module sends cost information and information about the resource that generated them to the cost module.
2. The SCMP will apply the discount/markup percentage configured in the cost model.

4.0.1.2 New subsystem creation

To add a new subsystem to the portal, click on the "menu" available in the top right and select "+ Add new cloud provider".



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Type | Creation Date | On-Premises | |
|----------------------------|-----------------------|---------------------|-------------------------------------|----------------|
| Azure Default | Azure | 04/01/2023 14:57:48 | <input type="checkbox"/> | ⋮ |
| VMWare Default | VMWare | 04/01/2023 15:14:16 | <input checked="" type="checkbox"/> | ⋮ |
| OpenShift Default | OpenShift | 07/03/2023 12:27:23 | <input type="checkbox"/> | ⋮ |
| Azure Hybrid Default | AzureStackHCI | 04/01/2023 15:49:36 | <input checked="" type="checkbox"/> | ⋮ |
| AWS Default | AmazonWebServices | 13/04/2023 11:05:32 | <input type="checkbox"/> | ⋮ |
| google pls owner | Google | 18/05/2023 14:52:32 | <input type="checkbox"/> | ⋮ |
| Google Default | Google | 24/01/2023 11:49:55 | <input type="checkbox"/> | ⋮ |
| Azure On-Premise Default | AzureStack | 04/01/2023 15:36:59 | <input checked="" type="checkbox"/> | ⋮ |
| Azure Hybrid Cloud | AzureStackHybridCloud | 09/06/2023 15:36:59 | <input checked="" type="checkbox"/> | ⋮ |
| Cluster 02 - Leonardo PaaS | OpenShift | 16/06/2023 16:42:04 | <input type="checkbox"/> | ⋮ |
| azure CMP | Azure | 30/06/2023 17:14:32 | <input type="checkbox"/> | ⋮ |

Figura 65 – Add a new Cloud Provider

The user views the basic data of the subsystem to be entered, explained below.

4.0.1.2.1 PARAMETERS SHARED AMONG PROVIDERS

On the creation page, we can note 3 fields:

- Name: indicates the name that will be displayed to identify the subsystem.
- Type: indicates the type of cloud provider to which the subsystem belongs.
- Version: the version relative to the provider of the subsystem to be installed.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a web-based configuration interface for a new cloud provider. At the top, there's a header with the Leonardo logo and navigation links for Cloud Systems, Cloud SIEMs, and Key Vaults. Below the header, a breadcrumb trail indicates the current location: Administration / Cloud System / New. The main title is "New Cloud Provider/Folder". Underneath, there's a section titled "Configuration data" containing three input fields: "Cloud Provider's Name *", "Type *", and "Version *". Each field has a small asterisk indicating it's required. At the bottom right of the form, there are three buttons: "Close", "Test Connection", and "Save".

Figura 66 – General parameters of a subsystem

After selecting the type and version of the system, the form updates to display specific parameters based on the selected provider, as each of them manages authentication and resources differently.

All providers require authentication, which may vary by system, for asset retrieval.

This sensitive information, such as passwords or certificates, is securely saved on an infrastructural element that handles data security <https://www.vaultproject.io/>.

4.0.1.2.2 CONNECTION VERIFICATION AND SAVING, SHARED AMONG PROVIDERS

For all subsystems, 3 buttons are available at the bottom of the page:

The "Close" button allows cancelling the addition of a new subsystem.

The "Test Connection" button is used to perform a connection test using the entered parameters. In case of errors, the system returns an error message indicating "Error: Unauthorized system" and the button turns red. Otherwise, the button will turn green, and it will be possible to save the subsystem using the "Save" button.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

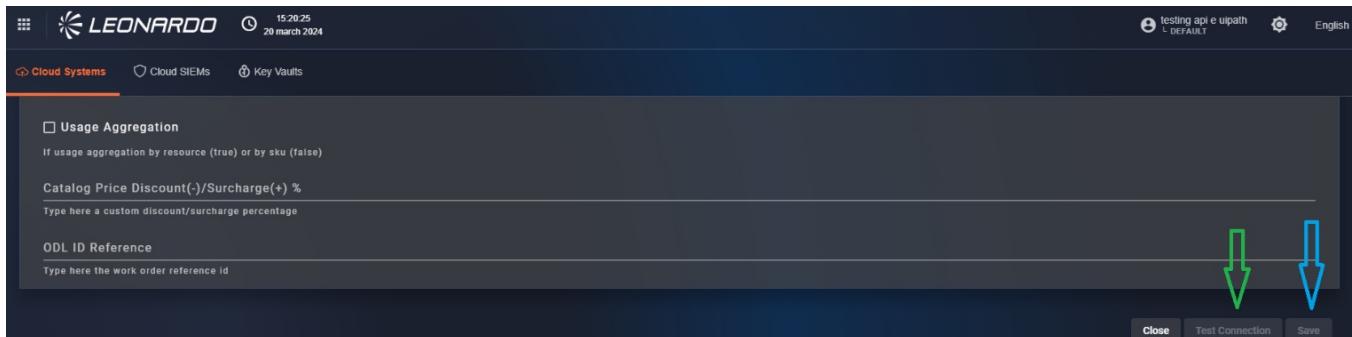


Figura 67 – Connection plates

Upon saving, the SCMP will communicate to the module managing that provider type to load all inventory items, metrics, costs, and security elements into our bus (Kafka).

The same module will subsequently schedule jobs for the periodic update of all existing assets.

After saving, a modal will appear informing the user that a cloud provider cannot be deleted before 24 hours. From the modal, click "OK". After doing so, the user is redirected to the Cloud Provider page.

4.0.1.2.3 AMAZON WEB SERVICES PARAMETERS

Enabled functionalities:

- Catalog item retrieval
- Inventory item retrieval
- Usage metrics retrieval
- Resource cost retrieval
- Security information retrieval
- Resource provisioning
- Service provisioning
- Complex blueprint provisioning

The specific parameters of the Amazon Web Services subsystem to be entered are shown in the table:



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

The screenshot shows a configuration dialog box for AWS settings. It includes fields for Access Key, Secret Key, Use a role, Resource Aggregator Name, Cost Bucket Path, Cost Export Dataset ID, Usage Aggregation, CMP Catalog Price Discount, ODL ID Reference, and First Cost Recover.

*Figura 68 – Mask of configuration
Amazon Web Services*

Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|---|----------|---|---|
| AccessKey * | string | The AWS access key is an alphanumeric string that identifies the AWS user. | ZYKZGVAKIS4YK5IXC AXB |
| SecretKey * | password | The AWS secret access key is an alphanumeric string used to authenticate the AWS user. | np6Kc_xwsvhR8Q~rP 05fCqYNXmbqfMGQL OEzfMt |
| use A role | Boolean | Specifies the use of one or more administration roles for authentication on one or more specific accounts within the provider's organization. | true |
| Arn Role (only if useArole is active) | string | Enter here the Arn ID of the role associated with a specific account for performing the monitoring discovery phase and for provisioning. | arn:aws:iam:{accountID}:role/{roleName} |
| Audit Arn Role (only if useArole is active) | string | Enter here the Audit Arn ID of the role associated with a specific account for performing the inventory discovery phase. | arn:aws:iam:{accountID}:role/{roleName} |
| Aggregator Name | string | Enter here the name of the aggregator on resources for using the AWS Config service to support the inventory discovery phase. | aws-{aggregatorName} |



| Name | Type | Description | Example |
|--|---------|--|----------------------------|
| Cost Bucket Path | string | Enter here the path of the storage bucket for cost queries. | s3://{{bucketPath}} |
| Cost Export Dataset ID | string | Enter here the ID of the cost dataset on which to execute queries. | {databaseName}.{tableName} |
| usageAggregation | Boolean | Indicates the type of aggregation used for cost calculation (true for resources, false for SKUs). | True |
| Rate Code Aggregation (only if useAggregation is false) | Boolean | Indicates whether SKU aggregation occurs by SKU ID or by rate code. | true |
| catalogPriceDiscount | integer | Enter here a discount/markup to apply to catalog prices for all resources that do not have an SCMP relationship. | 5 |
| odlID | string | Enter here the ID of the work order that will be associated with the subsystem and will be inserted as a tag on all subsystem resources. | ODL001 |
| dataFirstCostRecover | int | Enter the number of days prior to the creation date for which costs should be recovered at the first startup of the subsystem. | 15 |

■ Provider Configurations

1. S3 Configuration

- Access **Amazon S3**.
- Create or use a bucket for CUR data.
- Enable **Bucket Versioning**.

2. CUR Definition

- Access **Billing and cost management**.
- Go to the Data Exports section.
- Configure a new CUR report as follows:
 - Export details:
 - **Standard data export**: standard export format
 - **Export name**: name of the report
 - Data table content settings:
 - Select **CUR 2.0**.



- Select **Hourly** as granularity.
- Data export delivery options:
 - file format: **Parquet**.
 - file versioning: **Overwrite existing data export file**.
- Data export storage settings:
 - Configure the S3 bucket pointer with the one initially created.
 - Configure the bucket path prefix with **data**.

3. IAM Role Creation for Glue

- Access **IAM**.
- Create a custom role for Amazon Glue management.
- Assign the following policies:
 - AWSGlueServiceRole (standard AWS policy)
 - Custom policy for S3 bucket access:

```
{  
  "Version": "2012-10-17",  
  "Statement": [  
    {  
      "Effect": "Allow",  
      "Action": [  
        "s3:GetObject",  
        "s3:PutObject"  
      ],  
      "Resource": [  
        "arn:aws:s3:::{bucketPath}/*"  
      ]  
    }  
  ]  
}
```

4. Glue Database Creation

- Access **AWS Glue**.
- Create the database.

5. Crawler Configuration

- Create a **crawler** in Glue:
 - Select the custom role previously created.
 - Define the S3 path as `s3://{bucketPath}/data/`.



- Set a **scheduling** (e.g., hourly: 0 * * * *).

6. Usage in Athena

- After the first execution of the crawler, data will be available in **Athena** for queries.
- Δ *For past historical data, contact AWS support.*

1. AWS Configuration and Aggregators

a. Initial Configuration

- Access **AWS Config** and click **Get started**.
- Create an S3 bucket for aggregated data.
- Enable override for **IAM** resource types and leave the remaining default options; AWS will automatically create the necessary role.

b. Config Aggregator

- Create a **resource aggregator** in the **Aggregators** section.
- Include all regions.

1. IAM User Creation

- Access **IAM** and go to the **Users** section.
- Create a new user or select an existing one.
- Optional: enable console access for the created user.

2. Policies to Assign to the User

- AmazonAthenaFullAccess
- AmazonS3FullAccess
- AWS_ConfigRole
- AWSConfigUserAccess
- AmazonEC2ReadOnlyAccess
- CloudWatchReadOnlyAccess
- Add the following custom policy for managing the CUR bucket:



```
{  
    "Version": "2012-10-17",  
    "Statement": [  
        {  
            "Sid": "VisualEditor0",  
            "Effect": "Allow",  
            "Action": [ "s3:*" ],  
            "Resource": [  
                "arn:aws:s3:::{bucketPath}/*",  
                "arn:aws:s3:::{bucketPath}/*"  
            ]  
        }  
    ]  
}
```

3. Access Key

- Generate **Secret Credential**.
- Save the **Access Key** and **Secret Key** (cannot be retrieved later). To enable **role assumption** via STS for cross-account services (e.g., AWS Config), associate the following policy with the created user:

```
{  
    "Version": "2012-10-17",  
    "Statement": [  
        {  
            "Effect": "Allow",  
            "Action": "sts:AssumeRole",  
            "Resource": [  
                "arn:aws:iam::{accountID}:role/{roleName}"  
            ]  
        }  
    ]  
}
```

4.0.1.2.4 AZURE PARAMETERS

Enabled functionalities:

- Catalog item retrieval
- Inventory item retrieval
- Usage metrics retrieval
- Resource cost retrieval
- Security information retrieval



- Resource provisioning
- Service provisioning
- Complex blueprint provisioning

The specific parameters of the Azure subsystem to be entered are shown in the table:

The screenshot shows a configuration interface for the Azure subsystem. It includes fields for Cloud Provider's Name (set to Azure), Version (2020-08-01), and various connection parameters like Client ID, Client Secret, Tenant ID, and Subscription ID. There are also sections for Usage Aggregation, Catalog Price Discount, and ODL ID Reference. A legend at the bottom indicates that fields marked with an asterisk (*) are mandatory.

Figura 69 – Azure configuration mask

Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|----------------|----------|--|--|
| clientId * | string | The unique ID of the client connecting to the Azure Cloud subsystem. This ID is used to identify the client and authorize access to the subsystem's resources. | 5a85c16c6ad-49db-a58e-e209-ee11f53d6c6b |
| clientSecret * | password | The client's secret key, used to authenticate the client with the Azure Cloud subsystem. The secret key must be kept confidential and not shared with anyone. | np6Kc_.xwsvhR8Q-rP05fCqYNXmbqfMGQLOEzfMt |
| tenantId * | string | The ID of the Azure tenant to which the Azure Cloud subsystem belongs. A tenant is an organizational entity in Azure representing a company or organization. | 884147733-ff13-4783-a765-834183773083 |



| Name | Type | Description | Example |
|-----------------------------|---------|---|--|
| subscriptionId * | string | The ID of the Azure subscription used to access the Azure Cloud subsystem. A subscription is a contract for using Azure services. | 884147733-ff13-4783-a765-834183773083 |
| usageAggregation | boolean | Indicates whether "usage" aggregation is enabled for the subscription. When this option is enabled, subsystem costs will be grouped by Resource Type. | false |
| Storage account ID** | String | Enter the path where cost exports are performed. | /subscriptions/{{subscription}}/resourceGroups/{{resourcegroup}}/providers/Microsoft.Storage/storageAccounts/{{storage account}} |
| Cost from Billing storage** | boolean | Select this checkbox to retrieve costs in "billing Account" format. | true |
| catalogPriceDiscount | integer | Enter here a discount/markup to apply to catalog prices for all resources that do not have an SCMP relationship. | 5 |
| odlID | string | Enter here the ID of the work order that will be associated with the subsystem and will be inserted as a tag on all subsystem resources. | ODL001 |
| dataFirstCostRecover | int | Enter the number of days prior to the creation date for which costs should be recovered at the first startup of the subsystem. | 15 |



Variables for cost calculation

Variables indicated with ** are exclusive, so only one can be selected at a time. Each variable activates a different system for cost calculation, and if more than one is set, subsystem saving will be prevented. Specifically, we can:

- Use the "Storage account ID" field to retrieve costs via automatic extractions performed individually per subsystem (only if the storage belongs to the same tenant).
- Use the "Cost from Billing storage" field to retrieve costs at the billing account level, thus using a single file for all available subscriptions (Contributor and Blob Contributor permissions are required).
- By leaving "Cost from Billing storage" and "Cost from billing storage" empty, the SCMP will retrieve costs using the Azure APIs prepared for daily costs.

This distinction is necessary to prevent Azure APIs from responding with a 429 error due to a large number of requests. Additionally, to use the methods described previously, the Azure system must be correctly configured and the entered credentials must have all necessary permissions.

4.0.1.2.5 AZURESTACK PARAMETERS

Enabled functionalities:

- Catalog item retrieval
- Inventory item retrieval
- Usage metrics retrieval
- Resource cost retrieval
- Security information retrieval
- Resource provisioning
- Service provisioning
- Complex blueprint provisioning

The specific parameters of the AzureStack subsystem to be entered are shown in the table:



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 70 – AzureStack configuration
mask

Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|------------------|----------|--|---|
| clientId * | string | The unique ID of the client connecting to the Azure Cloud subsystem. This ID is used to identify the client and authorize access to the subsystem's resources. | 5a85c16c6ad-49db-a58e-e209-ee11f53d6cb |
| clientSecret * | password | The client's secret key, used to authenticate the client with the Azure Cloud subsystem. The secret key must be kept confidential and not shared with anyone. | np6Kc_.xwsvhR8QrP05fCqYNXmbqfMGQLOEzfMt |
| tenantId * | string | The ID of the Azure tenant to which the Azure Cloud subsystem belongs. A tenant is an organizational entity in Azure representing a company or organization. | 884147733-ff13-4783-a765-834183773083 |
| subscriptionId * | string | The ID of the Azure subscription used to access the Azure Cloud subsystem. A subscription is a contract for using Azure services. | 884147733-ff13-4783-a765-834183773083 |
| usageAggregation | boolean | Indicates whether "usage" aggregation is enabled for the subscription. When this option is enabled, subsystem costs will be grouped by Resource Type. | false |



| Name | Type | Description | Example |
|----------------------|---------|--|---------|
| catalogPriceDiscount | integer | Enter here a discount/markup to apply to catalog prices for all resources that do not have an SCMP relationship. | 5 |
| odlID | string | Enter here the ID of the work order that will be associated with the subsystem and will be inserted as a tag on all subsystem resources. | ODL001 |
| dataFirstCostRecover | int | Enter the number of days prior to the creation date for which costs should be recovered at the first startup of the subsystem. | 15 |

For On-Premise providers, in particular, data on infrastructure capacity is requested so that the SCMP can perform preliminary calculations in multiple scenarios.

For example, during provisioning, to ensure that the maximum allowed capacity of the provider is not exceeded.

4.0.1.2.6 AZURESTACK HCI PARAMETERS

Enabled functionalities:

- Catalog item retrieval
- Inventory item retrieval
- Usage metrics retrieval
- Resource cost retrieval
- Security information retrieval
- Resource provisioning
- Service provisioning
- Complex blueprint provisioning

The specific parameters of the AzureStack HCI subsystem to be entered are shown in the table:



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 71 – Configuration mask

AzureStack HCI

Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|------------------|----------|--|--|
| clientId * | string | The unique ID of the client connecting to the Azure Cloud subsystem. This ID is used to identify the client and authorize access to the subsystem's resources. | 5a85c16c6ad-49db-a58e-e209-ee11f53d6cb |
| clientSecret * | password | The client's secret key, used to authenticate the client with the Azure Cloud subsystem. The secret key must be kept confidential and not shared with anyone. | np6Kc_.xwsvhR8Q-rP05fCqYNXmbqfMGQLOEzfMt |
| tenantId * | string | The ID of the Azure tenant to which the Azure Cloud subsystem belongs. A tenant is an organizational entity in Azure representing a company or organization. | 884147733-ff13-4783-a765-834183773083 |
| subscriptionId * | string | The ID of the Azure subscription used to access the Azure Cloud subsystem. A subscription is a contract for using Azure services. | 884147733-ff13-4783-a765-834183773083 |
| usageAggregation | boolean | Indicates whether "usage" aggregation is enabled for the subscription. When this option is enabled, subsystem costs will be grouped by Resource Type. | false |



| Name | Type | Description | Example |
|----------------------|---------|--|---------|
| catalogPriceDiscount | integer | Enter here a discount/markup to apply to catalog prices for all resources that do not have an SCMP relationship. | 5 |
| odlID | string | Enter here the ID of the work order that will be associated with the subsystem and will be inserted as a tag on all subsystem resources. | ODL001 |
| dataFirstCostRecover | int | Enter the number of days prior to the creation date for which costs should be recovered at the first startup of the subsystem. | 15 |

For On-Premise providers, in particular, data on infrastructure capacity is requested so that the SCMP can perform preliminary calculations in multiple scenarios.

For example, during provisioning, to ensure that the maximum allowed capacity of the provider is not exceeded.

4.0.1.2.7 AZURESTACK HYBRID CLOUD PARAMETERS

Enabled functionalities:

- Catalog item retrieval
- Inventory item retrieval
- Usage metrics retrieval
- Resource provisioning
- Service provisioning
- Complex blueprint provisioning

The specific parameters of the AzureStack Hybrid cloud subsystem to be entered are shown in the table:



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

*Figura 72 – Configuration mask
AzureStack Hybrid Cloud*

Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|------------------|----------|--|---|
| clientId * | string | The unique ID of the client connecting to the Azure Cloud subsystem. This ID is used to identify the client and authorize access to the subsystem's resources. | 5a85c16c6ad-49db-a58e-e209-ee11f53d6cb |
| clientSecret * | password | The client's secret key, used to authenticate the client with the Azure Cloud subsystem. The secret key must be kept confidential and not shared with anyone. | np6Kc_.xwsvhR8Q~P05fCqYNXmbqfMGQLOEzfMt |
| tenantId * | string | The ID of the Azure tenant to which the Azure Cloud subsystem belongs. A tenant is an organizational entity in Azure representing a company or organization. | 884147733-ff13-4783-a765-834183773083 |
| subscriptionId * | string | The ID of the Azure subscription used to access the Azure Cloud subsystem. A subscription is a contract for using Azure services. | 884147733-ff13-4783-a765-834183773083 |
| usageAggregation | boolean | Indicates whether "usage" aggregation is enabled for the subscription. When this option is enabled, subsystem costs will be grouped by Resource Type. | false |



| Name | Type | Description | Example |
|----------------------|---------|--|---------|
| catalogPriceDiscount | integer | Enter here a discount/markup to apply to catalog prices for all resources that do not have an SCMP relationship. | 5 |
| odlID | string | Enter here the ID of the work order that will be associated with the subsystem and will be inserted as a tag on all subsystem resources. | ODL001 |
| dataFirstCostRecover | int | Enter the number of days prior to the creation date for which costs should be recovered at the first startup of the subsystem. | 15 |

For On-Premise providers, in particular, data on infrastructure capacity is requested so that the SCMP can perform preliminary calculations in multiple scenarios.

For example, during provisioning, to ensure that the maximum allowed capacity of the provider is not exceeded.

4.0.1.2.8 REDHAT EDGE DEVICE PARAMETERS

Enabled functionalities:

- Catalog item retrieval
- Inventory item retrieval
- Usage metrics retrieval
- Resource cost retrieval
- Security information retrieval
- Resource provisioning
- Service provisioning
- Complex blueprint provisioning

The specific parameters of the Google Cloud subsystem to be entered are shown in the table.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 73 – Edge configuration mask

Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|----------------------|---------|--|---------------------------|
| client_id * | string | | 10482247326 1100667392 |
| clientSecret * | string | Client secret used for connection | 82hg7ds1h0sd s7392 |
| odlID | string | Enter here the ID of the work order that will be associated with the subsystem and will be inserted as a tag on all subsystem resources. | ODL001 |
| catalogPriceDiscount | integer | Enter here a discount/markup to apply to catalog prices for all resources that do not have an SCMP relationship. | 10 |
| dataFirstCostRecover | int | Enter the number of days prior to the creation date for which costs should be recovered at the first startup of the subsystem. | 15 |

■ PROVIDER side configuration

To be able to add the system to the SCMP, some configurations need to be performed on the provider's portal.

Specifically:

- Create a service account
 - a. Access <https://console.redhat.com>
 - b. In the top right, click on the  Settings icon → Service Accounts → Create service account.
 - c. Enter Name and Description → Create.
 - d. Immediately copy the Client ID and Client Secret (the secret will not be shown again).
- Assign permissions
 - a. Go to Settings → User Access → Groups
 - b. Create a group that contains the following permissions/roles:

| Service | Recommended role |
|---------------------------------|--|
| Edge Management (fleet, update) | Edge Management Administrator or User |
| Image Builder | Image Builder Administrator or User |
| Insights Inventory (host read) | Insights Inventory Viewer |

- In the Service accounts tab of the group → Add service account → select the newly created account.
- Rotate and revoke permissions
 - a. Portal → Service Accounts → menu (:)
 - b. Select **Reset credentials** to regenerate only the Client Secret.
 - c. Select **Delete service account** to permanently decommission the automation.

With this configuration, you can securely orchestrate the entire edge lifecycle – from image generation to update rollout – without ever using personal credentials.

4.0.1.2.9 GOOGLE CLOUD PARAMETERS

Enabled functionalities:

Catalog item retrieval

- Inventory item retrieval



- Usage metrics retrieval
- Resource cost retrieval
- Security information retrieval
- Resource provisioning
- Service provisioning
- Complex blueprint provisioning

The specific parameters of the Google Cloud subsystem to be entered are shown in the table. The “Service account” field can be entered either automatically or manually as described in the paragraph.

Figura 74 – Google configuration mask

Parameters indicated with * are mandatory (available below the service account section).

| Name | Type | Description | Example |
|----------------------|--------|--|---|
| serviceAccount * | object | Connection file generated from the Google console | service_account.json |
| discoveryProjectId * | string | Identifier of the project for which discovery will be performed | Theproject-547280 |
| costExportProjectId | string | Dataset ID of the cost export service account if the dataset is different from the ProjectID | test-customer.test_customer.gcp_billing_export_resource_v1_0152 7DF_51B683_EB2A9 |



| Name | Type | Description | Example |
|---|---------|---|---------|
| usageAggregation | boolean | Indicates whether "usage" aggregation is enabled for the subscription. When this option is enabled, subsystem costs will be grouped by Resource Type. | false |
| Cost from USD Currency | boolean | Indicates whether the final cost is calculated from the price in USD or EUR. | true |
| providerPriceDiscount ** (only if costFromUSDCurrency is true) | integer | Enter here a discount/markup to apply to provider prices in USD for all resources. | 30 |
| catalogPriceDiscount ** | integer | Enter here a discount/markup to apply to catalog prices for all resources that do not have an SCMP relationship. | -5 |
| odlID | string | Enter here the ID of the work order that will be associated with the subsystem and will be inserted as a tag on all subsystem resources. | ODL001 |
| dataFirstCostRecover | int | Enter the number of days prior to the creation date for which costs should be recovered at the first startup of the subsystem. | 15 |

Variables for cost calculation

The variables indicated with ** are used differently for "customer" cost calculation depending on the presence of the "Cost from USD Currency" field. Specifically:

- If the field is deactivated, the value entered in "catalogPriceDiscount" is used as a percentage added to the price retrieved from the provider (or discounted if the value is negative), as for other providers.
- If the field is activated, the value entered in "catalogPriceDiscount" and the "providerPriceDiscount" value are used as a coefficient multiplied by the cost in USD retrieved from the provider.

This distinction is necessary to prevent Azure APIs from responding with a 429 error due to a large number of requests. Additionally, to use the methods described previously, the Azure system must be correctly configured and the entered credentials must have all necessary permissions.



The screenshot shows a configuration interface for a new cloud provider or folder. At the top, it says 'New Cloud Provider/Folder'. Below that, there's a section for 'Cloud Provider's Name' set to 'Google'. There's a checkbox for 'Is a folder of projects' which is checked. Under 'Connection Parameters', there's a note about uploading a JSON file and a button to 'Click here to import from service_account.json'. A red arrow points to this button. The entire configuration area is enclosed in a yellow box. At the bottom, there are sections for 'Active Project ID', 'Cost Export Dataset ID', 'Usage Aggregation', 'Catalog Price Discount', and 'OSS ID Reference'.

Figura 75 – Configuration file loading

By uploading the file, the form is automatically completed with the necessary parameters, but it is also possible to enter them manually (yellow box in the image), following the table. All fields are mandatory:

| Name | Type | Description | Example |
|------------------|----------|--|---|
| Type | string | Enter the name of the configured authentication type. | service_account |
| project_id * | string | Enter here the unique ID of the project associated with the service account. | Theproject-367810 |
| private_key_id * | string | Enter here the unique ID of the service account's private key. | 55cb5cf903ee93ea1e9c294a07e46e0af0633e6 |
| private_key * | password | Contains the service account's private key in PEM format. It is essential for authenticating the service account to Google Cloud APIs. | ----BEGIN PRIVATE KEY----MIIJQgIBADANB... |
| client_e-mail * | string | The unique email address of the service account. It is used to identify the service account when authenticating to Google Cloud APIs. | user@dominio.com |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Type | Description | Example |
|------------------------------|--------|---|---|
| client_id * | string | The client ID of the service account. It is a unique identifier used to identify the service account in Google Cloud. | 104822473261100667392 |
| auth_uri * | string | The URI used for authenticating the service account to Google Cloud APIs. | https://accounts.google.com/o/oauth2/auth |
| token_uri * | string | The URI used to obtain an access token for the service account. | https://oauth2.googleapis.com/token |
| auth_provider_x509_cert_url* | string | The URL of the X.509 certificate used for authenticating the service account. | https://www.googleapis.com/oauth2/v1/certs |
| client_x509_cert_url * | string | The URL of the X.509 certificate in the client. | https://www.googleapis.com/robot/v1/metadata/f543/myserviceaccount%40projectName.gserviceaccount.com |

■ Provider Configuration

1. Access GCP Console

- Go to <https://console.cloud.google.com/>
- Log in with your Google Cloud account.

2. Create or Identify the Service Account (SA)

From the console, select the project at the top where you want to add (or where it is already present) the service account. From the console, to create the service account, go to IAM and admin > Service accounts. Click on Create service account. Assign an ID (e.g., my-service-account), name, and description, then Create. On the service account page, go to the Keys section. Click on Add key and select Create new key. Choose JSON format and click Create. Download and keep the JSON file in a safe place.

3. Associate Permissions with the Service Account

On the same service accounts page, find the newly created account and click on its name. Go to the Permissions section and in the table below, next to the service account, in the Inheritance column, click on Edit principal. In the pop-up menu, select the appropriate roles for the service account. Below is the minimal list of roles for the SCMP: - App Engine Admin - BigQuery Data Transfer Service Agent - Cloud OS Config Service Agent - Compute Admin - Kubernetes Engine Service Agent - OS Inventory Viewer - Security Center Service Agent Click Save and add the permissions to the service account.

4. Enable Service APIs

Go back to the console home. Select the project at the top where the service account is present. Go to APIs and services. At the top, click on + Enable APIs and services. Search for the API services to enable in the search bar and click on their name. Once inside the API service, select Enable to activate it; below are the API services for the SCMP: - Cloud Monitoring API - Compute Engine API - Cloud Asset API - BigQuery API - Cloud Resource Manager API - OS Config API - Security Command Center API - Cloud Billing API - Service Usage API - Cloud Dataplex API

5. Cost Dataset

If the cost dataset is located in a different service account than the one you want to integrate, specify the complete connection string to the relevant dataset in the Cost Export Dataset ID text box (in the subsystem creation module present in SCMP administration) (e.g., projectId.datasetName.tableName).

4.0.1.2.10 KUBERNETES PARAMETERS

Enabled functionalities:

- Catalog item retrieval
- Inventory item retrieval



- Usage metrics retrieval
- Resource cost retrieval
- Security information retrieval
- Resource provisioning
- Service provisioning
- Complex blueprint provisioning

The specific parameters of the Kubernetes subsystem to be entered are shown in the table.

The screenshot shows a modal window titled "New Cloud Provider/Folder". The "Cloud Provider's Name" field is set to "Kubernetes". The "Version" field is set to "1.21.0". Under "Connection Parameters", there are fields for "Certificate Authority Data", "Kubernetes API Server URI", "User Certificate Data", "User Key Data", "User Token", and "User Name". Below these, there is a "Label Selector" field containing "0" and an "ODL ID Reference" field. At the bottom of the modal are "Close", "Test Connection", and "Save" buttons.

Figura 76 – Configuration mask

Kubernetes

Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|------------------------------|--------|--|------------------------------|
| Certificate authority data * | string | Enter the data related to the certificate used by the user for connection. | Sgeijesf90434n7u3h97ef |
| Kubernetes API server URI * | string | Enter the URL of the server to connect to. | https://www.google.com/infos |



| Name | Type | Description | Example |
|-------------------------|---------|--|--|
| User certificate Data * | String | Enter the certificate related to the user used for connection. | ---begin private key-- fnbsujffsfoije ... |
| User key Data * | String | Enter the key related to the user used for connection. | Sf8j9jts4ewht7h3wf wj908w |
| User token * | String | Secret token related to the user used for connection to the provider. | Sf8eufce9sfber4543 jh8ddsfh89r43 |
| User name * | String | Enter the username used for authentication. | administrator |
| Label selector | string | Enter here a selector to filter resources retrieved by the SCMP. | Name=rossi |
| catalogPriceDiscount | integer | Enter here a discount/markup to apply to catalog prices for all resources that do not have an SCMP relationship. | -10 |
| odlID | string | Enter here the ID of the work order that will be associated with the subsystem and will be inserted as a tag on all subsystem resources. | ODL001 |

■ Provider Configuration

The standard authentication method is via the parameters contained in the kubeconfig file. The kubeconfig defines:
API server endpoint (server) Authentication method (client certificates, tokens, oidc, etc.) Default namespace
Context Authentication: Via client certificates (client-certificate-data and client-key-data)

Or via token (token in the user context)

Minimal kubeconfig example:

```
apiVersion: v1
kind: Config
clusters:
- cluster: certificate-authority-data:
  server: https://name:my-cluster
contexts:
- context:
    cluster: my-cluster
    user: my-user
  name: my-context
current-context: my-context
users:
- name: my-user
  user:
    token:
```

4.0.1.2.11 OPENSHIFT PARAMETERS

Enabled functionalities:

- Catalog item retrieval
- Inventory item retrieval
- Usage metrics retrieval

- Resource cost retrieval
- Security information retrieval
- Resource provisioning
- Service provisioning
- Complex blueprint provisioning

The specific parameters of the OpenShift subsystem to be entered are shown in the table:

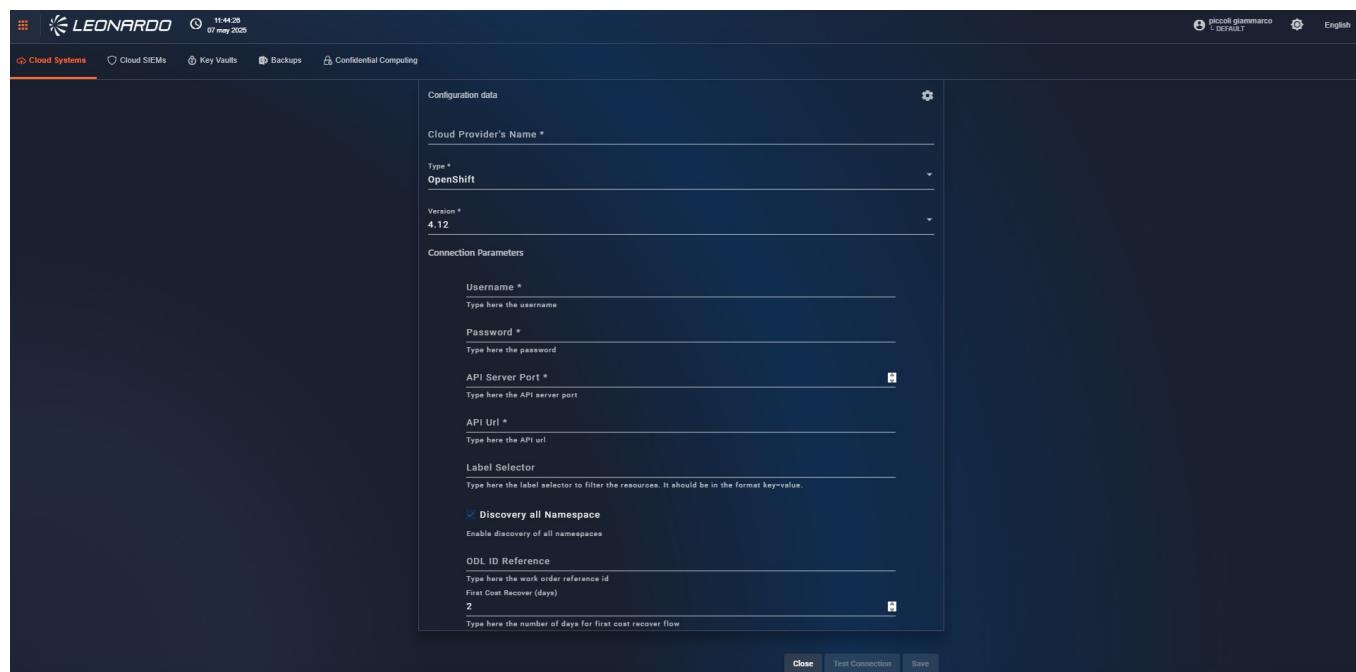


Figura 77 – OpenShift configuration mask

Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|-------------------|----------|---|-----------------------|
| Username * | string | The username of the OpenShift user that will be used for connection to the provider. | name.surname@mail.com |
| Password * | password | The client's password, used to authenticate the client with the subsystem. The secret key must be kept confidential and not shared with anyone. | np6KcXmbqfMGQLOEfzMt |
| API server port * | integer | The port on which the OpenShift APIs are listening. | 8090 |



| Name | Type | Description | Example |
|--|-----------|--|-----------------------|
| API url * | string | The OpenShift URL on which to make requests. | www.google.com |
| discover all Namespaces | boolean | If the user has administrator permissions on all OpenShift "projects," all namespaces will be retrieved. | false |
| Namespace selector (only visible if "discover all namespaces" is active) | selection | If the user has visibility of a limited number of namespaces, it is necessary to enter the list of enabled namespaces here. | demo.infos,production |
| odlID | string | Enter here the ID of the work order that will be associated with the subsystem and will be inserted as a tag on all subsystem resources. | ODL001 |
| dataFirstCostRecover | int | Enter the number of days prior to the creation date for which costs should be recovered at the first startup of the subsystem. | 15 |

■ User authorizations

If the "Discover all namespaces" field is selected, it is necessary that the user has administration permissions on **ALL** namespaces, otherwise, the system cannot be added.

This distinction is necessary because the OpenShift system automatically blocks incorrectly authorized requests.

■ Provider Configuration

To connect an OpenShift cluster system, it is sufficient to have a named or impersonal user with adequate privileges (e.g., cluster-admin or otherwise sufficient for the intended use) on the cluster.

Authentication:

Username and Password

Notes:

In OpenShift, it is very common to use specially created ServiceAccounts, with corresponding RoleBindings or ClusterRoleBindings.

Users can be both human (named) and technical (impersonal).

4.0.1.2.12 ORACLE PARAMETERS

Enabled functionalities:



- Catalog item retrieval
- Inventory item retrieval
- Resource cost retrieval
- Security information retrieval

The specific parameters of the Oracle subsystem to be entered are shown in the table:

Figura 78 – Oracle configuration mask

Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|---------------|--------|---|---|
| username * | string | The username used for authentication with OCI. | ocid5.user.oc77.aaabnbthaj6pnvbs2gqnaaaaait3mqzekefmlhwkige2wxna6hfaj3f6njma |
| fingerprint * | string | Is a unique value that identifies the device, used for authentication with OCI. | 6a:f4:6e:9a:73:95:27:d5:64:8d11:a3:f5:0e:fb:f4: |
| tenantId * | string | The ID of the OCI tenant to connect to. | ocid5.tenancy.oc77...aaabnbthaj6pnvbs2gqnaaaaait3mqzekefmlhwkige2wxna6hfaj3f6njma |



| Name | Type | Description | Example |
|----------------------|----------|---|---|
| region * | string | The region is the specific geographic location where OCI resources are located. | eu-dcc-rome-1 |
| Realm | string | The name of the logical container that groups OCI resources and their associated costs. | personal-realm.it |
| keyFile * | password | A PEM file containing the public and private key used for authentication. | " -----BEGIN PRIVATE KEY-----MII JQgIBADANB..." |
| usageAggregation | boolean | Indicates whether "usage" aggregation is enabled for the subscription. When this option is enabled, subsystem costs will be grouped by Resource Type. | false |
| catalogPriceDiscount | integer | Enter here a discount/markup to apply to catalog prices for all resources that do not have an SCMP relationship. | -10 |
| odlID | string | Enter here the ID of the work order that will be associated with the subsystem and will be inserted as a tag on all subsystem resources. | ODL001 |
| dataFirstCostRecover | int | Enter the number of days prior to the creation date for which costs should be recovered at the first startup of the subsystem. | 15 |

■ Provider Configuration

Procedure for creating parameters for external integration in Oracle Cloud Infrastructure (OCI): 1. Access OCI Console

Go to <https://cloud.oracle.com/>
Log in with your Oracle Cloud account.

1. Create or Identify the IAM User

In the main console menu, go to Identity & Security > Users. Select an existing user or create a new user for the integration: Click on Create User if you need to create one. Assign a name and an email. Save.

2. Associate the user with a group with adequate permissions

After creating the user, you must associate it with a group that has permissions for the resources you want to manage via API. Go to Identity > Groups. Select a group (e.g., Administrators or create a custom group). Click on Add User to Group and add the newly created user.

3. Generate the API key (Key File)

Go back to the user page (Identity > Users > select user). Go to the API Keys tab. Click on Add API Key. You have two options: Upload an existing public key (RSA public). Or generate a new public and private key from the console (download the private key). Select “Generate API Key Pair” to locally generate the key: Download the private key (.pem) and save it securely (it is your Key File). The public key will be automatically associated with the user.

4. Obtain the required parameters

User OCID (User OCID): Go to Identity > Users > select user. You will find the user OCID on the user page (format ocid1.user.oc1..aaaaaaaa...). Fingerprint: It is the fingerprint of the public API key you added (displayed in the API Keys section). Tenant OCID (Tenant OCID / Main Compartment OCID): Go to Identity > Tenancy (click on the tenancy name in the top left). You will find the tenancy OCID (it is the main tenant, e.g., ocid1.tenancy.oc1..aaaaaaaa...). Region: Choose your OCI region (e.g., eu-frankfurt-1, us-ashburn-1, etc.). You can find it in the top right of the console or in Governance & Administration > Regions. Realm: It is usually oc1 for most public OCI tenants. You can verify this in the documentation or via CLI if necessary.

Summary of parameters and where to find them

Parameter Where to find it / how to obtain it User OCID Identity > Users > select user > OCID Fingerprint Identity > Users > API Keys > fingerprint Tenant OCID Identity > Tenancy > OCID Region Top right of the console (e.g., eu-frankfurt-1) Realm Generally oc1 (standard OCI realm) Key File Private .pem key generated at the time of API Key creation

4.0.1.2.13 ORACLEEXACC PARAMETERS



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Enabled functionalities:

- Catalog item retrieval
- Inventory item retrieval
- Resource cost retrieval
- Security information retrieval

The specific parameters of the OracleExAcc subsystem to be entered are shown in the table:

The screenshot shows a configuration dialog titled "New Cloud Provider/Folder". It has sections for "Configuration data" and "Connection Parameters". Under "Configuration data", there are fields for "Cloud Provider's Name" (set to "OracleExAcc"), "Type" (set to "OracleExAcc"), and "Version" (set to "v1"). Under "Connection Parameters", there are fields for "User Ocid", "Fingerprint", "Tenancy Ocid", "Region", "Private Key", and "ODL ID Reference". The "Private Key" field contains a placeholder "Type here the private key" and a note about CMP Catalog Price Discount(%) and Surcharge(%). The "ODL ID Reference" field contains a placeholder "Type here the work order reference id" and a note about First Cost Recover (days).

Figura 79 – Configuration mask

OracleExAcc

Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|---------------|--------|---|--|
| username * | string | The username used for authentication with OCI. | ocid5.user.oc77.aaabnbthaj6pnvsb2g qnaaaaaait3mqzekefmilhwkige2wxna6h faj3f6njma |
| fingerprint * | string | Is a unique value that identifies the device, used for authentication with OCI. | 6a:f4:6e:9a:73:95:27:d5:64:8d11:a3:f5 :0e:fb:f4: |



| Name | Type | Description | Example |
|----------------------|----------|--|--|
| tenantId * | string | The ID of the OCI tenant to connect to. | ocid5.tenancy.oc77...aabnbthaj6pnv sb2gqnaaaaait3mqzekefmlhwkige2wx na6hfaj3f6njma |
| region * | string | The region is the specific geographic location where OCI resources are located. | eu-dcc-rome-1 |
| Private key * | password | A PEM file containing the public and private key used for authentication. | " -----BEGIN PRIVATE KEY-----MIIJQ gIBADANB..." |
| catalogPriceDiscount | integer | Enter here a discount/markup to apply to catalog prices for all resources that do not have an SCMP relationship. | -10 |
| odlID | string | Enter here the ID of the work order that will be associated with the subsystem and will be inserted as a tag on all subsystem resources. | ODL001 |
| dataFirstCostRecover | int | Enter the number of days prior to the creation date for which costs should be recovered at the first startup of the subsystem. | 15 |

4.0.1.2.14 VCLOUD PARAMETERS

Enabled functionalities:

- Catalog item retrieval
- Inventory item retrieval
- Usage metrics retrieval
- Resource cost retrieval
- Security information retrieval

The specific parameters of the VCloudDirector subsystem to be entered are shown in the table.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the configuration interface for a new cloud provider. It includes sections for 'Configuration data' (Cloud Provider's Name, Type, Version), 'Connection Parameters' (URL Endpoint, Tenant ID, Token), and optional settings (Catalog Price Discount, ODL ID Reference). Buttons at the bottom allow closing the window, testing the connection, or saving the configuration.

*Figura 80 – VCloudDirector
configuration mask*

Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|------------------------|----------|--|--|
| url * | string | The address of the VCloudDirector server to connect to. | https://url.westeurope.com/tenant/org-zzg-435832 |
| tenantId * | string | The VCloudDirector tenant ID is the unique identifier of the tenant to connect to. | org-zzg-435832 |
| Use providerPermission | boolean | To be activated if the user has all provider-level authorizations; if not activated, not all information is retrieved, only that of the enabled organizations. | true |
| token * | password | The authentication token for the VCloudDirector is a secret string used to authenticate the user with the VCloudDirector. | aesZo6LextKTQx92VoRpyzaesZo6LextKT |
| Location | String | Enter the region to which the VCloudDirector resources belong. | Eu west |
| Location | string | Enter the geographical location of the system. | OnPremise |
| catalogPriceDiscount | integer | Enter here a discount/markup to apply to catalog prices for all resources that do not have an SCMP relationship. | 5 |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Type | Description | Example |
|-------|--------|--|---------|
| odlID | string | Enter here the ID of the work order that will be associated with the subsystem and will be inserted as a tag on all subsystem resources. | ODL001 |

4.0.1.2.15 VMWARE PARAMETERS

Enabled functionalities:

- Catalog item retrieval
- Inventory item retrieval
- Usage metrics retrieval
- Resource cost retrieval
- Security information retrieval
- Resource provisioning
- Service provisioning
- Complex blueprint provisioning

The specific parameters of the VMWare subsystem to be entered are shown in the table:

The screenshot shows a configuration interface for a VMWare subsystem. The top navigation bar includes the Leonardo logo, user info (14:17:41, 21 March 2024), and language selection (English). The main page title is "Cloud Subsystems". The current tab is "VMWare". The configuration form has the following fields:

- Type ***: VMWare
- Version ***: 7.0.0
- Connection Parameters**:
 - Username ***: Type here the username
 - Password ***: Type here the password
 - URL ***: www
 - Location**: Select the sub-system location
- Total VCPU Capacity ***: Total virtual CPU of the sub-system
- Total RAM Capacity (MB) ***: Total RAM of the sub-system, in MB
- Total Storage Size Capacity (GB) ***: Total storage size of the sub-system, in GB
- Catalog Price Discount(−)/Surcharge(+) %**: Type here a custom discount/surcharge percentage
- ODL ID Reference**: Type here the work order reference id

Figura 81 – Configuration mask

VMWare



Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|----------------------|----------|--|---|
| clientId * | string | The unique ID of the client connecting to the Azure Cloud subsystem. This ID is used to identify the client and authorize access to the subsystem's resources. | 5a85c16c6ad-49db-a58e-e209-ee11f53d6c6b |
| clientSecret * | password | The client's secret key, used to authenticate the client with the Azure Cloud subsystem. The secret key must be kept confidential and not shared with anyone. | np6Kc_xwsvhR8Q-rP05fCqYNXmbqfMGQLOEzfMt |
| tenantId * | string | The ID of the Azure tenant to which the Azure Cloud subsystem belongs. A tenant is an organizational entity in Azure representing a company or organization. | 884147733-ff13-4783-a765-834183773083 |
| subscriptionId * | string | The ID of the Azure subscription used to access the Azure Cloud subsystem. A subscription is a contract for using Azure services. | 884147733-ff13-4783-a765-834183773083 |
| usageAggregation | boolean | Indicates whether "usage" aggregation is enabled for the subscription. When this option is enabled, subsystem costs will be grouped by Resource Type. | false |
| catalogPriceDiscount | integer | Enter here a discount/markup to apply to catalog prices for all resources that do not have an SCMP relationship. | 5 |
| odlID | string | Enter here the ID of the work order that will be associated with the subsystem and will be inserted as a tag on all subsystem resources. | ODL001 |
| daysFirstCostRecover | int | Enter the number of days prior to the creation date for which costs should be recovered at the first startup of the subsystem. | 15 |

For On-Premise providers, in particular, data on infrastructure capacity is requested so that the SCMP can perform preliminary calculations in multiple scenarios.

For example, during provisioning, to ensure that the maximum allowed capacity of the provider is not exceeded.

4.0.1.3 Folders

4.0.1.3.1 AZURE FOLDER

To allow the SCMP to leverage all the potential offered by the "Azure" provider, the ability to configure "Folders" has been introduced.

During the creation of a provider, by selecting the "Azure" type, we can observe the presence of an exclusive field for the provider:



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

- A confirmation box to indicate to the SCMP if the provider being added is a "Folder".

The screenshot shows the 'New Cloud Provider / Folder' configuration page. The 'Cloud Provider's Name' field contains 'Azure'. The 'Type' field also contains 'Azure'. Below these fields is a checkbox labeled 'Is a Folder of projects', which is checked and highlighted with a red box. A red arrow points to this checkbox from the left. Other fields visible include 'Version' (set to '2020-08-01'), 'Client ID', 'Client Secret', 'Tenant ID', and 'Usage Aggregation' (unchecked). The 'Connection Parameters' section is expanded.

Figura 82 – Option folder Azure

The specific parameters of the Azure subsystem to be entered are shown in the following table:

The screenshot shows the 'Configuration mask Azure' dialog box. It includes fields for 'Client ID', 'Client Secret', 'Tenant ID', 'Usage Aggregation' (unchecked), 'Catalog Price Discount(-)/Surcharge(+) %', 'ODL ID Reference', and 'Days first cost recover' (set to 2). At the bottom of the dialog are buttons for 'Close', 'Test Connection', and 'Save'.

Figura 83 – Configuration mask Azure



Folder

Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|----------------------|----------|--|---|
| clientId * | string | The unique ID of the client connecting to the Azure Cloud subsystem. This ID is used to identify the client and authorize access to the subsystem's resources. | 5a85c16c6ad-49db-a58e-e209-ee11f53d6c6b |
| clientSecret * | password | The client's secret key, used to authenticate the client with the Azure Cloud subsystem. The secret key must be kept confidential and not shared with anyone. | np6Kc_.xwsvhR8Q~P05fCqYNXmbqfMGQLOEzfMt |
| tenantId * | string | The ID of the Azure tenant to which the Azure Cloud subsystem belongs. A tenant is an organizational entity in Azure representing a company or organization. | 884147733-ff13-4783-a765-834183773083 |
| usageAggregation | boolean | Indicates whether "usage" aggregation is enabled for the subscription. When this option is enabled, subsystem costs will be grouped by Resource Type. | false |
| catalogPriceDiscount | integer | Enter here a discount/markup to apply to catalog prices for all resources that do not have an SCMP relationship. | 5 |
| odlID | string | Enter here the ID of the work order that will be associated with the subsystem and will be inserted as a tag on all subsystem resources. | ODL001 |
| daysFirstCostRecover | int | Enter the number of days prior to the creation date for which costs should be recovered at the first startup of the subsystem. | 15 |

4.0.1.3.2 GOOGLE CLOUD FOLDERS

To allow the SCMP to leverage all the potential offered by the "Google Cloud" provider, the ability to configure "Folders" has been introduced, along with the option to import the file generated from the provider's console to simplify its insertion.

During the creation of a provider, by selecting the "Google Cloud" type, we can observe the presence of 2 exclusive fields for the provider:

1. A confirmation box to indicate to the SCMP if the provider being added is a "Folder".
2. A box where, by clicking inside, it will be possible, through the Windows file selection window, to insert the "JSON" file exported directly from the Google console.

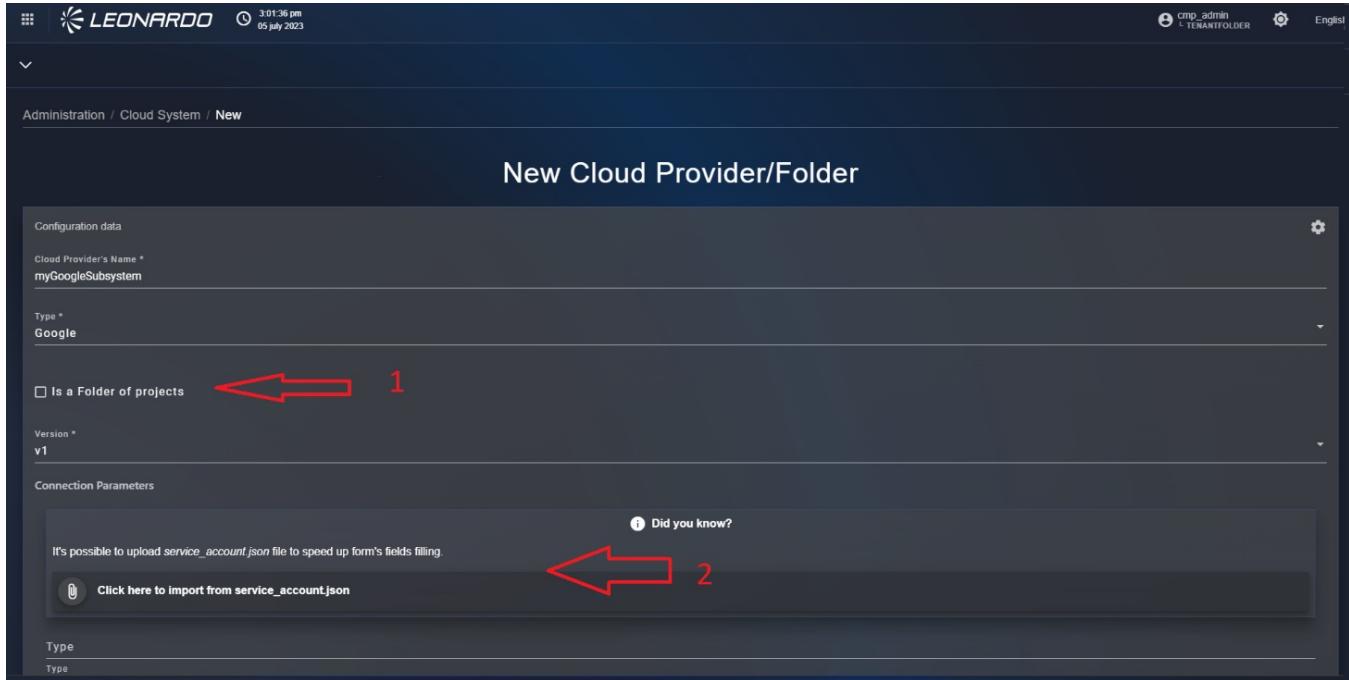


Figura 84 – Specific parameters of Google Cloud

The specific parameters for the Google Folder to be entered are shown in the table:

| Name | Type | Description | Example |
|---|---------|---|-------------------------|
| serviceAccount | object | Connection file generated from the Google console | service_account.json |
| costExportDatasetID | string | Enter the ID of the dataset to be used for information retrieval. | Projectid.dataset.table |
| usageAggregation | boolean | Indicates whether "usage" aggregation is enabled for the subscription. When this option is enabled, subsystem costs will be grouped by Resource Type. | false |
| Cost from USD Currency | Boolean | Indicates whether the final cost is calculated from the price in USD or EUR. | true |
| providerPriceDiscount (only if costFromUSDCurrency is true) | integer | Enter here a discount/markup to apply to provider prices in USD for all resources. | 30 |
| Cost cross project | Boolean | Indicates whether to retrieve costs for all projects in the billing account or only for the current project. | true |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Type | Description | Example |
|----------------------|---------|--|---------|
| catalogPriceDiscount | integer | Enter here a discount/markup to apply to catalog prices for all resources that do not have an SCMP relationship. | -20 |
| odlID | string | Enter here the ID of the work order that will be associated with the subsystem and will be inserted as a tag on all subsystem resources. | ODL001 |
| daysFirstCostRecover | int | Enter the number of days prior to the creation date for which costs should be recovered at the first startup of the subsystem. | 15 |

■ Mandatory Enabled Services

The following services must be enabled on the service account used:

- bigquery.googleapis.com
- clouddresourcemanagement.googleapis.com
- cloudasset.googleapis.com
- cloudbilling.googleapis.com
- compute.googleapis.com
- container.googleapis.com
- monitoring.googleapis.com

The "ServiceAccount" field can be automatically entered by uploading the file or manually by entering the fields available in the form.

After configuring a "Folder" type system, it will be displayed in both the cloud provider list and the folders page.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Type | Creation Date | On-Premises | State |
|----------------------------|------------|---------------------|--------------------------|--------------------|
| CMP Managed Folder | GOOGLE | 20/05/2024 15:53:40 | <input type="checkbox"/> | Green |
| CMP Managed Azure Folder | AZURE | 20/05/2024 15:54:47 | <input type="checkbox"/> | Green |
| MAE Digital Transformation | AZURE | 20/05/2024 15:54:48 | <input type="checkbox"/> | Green |
| MAE CMP | AZURE | 20/05/2024 15:54:49 | <input type="checkbox"/> | Green |
| MAE OSP 2030 | AZURE | 20/05/2024 15:54:49 | <input type="checkbox"/> | Green |
| MAE LAB | AZURE | 20/05/2024 15:54:49 | <input type="checkbox"/> | Green |
| CONIF Management | AZURE | 20/05/2024 15:51:15 | <input type="checkbox"/> | Green |
| Cluster 02 | OPENSHIFT | 20/05/2024 16:48:48 | <input type="checkbox"/> | Green |
| CMP-DEV3 CLUSTER | KUBERNETES | 10/06/2024 13:47:59 | <input type="checkbox"/> | Green |

Figura 85 – See folders

From the "Cloud System" page of the "Administration" module, click the "Folders" tab in the top right, which will display the list of folders configured in the tenant.

Within the page, the same view, modify, and delete operations can be performed on folders as those performed on the "Cloud Provider" page.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed web interface for the Leonardo Secure Cloud Management Platform. At the top, there's a header with the Leonardo logo, the date and time (3:10:33 pm, 05 July 2023), and user information (cmp_admin, cmp_tenantfolder, English). Below the header, a navigation bar has three tabs: 'Cloud Systems' (selected), 'Cloud SIEMs', and 'Key Vaults'. The main content area is titled 'Administration / Cloud System'. On the left, there's a sidebar labeled 'Folder list' with a table showing one entry: 'ASL02 Folder' (Type: Google, Creation Date: 30/06/2023 16:21:22). On the right, there are buttons for 'Show', 'Systems', 'Folders' (which is highlighted in red), and a menu icon. A large red arrow points to the 'Folders' button.

Figura 86 – Access to Folders

When accessing a "Folder" in "View" mode, scrolling down the page reveals a list of subsystems present in the provider and their status information:

- In green, we can see a subsystem correctly configured in the provider that the SCMP automatically adds to the system and will be visible in the "Cloud Providers" section and in all SCMP functionalities.
- In red, we can see an incorrectly configured subsystem which, after appropriate modifications from the "Google Cloud" console, can be accepted by the SCMP.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a user interface for managing subsystems. At the top, there are tabs for 'Cloud Systems', 'Cloud SIEMs' (which is the active tab), and 'Key Vaults'. Below the tabs, there are several input fields for configuration, including 'auth provider x509 cert url', 'client x509 cert url', and 'Catalog Price Discount(-)/Surcharge(+) %'. There is also a field for 'ODL ID Reference'. Under the heading 'Contained Subsystems:', a list of subsystems is displayed. The subsystem 'ASL02-E-MANAGEMENT' is highlighted with a green border. The subsystem 'ASL02-B-PRJ-SEC-SHARED' is highlighted with a red border. A warning message 'Warning: Subsystem not added (perhaps insufficient permissions?)' is shown next to the red border. At the bottom right, there is a 'Close' button.

Figura 87 – See subsystems of Folder

4.0.2 SIEM

The user can create a SIEM provider by clicking on the tab depicting a shield, located in the top bar, after accessing the "Cloud SIEMs" page, in the top right, click on the hamburger menu and then click on "Attach a SIEM".



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with tabs for 'Cloud Systems', 'Cloud SIEMs' (which is highlighted with a red circle), and 'Secrets Managers'. Below the navigation is a breadcrumb trail: 'Administration / Cloud SIEMs'. The main area is titled 'Security Information & Event Manager'. It displays a table titled 'SIEMs list' with one entry: 'SIEM Pro Edition' (Type: SENTINEL, UUID: 3bbc0471-3165-46fd-b937-e1c9bb8994ef, Creation Date: 30/01/2023 11:04:39). In the top right corner of the table, there's a button labeled '+ Attach a SIEM' with a red arrow pointing to it, and a three-dot menu icon with another red arrow pointing to it.

Figura 88 – Creation of a SIEM cloud provider

On the "Add SIEM" page, fill in all fields in the "General properties" section. After doing this, fill in all fields in the "SIEM's properties" section according to the table:

The screenshot shows the 'Add SIEM' configuration page. The left sidebar shows 'Administration / Cloud SIEMs / Add SIEM'. The main area is titled 'Attach new SIEM'. It has two sections: 'General properties' and 'SIEM's properties'. In 'General properties', 'Name' is set to 'SIEM - Business Edition' and 'Type' is set to 'SENTINEL'. In 'SIEM's properties', there are five fields: 'clientId' (marked with an asterisk), 'clientSecret' (marked with an asterisk), 'resourceGroup' (marked with an asterisk), 'subscriptionId' (marked with an asterisk), and 'tenantId' (marked with an asterisk).



Figura 89 – Compilation of the form to create a SIEM provider

Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|------------------|----------|---|---|
| clientId * | string | Unique ID of the SIEM to connect to, provided by the SIEM during application registration. | 1b16698f-2df5-ed44-86b9ed-4b42c 1fe7ad9 |
| clientSecret * | password | The secret to use for the connection, provided by the SIEM during application registration. | 1b16698f-2df5-ed44-86b9ed-4b42c 1fe7ad9 |
| resourceGroup * | string | The Azure resource group where the SIEM is hosted. | myGroup |
| subscriptionId * | string | The Azure subscription ID associated with the SIEM. | 1b16698f-2df5-ed44-86b9ed-4b42c 1fe7ad9 |
| tenantId * | string | The Azure tenant ID associated with the SIEM. | 1b16698f-2df5-ed44-86b9ed-4b42c 1fe7ad9 |
| workspaceID* | string | The Log Analytics workspace ID associated with the SIEM. | 1b16698f-2df5-ed44-86b9ed-4b42c 1fe7ad9 |
| workspaceName* | string | The name of the Log Analytics workspace associated with the SIEM. | theWorkspaceName |

Finally, in the bottom right, click the "Save" button. Afterward, a popup will appear confirming the SIEM's creation, and the user will be redirected to the list of SIEMs.

4.0.2.1 Viewing, modifying, and deleting

To view a SIEM, next to it, click on the kebab menu and then click "Show". At this point, the user is on the "Show SIEM" page where data can be viewed but not modified. After viewing the data, in the bottom right, click the "Close" button. After this, the user is back on the list of SIEMs.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the 'Administration / Cloud SIEMs' section. The main title is 'Security Informations & Events Managers'. Below it is a table titled 'SIEMs list' with columns: Name, Type, UUID, and Creation Date. One row is visible: 'Azure Sentinel CMP' (Type: SENTINEL, UUID: b8e937d1-9b23-4d90-963c-48ccd2f03828, Creation Date: 02/12/2022 17:16:44). To the right of the table is a context menu with options: Show, Edit, and Delete.


Figura 90 – Access to SIEM in display mode

The screenshot shows the 'Administration / Cloud SIEMs / Show SIEM' section. The title is 'Show SIEM b8e937d1-9b23-4d90-963c-48ccd2f03828'. It contains two main sections: 'General properties' and 'SIEM's properties'. The 'General properties' section includes fields: Name (Azure Sentinel CMP), Type (SENTINEL), UUID (b8e937d1-9b23-4d90-963c-48ccd2f03828), and Creation Date (2022-12-02T17:16:44.02). The 'SIEM's properties' section includes fields: clientId, clientSecret, and resourceGroup (sentineltest).

Figura 91 – SIEM in visual mode

To modify a SIEM, next to it, click on the kebab menu and then click "Edit". At this point, you are on the "Edit SIEM" page where fields can be modified.

After modifying the fields of interest, in the bottom right, click the "Update" button. After this, a popup will appear confirming the SIEM's modification, and the user will be back on the list of SIEMs.

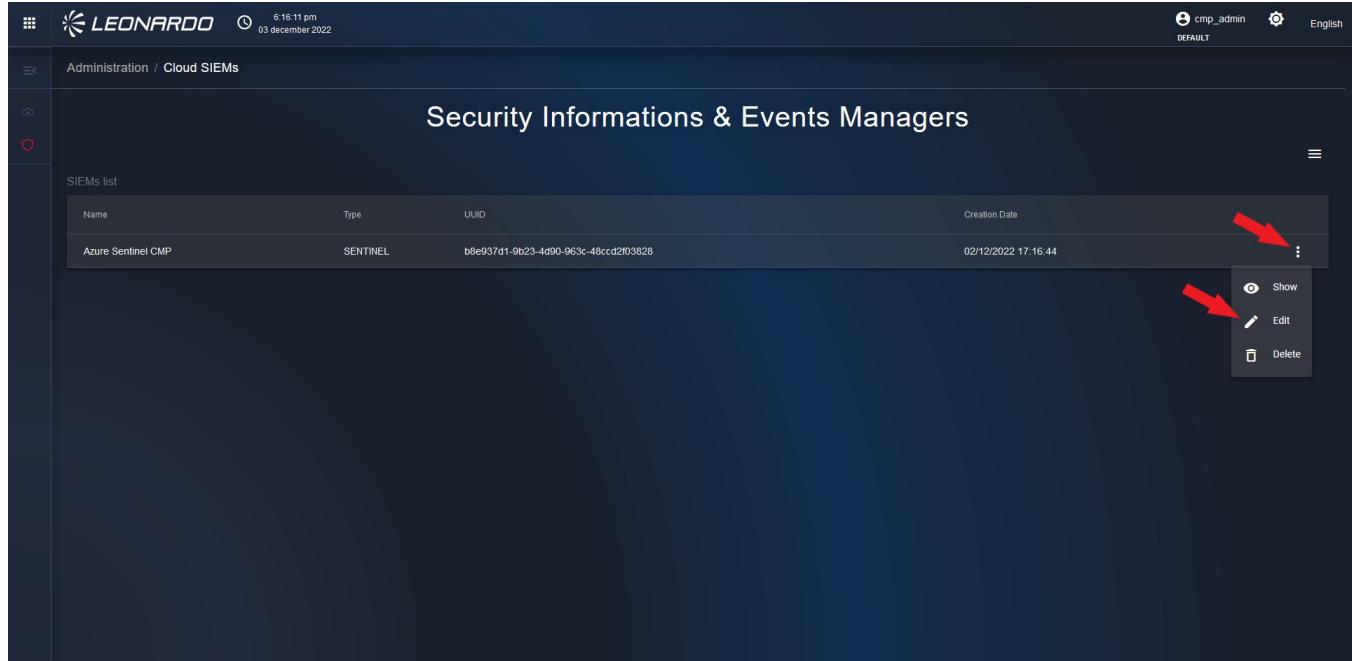

The screenshot shows the 'Cloud SIEMs' section of the Leonardo platform. It displays a table with one row of data:

| Name | Type | UUID | Creation Date |
|--------------------|----------|-------------------------------------|---------------------|
| Azure Sentinel CMP | SENTINEL | b8e937d1-9b23-4d90-963c-48cc2f03828 | 02/12/2022 17:16:44 |

Next to the last column, there is a vertical ellipsis (...). A red arrow points to this icon. A second red arrow points to the 'Edit' option in the resulting context menu, which also includes 'Show' and 'Delete'.

Figura 92 – Access to SIEM in edit mode



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the 'Edit SIEM' page for a specific instance. The top navigation bar includes the Leonardo logo, user information (cmp_admin, DEFAULT), and language selection (English). The main content area has two sections: 'General properties' and 'SIEM's properties'. In 'General properties', fields include Name (Azure Sentinel CMP), Type (SENTINEL), UUID (b8e937d1-9b23-4d90-963c-48ccd2f03828), and Creation Date (2022-12-02T17:16:44.02). In 'SIEM's properties', fields include clientId, clientSecret, and resourceGroup (sentineltest). Below these sections, there are four input fields: subscriptionId (09837d5-2dd0-4623-9b82-5a510fd983d2), tenantId, workspaceId (6aa7ef19-6586-45df-8aea-e59335bba3d7), and workspaceName (workspacedev). A red 'Update' button is located at the bottom right of the form.

Figura 93 – SIEM in edit mode

To delete a SIEM, next to it, click on the kebab menu and then click "Delete". At this point, a modal will appear where you need to click the "Remove" button. After this, the SIEM is no longer present in the list.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the 'Administration / Cloud SIEMs' section. A table lists a single SIEM entry: 'Azure Sentinel CMP' (Type: SENTINEL, UUID: b8e937d1-9b23-4d90-963c-48cccd2f03828, Creation Date: 02/12/2022 17:16:44). To the right of the table is a context menu with three options: 'Show', 'Edit', and 'Delete'. A red arrow points to the 'Delete' option.

Figura 94 – Option to delete a SIEM
"Delete"

The screenshot shows the same 'Administration / Cloud SIEMs' section. A confirmation dialog box is displayed over the table, asking 'Are you sure you want to delete the SIEM b8e937d1-9b23-4d90-963c-48cccd2f03828?'. The dialog has 'Cancel' and 'Remove' buttons. A red arrow points to the 'Remove' button.

Figura 95 – Confirm to delete a SIEM

4.0.3 Secrets Managers

The user can create a secret manager by clicking on the tab depicting a padlock, located in the top bar, as shown in the figure.

After accessing the “Secret Manager” page, at the top right, click on the burger menu and then click on “Add a secret manager”

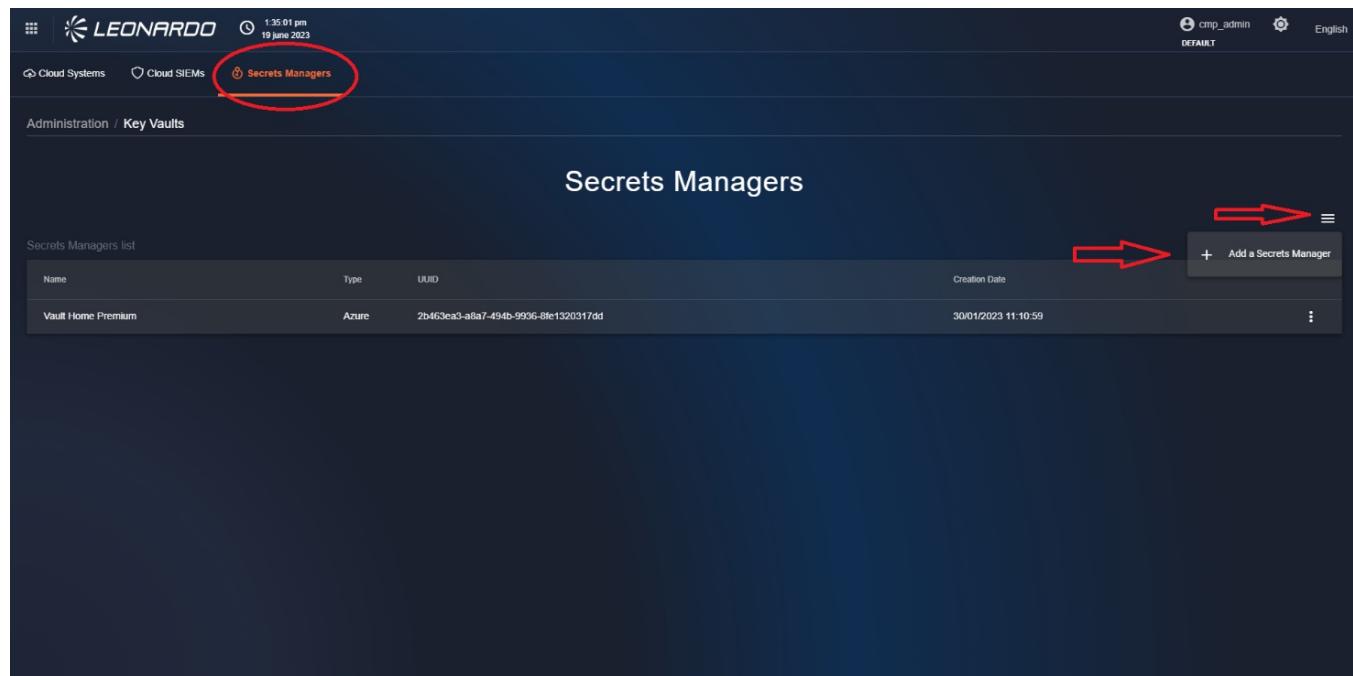


Figura 96 – Add a new Secret Manager

Here is an example form for adding a Secret manager from an Azure type provider (selectable from the "Type" dropdown at the top of the page).

After entering all the required parameters, click the "Save" button at the bottom to complete the entry, and the user will be redirected to the "Secret manager" list where the newly created component can be viewed.

4.0.3.1 Azure Key Vault

The specific parameters for an Azure Key Vault to be entered are shown in the table:



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a configuration interface for an Azure Key Vault. At the top, there are navigation links for Cloud Systems, Cloud SIEMs, and Key Vaults, with Key Vaults being the active tab. The main area is titled 'General properties' and contains a field for 'Name *'. Below this is a section for 'Azure Key Vault' and another for 'Secrets Manager's properties'. The 'Secrets Manager's properties' section contains fields for 'clientid *', 'clientSecret *', 'resourceGroup *', 'subscriptionId *', 'tenantId *', and 'privateUrl *'. A 'Save' button is located at the bottom right of the form.

Figura 97 – Configuration mask Azure key vault

Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|------------------|----------|---|---|
| clientId * | string | Unique identifier of the key vault. | 09f8985-9f89d0-4623-98982-5a510fd3d2 |
| clientSecret * | password | A secret key used to authenticate the application with the Key Vault. | np6Kc_.xwsvhR8Q~rP05fCqYNXmbqfMGQLOEzfMt |
| resourceGroup * | string | The Azure resource group where the Key Vault is hosted. | resourceGroupName |
| subscriptionId * | string | The Azure subscription ID associated with the Key Vault. | 09f8985-9f89d0-4623-98982-5a510fd3d2 |
| tenantId | string | The Azure tenant ID associated with the Key Vault. | 09f8985-9f89d0-4623-98982-5a510fd3d2 |
| privateUrl | string | Private access URL to the Key Vault. | https://vault.azure.net/vault |

Table 25 – Azure Key Vault specific fields

4.0.3.2 Google Secret Manager



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The specific parameters for the Google Secret Manager to be entered are shown in the following table:

Figura 98 – Google Secret Manager
configuration mask

Parameters indicated with * are mandatory.

| Name | Type | Description | Example |
|------------------|--------|---|---|
| kmsProjectId * | string | The Google Cloud Platform (GCP) project ID associated with the Google Cloud Key Management Service (KMS). | 5a85c16c6ad-49db-a58e-e209-ee11f53d6c6b |
| serviceAccount * | object | Connection file generated from the Google console. | service_account.json |

It is possible to manually enter the parameters present in the “service_account.json” file into the displayed form if you do not want to upload it. All parameters are mandatory:

| Name | Type | Description | Example |
|--------------|--------|--|-------------------|
| Type | string | Enter the name of the configured authentication type. | service_account |
| project_id * | string | Enter here the unique ID of the project associated with the service account. | Theproject-367810 |



| Name | Type | Description | Example |
|------------------------------|----------|--|---|
| private_key_id * | string | Enter here the unique ID of the service account's private key. | 55cb5cf903ee93ea1e9c294a07e46e0af0633e6 |
| private_key * | password | Contains the service account's private key in PEM format. It is essential for authenticating the service account to Google Cloud APIs. | -----BEGIN PRIVATE KEY-----MIIJQgIBADANB... |
| client_e-mail * | string | The unique email address of the service account. It is used to identify the service account when authenticating to Google Cloud APIs. | user@dominio.com |
| client_id * | string | The client ID of the service account. It is a unique identifier used to identify the service account in Google Cloud. | 104822473261100667392 |
| auth_uri * | string | The URI used for authenticating the service account to Google Cloud APIs. | https://accounts.google.com/o/oauth2/auth |
| token_uri * | string | The URI used to obtain an access token for the service account. | https://oauth2.googleapis.com/token |
| auth_provider_x509_cert_url* | string | The URL of the X.509 certificate used for authenticating the service account. | https://www.googleapis.com/oauth2/v1/certs |
| client_x509_cert_url * | string | The URL of the X.509 certificate in the client. | https://www.googleapis.com/robot/v1/metadata/f543/myserviceaccount%40projectName.gserviceaccount.com |

4.0.3.3 Viewing, modifying, and deleting a system

It is possible to view the data of a Secret Manager, within the list, by clicking on the kebab menu corresponding to a manager, and then on "Show".



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Type | UUID | Creation Date | Actions |
|--------------------|-------|--------------------------------------|---------------------|---|
| Vault Home Premium | Azure | 2b463ea3-a8a7-494b-9936-8fe1320317dd | 30/01/2023 11:10:59 | Show Edit Delete |

Figura 99 – Access to the manager in display mode

On this page, you can view the Provider's configuration.

Secrets Manager's properties

clientId
1b42c98f-2df5-446b-89ed-4b1fe7166ad9

clientSecret
sentineltest

subscriptionId
09f837d5-2dd0-4623-9b82-5a510fd983d2

tenantId
70fc5a88-7c0f-42ad-9db2-35d1222673c6

privateUrl
https://vaulttestcmp.vault.azure.net/

Figura 100 – manager in display mode

To return to the Secret manager page, click the "Close" button in the bottom left.

At this point, the user will be on the Secret manager page.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

To modify the data of a Secret manager within the list, click on the kebab menu corresponding to a Cloud Provider, and click on "Edit".

The screenshot shows a dark-themed web interface for managing secrets. At the top, there's a navigation bar with tabs: 'Cloud Systems', 'Cloud SIEMs', and 'Secrets Managers'. The 'Secrets Managers' tab is active, indicated by an orange underline. Below the tabs, a breadcrumb navigation shows 'Administration / Key Vaults'. The main title 'Secrets Managers' is centered above a table. The table has columns: 'Name', 'Type', 'UUID', and 'Creation Date'. One row is visible, showing 'Vault Home Premium' as the name, 'Azure' as the type, '2b463ea3-a8a7-494b-9996-8fe13203170d' as the UUID, and '30/01/2023 11:10:59' as the creation date. To the right of the table, a context menu is open over the first row. The menu items are 'Show' (with a magnifying glass icon), 'Edit' (with a pencil icon), and 'Delete' (with a trash bin icon). A red arrow points to the 'Edit' button.

Figura 101 – Access to the manager in edit mode

After doing so, the user will be on the Cloud Provider page in edit mode where data can be modified. To return to the Cloud Provider page, click the "Save" button in the bottom left. At this point, the user will be on the Cloud Provider page.

To delete a "Secret manager", within the list, click on the kebab menu at a Secret Manager, and click on "Delete".



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the 'Secrets Managers' section of the Leonardo platform. It lists a single entry: 'Vault Home Premium' (Type: Azure, UUID: 2b463ea3-a6a7-494b-9936-8fe1320317dd, Creation Date: 30/01/2023 11:10:59). To the right of each entry is a vertical menu with three options: 'Show', 'Edit', and 'Delete'. A red arrow points to the 'Delete' button for the 'Vault Home Premium' entry.

*Figura 102 – Starting for the Elimination
of a Secret Manager*

Done that, a modal will appear where you need to click on the “Remove” button

The screenshot shows the same 'Secrets Managers' list as before, but now a modal dialog box is overlaid on the screen. The dialog is titled 'Confirm Secrets Manager deletion' and contains the message 'Are you sure you want to delete the Secrets Manager Vault Home Premium?'. At the bottom of the dialog are two buttons: 'Cancel' (gray) and 'Remove' (red).

Figura 103 – Confirm deletion of the

Secret Manager

At this point, the Secret manager will no longer be present in the list, and the asset removal flow will be launched on the resource-manager.

4.0.4 Backup

The user is given the ability to connect the SCMP to a CommVault to subsequently retrieve and display information related to backups and operations performed by the Vault.

To access this functionality, you need to select the "CommVault" tab available at the top of the "Administration" functionality.

We will be directed to the page containing the list of all configured "CommVaults", and by clicking on the menu on the right, it will be possible to add a new CommVault.

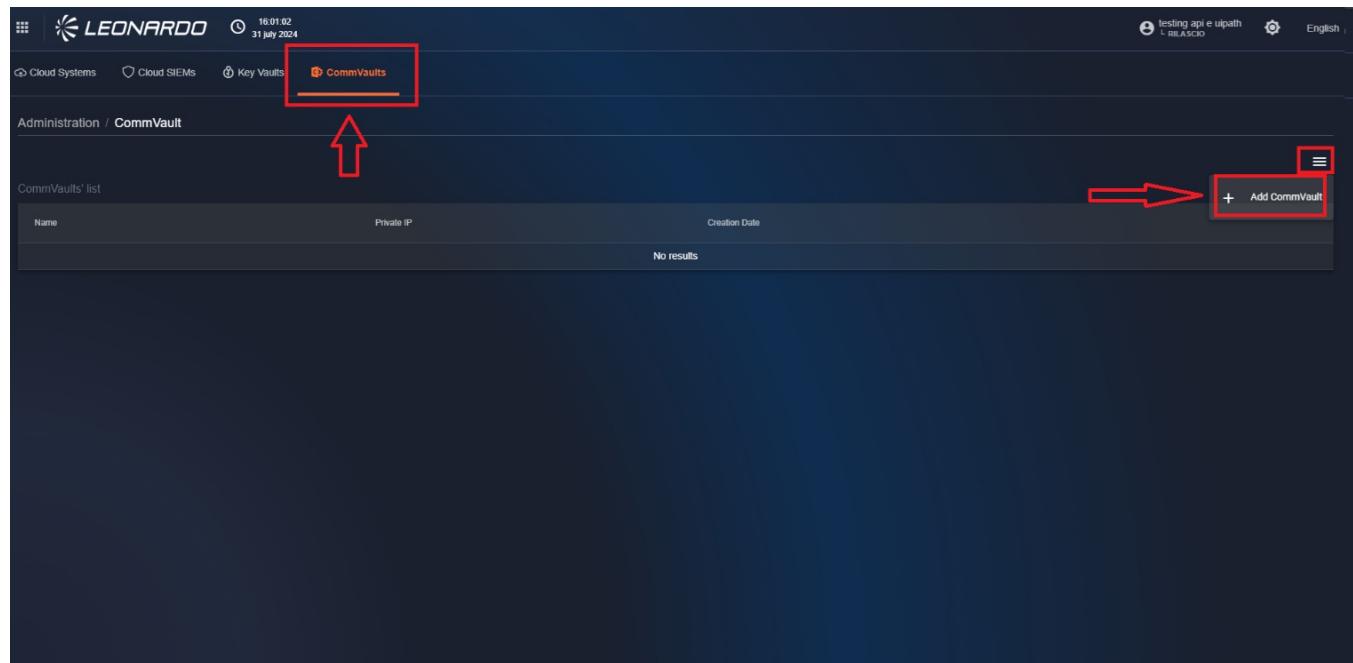


Figura 104 – Accesso a CommVault

On this page, after entering the access credentials (IP address, username, and password), we can click the "Test connection" button to confirm the correct data entry and then confirm the entry via the "Save" button.




Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

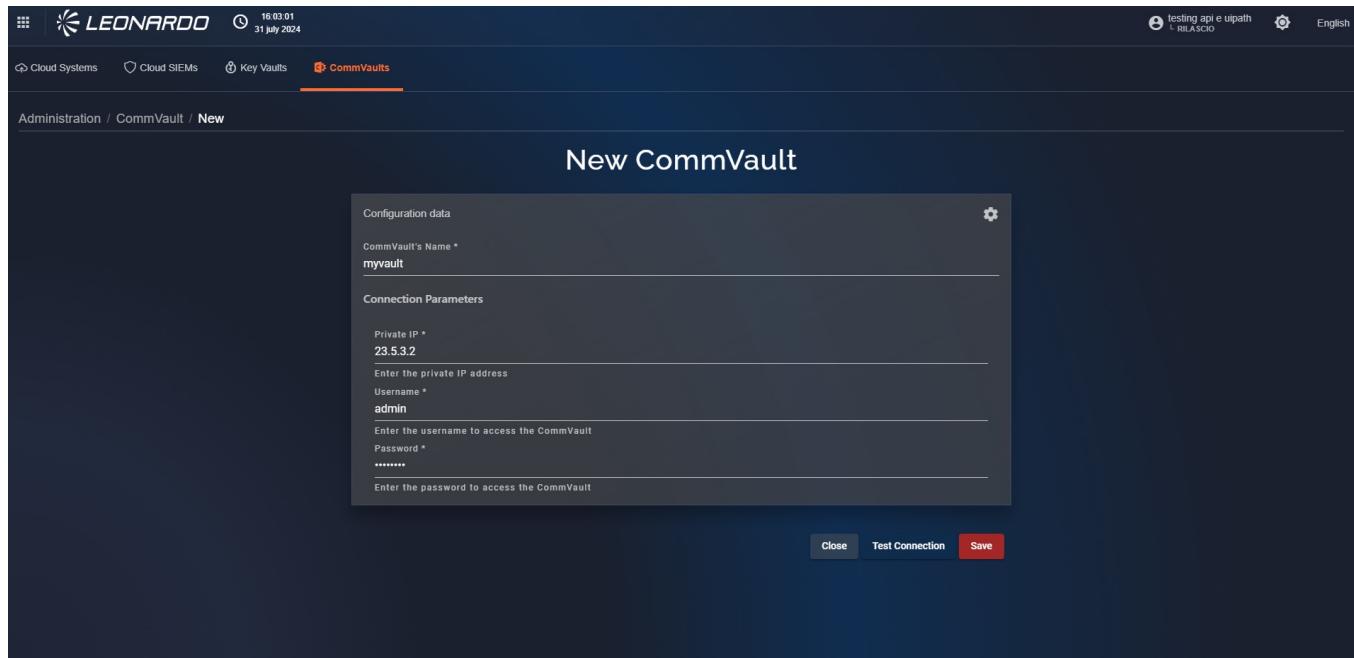

*Figura 105 – Creation of connection to
a CommVault*

4.0.5 Confidential computing

In the Confidential Computing section, the user is given the ability to add a connection to a "Remote Attestation" service within the SCMP to control and view information regarding the confidentiality status of machines managed by the service.

To access this functionality, you need to select the "Confidential computing" tab available at the top in the "Administration" functionality.

We will be directed to the page containing the list of all configured "Remote attestation" services, and by clicking on the menu on the right, it will be possible to add a new connection.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links for Cloud Systems, Cloud SIEMs, Key Vaults, CommVaults, and Confidential Computing. The Confidential Computing link is highlighted with a red box and has an upward-pointing arrow above it. Below the navigation bar is a breadcrumb trail: Administration / Confidential Computing. The main content area is titled 'Remote Attestations' List. It features a table with columns for Name, URL, and Creation Date. A message at the bottom of the table says 'No results'. In the bottom right corner of the list area, there's a red box around a button labeled '+ Add Remote Attestation' with a plus sign icon.

Figura 106 – Accesso a Confidential Computing

On this page, after entering the access credentials (IP address, username, and password), we can click the "Test connection" button to confirm the correct data entry and then confirm the entry via the "Save" button.

The screenshot shows a modal dialog box titled 'New Remote Attestation'. The dialog has a dark background and contains several input fields and buttons. At the top left, it says 'Configuration data'. Below that is a section titled 'Remote Attestation's Name *' with a text input field. Underneath is a section titled 'Connection Parameters' with three fields: 'Username *' (with placeholder 'Type here the username of the remote attestation profile'), 'Password *' (with placeholder 'Type here the password of the remote attestation profile'), and 'Url *' (with placeholder 'Type here the connection url to remote attestation server'). At the bottom of the dialog are three buttons: 'Close', 'Test Connection', and 'Save'.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

*Figura 107 – Creation of connection to
a service "Remote Attestation"*

5 Dashboard

Accessing the SCMP, the homepage presents a summary of four sections: inventory, monitoring, costs, and security.

In particular:

- The Inventory section shows:
 - A pie chart regarding SCMP resources (for each resource of a single provider, an SCMP type instance is created, so the data can be considered as the sum of all resources present across all providers).
 - A pie chart for each provider type.
- The monitoring section shows the most populated metrics with their relative usage.
- The costs section shows a summary of costs for the last 30 days.
- The security section shows the most severe vulnerabilities.

The title of each section is clickable and leads to the specific dashboard.



*Figura 108 – Dashboard section
"Inventory"*

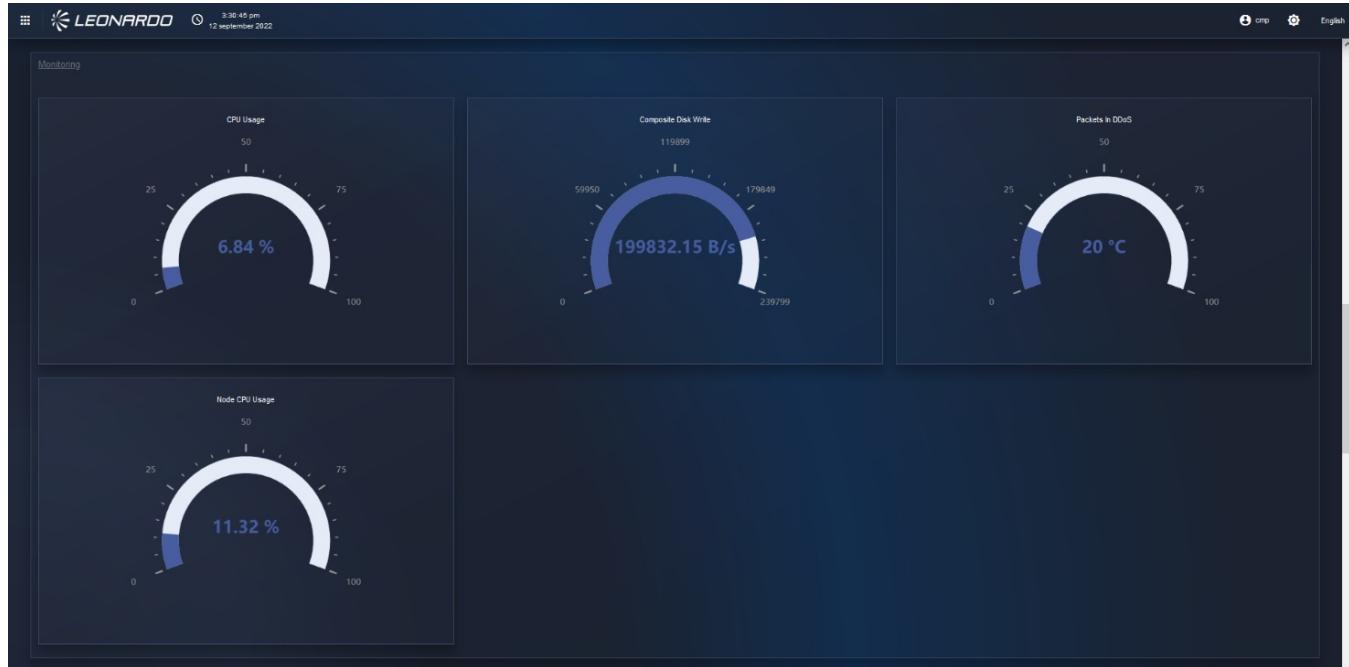


Figura 109 – Dashboard section
"Monitoring"

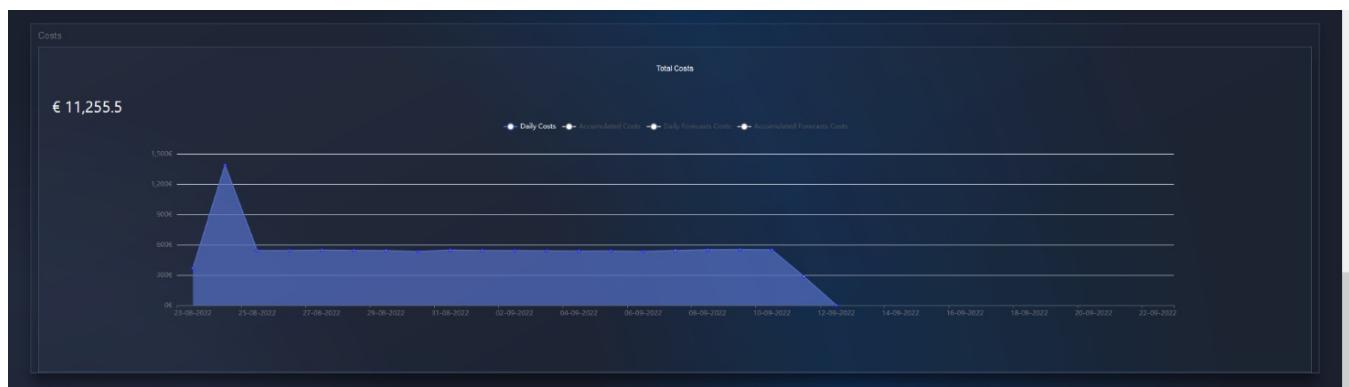


Figura 110 – Dashboard section "Costs"



*Figura 111 – Dashboard section
"Security"*

6 Inventory

The inventory functionality collects metadata of installed assets across all providers present on the SCMP.

The assets currently present are:

- Virtual Machine
- Data Stores
- Networks
- Clusters
- Edge
- Security
- Others

Heterogeneous metadata, coming from different sources, is then normalized by the SCMP to allow for standard visualization.

Inventory is accessible from the “Inventory” menu item.



Figura 112 – Accesso a Inventory

6.0.1 Inventory Dashboard

The Dashboard page provides a global and aggregated view of all resources, while the menus above the breadcrumb path allow filtering by resource type. The functionalities available on the various pages are identical.

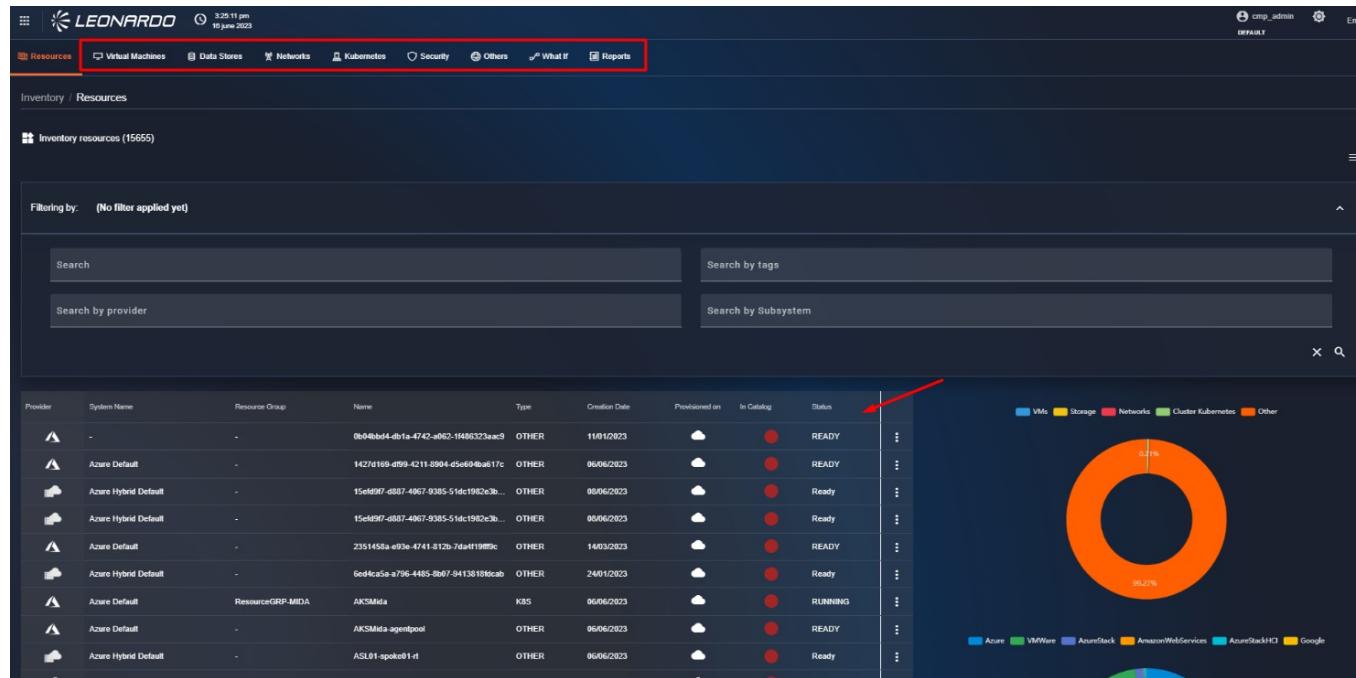


Figura 113 – dashboard di inventario

Within the “Resources” tab page, there are filters; in the first filter at the top, it is possible to search for resources by name, resource group, Provider, etc. It is also possible to filter resources by “Provider” and “Subsystem”.

The last filter allows searching by tag. Click on it and select a tag, then by clicking the button depicting a magnifying glass, the page will refresh and display the list of filtered resources.



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

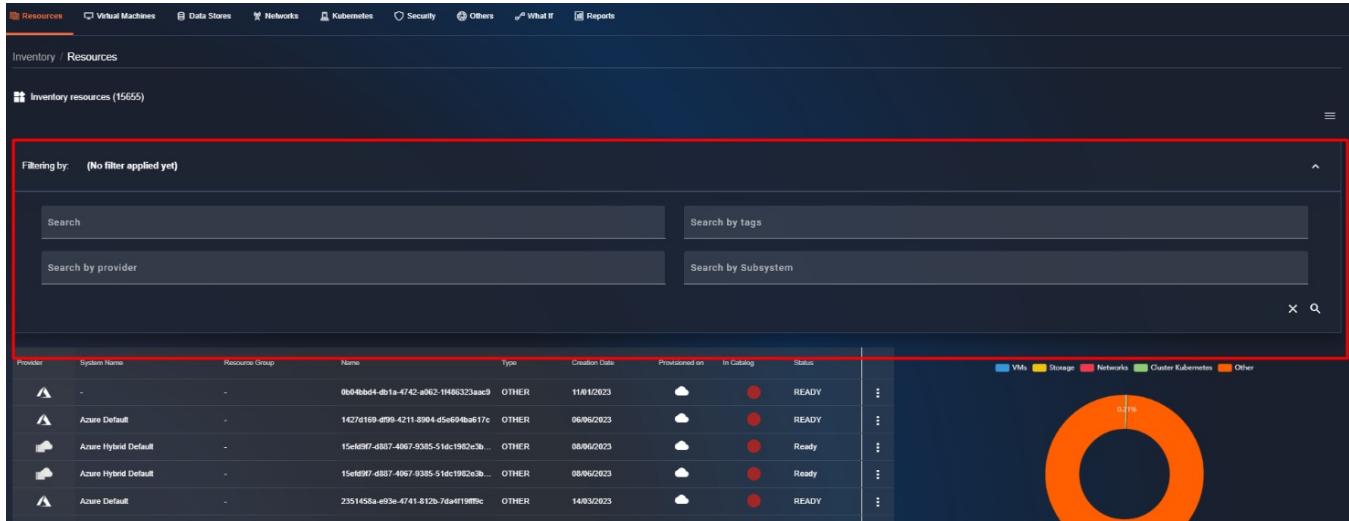


Figura 114 – Ricerca generica, per tag,
per Provider e Subsystem

It is also possible to click on the graphs to automatically apply the relevant filters.

6.0.1.1 Resource detail view

To view the details of a resource, you can click as shown in the figure:

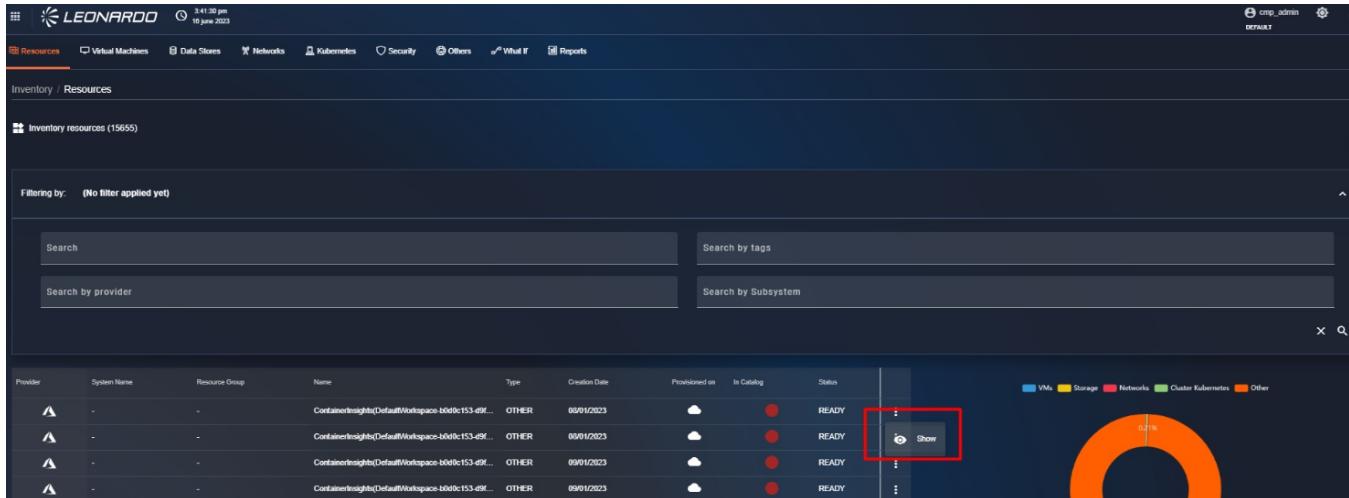


Figura 115 – Accesso alla risorsa in
modalità lettura

The detail of an inventory asset shows the main characteristics at the top, such as monthly cost, machine size, and an external link to the resource pointing to the reference provider.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Below is the detailed view of a VM:

| Virtual Machine (v1.1) | | Details | | |
|------------------------|---|----------------|-----------------|--|
| System | CMP | Monthly Cost | 0.60 | |
| State | POWERED_ON | Name | Test21 | |
| Update Date | 08/09/2023 | OS Type | Linux | |
| Provider | AzureStack | Category | Standard_F4s_v2 | |
| Resource Link | https://portal.azurecloud.net/#blade/HubsBlade/Resource/Subscriptions/08a600c0-400e-49b4-8117a0111resourceProviders/Microsoft.Compute/virtualMachines/Test21 | | | |
| Networking | | Disks | | |
| Interface Test21-eth | Disk ssdHdks-Test21 | | | |
| Public IP Address | Size (GB) | | | |
| Private IP Address | 172.16.0.12 | 10 | | |
| IP Version | IPv4 | IOPS | | |
| State | Succeeded | Throughput | | |
| | | State ATTACHED | | |

Figura 116 – Dettaglio risorsa

And at the bottom, the asset's relationships with other SCMP elements, as shown in the figure:

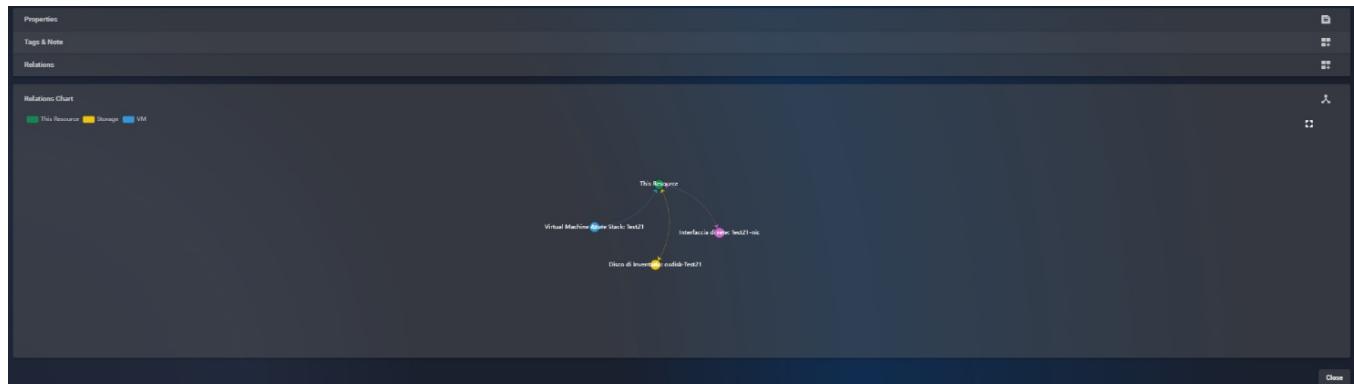


Figura 117 – Grafico delle relazioni

The relationship graph allows navigating between resources by directly clicking on the circle of the linked resource, in order to land on its details.

Furthermore, it is possible to edit some attributes, such as tags, as shown in the figure:



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 118 – Selezione del tag

For the “Provider Tags...” field, it is not possible to select a tag, as tags in this section are retrieved directly from the subsystem.

The “Add SCMP Tag...” field allows selecting from a list or manually entering one. Inside the tag, there is an “X” symbol to delete it.

It is possible to add multiple tags to the resource.

Subsequently, in the bottom right of the “Tags & Note” section, click on the “Save” button to save the change, and a banner will appear at the bottom indicating the tag has been saved.

Scroll the page to the bottom, and click on the “Close” button located on the right to return to the “Dashboard” tab page.

6.0.1.2 Actions on inventory machines

For inventory machines from supported providers, a new button available in the table context menu called “Manage” can be used to perform basic operations on the machines.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links like Resources, Virtual Machines, Data Stores, Clusters, Edge (which is highlighted), Networking, Security, Others, What If, and Reports. Below the navigation is a breadcrumb path: Inventory / Edge Devices. A search bar and a 'Search by Subsystem' input field are present. The main area displays a table of resources with columns: Provider, Name, System, Size, Resource Group, Type, Creation Date, Provisioned on, In Catalog, and Status. Two entries are listed: 'marco01' and 'rheledge01'. For each entry, there's a context menu with options like 'Show' and 'Manage'. A red arrow points to the 'Manage' button for the 'rheledge01' entry. To the right of the table, there's a large circular progress bar labeled 'REDHATEDGE' with '100%' completion. The bottom of the screen shows pagination controls and a footer with the text 'REDHAT'.

*Figura 119 – Accesso alla funzionalità
di "management"*

From this resource detail page, the following operations can be performed using the menu at the top of the page; the operations available on the machines may vary depending on the provider:

Azure Stack HCI

- Start machine
- Stop machine
- Resize machine
- Add storage disks
- Add network interface
- Delete resource
- Remove disk from resource
- Remove network interface

Red Hat Edge

- Update an EDGE device image



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Operations are indicated in white when they can be executed and in gray when they are not supported or unavailable for the resource.

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links for Resources, Virtual Machines (which is the active tab), Data Stores, Networks, Clusters, Security, Others, What If, and Reports. Below the navigation bar, the page title is "Inventory / Virtual Machines / Manage 64a526744bfbe4f2c8b9ff86". The main content area is titled "Manage Virtual Machine di Inventory". It features a toolbar with icons for Start, Stop, Resize, Attach Disk, Remove, and Remove Attached Disk. Below the toolbar, there are two main sections: "Virtual Machine (v1.1)" and "Details". The "Virtual Machine" section contains fields for System (CMP), State (POWERED_OFF), Update Date (05/07/2023), Provider (VMWare), and Resource Link (https://10.129.5.31/ui/app/home). The "Details" section lists Monthly Cost (0.00), Name (DNS-Server01), OS Type (-), and Category (vm-4019). On the right side, there's a "Disks" section showing a single disk entry: Disk CMP_01, Size (GB) (-), IOPS (-), Throughput (-), and State (ATTACHED). The entire screenshot has a dark blue background.

Figura 120 – Operazioni sulle macchine
di inventario

6.0.1.3 “Cluster Explorer” functionality

Cluster Explorer is a powerful feature that allows users to view namespaces within a cluster in detail. This function provides a comprehensive overview of data and resource organization within the cluster, facilitating navigation and management of complex environments.

With Cluster Explorer, users can:

- View the complete list of namespaces in a cluster: Get a quick overview of all available namespaces in the cluster.
- Examine the details of each namespace: Access complete information about each namespace, including name, description, labels, and resource quotas.
- Filter and search namespaces: Quickly find specific namespaces using advanced filtering and search criteria.

To access the functionality, select the “Clusters” item from the horizontal menu of the Inventory module.

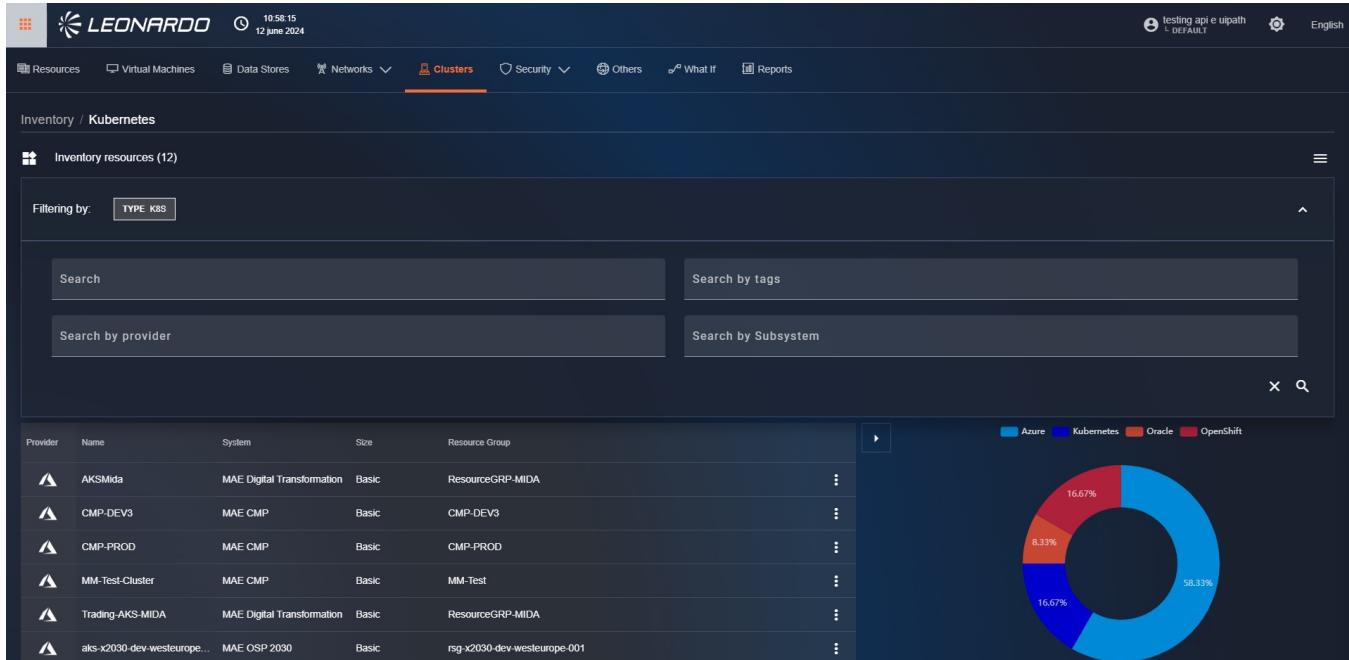


Figura 121 – Accesso alla funzionalità di cluster explorer

Inside the page, a list of clusters present within the subsystems configured in the system will be displayed. Clicking on one of them will open a modal with the general details of the cluster.

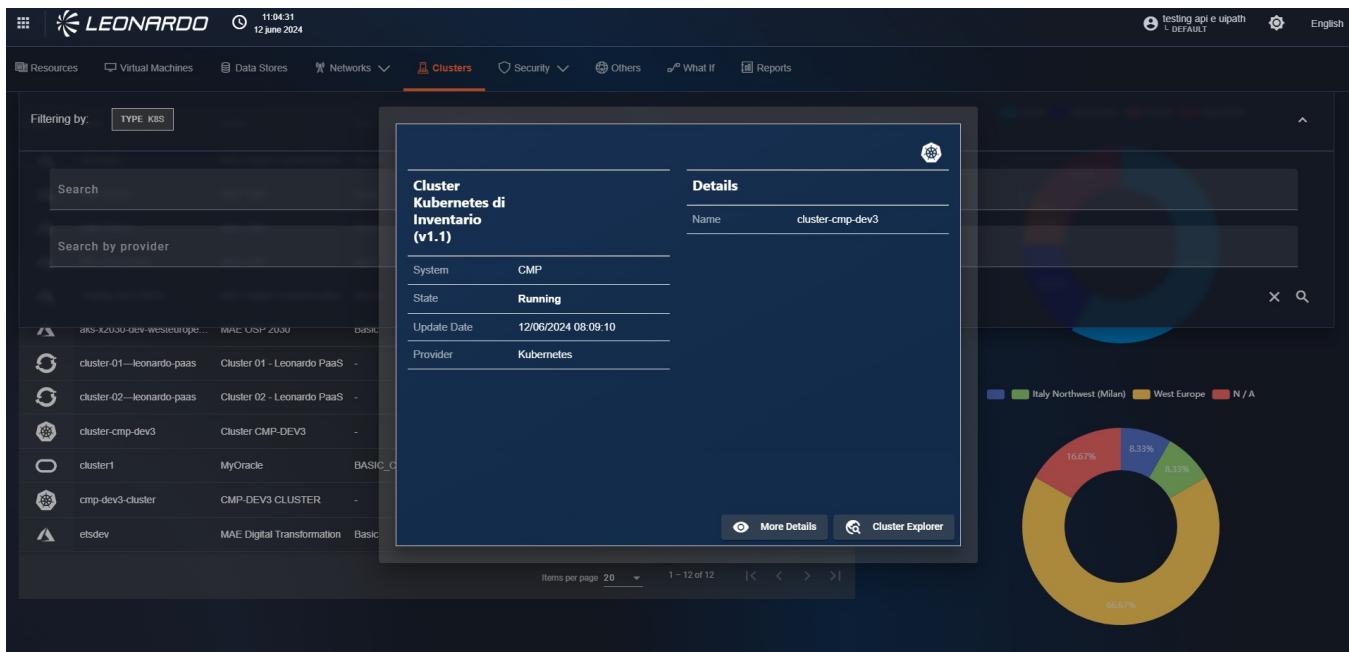


Figura 122 – Finestra di dettaglio del cluster

We can notice that at the bottom right there is a “cluster explorer” button; pressing it will redirect us to the cluster Dashboard. This page can also be accessed using the “cluster explorer” button available in the “three dots” context menu present for each cluster in the list of results.

Within this page, we can view a graph representing the distribution of namespaces within the cluster; on the right, the legend of namespaces with the number of active pods is displayed.

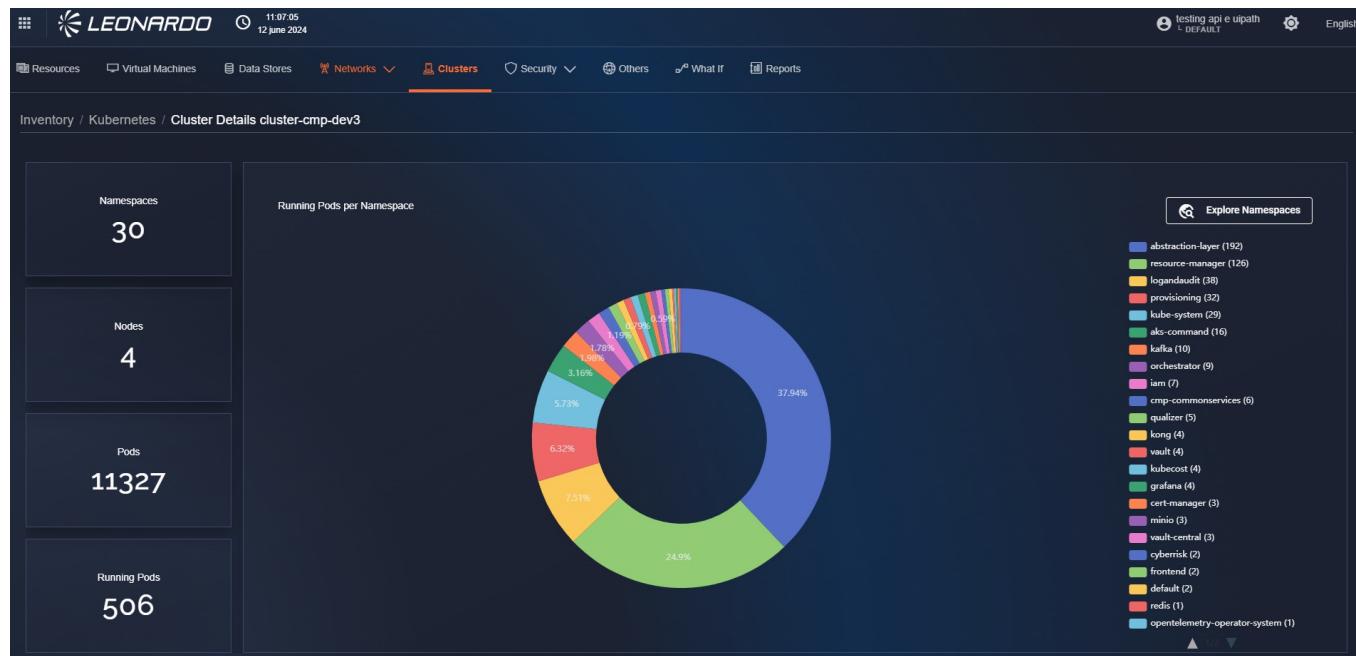


Figura 123 – Dashboard del “cluster explorer”

We can drill down into the details of namespaces using different components on the page:

it is possible to click on the “Explore namespaces” button at the top right or click on the number of namespaces displayed at the top left to view the namespace exploration page without filters. If we want to directly view the details of a namespace present in the graph, it is possible to click on the corresponding slice, and the detail page will be automatically filtered for the selected namespace.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 124 – Pagina "Namespace explorer"

The namespaces field at the top allows searching among available clusters by entering free text. If a match is found, you can select the namespace from the list to view its details.



Figura 125 – Dettaglio dei namespace

Using the “Down Arrow” commands, it will be possible to navigate between available categories and sub-categories of elements. Finally, by selecting a result, its details will be displayed in the right section of the page, which will be automatically populated with the selected result from the left.

Creation Date: 10/05/2024 14:13:10 | Update Date: 12/06/2024 09:07:11 | Description: kubernetes namespace inventario | State: ACTIVE

Quotas -

View as: grid list

Workload

POD (229)

- command-94...
- command-5fd...
- command-29...
- command-16...
- command-b1...
- command-0a...
- command-c3...
- command-bf2...
- command-aa...
- command-a8...
- command-42...
- command-6d...
- command-40...
- command-08...
- command-e7...
- command-9d...

Configuration

Creation Date: 22/05/2024 05:05:30
Name: command-9492279db8094af4968e3cdb0213f53f
Description: kubernetes pod inventario
State: FAILED
ID: 664d7d1a3c94de4c658f79ca
UUID: e2bbbd1b-4d84-41db-ae07-038d60e1aa3b
Node Name: aks-poolnew-67150953-vmss000000
Pod IP Address: 10.244.4.152
Host IP Address: 198.18.110.18
State: SUCCEEDED
App Name: undefined

| Name | CPU Limit | CPU Request | Memory Limit | Memory Request |
|--------------|-----------|-------------|-----------------|----------------|
| user-command | 500 m | 200 m | 1.073.741.824 B | 524.288.000 B |

Figura 126 – Dettagli del contenuto del namespace

6.0.2 “WHAT IF” Functionality

This functionality allows performing simulations for asset migration from one provider to another, or within the same provider, in order to compare management and maintenance costs.

To run a simulation, click on the tab above the breadcrumb path that depicts a relationship connecting two entities, named ‘What If’.

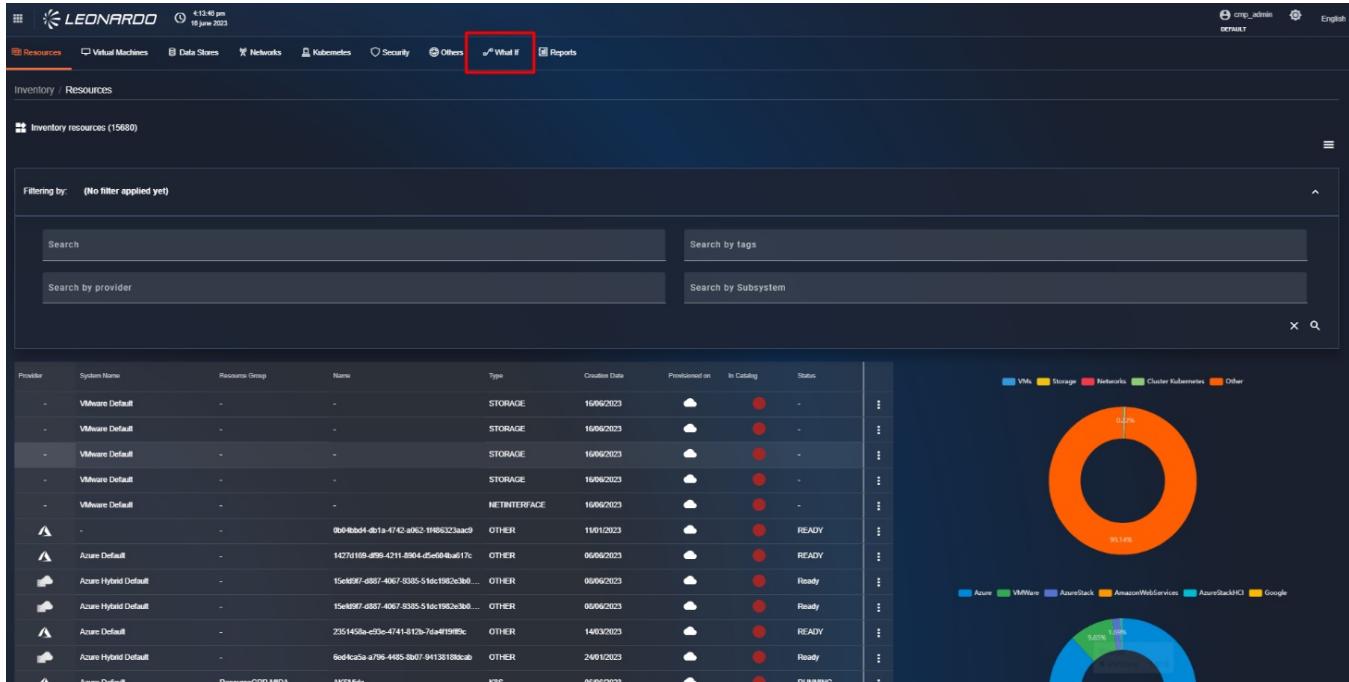


Figura 127 – Accesso a “What If”

After doing so, you will find yourself on the “What If” tab page.

Above the list of simulations, on the right, we can notice two tabs that allow filtering the list by simulation type, specifically:

upon opening the page, all “Change Provider” type simulations will be displayed, while clicking on the “Capacity” tab will allow viewing the list of “Change size” type simulations.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there is a navigation bar with links for Resources, Virtual Machines, Data Stores, Networks, Kubernetes, Security, Others, What If (which is highlighted), and Reports. Below the navigation bar, the URL is shown as Inventory / What If.

In the center, there is a question: "What do you want to simulate today?". Two options are displayed in boxes: "Migrate to another provider" (with a circular arrow icon) and "Change resources capacity" (with a bar chart icon). Below these options, a link says "... or take a look to a previous simulation:". A red arrow points from this link down to a table of previous simulations.

The table has columns for Name, Creation Date, Destination Providers, Status, Export, and Options. It lists five entries, all of which have a green status circle and a download icon. The table includes a filter bar at the top right labeled "Filter simulations: Provider Migration Capacity".

| Name | Creation Date | Destination Providers | Status | Export | Options |
|-----------------------------|------------------|-----------------------|--------|----------|---------|
| Multiple Provider Migration | 18/04/2024 10:05 | Azure, Google, Oracle | Green | Download | ⋮ |
| Multiple Provider Migration | 18/04/2024 10:02 | Azure, Oracle | Green | Download | ⋮ |
| Multiple Provider Migration | 15/04/2024 14:39 | Google, Azure, Oracle | Green | Download | ⋮ |
| Multiple Provider Migration | 15/04/2024 12:59 | Google, Oracle | Green | Download | ⋮ |
| Multiple Provider Migration | 11/03/2024 10:24 | Google, Oracle | Green | Download | ⋮ |

Figura 128 – Pagina di “What If”

6.0.2.1 Scenario “What If”: Provider Migration

To perform a “What If: Migrate Provider” simulation, click on the box on the left titled “Migrate to another provider”.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links for Resources, Virtual Machines, Data Stores, Networks, Kubernetes, Security, Others, What If (which is highlighted), and Reports. Below the navigation bar, a breadcrumb trail shows 'Inventory / What If'. The main area has a dark background with white text. It asks 'What do you want to simulate today?' and provides two options: 'Migrate to another provider' (highlighted with a red box) and 'Change resources capacity'. Below these options, it says '... or take a look to a previous simulation:' followed by a table of past simulations. The table has columns for Name, Creation Date, Destination Providers, Status, Export, and Options. There are five entries, each with a green status icon and a download icon. The last entry shows 'Azure, Google' as destination providers. At the bottom right of the table, there are pagination controls.

| Name | Creation Date | Destination Providers | Status | Export | Options |
|-----------------------------|------------------|-----------------------|--------|----------|---------|
| Multiple Provider Migration | 06/06/2023 09:35 | Azure | Green | Download | ⋮ |
| Multiple Provider Migration | 06/06/2023 09:33 | Azure | Green | Download | ⋮ |
| Multiple Provider Migration | 06/06/2023 15:36 | Azure | Green | Download | ⋮ |
| Multiple Provider Migration | 06/06/2023 16:44 | Google | Green | Download | ⋮ |
| Multiple Provider Migration | 06/06/2023 16:43 | Azure, Google | Green | Download | ⋮ |

Figura 129 – Accesso alla funzionalità
"What If: Migrate Provider"

After doing so, the user will find themselves on the "Start" page of step 1 for simulating resource migration from one cloud provider to another.

On the left, in the "Select Resources to migrate" box, the user can search for resources using three types of filters, including:

- "Search" which allows searching for a resource by name;
- "Search by Type" to obtain resources by selecting the resource type;
- "Search by tags" which allows searching for resources using one or more tags.

Within the resource table, only resources that have a relationship in the catalog will be displayed.

Within the resource table, click on one of them and, using the "drag and drop" technique, drag it to the right, into the box titled "Currently selected".

A maximum of three resources can be included per simulation.

Subsequently, in the bottom right, click on the "Next" button.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the 'Provider Migration' interface. In the top navigation bar, 'cmp_admin' and 'DEFAULT' are visible. Below the navigation, there are tabs: 'Inventory / What If / Provider Migration'. The main area has a header '1 Start' and a sub-header 'Destination Providers'. On the left, there's a sidebar with 'Select Resources to migrate:' containing 'Search', 'Search by type', and 'Search by tags' fields. A red box highlights this sidebar. On the right, there's a list of resources with a header 'Currently selected: (0/3)'. A red box highlights this list. The resources listed include 'vm-default' (AWS Default), 'mida-database-vm' (Azure Default), and 'VM-PQP-Class' (AWS Default). Below the list is a placeholder text 'Drag here the resources you want to select.' At the bottom right, there are 'Next >' and 'Back' buttons.

Figura 130 – Scelta delle risorse in cui effettuare la migrazione del provider

After doing so, the user will find themselves on the “Destination Providers” page of step 2, where it is possible to click on the checkbox corresponding to one or more providers. Based on the selected provider type, the value in the ‘Option selected’ field at the bottom left will be automatically populated with the names of the selected providers.

Subsequently, in the bottom right, click on the “Next” button, while to return to the “Start” page of step 1, click on the “Back” button.

The screenshot shows the 'Provider Migration' interface. The top navigation bar and sidebar are identical to the previous screenshot. The main area has a header '2 Destination Providers'. On the left, there's a sidebar with 'In which provider would you like to move these resources?' containing 'Select all' and a list of providers: 'Azure Default (Azure)', 'Azure On-Premise Default (AzureStack)', and 'Azure Hybrid Default (AzureStackHCI)'. A red box highlights this sidebar. On the right, there's a list of providers with a header 'Option selected Azure Default (Azure)'. At the bottom right, there are 'Back' and 'Next >' buttons. A red box highlights the 'Next >' button.

Figura 131 – Scelta del Cloud Provider


in cui migrare le risorse

After clicking the “Next” button, the user will find themselves on the page of step 3 titled “Details”.

On this page, cards will be displayed, one for each subsystem selected in step 2.

In each card, on the left, there is a list of regions available for the cloud provider, and on the right, an empty section is displayed.

Selecting one or more regions in the right section (in red in the figure) will display a menu in the right section that allows selecting the type of cost to apply (in yellow in the figure). Selecting the “Consumption” type requires no further parameters, while selecting the “Reservation” type, to the left of the field, it will be possible to choose the Reservation period (in yellow in the figure).

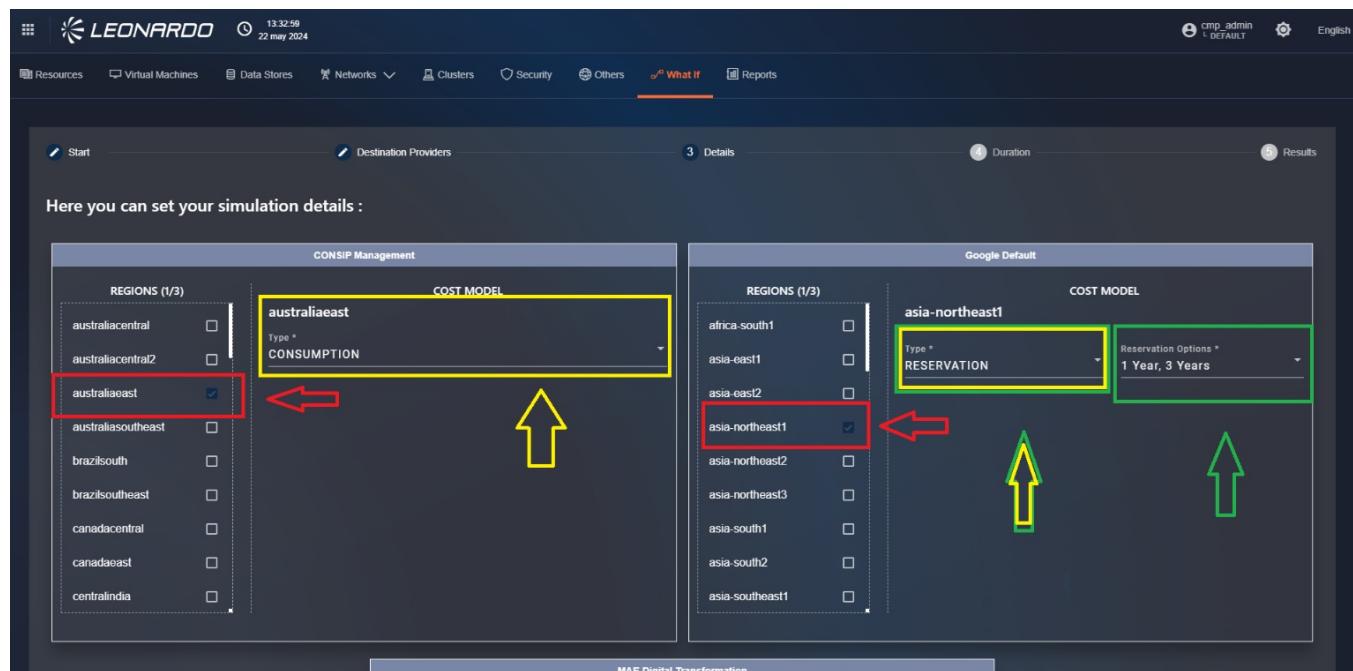

*Figura 132 – Selezione della "Regione"
e del "Cost Model"*

After clicking the “Next” button, the user will find themselves in step 4 titled “Duration”.

From the “Duration” page of step 4, select an interval for the simulation among:

- “One Month”
- “Six Months”
- “One Year”



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

To return to the “Details” page, in the bottom right, click on the “Back” button. Instead, to proceed with the simulation, click on the “Launch Simulation” button.

Figura 133 – Selezione dell’intervallo di tempo

After clicking the “Launch Simulation” button, the user will find themselves on the “Results” page of step 5.

Within the “Results” page, at the top, the “Simulation parameters” box can be viewed, which contains a summary of the parameters used. (in yellow in the figure)

Below the “Summary” box, there are different sections, one for each destination provider (in red in the figure), and inside, we can view the list of resources that can be migrated to the provider (in green in the figure). Clicking on one of them will display a histogram graph. In this graph we can note:

- A line parallel to the X-axis indicating the current cost of the resource.
- A series of bars (one for each region and selected cost type) that will be red when the destination price is higher than the starting price or green when the price is lower than the current cost of the resource; hovering over one of them will display its reference.
- A summary table of the selected cost types, which is used to generate the bar chart.

It is possible to view details for other simulations (in purple in the figure) using the procedure just described.

To exit the simulation without saving, in the bottom right, click on the “Close” button.

To save the simulation, click on the “Save” button next to the “Close” button, and then click on “Confirm”.

After clicking a button, the user is redirected to the “What If” tab page.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Simulation parameters:

- Resources: VM-MONGO3-CMP (Azure), instance-1 (Google)
- Destination Providers: Google Default (Google), MAE CMP (Azure), MyOracle (Oracle)
- Duration: Six Months

Destination Providers:

- Google Default
- instance-1
- VM-MONGO3-CMP

- MAE CMP
- MyOracle

Figura 134 – Pagina dei risultati della simulazione WHAT IF



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

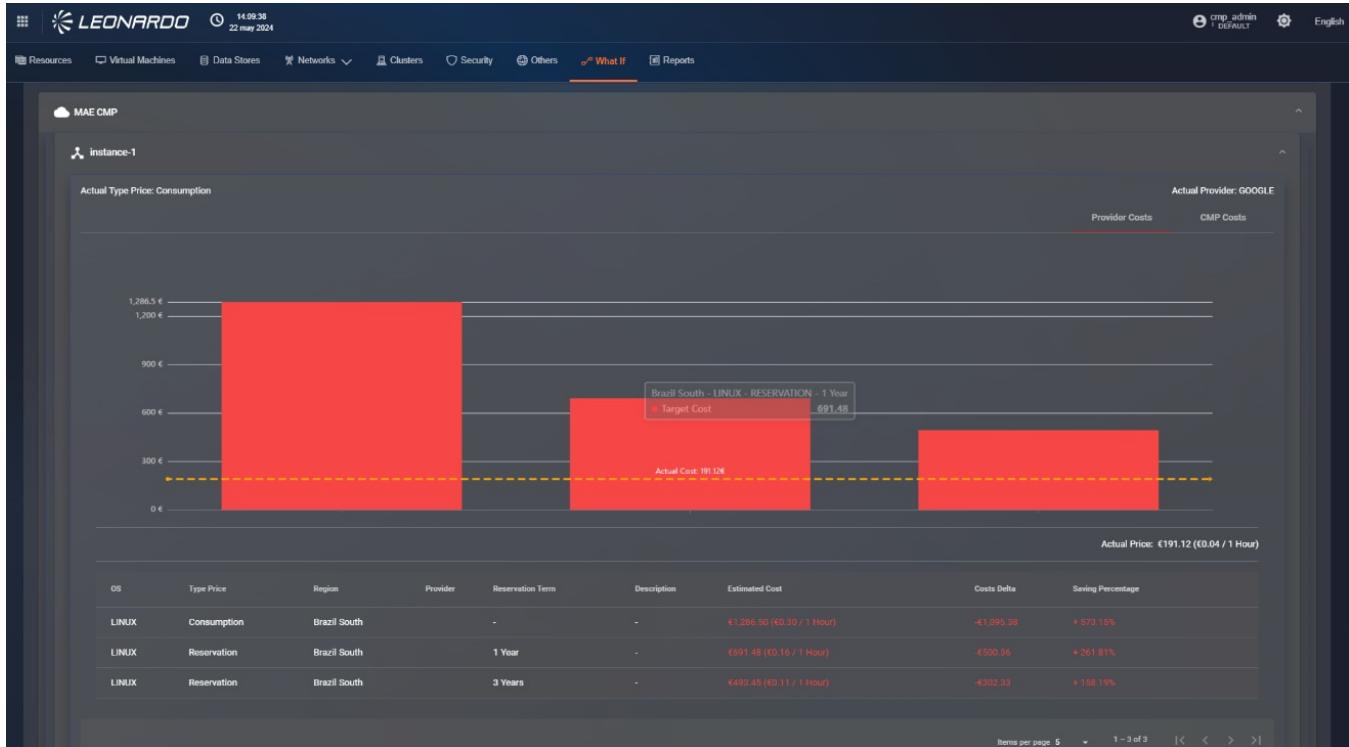


Figura 135 – Tabella riassuntiva della/e risorse

It is possible to update and re-run a simulation without re-entering all data.

To do this, click on the row to be modified. At this point, the user will be redirected to step 1 of the simulation, where all steps have been pre-filled using the saved parameters.



Leonardo Cyber & Security Solutions

21 Nov 2025
08.00

Secure Cloud Management Platform

Migrate to another provider

Change resources capacity

... or take a look to a previous simulation:

| Name | Creation Date | Destination Providers | Status | Export | Options |
|-----------------------------|------------------|-----------------------|--------|----------|---------|
| Multiple Provider Migration | 16/06/2023 09:39 | Azure | Green | Download | ⋮ |
| Multiple Provider Migration | 16/06/2023 09:35 | Azure | Green | Download | ⋮ |
| Multiple Provider Migration | 16/06/2023 09:33 | Azure | Green | Download | ⋮ |
| Multiple Provider Migration | 14/06/2023 15:36 | Azure | Green | Download | ⋮ |
| Multiple Provider Migration | 06/06/2023 16:44 | Google | Green | Download | ⋮ |

Figura 136 – Avvio per l'aggiornamento
della simulazione di tipo "Migrate to
another provider"

6.0.2.2 Scenario “What If”: Change Resource Capacity

This functionality allows comparing the costs of a resource in case of modification of its technical characteristics.

Still from the “What If” tab page, in the top right, click on the “Change resources capacity” box.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there are navigation links for Resources, Virtual Machines, Data Stores, Networks, Kubernetes, Security, Others, What If (which is currently selected), and Reports. The main area has two large buttons: 'Migrate to another provider' on the left and 'Change resources capacity' on the right, both with a 'refresh' icon above them. Below these buttons, the text "... or take a look to a previous simulation:" is displayed. A table titled 'Filter simulations' is shown, with columns for Name, Creation Date, Destination Providers, Status, Export, and Options. The table lists five entries, all of which have 'Azure' as the destination provider and a green status circle with a downward arrow. The last entry is for 'Google'. At the bottom of the table, there are pagination controls for 'Items per page' (set to 5) and '1 - 5 of 20'.

*Figura 137 – Accesso alla funzionalità
"What If: Change resources capacity"*

After doing so, the user will find themselves on the “Start” page of step 1.

On the left, in the “Select Resources to change” box, the user can search for resources using three types of filters, including:

- “Search” which allows searching for a resource by name;
- “Search by Type” which allows obtaining resources by selecting the resource type;
- “Search by tags” which allows searching for resources using one or more tags associated with them.

The resource table will only show resources that, within the SCMP catalog, have more than one “Relationship” with different sizes but belong to the same region, price type, and operating system.

In the bottom left, there is the resource table, which can be filtered based on the parameters entered in the filter(s). Within the resource table, click on one of them and, using the “drag and drop” technique, drag it to the right, into the box titled “Currently selected:”.

A maximum of three resources can be included per simulation.

Subsequently, in the bottom right, click on the “Next” button.



Leonardo Cyber & Security Solutions

21 Nov 2025
08.00

Secure Cloud Management Platform

Figura 138 – Selezione delle risorse da cui modificare le capacità

After doing so, the user will find themselves on the “Resource Provider” page of step 2, where it is possible to modify the size of one or more resources.

Within the “Resource Provider” page of step 2, for a resource, click on the dropdown menu in the “Size” column and select a different size from the initial one.

After that, in the bottom right, click on the “Next” button to continue the simulation.

To return to the “Start” page of step 1, click on the “Back” button.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 139 – Modifica della size di una risorsa

After clicking the “Next” button, the user will find themselves on the “Duration” page of step 3.

Within the aforementioned page, it is necessary to select an interval for the simulation.

After that, in the bottom right, click on the “Launch Simulation” button.

To go back, click on the “Back” button; in this way, the user will find themselves on the “Resource Provider” page of step 2.

The screenshot shows a web-based interface for resource management. At the top, there's a navigation bar with the Leonardo logo and some administrative details. Below it, a breadcrumb trail indicates the current location: Inventory / What If / Resource Change. The main content area is titled "Duration". It contains a section for selecting a simulation interval, with options for One Month, Six Months, and One Year. The "Six Months" option is highlighted. A note below says "Option selected: Six Months". At the bottom right of this section is a blue "LAUNCH SIMULATION" button. Above the duration section, there are tabs for "Start", "Resource Provider", and "Results". The "Resource Provider" tab is currently active.

Figura 140 – Selezione dell'intervallo per la simulazione

After clicking the “Launch Simulation” button, the user will find themselves on the “Results” page of step 4.

Within the “Results” page, at the top, there is a “Summary” box that advises whether to modify the size of the resources. Below, there is an histogram graph, where the purple bar represents current costs, while the green bar represents target costs.

To save the simulation, click on the “Save” button next to the “Close” button, and then click on “Confirm”. After doing so, the user is redirected to the “What If” page.

To exit the simulation without saving it, in the bottom right, click on the “Close” button. After doing so, the user will find themselves on the “What If” page.



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform's "What If" scenario for Provider Migration. At the top, there are tabs for "Start", "Destination Providers", "Details", and "Duration". The "Details" tab is active.

Simulation parameters:

- Resources: vm-default (AmazonWebServices/miida-database-vm (Azure))
- Destination Providers: Azure Default (Azure)
- Destination Providers Region: uscentral
- Destination Providers Cost: CONSUMPTION
- Duration: One Year

Summary:

Moving these 2 resources to these providers you would lose -199.99% (-1549.13€) compared to the actual costs.
ADVICE: It's suggested to remain with actual provider.

Details:

Selected Resources

| Resource | Actual Cost | Target Cost |
|-------------------|-------------|-------------|
| miida-database-vm | 1000 € | 1500 € |
| VM-PGP-Class | 1000 € | 1500 € |
| vm-default | 1000 € | 1500 € |

miida-database-vm

| OS | Type | Region | Provider | Reservation Term | Description | Estimated Cost | Saving Percentage |
|-------|-------------|-------------|----------|------------------|-------------------|-------------------------|-------------------|
| LINUX | Consumption | West Europe | AZURE | None | miida-database-vm | £968.54 (0.11 / 1 Hour) | +19.99% |

VM-PGP-Class

| OS | Type | Region | Provider | Reservation Term | Description | Estimated Cost | Saving Percentage |
|--------------------------------|-------------|-------------|----------|------------------|--------------|-------------------------|-------------------|
| Windows Server 2019 Datacenter | Consumption | West Europe | AZURE | None | VM-PGP-Class | £968.54 (0.11 / 1 Hour) | +19.99% |

Figura 141 – Parametri di configurazione e consiglio sulla simulazione

6.0.2.3 What If scenario Export

For a simulation of a resource size modification, it is possible to export it in PDF, CSV, and JSON format.

Within the “What If” page, at the bottom, there is a table of simulations; click on the “Capacity” button located in the top right corner of the aforementioned table.

After doing so, the table shows simulations regarding resource size modification.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

For a simulation, click on the button depicting an arrow.

At this point, a sub-menu will open where it is possible to export in the three previously described formats.

The screenshot shows a web-based management interface for Leonardo's Secure Cloud Management Platform. At the top, there is a navigation bar with links for Resources, Virtual Machines, Data Stores, Networks, Kubespaces, Security, Others, What If, Reports, and Help. On the right side of the header, there are user authentication details (mp_admin) and language selection (English). Below the header, there are two large buttons: "Migrate to another provider" (with a circular arrow icon) and "Change resources capacity" (with a bar chart icon). In the center, there is a message "... or take a look to a previous simulation:". To the right of this message, there is a table listing five previous simulations. The table columns include Name, Creation Date, Duration, Status, Report, and Options. The first simulation is named "Resource Migration" and was created on 16/06/2023 at 17:19, with a duration of Six Months. The last simulation listed is also named "Resource Migration" and was created on 26/06/2023 at 04:27, with a duration of Six Months. On the far right of the table, there is a "Capacity" button, which is highlighted with a red box and an arrow pointing to it from the left. Below the table, there is a "Filter simulations:" dropdown set to "Provider Migration" and a "Capacity" button. At the bottom of the table, there are pagination controls for "Items per page" (set to 5), "1 - 5 of 10", and navigation arrows.

Figura 142 – Export della simulazione

Also for a simulation, it is possible to print it.

For a simulation, click on the kebab menu, and then click on the “Print” option.

At this point, a modal of the print preview will appear. Finally, click on the “Print” button to start printing the document.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there are two large buttons: "Migrate to another provider" and "Change resources capacity". Below them, a section titled "... or take a look to a previous simulation:" displays a table of past simulations. The table has columns for Name, Creation Date, Duration, Status, Export, and Options. A red box highlights the "Capacity" filter button at the top right of the table. Another red box highlights the "Delete" option in the kebab menu for the first simulation row.

| Name | Creation Date | Duration | Status | Export | Options |
|--------------------|------------------|------------|--------|--------|----------------|
| Resource Migration | 19/09/2023 17:19 | Six Months | Green | + | ⋮ |
| Resource Migration | 14/09/2023 15:39 | Six Months | Green | + | ⋮ |
| Resource Migration | 14/09/2023 15:39 | Six Months | Green | + | ⋮ |
| Resource Migration | 3/09/2023 12:55 | One Year | Green | + | ⋮ |
| Resource Migration | 3/09/2023 04:27 | Six Months | Green | + | ⋮ |

Figura 143 – Stampa della simulazione

For a simulation, click on the kebab menu.

From the list of options, click on “Delete”.

This screenshot is identical to the one above, showing the list of previous simulations. A red box highlights the "Delete" option in the kebab menu for the first simulation row, indicating it has been selected.

| Name | Creation Date | Duration | Status | Export | Options |
|--------------------|------------------|------------|--------|--------|----------------|
| Resource Migration | 19/09/2023 17:19 | Six Months | Green | + | ⋮ |
| Resource Migration | 14/09/2023 15:39 | Six Months | Green | + | ⋮ |
| Resource Migration | 14/09/2023 15:39 | Six Months | Green | + | ⋮ |
| Resource Migration | 3/09/2023 12:55 | One Year | Green | + | ⋮ |
| Resource Migration | 3/09/2023 04:27 | Six Months | Green | + | ⋮ |



Figura 144 – Opzione per eliminare una simulazione

After clicking the “Delete” option, a modal will appear where it is necessary to confirm the deletion of the simulation by clicking on the “Confirm” button.

After doing so, the simulation is no longer present in the table.

If, however, you do not want to confirm the deletion of the simulation, click on the “Cancel” button.

| Name | Creation Date | Duration | Status | Export | Options |
|--------------------|------------------|------------|--------|--------|---------|
| Resource Migration | 19/06/2023 17:19 | Six Months | Green | Up | ⋮ |
| Resource Migration | 14/06/2023 15:30 | Six Months | Green | Up | ⋮ |
| Resource Migration | 14/06/2023 15:30 | Six Months | Green | Up | ⋮ |
| Resource Migration | 30/05/2023 12:55 | One Year | Green | Up | ⋮ |
| Resource Migration | 30/05/2023 04:27 | Six Months | Green | Up | ⋮ |

Figura 145 – Conferma dell'eliminazione della simulazione

6.0.3 Reporting Tools

The reporting functionality, specific to features, allows generating global reports of the information available for the various providers. Within the pages, there will also be the possibility to create files to facilitate information sharing.

To access the functionality, above the breadcrumb path, click on the “Reports” tab.

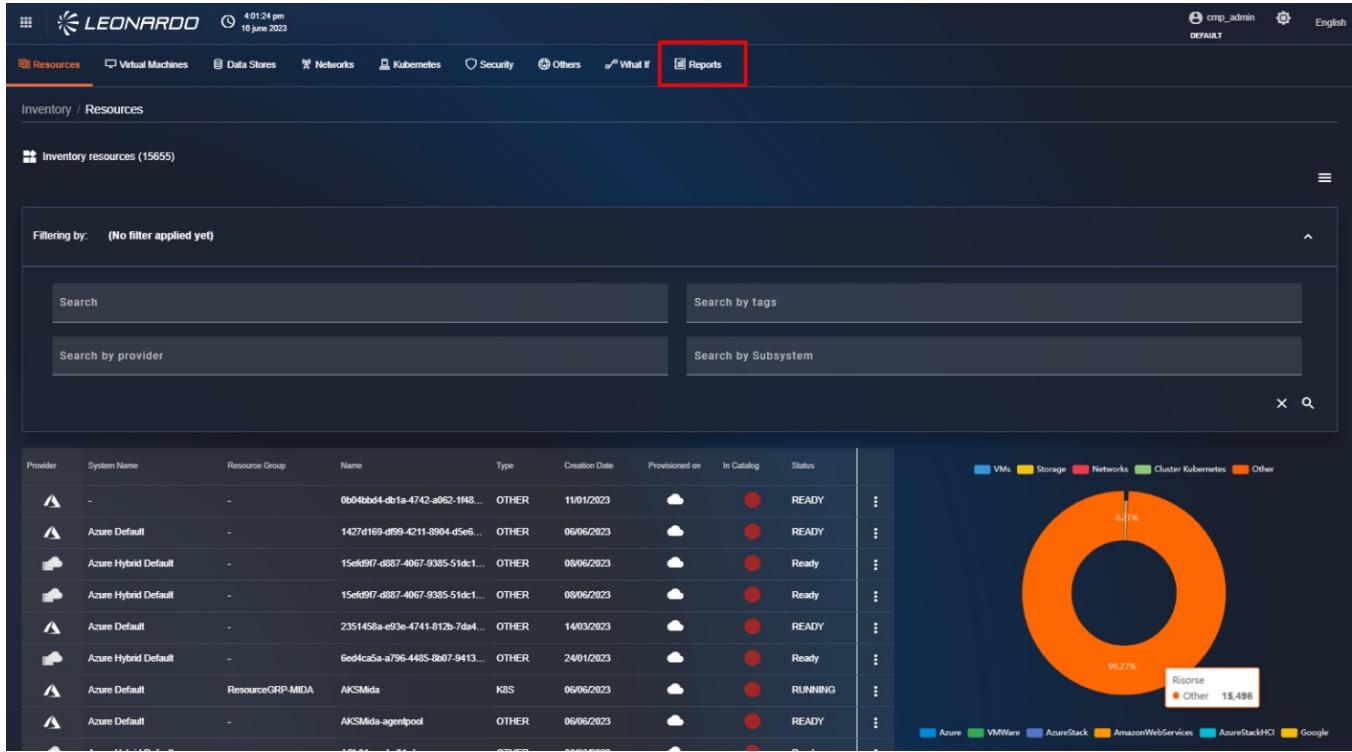


Figura 146 – Accesso al report di Catalogo

6.0.3.1 Available report types

- INVENTORY Summary** – Summary on the quantity of main inventory resources based on the selected provider/subsystem combination.

6.0.3.2 Report Creation

At the top right of the page, we can click on the “New Report” button to start creating a report. Specifically, a modal is displayed containing the list of available report types.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links for Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports. The Reports link is currently selected. Below the navigation, a sub-menu for 'Inventory / Reports' is visible. The main area displays a table of existing reports under the 'Ready' tab. The columns include Sub Category, Provider, Creation Date, Status, and Actions. One row in the table is highlighted, showing 'SUMMARY' under Sub Category and 'AZURE, GOOGLE, OPENSHIFT' under Provider. A modal window titled 'New report' is overlaid on the page. It contains a sub-header 'New report' with a small icon, followed by the instruction 'Select a report type from the list'. Below this, a list item 'Inventory Summary' is shown with the description 'Report about the number of resources related to specific filters'. At the bottom of the modal are two buttons: 'Cancel' and 'Configure'.

Figura 147 – Creazione nuovo report

Once the report type is selected, click on the “Configure” button to select the providers to include in the report. In the newly opened window, we find the “Provider” field which allows selecting one or more pre-existing providers in the system. Subsequently, it is possible to select one or more subsystems to include in the report; if no providers are selected, no subsystem can be selected. Finally, there is a “tag” section to include only resources that have the entered tag.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links for Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports. The Reports link is currently selected. Below the navigation bar, there's a sub-navigation for Inventory / Reports. A modal dialog box titled "Reports" is open in the center. The dialog has tabs for "Ready" (selected) and "Scheduled". Inside the "Ready" tab, there's a section for "Inventory" with fields for "Provider" (set to "Azure, Google") and "Subsystem" (set to "MAE LAB, CMPPROJECT-374610"). There are also sections for "Tags" and "Report Type" (with "One-Shot" selected). At the bottom of the dialog is a red "Submit" button. To the right of the dialog, there's a table listing reports with columns for "Status" (all entries are "READY") and "Actions". The table includes rows for various report types and their creation times: 10/06/2024 - 12:30 AM, 07/06/2024 - 12:30 AM, 06/06/2024 - 12:29 AM, 05/06/2024 - 12:29 AM, and 03/06/2024 - 2:39 PM.

Figura 148 – Configurazione del report

At this point, the user can choose between two different actions:

- Create a static report that will be saved in the system.
- Schedule a task that generates the report periodically.

To confirm the creation of a static report, verify that “One-Shot” has been selected for the “Report type” field and click the “Submit” button at the bottom.

After a loading period, the newly generated report will be visible in the list.




Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

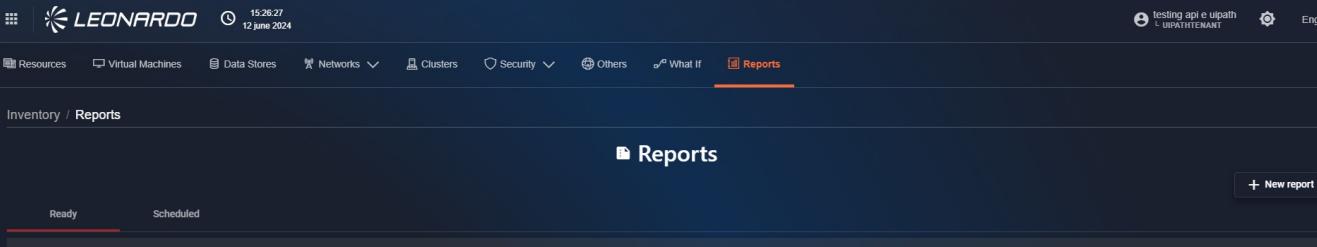

The screenshot shows the Leonardo Cloud Management Platform interface. At the top, there's a header bar with the Leonardo logo, system status (15:26:27, 12 June 2024), and user information (testing api e upath). Below the header is a navigation bar with links: Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports (which is highlighted with an orange underline). The main content area has a dark blue header with the title "Reports" and a subtitle "Inventory / Reports". A "New report" button is located in the top right of this header. The main body contains a table with columns: Sub Category, Provider, Creation Date, Status, and Actions. The table lists 12 rows, all of which are "READY". Each row has a three-dot menu icon in the Actions column.

| Sub Category | Provider | Creation Date | Status | Actions |
|--------------|--------------------------|-----------------------|--------|---------|
| SUMMARY | AZURE, GOOGLE | 12/06/2024 - 1:21 PM | READY | ⋮ |
| SUMMARY | AZURE | 12/06/2024 - 12:29 PM | READY | ⋮ |
| SUMMARY | AZURE | 12/06/2024 - 12:28 PM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 10:05 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 10:01 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 8:32 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 8:20 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 12:30 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 07/06/2024 - 12:30 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 05/06/2024 - 12:29 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 05/06/2024 - 12:29 AM | READY | ⋮ |

Figura 149 – Lista dei report effettuati

6.0.3.2.1 REPORT SCHEDULING

If, instead, you want to schedule automatic report execution, it will be necessary to select “Recurring” for the “Report Type” field. In this case, the window refreshes to show additional parameters for configuring the periodic report.

The parameters to enter are:

- Period: allows selecting the report sending frequency (hourly, daily, ...).
 - "Receive only if not empty" if selected, the file will not be sent when it contains no information.
 - Report Language: allows selecting the language used in the report.
 - File format: allows selecting one or more file types to include in the email.
 - User E-mails: allows entering an email address to send reports to. After entering an email, it is necessary to press "Enter" on the keyboard to confirm its insertion. Once pressed, the newly entered email will move to the box at the bottom, and the field will be cleared to allow the insertion of a new email, if necessary.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the 'Costs' report configuration dialog. It includes fields for 'Report Type' (One-Shot or Recurring), 'Period' (e.g., 'Last 7 days'), 'Report's language' (e.g., 'English'), 'File format' (e.g., 'CSV'), and 'User E-mails' (e.g., 'FinOps Report'). A note at the bottom says 'Press ENTER for each email you want to confirm and add to the list of recipients. It's possible to add multiple emails.' Below the dialog, a table lists scheduled reports with columns for 'Status' (READY) and 'Actions' (three dots).

| | Status | Actions |
|-------|--------|---------|
| 1 | READY | ... |
| 2 | READY | ... |
| 3 | READY | ... |
| 4 | READY | ... |
| 5 | READY | ... |
| 6 | READY | ... |
| 7 | READY | ... |
| 8 | READY | ... |
| 9 | READY | ... |
| 10 | READY | ... |
| 11 | READY | ... |
| 12 | READY | ... |
| 13 | READY | ... |
| 14 | READY | ... |
| 15 | READY | ... |
| 16 | READY | ... |
| 17 | READY | ... |
| 18 | READY | ... |
| 19 | READY | ... |
| 20 | READY | ... |
| 21 | READY | ... |
| 22 | READY | ... |
| 23 | READY | ... |
| 24 | READY | ... |
| 25 | READY | ... |
| 26 | READY | ... |
| 27 | READY | ... |
| 28 | READY | ... |
| 29 | READY | ... |
| 30 | READY | ... |
| 31 | READY | ... |
| 32 | READY | ... |
| 33 | READY | ... |
| 34 | READY | ... |
| 35 | READY | ... |
| 36 | READY | ... |
| 37 | READY | ... |
| 38 | READY | ... |
| 39 | READY | ... |
| 40 | READY | ... |
| 41 | READY | ... |
| 42 | READY | ... |
| 43 | READY | ... |
| 44 | READY | ... |
| 45 | READY | ... |
| 46 | READY | ... |
| 47 | READY | ... |
| 48 | READY | ... |
| 49 | READY | ... |
| 50 | READY | ... |
| 51 | READY | ... |
| 52 | READY | ... |
| 53 | READY | ... |
| 54 | READY | ... |
| 55 | READY | ... |
| 56 | READY | ... |
| 57 | READY | ... |
| 58 | READY | ... |
| 59 | READY | ... |
| 60 | READY | ... |
| 61 | READY | ... |
| 62 | READY | ... |
| 63 | READY | ... |
| 64 | READY | ... |
| 65 | READY | ... |
| 66 | READY | ... |
| 67 | READY | ... |
| 68 | READY | ... |
| 69 | READY | ... |
| 70 | READY | ... |
| 71 | READY | ... |
| 72 | READY | ... |
| 73 | READY | ... |
| 74 | READY | ... |
| 75 | READY | ... |
| 76 | READY | ... |
| 77 | READY | ... |
| 78 | READY | ... |
| 79 | READY | ... |
| 80 | READY | ... |
| 81 | READY | ... |
| 82 | READY | ... |
| 83 | READY | ... |
| 84 | READY | ... |
| 85 | READY | ... |
| 86 | READY | ... |
| 87 | READY | ... |
| 88 | READY | ... |
| 89 | READY | ... |
| 90 | READY | ... |
| 91 | READY | ... |
| 92 | READY | ... |
| 93 | READY | ... |
| 94 | READY | ... |
| 95 | READY | ... |
| 96 | READY | ... |
| 97 | READY | ... |
| 98 | READY | ... |
| 99 | READY | ... |
| 100 | READY | ... |
| 101 | READY | ... |
| 102 | READY | ... |
| 103 | READY | ... |
| 104 | READY | ... |
| 105 | READY | ... |
| 106 | READY | ... |
| 107 | READY | ... |
| 108 | READY | ... |
| 109 | READY | ... |
| 110 | READY | ... |
| 111 | READY | ... |
| 112 | READY | ... |
| 113 | READY | ... |
| 114 | READY | ... |
| 115 | READY | ... |
| 116 | READY | ... |
| 117 | READY | ... |
| 118 | READY | ... |
| 119 | READY | ... |
| 120 | READY | ... |
| 121 | READY | ... |
| 122 | READY | ... |
| 123 | READY | ... |
| 124 | READY | ... |
| 125 | READY | ... |
| 126 | READY | ... |
| 127 | READY | ... |
| 128 | READY | ... |
| 129 | READY | ... |
| 130 | READY | ... |
| 131 | READY | ... |
| 132 | READY | ... |
| 133 | READY | ... |
| 134 | READY | ... |
| 135 | READY | ... |
| 136 | READY | ... |
| 137 | READY | ... |
| 138 | READY | ... |
| 139 | READY | ... |
| 140 | READY | ... |
| 141 | READY | ... |
| 142 | READY | ... |
| 143 | READY | ... |
| 144 | READY | ... |
| 145 | READY | ... |
| 146 | READY | ... |
| 147 | READY | ... |
| 148 | READY | ... |
| 149 | READY | ... |
| 150 | READY | ... |
| 151 | READY | ... |
| 152 | READY | ... |
| 153 | READY | ... |
| 154 | READY | ... |
| 155 | READY | ... |
| 156 | READY | ... |
| 157 | READY | ... |
| 158 | READY | ... |
| 159 | READY | ... |
| 160 | READY | ... |
| 161 | READY | ... |
| 162 | READY | ... |
| 163 | READY | ... |
| 164 | READY | ... |
| 165 | READY | ... |
| 166 | READY | ... |
| 167 | READY | ... |
| 168 | READY | ... |
| 169 | READY | ... |
| 170 | READY | ... |
| 171 | READY | ... |
| 172 | READY | ... |
| 173 | READY | ... |
| 174 | READY | ... |
| 175 | READY | ... |
| 176 | READY | ... |
| 177 | READY | ... |
| 178 | READY | ... |
| 179 | READY | ... |
| 180 | READY | ... |
| 181 | READY | ... |
| 182 | READY | ... |
| 183 | READY | ... |
| 184 | READY | ... |
| 185 | READY | ... |
| 186 | READY | ... |
| 187 | READY | ... |
| 188 | READY | ... |
| 189 | READY | ... |
| 190 | READY | ... |
| 191 | READY | ... |
| 192 | READY | ... |
| 193 | READY | ... |
| 194 | READY | ... |
| 195 | READY | ... |
| 196 | READY | ... |
| 197 | READY | ... |
| 198 | READY | ... |
| 199 | READY | ... |
| 200 | READY | ... |
| 201 | READY | ... |
| 202 | READY | ... |
| 203 | READY | ... |
| 204 | READY | ... |
| 205 | READY | ... |
| 206 | READY | ... |
| 207 | READY | ... |
| 208 | READY | ... |
| 209 | READY | ... |
| 210 | READY | ... |
| 211 | READY | ... |
| 212 | READY | ... |
| 213 | READY | ... |
| 214 | READY | ... |
| 215 | READY | ... |
| 216 | READY | ... |
| 217 | READY | ... |
| 218 | READY | ... |
| 219 | READY | ... |
| 220 | READY | ... |
| 221 | READY | ... |
| 222 | READY | ... |
| 223 | READY | ... |
| 224 | READY | ... |
| 225 | READY | ... |
| 226 | READY | ... |
| 227 | READY | ... |
| 228 | READY | ... |
| 229 | READY | ... |
| 230 | READY | ... |
| 231 | READY | ... |
| 232 | READY | ... |
| 233 | READY | ... |
| 234 | READY | ... |
| 235 | READY | ... |
| 236 | READY | ... |
| 237 | READY | ... |
| 238 | READY | ... |
| 239 | READY | ... |
| 240 | READY | ... |
| 241 | READY | ... |
| 242 | READY | ... |
| 243 | READY | ... |
| 244 | READY | ... |
| 245 | READY | ... |
| 246 | READY | ... |
| 247 | READY | ... |
| 248 | READY | ... |
| 249 | READY | ... |
| 250 | READY | ... |
| 251 | READY | ... |
| 252 | READY | ... |
| 253 | READY | ... |
| 254 | READY | ... |
| 255 | READY | ... |
| 256 | READY | ... |
| 257 | READY | ... |
| 258 | READY | ... |
| 259 | READY | ... |
| 260 | READY | ... |
| 261 | READY | ... |
| 262 | READY | ... |
| 263 | READY | ... |
| 264 | READY | ... |
| 265 | READY | ... |
| 266 | READY | ... |
| 267 | READY | ... |
| 268 | READY | ... |
| 269 | READY | ... |
| 270 | READY | ... |
| 271 | READY | ... |
| 272 | READY | ... |
| 273 | READY | ... |
| 274 | READY | ... |
| 275 | READY | ... |
| 276 | READY | ... |
| 277 | READY | ... |
| 278 | READY | ... |
| 279 | READY | ... |
| 280 | READY | ... |
| 281 | READY | ... |
| 282 | READY | ... |
| 283 | READY | ... |
| 284 | READY | ... |
| 285 | READY | ... |
| 286 | READY | ... |
| 287 | READY | ... |
| 288 | READY | ... |
| 289 | READY | ... |
| 290 | READY | ... |
| 291 | READY | ... |
| 292 | READY | ... |
| 293 | READY | ... |
| 294 | READY | ... |
| 295 | READY | ... |
| 296 | READY | ... |
| 297 | READY | ... |
| 298 | READY | ... |
| 299 | READY | ... |
| 300 | READY | ... |
| 301 | READY | ... |
| 302 | READY | ... |
| 303 | READY | ... |
| 304 | READY | ... |
| 305 | READY | ... |
| 306 | READY | ... |
| 307 | READY | ... |
| 308 | READY | ... |
| 309 | READY | ... |
| 310 | READY | ... |
| 311 | READY | ... |
| 312 | READY | ... |
| 313 | READY | ... |
| 314 | READY | ... |
| 315 | READY | ... |
| 316 | READY | ... |
| 317 | READY | ... |
| 318 | READY | ... |
| 319 | READY | ... |
| 320 | READY | ... |
| 321 | READY | ... |
| 322 | READY | ... |
| 323 | READY | ... |
| 324 | READY | ... |
| 325 | READY | ... |
| 326 | READY | ... |
| 327 | READY | ... |
| 328 | READY | ... |
| 329 | READY | ... |
| 330 | READY | ... |
| 331 | READY | ... |
| 332 | READY | ... |
| 333 | READY | ... |
| 334 | READY | ... |
| 335 | READY | ... |
| 336 | READY | ... |
| 337 | READY | ... |
| 338 | READY | ... |
| 339 | READY | ... |
| 340 | READY | ... |
| 341 | READY | ... |
| 342 | READY | ... |
| 343 | READY | ... |
| 344 | READY | ... |
| 345 | READY | ... |
| 346 | READY | ... |
| 347 | READY | ... |
| 348 | READY | ... |
| 349 | READY | ... |
| 350 | READY | ... |
| 351 | READY | ... |
| 352 | READY | ... |
| 353 | READY | ... |
| 354 | READY | ... |
| 355 | READY | ... |
| 356 | READY | ... |
| 357 | READY | ... |
| 358 | READY | ... |
| 359 | READY | ... |
| 360 | READY | ... |
| 361 | READY | ... |
| 362 | READY | ... |
| 363 | READY | ... |
| 364 | READY | ... |
| 365 | READY | ... |
| 366 | READY | ... |
| 367 | READY | ... |
| 368 | READY | ... |
| 369 | READY | ... |
| 370 | READY | ... |
| 371 | READY | ... |
| 372 | READY | ... |
| 373 | READY | ... |
| 374 | READY | ... |
| 375 | READY | ... |
| 376 | READY | ... |
| 377 | READY | ... |
| 378 | READY | ... |
| 379 | READY | ... |
| 380 | READY | ... |
| 381 | READY | ... |
| 382 | READY | ... |
| 383 | READY | ... |
| 384 | READY | ... |
| 385 | READY | ... |
| 386 | READY | ... |
| 387 | READY | ... |
| 388 | READY | ... |
| 389 | READY | ... |
| 390 | READY | ... |
| 391 | READY | ... |
| 392 | READY | ... |
| 393 | READY | ... |
| 394 | READY | ... |
| 395 | READY | ... |
| 396 | READY | ... |
| 397 | READY | ... |
| 398 | READY | ... |
| 399 | READY | ... |
| 400 | READY | ... |
| 401 | READY | ... |
| 402 | READY | ... |
| 403 | READY | ... |
| 404 | READY | ... |
| 405 | READY | ... |
| 406 | READY | ... |
| 407 | READY | ... |
| 408 | READY | ... |
| 409 | READY | ... |
| 410 | READY | ... |
| 411 | READY | ... |
| 412 | READY | ... |
| 413 | READY | ... |
| 414 | READY | ... |
| 415 | READY | ... |
| 416 | READY | ... |
| 417 | READY | ... |
| 418 | READY | ... |
| 419 | READY | ... |
| 420 | READY | ... |
| 421 | READY | ... |
| 422 | READY | ... |
| 423 | READY | ... |
| 424 | READY | ... |
| 425 | READY | ... |
| 426 | READY | ... |
| 427 | READY | ... |
| 428 | READY | ... |
| 429 | READY | ... |
| 430 | READY | ... |
| 431 | READY | ... |
| 432 | READY | ... |
| 433 | READY | ... |
| 434 | READY | ... |
| 435 | READY | ... |
| 436 | READY | ... |
| 437 | READY | ... |
| 438 | READY | ... |
| 439 | READY | ... |
| 440 | READY | ... |
| 441 | READY | ... |
| 442 | READY | ... |
| 443 | READY | ... |
| 444 | READY | ... |
| 445 | READY | ... |
| 446 | READY | ... |
| 447 | READY | ... |
| 448 | READY | ... |
| 449 | READY | ... |
| 450 | READY | ... |
| 451 | READY | ... |
| 452 | READY | ... |
| 453 | READY | ... |
| 454 | READY | ... |
| 455 | READY | ... |
| 456 | READY | ... |
| 457 | READY | ... |
| 458 | READY | ... |
| 459 | READY | ... |
| 460 | READY | ... |
| 461 | READY | ... |
| 462 | READY | ... |
| 463 | READY | ... |
| 464 | READY | ... |
| 465 | READY | ... |
| 466 | READY | ... |
| 467 | READY | ... |
| 468 | READY | ... |
| 469 | READY | ... |
| 470</ | | |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 151 – Lista dei report effettuati

6.0.3.2.2 LIST OF SCHEDULED REPORTS

To view the list of scheduled reports, select the “Scheduled” tab at the top left of the reports page.

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with various icons and links like 'Resources', 'Virtual Machines', 'Data Stores', 'Networks', 'Clusters', 'Security', 'Others', 'What If', and 'Reports'. The 'Reports' link is underlined in orange. Below the navigation, the title 'Inventory / Reports' is followed by 'Reports' in bold. On the left, there are two tabs: 'Ready' and 'Scheduled', with 'Scheduled' being the active one and highlighted with a red box and a red arrow pointing to it. The main area displays a table with columns: Period (Hourly), Language (EN), Recipients (noame@gmail.com), and Last sent (12/06/2024 - 1:21 PM). At the bottom right of the table, there are pagination controls for 'Items per page' (20), 'Page' (1-1 of 1), and navigation arrows.

Figura 152 – Lista dei report schedulati

On this page, you will find the list and related information of scheduled reports present in the system. For each result, by clicking the “Three dots” button on the right, three operations can be performed:

- View the last generated report.
- Edit the schedule settings; it will not be possible to modify the selected providers or subsystems.
- Delete the schedule to stop sending emails.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 153 – Modifica di una schedule

6.0.3.2.3 USING REPORTS

By clicking on a static report row, or using the “Show report” button available for scheduled reports, it will be possible to view the detail page of the selected report.

Within the Inventory report summary, there is a “Stats” section showing the number of disks, interfaces, networks, and virtual machines belonging to the selected provider.

Below the “Stats” section, the filters used by the user to generate the report are present.

Below the filters, there is a summary table of resources belonging to the providers. On the right, there are two buttons: “PRINT” and “EXPORT”.

Clicking on the “PRINT” button, a print preview modal appears. To print the report, click on the “Print” button in the bottom right; at this point, the printing of the report will start.

Clicking on the “EXPORT” button, it is possible to export the report in “.csv”, “.json”, or “.pdf” format.

To return to the “Results” tab, in the bottom right, click on the “CLOSE” button or in the top left, click on the left-pointing arrow, next to the report title.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links for Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports. The Reports link is underlined, indicating it's the active section. Below the navigation, a breadcrumb trail shows 'Inventory / Reports' and a specific report ID 'Report 6669a0d3aae316468b3c8b34'. The main content area is titled 'Report Inventory Summary' with a back arrow. It features a 'Stats' section with five boxes: 1 VMs, 1 Disks, 1 Networks, 0 Interfaces, and 0 K8Ss. Below this, a table lists provider information: Azure (MAE LAB) and Google (CMPPROJECT-374610). The table has columns for Type Provider, Subsystem Name, VMs, Disks, Networks, Interfaces, and K8Ss. At the bottom right of the table, there are pagination controls for 'Items per page' (set to 20), '1 – 2 of 2', and navigation arrows.

| Type Provider | Subsystem Name | VMs | Disks | Networks | Interfaces | K8Ss |
|---------------|-------------------|-----|-------|----------|------------|------|
| Azure | MAE LAB | 14 | 16 | 14 | 0 | 0 |
| Google | CMPPROJECT-374610 | 1 | 1 | 1 | 0 | 0 |

Figura 154 – Dettagli dei report

7 Monitoring

The SCMP collects metrics from all cloud providers and aggregates them by macro categories.

This aggregation allows comparison between metrics from different providers.

By accessing the dashboard, we can see how this aggregation mechanism provides an overview of resource utilization, divided by provider and organized by associated resource type.

Within the functionality, it is possible to filter by resource type using the tab bar at the top, while for a general view, the dashboard can be used.

The monitoring module can be accessed via the dedicated menu. As shown in the figure:



Figura 155 – Access to the Monitoring Module

7.0.1 Monitoring Dashboard

At this point, the user will be on the "Dashboard" monitoring tab page.



Figura 156 – Monitoring Dashboard

7.0.1.1 Monitoring Section Filters

Within the page, a series of filters are available that can be selected simultaneously to filter the dashboard results.

The main filter is the display period, which can be found at the top right. Clicking on it will open a selection window (in yellow in the figure) where it will be possible to either enter a customized time range, using the "From" and "To" fields on the left, or select a "Smart" time range by directly clicking on the desired choice in the scrollable section on the right.

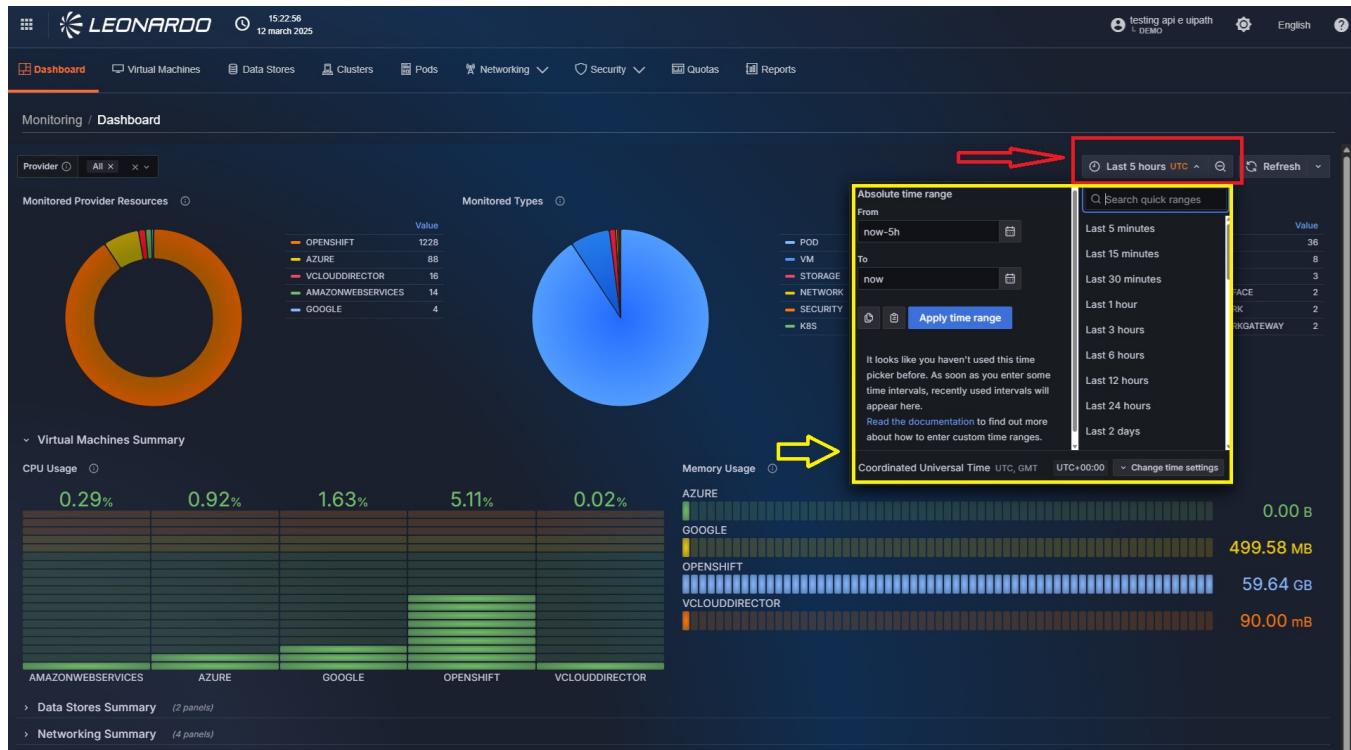


Figura 157 – Monitoring Time Filter

Additionally, a series of filters are available at the top left of the page, allowing users to filter the retrieved resources. Specifically, it is possible to filter by:

- Provider type
- Subsystem name.
- Resource name (only in detailed dashboards)

These filters allow for multiple values to be selected and can be combined to achieve the desired granularity.



Figura 158 – Monitoring Functionality

Filters

7.0.2 Quotas Dashboard

The Quotas dashboard, available in the "Quotas" tab, allows viewing the details of consumption and related limits applied to Vcloud type subsystems.

To access it, you need to click the button at the top of the tab bar.

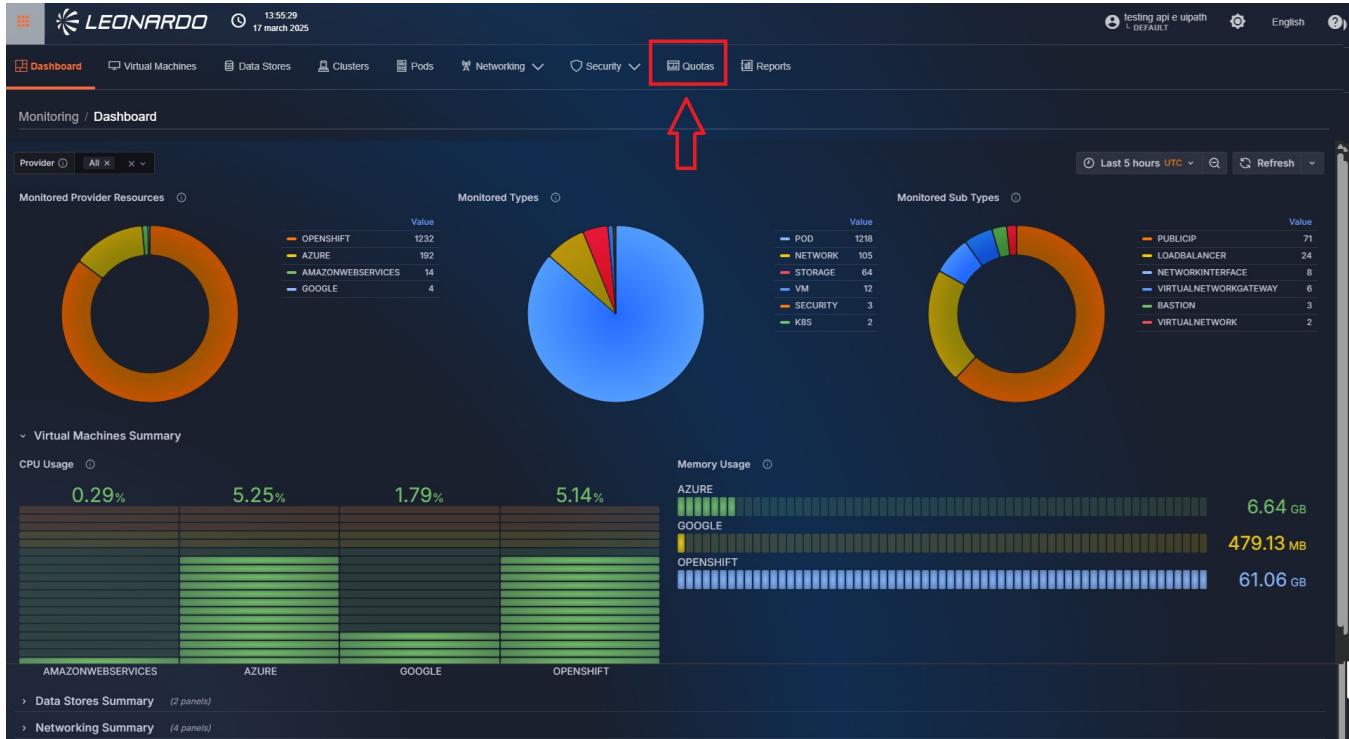


Figura 159 – Access to the Quotas section

At this point, the user will be on the "Quotas" monitoring tab page. At the top, we can see a filter bar, which allows filtering by provider or subsystem. Additionally, it is possible to view the filters for the chart using the "Show additional filters" button; these filters modify the chart's display. Below the filters, there is a table indicating the subsystem name and the quotas used, limits, and an average utilization divided by resource type. Finally, at the bottom, a time-based chart on the selected metric in the filters can be displayed.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

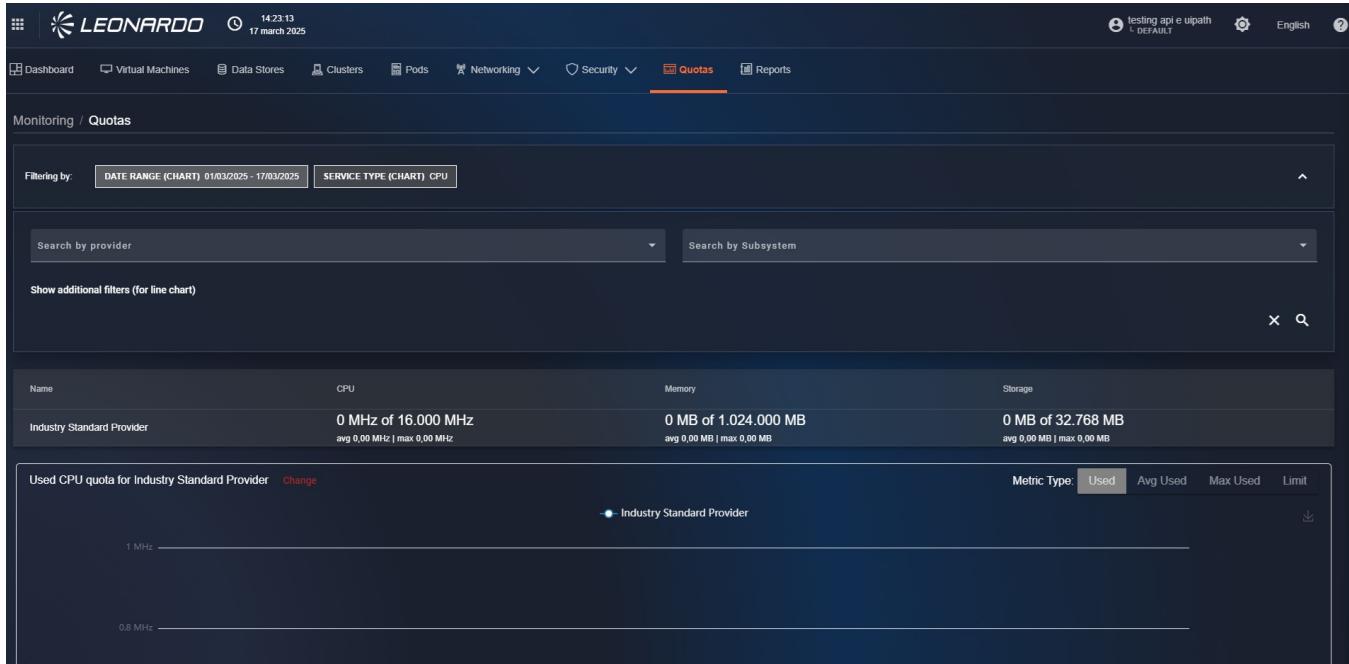


Figura 160 – Quotas Dashboard

7.0.3 Alarms on Quota Usage

To allow the user to receive notifications when quota usage thresholds are exceeded, an "Alerting" module has been included. To access it, you need to select the tab at the top of the Monitoring functionality.

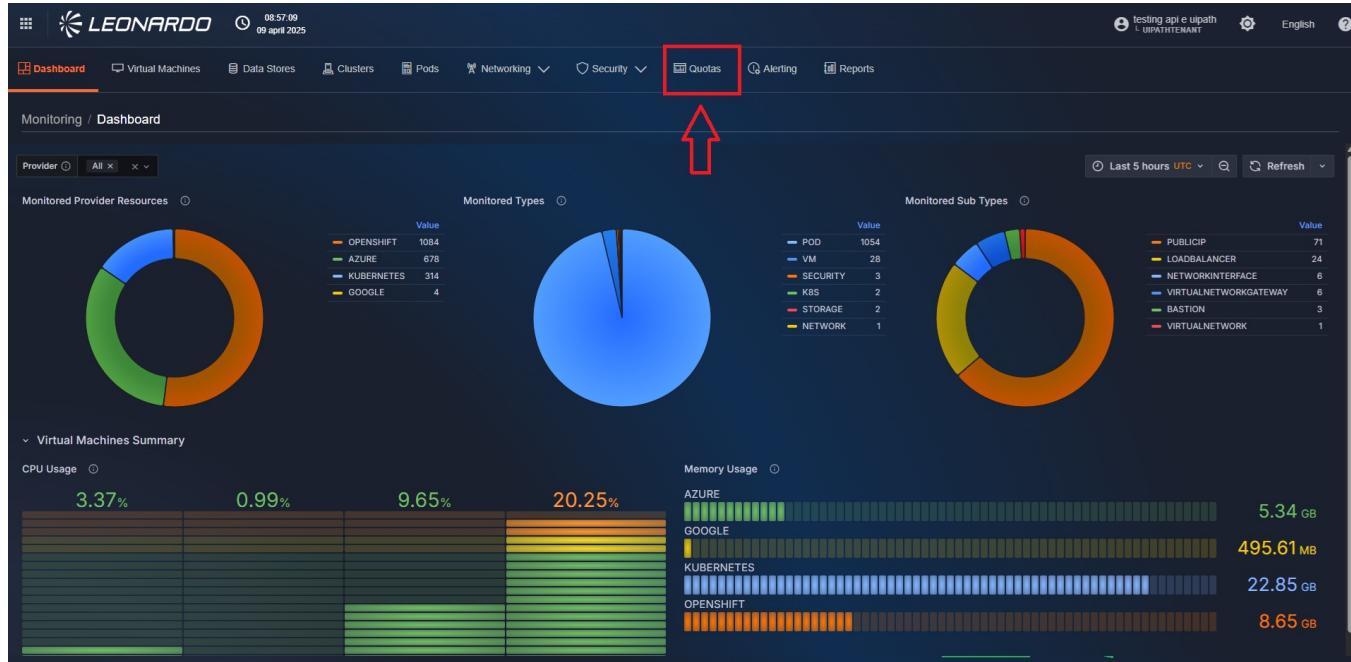


Figura 161 – Access to the Alerting system

Within the page, we find the list of "alerts" configured on the system, along with their respective configurations.

7.0.3.1 New Alert Creation

Using the menu available on the right, it is possible to add a new alert to the system. To do this, we select the displayed "New alert" option, and a configuration page will open.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed web interface for managing cloud resources. At the top, there's a navigation bar with links for Dashboard, Virtual Machines, Data Stores, Clusters, Pods, Networking, Security, Quotas, Alerting (which is currently selected), and Reports. Below the navigation, a breadcrumb trail indicates the user is in Monitoring / Active alert rules. The main area displays a table titled 'Active alert rules' with two rows of data. The columns are labeled: Alert Schedule, Alert Type, Alert Send Type, and Creation Date. The first row is for a 'Daily' schedule with a 'Quota' type, sent via 'Email' on 27/03/2025 at 16:45:00. The second row is for a 'Weekly' schedule with a 'Quota' type, also sent via 'Email' on 04/04/2025 at 14:24:08. In the bottom right corner of the alert list, there's a green box highlighting a red-bordered button labeled '+ New rule'.

Figura 162 – New Alert Creation

On the configuration page, all fields must be filled in, specifically:

- **"Alert type"**: Select the alert type
- **"Alert schedule"**: Indicates the frequency of checks to be performed
- **"Quota type"**: Select the quota type to monitor
- **"Threshold (%)"**: Enter the percentage beyond which the alert will be sent.
- **"Subsystems"**: Select one or more subsystems to monitor
- **"Alert send type"**: Select the type of alert to receive, via e-Mail or Rabbit queue (for automatic integration with other systems)
- **"Alert format"**: Select the format of the sent file that defines the alert details.
- **"Emails"**: By selecting E-mail as the notification type, we can enter an email address to send reports to. After entering an email, it is necessary to press "Enter" on the keyboard to confirm its entry. Once pressed, the newly entered email will move to the box at the bottom, and the field will be cleared to allow for the entry of a new email, if necessary.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed web interface for managing alerts. At the top, there's a navigation bar with links like Dashboard, Virtual Machines, Data Stores, Clusters, Pods, Networking, Security, Quotas, Alerting (which is highlighted in red), and Reports. Below the navigation is a sub-menu for 'Alerting' with options for 'New Rule', 'Edit Rule', and 'Delete Rule'. The main area is titled 'New Rule' and contains the following configuration fields:

- Alert configuration**
- Alert Type:** Quota
- Alert Schedule:** Daily
- Quota Type:** Memory
- Threshold (%):** 75
- Subsystems:** Industry Standard Provider
- Alert Send Type:** Email
- Alert Format:** CSV
- Emails:** A text input field with placeholder text: "Press ENTER for each email you want to confirm and add to the list of recipients. It's possible to add multiple emails."

At the bottom right of the configuration panel are two buttons: "Cancel" and "Add".

Figura 163 – Configuration Page

7.0.3.2 Viewing, Modifying, and Deleting an Alert

On this page, we find the list and related information of the alerts present in the system. For each result, by clicking the "Three dots" button on the right, it will be possible to perform three operations:

- View the "alert" configuration
- Edit the alert settings.
- Delete the schedule to stop sending emails.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Alert Schedule | Alert Type | Alert Send Type | Creation Date | Actions |
|----------------|------------|-----------------|---------------------|---------|
| Daily | Quota | Email | 27/03/2025 16:45:00 | |
| Weekly | Quota | Email | 04/04/2025 14:24:08 | |

Figura 164 – Alert Operations

7.0.4 Reporting Tools

The reporting functionality, specific to each feature, allows generating global reports of the information available for the various providers. Within the pages, the possibility will also be given to create files to facilitate information sharing. To access the functionality, above the breadcrumb path, click on the "Reports" tab.

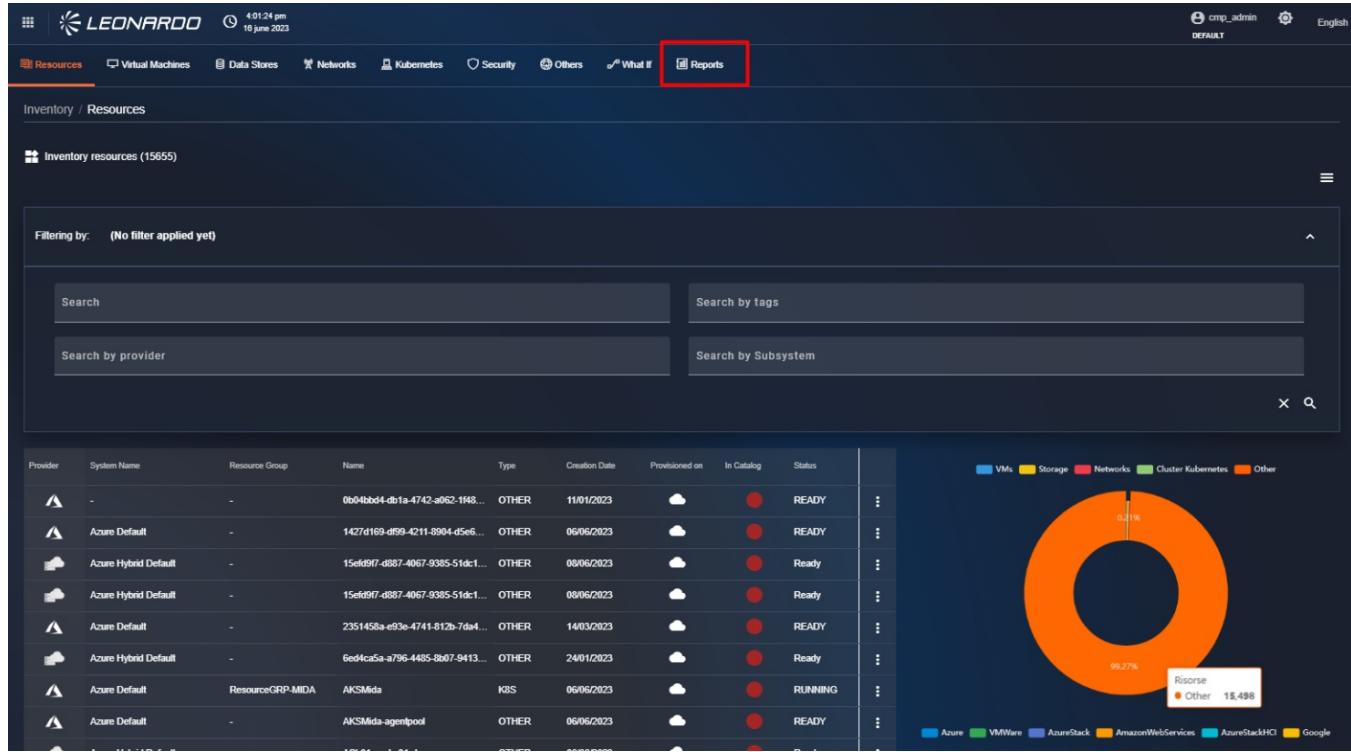


Figura 165 – Access to Catalog Report

7.0.4.1 Available Report Types

- Monitoring Threshold Quotas** – List of VCloud and/or Backup subsystems, integrated into the SCMP, with details of utilization quotas (CPU, Memory, Storage, Backup). Based on the selected filter combination, it is possible to filter subsystems that exceed a certain utilization threshold.

7.0.4.2 Report Creation

At the top right of the page, we can click the "New Report" button to start creating a report. Specifically, a modal is displayed containing the list of available report types.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links for Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports. The Reports link is currently selected. Below the navigation, there's a breadcrumb trail: Inventory / Reports. The main area displays a table of existing reports under the 'Ready' tab. The columns include Sub Category, Provider, Creation Date, Status, and Actions. One row in the table is highlighted, showing 'SUMMARY' under Sub Category and 'AZURE, GOOGLE, OPENSHIFT' under Provider. A modal window titled 'New report' is overlaid on the page. It contains a sub-header 'New report' with a small icon, followed by the instruction 'Select a report type from the list'. Below this, a card-like box displays the 'Inventory Summary' report type, which is described as 'Report about the number of resources related to specific filters'. At the bottom of the modal, there are two buttons: 'Cancel' and 'Configure'. The 'Configure' button is highlighted in blue.

Figura 166 – New Report Creation

Once the report type is selected, click the "Configure" button to select the providers to include in the report. In the newly opened window, we find the "Provider" field which allows selecting one or more pre-existing providers in the system. Subsequently, it is possible to select one or more subsystems to include in the report; if no providers are selected, no subsystems can be selected. Finally, there is a "tag" section to include only resources that have the entered tag.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links for Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports. The Reports link is currently selected, indicated by an orange underline. Below the navigation bar, there's a sub-menu for Inventory / Reports. A modal dialog box titled "Reports" is open in the center. The dialog has tabs for "Ready" (selected) and "Scheduled". Inside the "Ready" tab, there's a section for "Inventory" with dropdown menus for "Provider" (set to "Azure, Google") and "Subsystem" (set to "MAE LAB, CMPPROJECT-374610"). There's also a "Tags" section and a "Report Type" section with radio buttons for "One-Shot" (selected) and "Recurring". At the bottom of the dialog is a red "Submit" button. To the right of the dialog, there's a table listing various reports with columns for "Status" (all listed as "READY") and "Actions". The table includes rows for "Inventory Summary", "Tags", and several "SUMMARY" entries for different providers like AZURE, AZURE, GOOGLE, OPENSHIFT, and AZURE, GOOGLE, KUBERNETES, OPENSHIFT, each with a timestamp from June 2024.

Figura 167 – Report Configuration

At this point, the user can choose between two different actions:

- Create a static report that will be saved in the system.
- Schedule a job that generates the report periodically.

To confirm the creation of a static report, verify that "One-Shot" has been selected for the "Report type" field and click the "Submit" button at the bottom. After a loading period, the newly generated report will be visible in the list.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Sub Category | Provider | Creation Date | Status | Actions |
|--------------|--------------------------|-----------------------|--------|---------|
| SUMMARY | AZURE, GOOGLE | 12/06/2024 - 1:21 PM | READY | ⋮ |
| SUMMARY | AZURE | 12/06/2024 - 12:29 PM | READY | ⋮ |
| SUMMARY | AZURE | 12/06/2024 - 12:28 PM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 10:05 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 10:01 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 8:32 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 8:20 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 12:30 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 07/06/2024 - 12:30 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 06/06/2024 - 12:29 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 05/06/2024 - 12:29 AM | READY | ⋮ |
| SUMMARY | | 04/06/2024 - 12:29 AM | READY | ⋮ |

Figura 168 – List of Generated Reports

7.0.4.2.1 REPORT SCHEDULING

If, on the other hand, automatic report execution is desired, it will be necessary to select "Recurring" for the "Report Type" field. In this case, the window updates to show additional parameters for configuring the periodic report. The parameters to enter are:

- Period: allows selecting the report sending frequency (hourly, daily, ...).
- "Receive only if not empty": if selected, the file will not be sent when it contains no information.
- Report Language: allows selecting the language used in the report.
- File format: allows selecting one or more file types to include in the email.
- User E-mails: allows entering an email address to send reports to. After entering an email, it is necessary to press "Enter" on the keyboard to confirm its entry. Once pressed, the newly entered email will move to the box at the bottom, and the field will be cleared to allow for the entry of a new email, if necessary.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Cloud Management Platform interface. At the top, there's a navigation bar with icons for Home, Dashboard, DashboardCustomer, Virtual Machines, Data Stores, Clusters, Networking, Security, Usages, and Reports. The date and time (15:16:35, 04 June 2025) are also displayed. On the left, a sidebar lists categories like FINOPS COST, DETAILS GROUP RESOURCE, DETAILS, SUMMARY GROUP RESOURCE, SUMMARY, FINOPS COST, FINOPS COST, FINOPS COST, and SUMMARY. The main content area has tabs for 'Costs' and 'Reports', with 'Costs' currently selected. Below this, there are sections for 'Ready' and 'Scheduled' tasks. A prominent modal window titled 'Costs' is open, containing fields for 'Report Type' (One-Shot or Recurring), 'Period' (Grouped by Month or Group By Resource), 'Report's language' (English or Italian), 'File format' (Costs Details or Groups By Resource), and 'User E-mails' (with a note about adding multiple emails). The background shows a list of resources with columns for Status (READY), Actions (three dots), and various numerical values.

Figura 169 – Scheduled Report Parameters

Having configured all parameters, the "Submit" button will become clickable. Click it to confirm the entry, and after a loading period, the newly generated report will be visible in the list.

| LEONARDO | | 15:26:27 12 June 2024 | testing api e upath L'UPATHITENANT | ⚙️ | English | | | |
|---------------------|--------------------------|--------------------------|---------------------------------------|----------|-----------------------|--------|---------|------------------------------|
| Resources | Virtual Machines | Data Stores | Networks | Clusters | Security | Others | What If | Reports |
| Inventory / Reports | | | | | | | | |
| Reports | | | | | | | | |
| Ready | Scheduled | | | | | | | + New report |
| Sub Category | Provider | | | | Creation Date | Status | | Actions |
| SUMMARY | AZURE, GOOGLE | | | | 12/06/2024 - 12:11 PM | READY | | ⋮ |
| SUMMARY | AZURE | | | | 12/06/2024 - 12:29 PM | READY | | ⋮ |
| SUMMARY | AZURE | | | | 12/06/2024 - 12:28 PM | READY | | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | | | | 10/06/2024 - 10:05 AM | READY | | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | | | | 10/06/2024 - 10:01 AM | READY | | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | | | | 10/06/2024 - 8:32 AM | READY | | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | | | | 10/06/2024 - 8:20 AM | READY | | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | | | | 10/06/2024 - 12:30 AM | READY | | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | | | | 07/06/2024 - 12:30 AM | READY | | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | | | | 06/06/2024 - 12:29 AM | READY | | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | | | | 05/06/2024 - 12:29 AM | READY | | ⋮ |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 170 – List of Generated Reports

7.0.4.2.2 LIST OF SCHEDULED REPORTS

To view the list of scheduled reports, select the "Scheduled" tab located at the top left of the reports page.

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with various links like Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports. The Reports link is underlined in orange. Below the navigation, it says 'Inventory / Reports'. On the left, there are two tabs: 'Ready' and 'Scheduled', with 'Scheduled' being the active one. There's also a 'New report' button. The main area displays a table with columns: Period, Language, Recipients, Last sent, and Actions. One row is visible, showing 'Hourly', 'EN', 'noame@gmail.com', '12/06/2024 - 1:21 PM', and a three-dot menu icon. At the bottom right, there are pagination controls for items per page (20) and a total count of 1.

Figura 171 – List of Scheduled Reports

On this page, we find the list and related information of the scheduled reports present in the system. For each result, by clicking the "Three dots" button on the right, it will be possible to perform three operations:

- View the last generated report.
- Edit the schedule settings; it will not be possible to modify the selected providers or subsystems.
- Delete the schedule to stop sending emails.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 172 – Modify a schedule

7.0.4.2.3 REPORT USAGE

By clicking on a static report row, or by using the "Show report" button available for scheduled reports, it will be possible to view the detail page of the selected report. Within the Inventory report summary, there is a "Stats" section which includes the number of disks, interfaces, networks, and virtual machines belonging to the selected provider. Below the "Stats" section, there are the filters used by the user to generate the report. Below the filters, there is a summary table of resources belonging to the providers. On the right, there are two buttons: "PRINT" and "EXPORT". Clicking the "PRINT" button will display a print preview modal. To print the report, click the "Print" button at the bottom right; at this point, the printing of the report will start. Clicking the "EXPORT" button allows exporting the report in ".csv", ".json", or ".pdf" format. To return to the "Results" tab, click the "CLOSE" button at the bottom right, or click the left-pointing arrow at the top left, next to the report title.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links for Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports. The Reports link is underlined, indicating it's the active section. Below the navigation is a breadcrumb trail: Inventory / Reports / Report 6669a0d3aae316468b3c8b34. The main content area is titled "Report Inventory Summary". It features a "Stats" section with five boxes: 1 VMs, 1 Disks, 1 Networks, 0 Interfaces, and 0 K8Ss. Below this is a table titled "PROVIDER: AZURE, GOOGLE | SUBSYSTEM: MAE LAB,CMPPROJECT-374610". The table has columns for Type Provider, Subsystem Name, VMs, Disks, Networks, Interfaces, and K8Ss. It lists two entries: Azure (MAE LAB) with 14 VMs, 16 Disks, 14 Networks, 0 Interfaces, and 0 K8Ss; and Google (CMPPROJECT-374610) with 1 VM, 1 Disk, 1 Network, 0 Interfaces, and 0 K8Ss. At the bottom right of the table are buttons for "PRINT" and "EXPORT".

| Type Provider | Subsystem Name | VMs | Disks | Networks | Interfaces | K8Ss |
|---------------|-------------------|-----|-------|----------|------------|------|
| Azure | MAE LAB | 14 | 16 | 14 | 0 | 0 |
| Google | CMPPROJECT-374610 | 1 | 1 | 1 | 0 | 0 |

Figura 173 – Report Details

8 Security

The SCMP's security feature shows the vulnerabilities of inventory assets present on the SCMP.

To access the “Security” feature, click the bento button in the top left. After doing so, the menu bar will appear, where you need to click on “Security”.



Figura 174 – Access to Security

8.0.1 General Dashboard

At this point, the user is on the “Dashboard” tab page where the security data of resources for all configured providers are shown in an aggregated manner.

At the top, there is a filter bar that allows filtering results by subsystem, status, and/or policy name.

After that, the user notices the presence of the bar chart indicating the compliance status of resources assigned to policies, subdivided by subsystem.

By hovering the mouse over a section of the chart, we can see that the values displayed on the page are updated to show a preview of the detail.

It is possible to click on a section of the chart to automatically apply the “subsystem” and “status” filters to the page.



Leonardo Cyber & Security Solutions

21 Nov 2025
08.00

Secure Cloud Management Platform

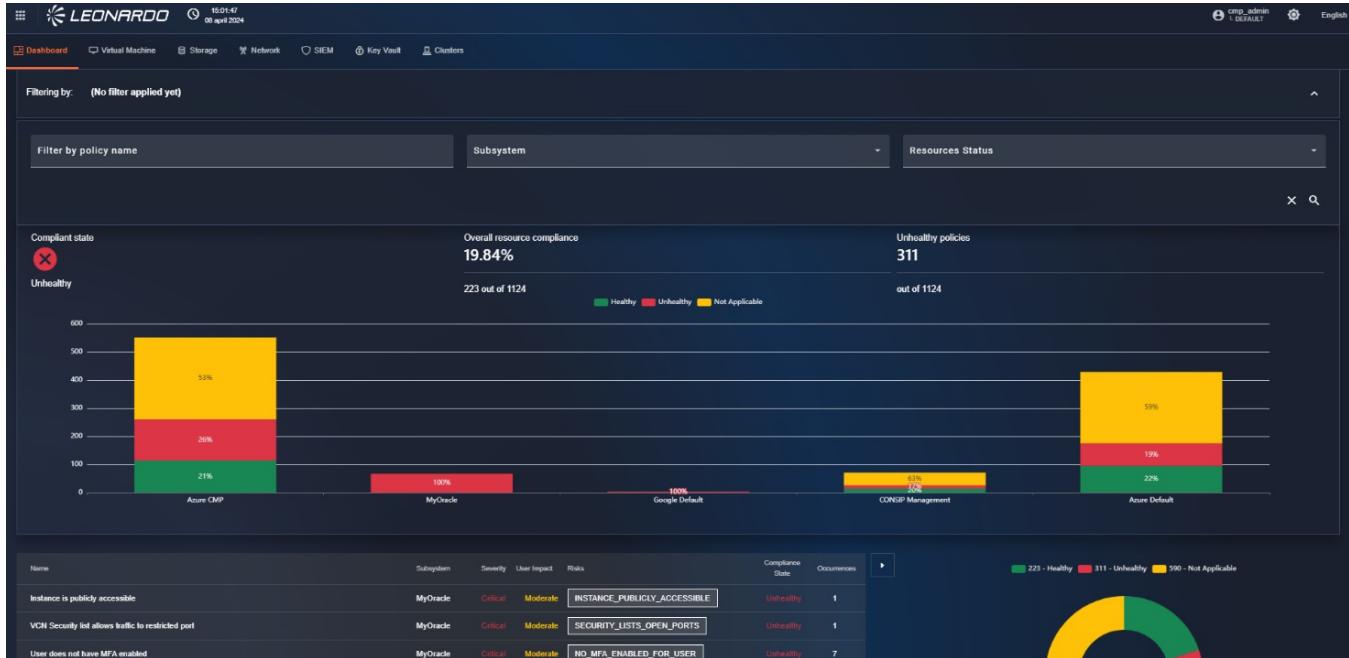


Figura 175 – Security Dashboard

Scrolling down the page, there is the policies table which will be automatically filtered based on the selected filters.

The table lists various policies categorized by subsystem, severity, and user impact, along with their compliance status and occurrences. A donut chart on the right indicates the overall status distribution.

| Name | Subsystem | Severity | User Impact | Risks | Compliance State | Occurrences |
|---|---------------|----------|-------------|---|------------------|-------------|
| Instance is publicly accessible | MyOracle | Critical | Moderate | INSTANCE_PUBLICLY_ACCESSIBLE | Unhealthy | 1 |
| VCN Security list allows traffic to restricted port | MyOracle | Critical | Moderate | SECURITY_LISTS_OPEN_PORTS | Unhealthy | 1 |
| User does not have MFA enabled | MyOracle | Critical | Moderate | NO_MFA_ENABLED_FOR_USER | Unhealthy | 7 |
| Firewall rules that allow connections from all IP addresses on TCP port 3389 or UDP port 3389 may expose RDP services to attackers | | | | | Unhealthy | 1 |
| To reduce the attack surface, avoid assigning public IP addresses to your VMs. Stopped instances may still be flagged with a Public IP binding, e.g. if the network interfaces are configured to assign an ephemeral public IP on start. Ensure the network configurations for stopped instances do not include external access | | | | | Unhealthy | 1 |
| Firewall rules that allow connections from all IP addresses on TCP port 22 or SCTP port 22 may expose SSH services to attackers | | | | | Unhealthy | 1 |
| Firewall rules that allow connections from all IP addresses on TCP port 22 or SCTP port 22 may expose SSH services to attackers | | | | | Unhealthy | 1 |
| To reduce the attack surface, avoid assigning public IP addresses to your VMs. Stopped instances may still be flagged with a Public IP binding, e.g. if the network interfaces are configured to assign an ephemeral public IP on start. Ensure the network configurations for stopped instances do not include external access | | | | | Unhealthy | 1 |
| Firewall rules that allow connections from all IP addresses on TCP port 3389 or UDP port 3389 may expose RDP services to attackers | | | | | Unhealthy | 1 |
| All network ports should be restricted on network security groups associated to your virtual machine | Azure CMP | High | High | MaliciousInsider, DataSpillage, DataExfiltration | Unhealthy | 9 |
| Machines should be configured to periodically check for missing system updates | Azure Default | High | Low | AccountBreach, DataExfiltration, DataSpillage, MaliciousInsider | Healthy | 9 |

Figura 176 – Policies table



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Clicking on a row in the table will open a detail window where you can find all information related to the selected policy, and the list of affected resources will also be available. It is possible to click on the name of a machine to view its details; in this case, the user will be redirected to the SCMP inventory resource in “view” mode.

The screenshot shows a detailed policy view for a specific policy named "All network ports should be restricted on network security groups associated to your virtual machine". The policy details include:

- Risks:** MaliciousInsider, DataSpillage, DataExfiltration
- Implementation Effort:** Low | **User Impact:** High | **Severity:** High
- Cloud Provider's Advice:** Defender for Cloud has identified some of your network security groups' inbound rules to be too permissive. Inbound rules should not allow access from 'Any' or 'Internet' ranges. This can potentially enable attackers to target your resources.

The main table lists affected resources:

| Name | Severity | Compliance Status |
|---|----------|-------------------|
| Resource | High | Unhealthy |
| VCN Security Group | High | Unhealthy |
| User IP | High | Unhealthy |
| Firewall rule RDP service | High | Unhealthy |
| To reduce it be flagged as public IP on Firewall rule SSH service | High | Unhealthy |
| Firewall rule RDP service | High | Unhealthy |
| To reduce it be flagged as public IP on Firewall rule RDP service | High | Unhealthy |

Below the table, there are two additional sections:

- All network ports should be restricted on network security groups associated to your virtual machine:** Azure CMP, High, Unhealthy. Risks: MaliciousInsider, DataExfiltration.
- Machines should be configured to periodically check for missing system updates:** Azure Default, High, Low. Risks: AccountBreach, DataExfiltration, DataSpillage, MaliciousInsider.

Figura 177 – Policy details

To exit the detail, you need to click outside the window, which will close automatically.

8.0.2 Dashboards specific to resource type

It is possible to further filter policies by resource type, using the tabs at the top of the page.

Once the resource type is selected, it is possible to navigate the pages following the methods described in the previous paragraph.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

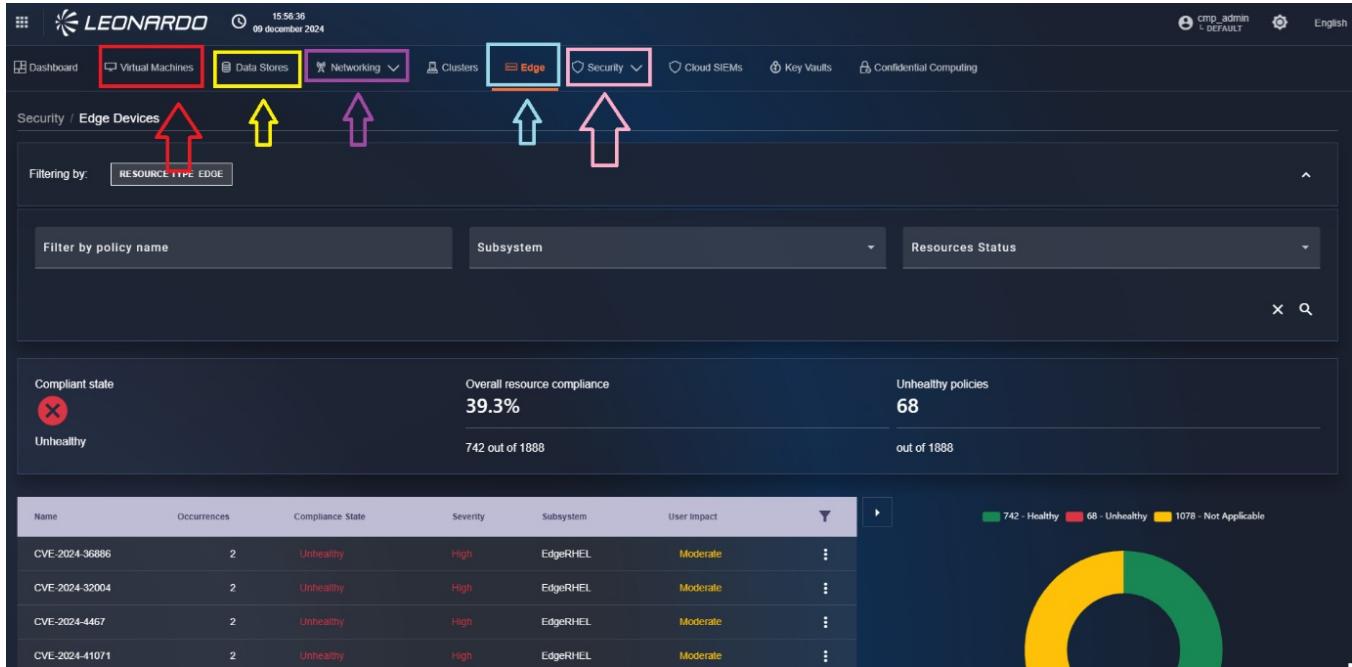


Figura 178 – Virtual Machines
compliance Dashboard

8.0.3 SIEM Dashboard

To view the SIEM dashboard, click on the tab that depicts a shield. At the top, there is a dropdown menu where you can select the subscription of interest, while next to it is a dropdown menu where you can select a time range.

Below, there is the “Summary” section which contains information, including for example “Alerts” which indicates the number of alerts. Also within the “Summary” section is the “Incidents by status” chart which indicates incidents by status.

Below the “Summary” section, there is the “Hourly Events Grouped By Type” section which contains a histogram chart indicating hourly events by type.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

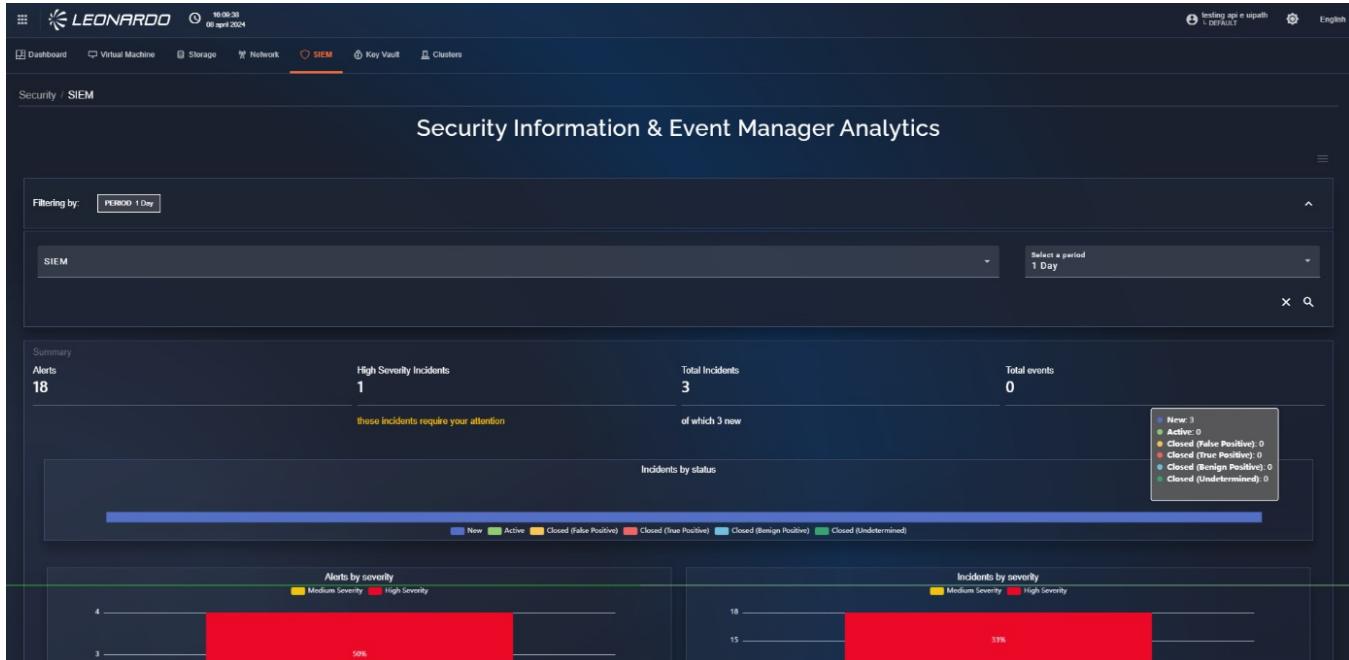


Figura 179 – SIEM Dashboard

Scrolling through the SIEM dashboard, there is the “Event types” chart which indicates all event types.

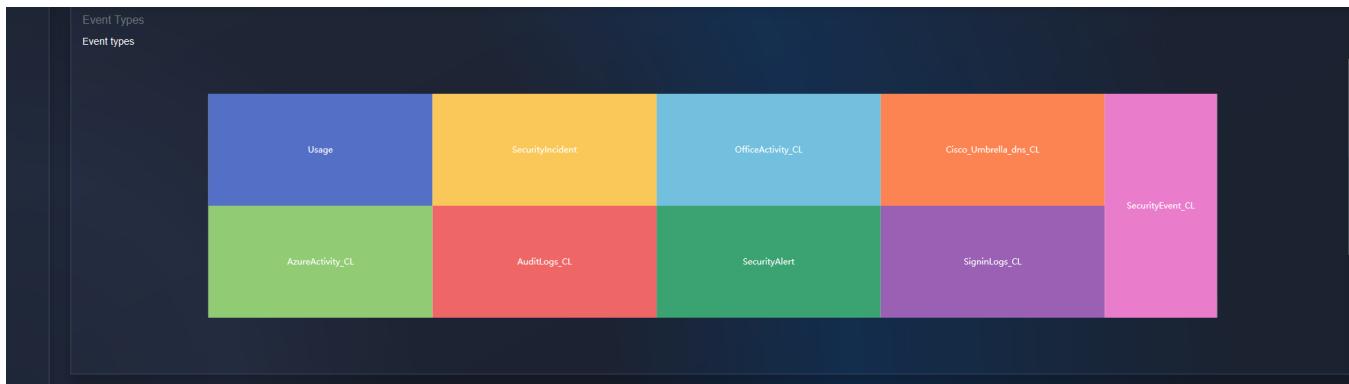


Figura 180 – “Event types” of the SIEM dashboard

Finally, at the bottom of the page, there are two tables: on the left, the “Alert rules” table which shows a set of alarm rules, while on the right, there is the “Incidents” table which shows incidents.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Severity | Kind |
|--|----------|-----------|
| Solorigate Network Beacon | High | Scheduled |
| Sign-ins from IPs that attempt sign-ins to disabled accounts | Medium | Scheduled |
| Malicious Inbox Rule - custom | Medium | Scheduled |
| Advanced Multistage Attack Detection | High | Fusion |
| Azure DevOps Service Connection Abuse | Medium | Scheduled |

| Name | Status | Alerts count |
|--|--------|--------------|
| Solorigate Network Beacon | New | 6 |
| Malicious Inbox Rule, affected user AdeleV@contoso.OnMicrosoft.com | New | 6 |
| Sign-ins from IPs that attempt sign-ins to disabled accounts | New | 6 |

Figura 181 – “Alert rules” and
“Incidents” tables

Clicking on a row in the table will open a detail window, where you can find all information related to the selected rule or incident.

The screenshot shows the Azure Sentinel interface. The top navigation bar includes the Leonardo logo, a timestamp (16:11:42, 08 aprile 2024), and a dropdown for selecting a subscription ('testing api e upath'). The main dashboard has tabs for Dashboard, Virtual Machine, Storage, Network, Key Vault, Clusters, and SIEM (which is currently selected). Below the tabs, there's a 'Filtering by' section with a dropdown set to 'SIEM' and a 'Select a period' dropdown set to '1 Day'. The main content area displays a table of 'Alert rules' and a larger modal window for the 'Advanced Multistage Attack Detection' rule. The modal contains detailed information such as the rule's description, detection logic (using Fusion), and specific alert details like 'Name: Advanced Multistage Attack Detection', 'Severity: High', and 'SIEM's UUID: 3bbc0471-3165-46fd-b937-e1c9bb8994ef'. It also lists tactics like Collection, CommandAndControl, CredentialAccess, DefenseEvasion, Discovery, Execution, Exfiltration, Impact, InitialAccess, LateralMovement, Persistence, and PrivilegeEscalation. The background shows other rows of the 'Alert rules' table and the 'Incidents' table.

Figura 182 – “Incidents” details

8.0.4 Secret Manager Dashboard

To view the SIEM dashboard, click on the tab that depicts a key. At the top, there is a dropdown menu where you can select the subscription of interest.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

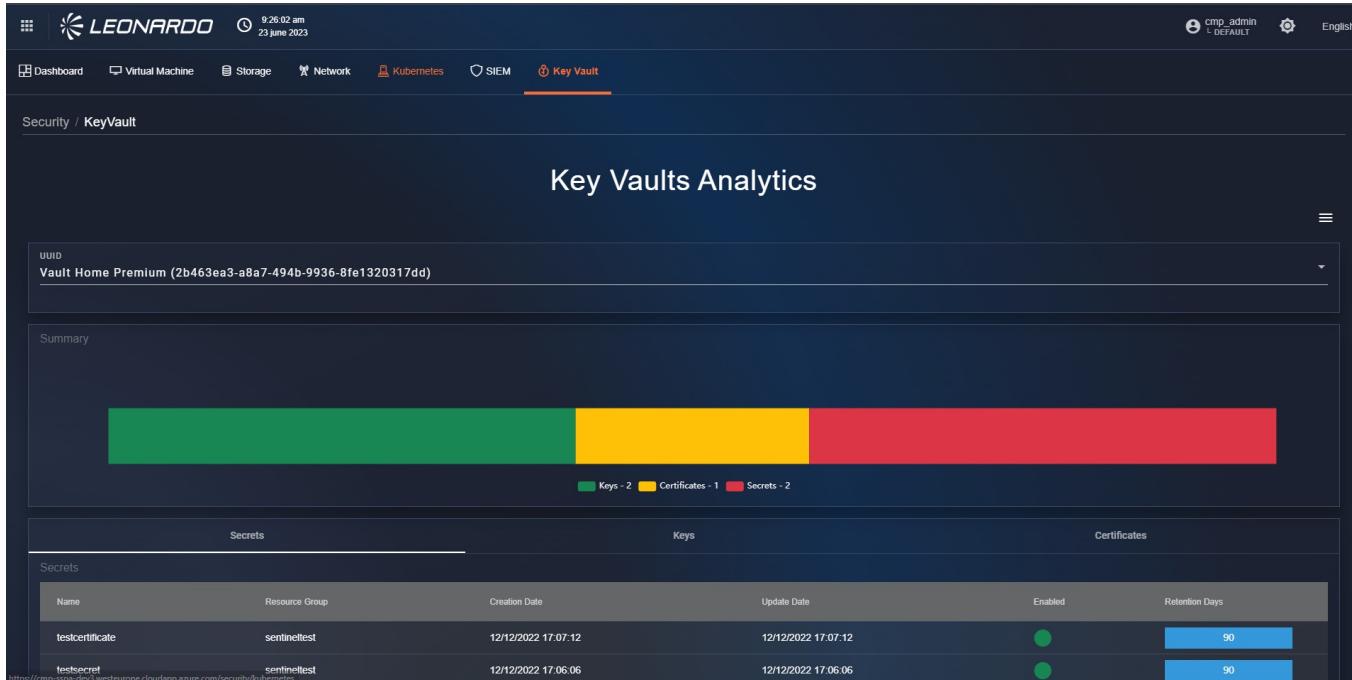


Figura 183 – Key Vault Dashboard

At the bottom of the page, you can see navigation buttons for the table and a table.

Depending on the selected page, the table will display respectively:

- Secret
- Keys
- Certificates



21 Nov 2025
08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

| Name | Resource Group | Creation Date | Update Date | Enabled | Retention Days |
|-----------------|----------------|---------------------|---------------------|---------|----------------|
| testcertificate | sentineltest | 12/12/2022 17:07:12 | 12/12/2022 17:07:12 | ● | 90 |
| testsecret | sentineltest | 12/12/2022 17:06:06 | 12/12/2022 17:06:06 | ● | 90 |

Figura 184 – Viewable resources

Clicking on a row in the table allows you to view the detail of the selected resource.

Figura 185 – Key details

8.0.5 Clusters Dashboard

At this point, the user is on the “Dashboard” tab page where all alerts generated by the configured “Cluster” type subsystems in SCMP are shown in an aggregated manner.

At the top, there is a filter bar that allows filtering results by namespace, subscription, and/or policy name.

After that, the user notices the presence of the bar chart indicating the total number of “alerts” received, subdivided by subsystem.

By hovering the mouse over a section of the chart, we can see that the values displayed on the page are updated to show a preview of the detail.

It is possible to click on a section of the chart to automatically apply the “subsystem” filter.

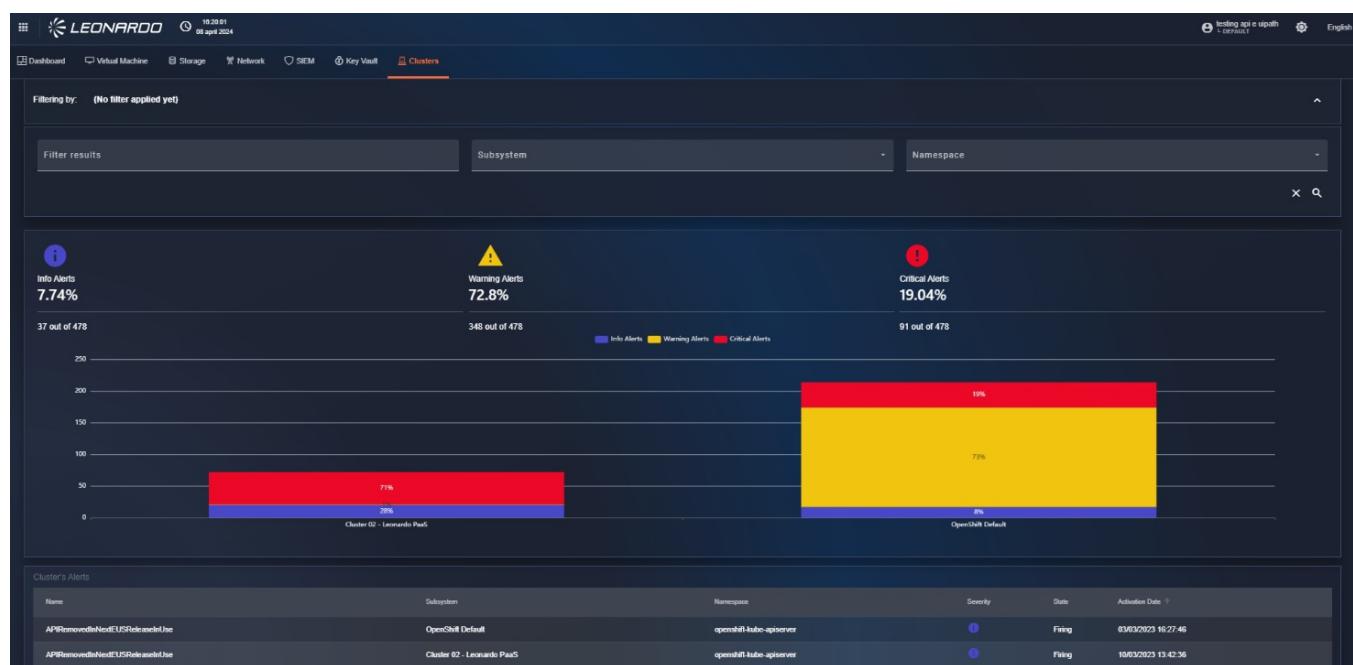


Figura 186 – “Cluster alerts” Dashboard

Scrolling down the page, there is the “alerts” table which will be automatically filtered based on the selected filters.



Leonardo Cyber & Security Solutions

21 Nov 2025
08.00

Secure Cloud Management Platform

| Cluster's Alerts | | | | | | |
|--------------------------------------|----------------------------|--------------------------|----------|--------|---------------------|--------|
| Name | Subsystem | Namespace | Severity | Status | Activation Date | Action |
| APIRemovedInNewUSAKubelessUse | OpenShift Default | openshift-kube-apiserver | Info | Firing | 03/03/2023 15:27:46 | |
| APIRemovedInNewUSAKubelessUse | Cluster 02 - Leonardo PaaS | openshift-kube-apiserver | Info | Firing | 10/03/2023 14:42:36 | |
| APIRemovedInNewReleaseUse | OpenShift Default | openshift-kube-apiserver | Info | Firing | 03/03/2023 16:27:46 | |
| APIRemovedInNewReleaseUse | Cluster 02 - Leonardo PaaS | openshift-kube-apiserver | Info | Firing | 10/03/2023 13:42:36 | |
| AggregatedLoggingSystemCPULight | Cluster 02 - Leonardo PaaS | openshift-logging | Info | Firing | 22/03/2023 14:49:24 | |
| AlermanagerClusterDown | Cluster 02 - Leonardo PaaS | openshift-monitoring | Warning | Firing | 10/03/2023 16:17:37 | |
| AlermanagerClusterDown | OpenShift Default | openshift-monitoring | Warning | Firing | 03/03/2023 16:49:04 | |
| AlermanagerClusterFailedToSendAlerts | OpenShift Default | openshift-monitoring | Warning | Firing | 03/03/2023 16:49:04 | |
| AlermanagerClusterFailedToSendAlerts | Cluster 02 - Leonardo PaaS | openshift-monitoring | Warning | Firing | 10/03/2023 14:17:37 | |
| AlermanagerConfigInconsistent | Cluster 02 - Leonardo PaaS | openshift-monitoring | Warning | Firing | 10/03/2023 14:17:37 | |
| AlermanagerConfigInconsistent | OpenShift Default | openshift-monitoring | Warning | Firing | 03/03/2023 16:49:04 | |
| AlermanagerFailedReload | Cluster 02 - Leonardo PaaS | openshift-monitoring | Critical | Firing | 10/03/2023 16:17:37 | |
| AlermanagerFailedReload | OpenShift Default | openshift-monitoring | Critical | Firing | 03/03/2023 16:49:04 | |

Figura 187 – Alerts table

Clicking on a row in the table will open a detail window, where you can find all information related to the selected “alert”.

The screenshot shows a detailed view of an alert for a virtual machine. The top navigation bar includes the Leonardo logo, user info, and tabs for Dashboard, Virtual Machine, Storage, Network, SIEM, Key Vault, and Clusters. The main content area has a title "Policy Details: All network ports should be restricted on network security groups associated to your virtual machine". It displays a table of findings with columns for Name, Instance ID, Description, Severity, Compliance State, and Status. A sidebar on the left shows filtering options and a "Cloud Provider's Advice" section. At the bottom, there are two summary cards: one for network port restrictions and another for system updates.

| Name | Instance ID | Description | Severity | Compliance State | Status |
|--|--|-------------|-----------|------------------|--------|
| VCN Security | /subscriptions/09837d5-2d40-4623-9b82-5a5104d983d2/resourcegroups/cmp-rsg/providers/microsoft.compute/virtualmachines/vm-ubnt-manage0 | High | Unhealthy | | |
| User role | /subscriptions/09837d5-2d40-4623-9b82-5a5104d983d2/resourcegroups/cmp-rsg/providers/microsoft.compute/virtualmachines/vm-ubnt-morphus | High | Unhealthy | | |
| Firewall rule RDP service | /subscriptions/09837d5-2d40-4623-9b82-5a5104d983d2/resourcegroups/cmp-dev3/providers/microsoft.compute/virtualmachines/vm-mongo3-cmp | High | Unhealthy | | |
| To reduce it be flagged as public IP on Firewall rule | /subscriptions/09837d5-2d40-4623-9b82-5a5104d983d2/resourcegroups/cmp-prod/providers/microsoft.compute/virtualmachines/vm-mongo4-cmp-prod | High | Unhealthy | | |
| SSH service | /subscriptions/09837d5-2d40-4623-9b82-5a5104d983d2/resourcegroups/cmp-prod/providers/microsoft.compute/virtualmachines/vm-postgres-cmp-prod | High | Unhealthy | | |
| Firewall rule SSH service | /subscriptions/09837d5-2d40-4623-9b82-5a5104d983d2/resourcegroups/cmp-prod/providers/microsoft.compute/virtualmachines/eld-iam-utn-vmsel_2b474302 | High | Unhealthy | | |
| To reduce it be flagged as public IP on Firewall rule | /subscriptions/09837d5-2d40-4623-9b82-5a5104d983d2/resourcegroups/cmp-prod/providers/microsoft.compute/virtualmachines/eld-iam-utn-vmsel_7cde408 | High | Unhealthy | | |
| RDP service | /subscriptions/09837d5-2d40-4623-9b82-5a5104d983d2/resourcegroups/devbox-ig-template-vm-win11/providers/microsoft.compute/virtualmachines/vm-devbox-win11-template | High | Unhealthy | | |
| All network ports should be restricted on network security groups associated to your virtual machine | Azure CMP | High | Info | MaliciousInsider | 9 |
| Machines should be configured to periodically check for missing system updates | Azure Default | High | Low | DataExfiltration | 0 |

Figura 188 – Alert details on clusters

To exit the detail, you need to click outside the window, which will close automatically.

8.0.6 Compliance Dashboard

To view the compliance dashboard, click on the tab that depicts a document in the security module.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

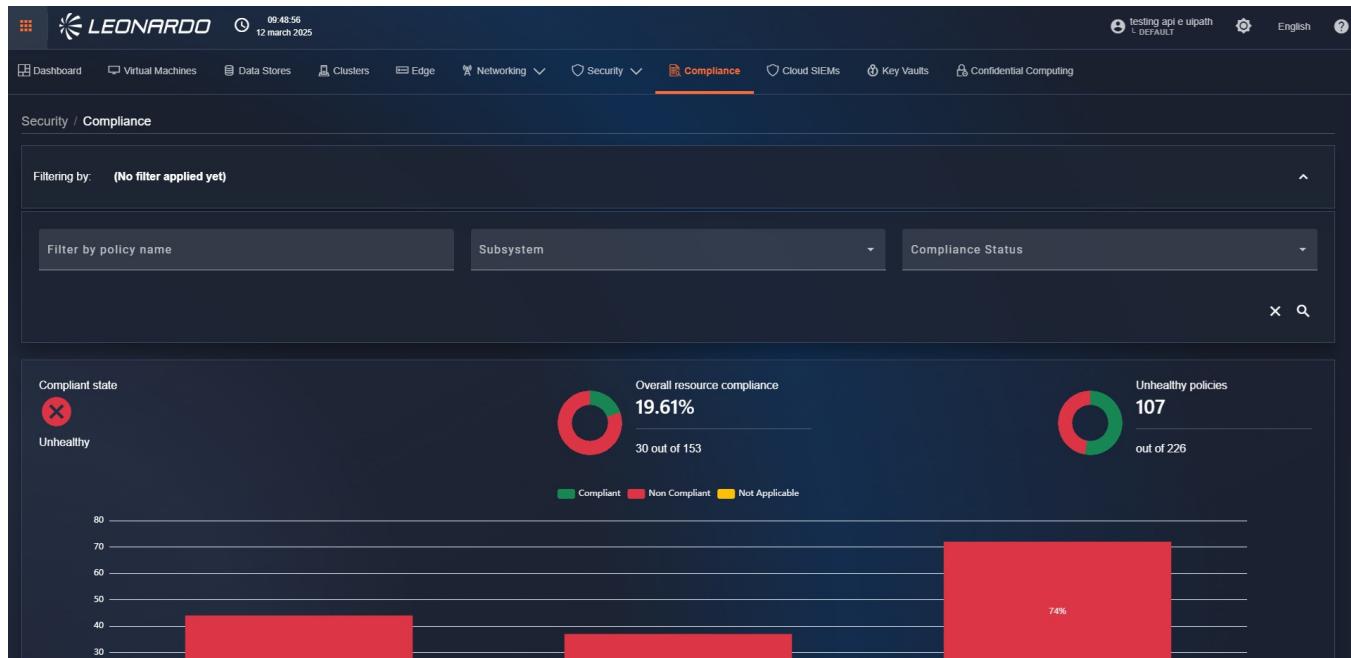


Figura 189 – Compliance dashboard

At this point, the user is on the "Compliance" tab page, composed of 4 sections. The first section contains filters that allow searching by policy name, subsystem, and/or compliance status. The second section, always active, contains pie charts that indicate the general status of the filtered resources.

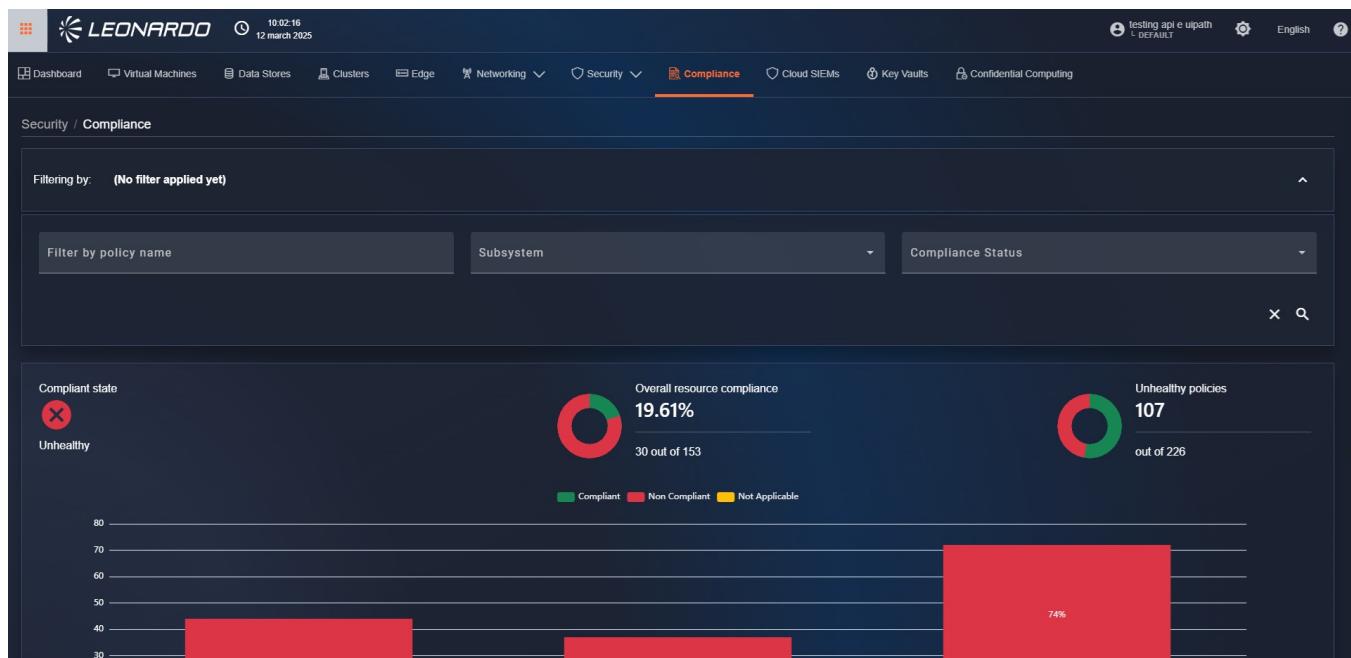


Figura 190 – “Filters” and “pie charts” sections

The third section, active only if multiple different subsystems are present in the results, shows a bar chart, subdivided by provider, of the compliance status of resources. The last section contains a table with general information on policy groups.

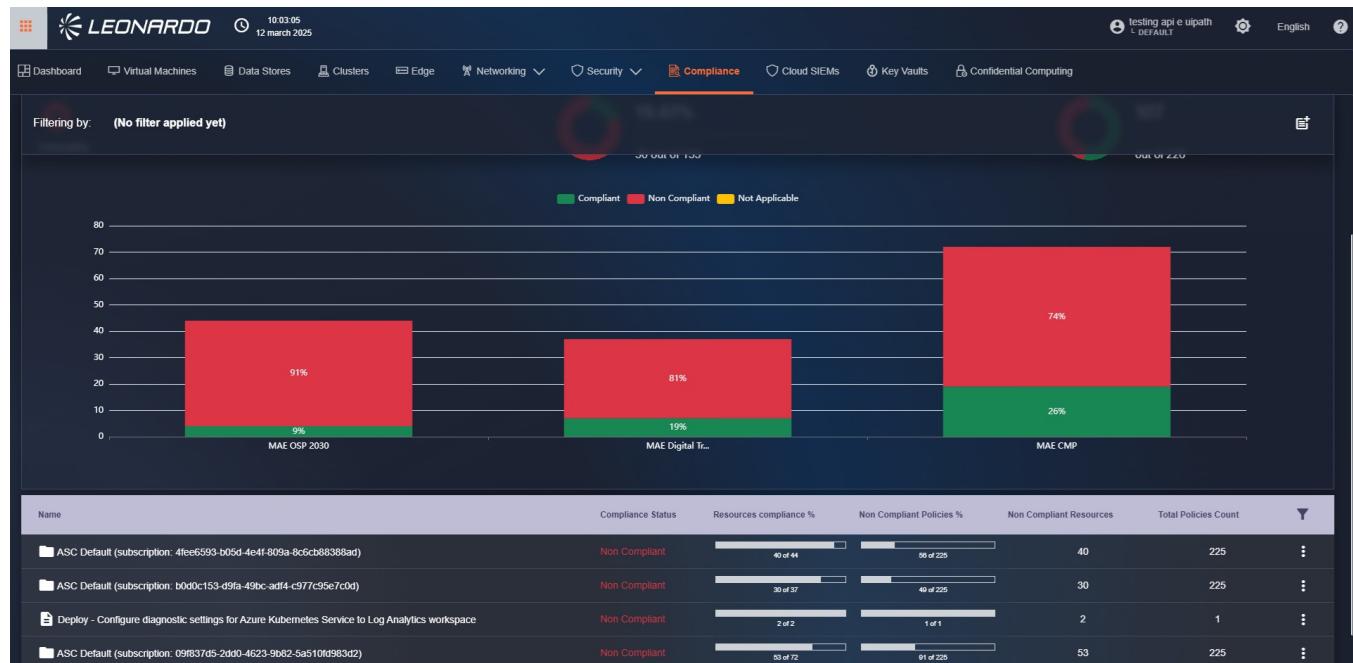


Figura 191 – “Bar charts” and “table” sections

Clicking on a row in the table opens a modal where it will be possible to view the list of all policies configured in the group, with the relative resource count. Still within the modal, we can click on one of the displayed policies; doing so will show at the bottom the list of all machines assigned to the policy and their respective status. Next to each resource, a "link" button is available; once clicked, the user will be redirected to the inventory page of the selected resource.



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

The screenshot shows a dashboard titled 'Policy Set's Details: ASC Default (subscription: b0d0c153-d9fa-49bc-adf4-c977c95e7c0d)'. It includes a table of resources and their compliance status across different subsystems.

| Name | Total Resources Count | Policy Assignment Name | Subsystem | Compliance Status |
|--|-----------------------|--|----------------------------|-------------------|
| A Microsoft Entra administrator should be provisioned for MySQL servers | 0 | ASC Default (subscription: b0d0c153-d9fa-49bc-adf4-c977c95e7c0d) | MAE Digital Transformation | Compliant |
| A Microsoft Entra administrator should be provisioned for PostgreSQL servers | 0 | ASC Default (subscription: b0d0c153-d9fa-49bc-adf4-c977c95e7c0d) | MAE Digital Transformation | Compliant |
| A maximum of 3 owners should be designated for your subscription | 1 | ASC Default (subscription: b0d0c153-d9fa-49bc-adf4-c977c95e7c0d) | MAE Digital Transformation | Non Compliant |
| A vulnerability assessment solution should be enabled on your virtual machines | 6 | ASC Default (subscription: b0d0c153-d9fa-49bc-adf4-c977c95e7c0d) | MAE Digital Transformation | Non Compliant |
| API Management APIs should use only encrypted protocols | 0 | ASC Default (subscription: b0d0c153-d9fa-49bc-adf4-c977c95e7c0d) | MAE Digital Transformation | Compliant |

Resources related to the policy: A vulnerability assessment solution should be enabled on your virtual machines

| Resource Name | Compliance Status | Resource Link |
|--|-------------------|---------------|
| /subscriptions/b0d0c153-d9fa-49bc-adf4-c977c95e7c0d/resourcegroups/vm-pqp-class_group/providers/microsoft.compute/virtualmachines/vm-pqp-class | Non Compliant | 🔗 |
| /subscriptions/b0d0c153-d9fa-49bc-adf4-c977c95e7c0d/resourcegroups/resourcegrp-mida/providers/microsoft.compute/virtualmachines/trading-vm-testvpn | Non Compliant | 🔗 |
| /subscriptions/b0d0c153-d9fa-49bc-adf4-c977c95e7c0d/resourcegroups/resourcegrp-mida/providers/microsoft.compute/virtualmachines/oms-sonar | Non Compliant | 🔗 |
| /subscriptions/b0d0c153-d9fa-49bc-adf4-c977c95e7c0d/resourcegroups/mida-db2-rg/providers/microsoft.compute/virtualmachines/mida-db2 | Non Compliant | 🔗 |
| /subscriptions/b0d0c153-d9fa-49bc-adf4-c977c95e7c0d/resourcegroups/resourcegrp-mida/providers/microsoft.compute/virtualmachines/mida-database-vm | Non Compliant | 🔗 |

Figura 192 – Policy details

9 Catalog

The Catalog section has three important features:

- Displaying the list of installable assets retrieved from providers, along with their associated prices and regions.
- Enabling the tenant administrator to define items that can be subsequently used for provisioning.
- Enabling the tenant administrator to define items that can be subsequently used within What If module simulations.

The retrieved prices, in addition to being visible within the asset's details, are used for What If scenarios and cost calculation.

To access the Catalog functionality, click on the bento button in the upper left corner.

Then, click on "Catalog".



Figura 193 – Accesso a Catalog

At this point, the user is on the "Resources" tab page.

We can divide the functionality into 3 sections to specify its behavior:

- SCMP catalog items (yellow box in the image).

- Provider catalog items (green box in the image).
- SCMP catalog services and blueprints (red box in the image).

Below, we will analyze each group of functionalities separately.

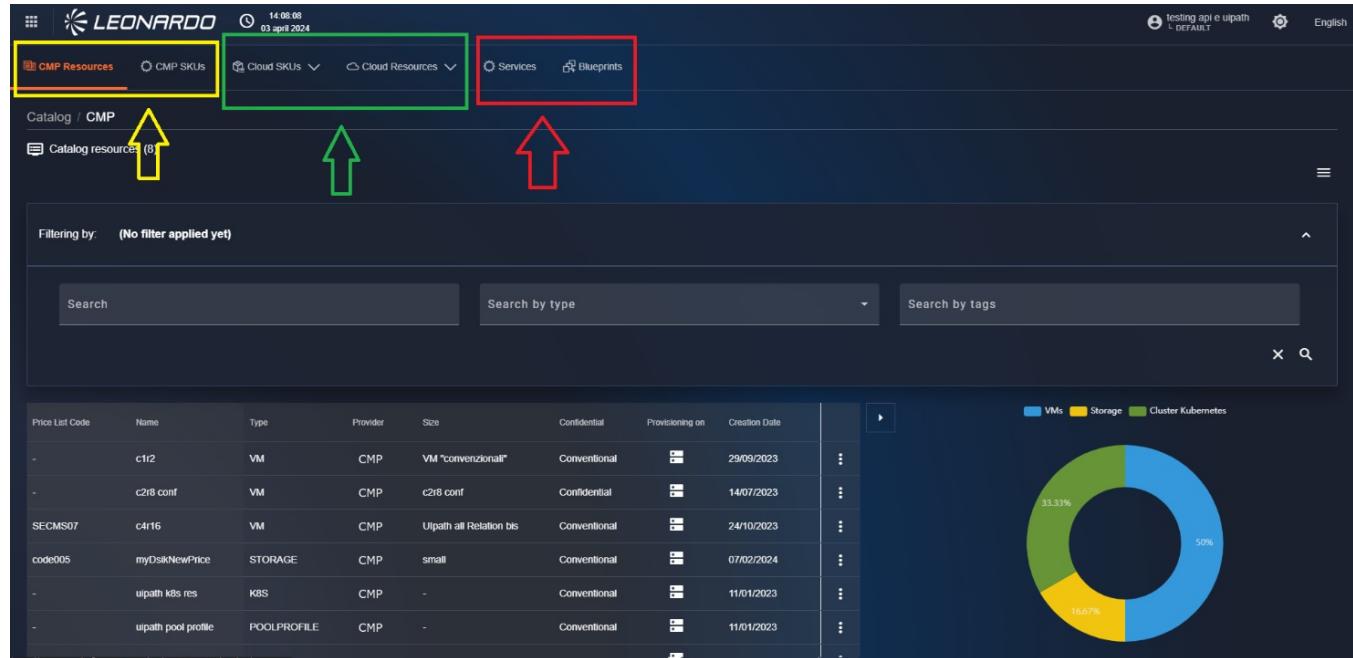


Figura 194 – Catalogo della SCMP

9.0.1 SCMP Catalog Item Management

On the page, there is a series of filters that, once selected and by clicking on the magnifying glass button, will be used to filter the list of results.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo SCMP interface. At the top, there's a navigation bar with links for CMP Resources, CMP SKUs, Cloud SKUs, Cloud Resources, Services, and Blueprints. The main area is titled 'Catalog / CMP' and shows 'Catalog resources (3)'. A search bar at the top has 'TYPE VM' selected. Below it are three search filters: 'Search' (empty), 'Search by type VM' (selected), and 'Search by tags' (empty). A table lists three VM resources: c1r2, c2r6 conf, and c4r16, with columns for Price List Code, Name, Type, Provider, Size, Confidentiality, Provisioning on, and Creation Date. To the right of the table is a large blue donut chart labeled 'VMs' and '100%'.

| Price List Code | Name | Type | Provider | Size | Confidential | Provisioning on | Creation Date |
|-----------------|-----------|------|----------|-------------------------|--------------|-----------------|---------------|
| - | c1r2 | VM | CMP | VM "convenzionali" | Conidential | 29/09/2023 | |
| - | c2r6 conf | VM | CMP | c2r6 conf | Confidential | 14/07/2023 | |
| SECMS07 | c4r16 | VM | CMP | Ulpath all Relation bts | Conidential | 24/10/2023 | |

Figura 195 – Catalogo SCMP filtrato

■ Association between SCMP catalog resource/SKU and Provider catalog resource/SKU

To allow the system to correctly calculate costs, it is necessary that the SCMP catalog resource or SKU contains a reference to the actual ID retrieved from the provider (as explained in this section) in order to correctly overwrite the cost of the resource / SKU.

Next to the magnifying glass button, there is an "X" button to reset the filters and the resource table.

Below the search filter, there is a search filter for tags.

Click on it and select a tag; at this point, the table returns the resources associated with the tag selected by the user.

9.0.1.1 Resources and relationships between resources

Within the SCMP, it is possible to configure a "Relationship" type resource. This relationship allows mapping machines from various providers to modify their costs and enable their use in other functionalities (e.g., for cost calculation).

Automatic Relationships

If a price list resource with the provider's UUID but no relationship is present in the SCMP catalog, the relationship will be created automatically, and costs will be updated accordingly. After a few minutes, the relationship will also be visible within the catalog.

To access the relationships page, click the "SCMP Resources" tab at the top of the Catalog functionality.

The screenshot shows the Leonardo Secure Cloud Management Platform (SCMP) interface. At the top, there is a navigation bar with the Leonardo logo, user information (testing api e upath, DEFAULT), and language selection (English). Below the navigation bar, the main header is 'Catalog / CMP'. A red box highlights the 'CMP Resources' tab, which is currently active. An arrow points from the text 'click the "SCMP Resources" tab' to this highlighted tab. The main content area displays a table of 'Catalog resources (7)'. The columns include Price List Code, Name, Type, Provider, Size, Confidential, Provisioning on, and Creation Date. The table lists various resources such as 'myDiskNewPrice', 'rel002', 'uiPath k8s res', etc. To the right of the table is a donut chart showing the distribution of resources by type: VMs (blue), Storage (yellow), and Cluster Kubernetes (green). The chart indicates 40% for VMs, 20% for Storage, and 40% for Cluster Kubernetes. A callout box points to the 'Risorse' section of the chart.

Figura 196 – Accesso a "SCMP resources"

At the top, there is a filter section that allows searching by:

- "Search": allows entering free text for searching.
- "Search By tags": allows searching using tags associated with resources.
- "Search by Service name": allows searching by service name.

9.0.1.1.1 RESOURCE EXPORT

To export the list of Catalog resources present in the list, on the page, in the upper right corner, click on the hamburger menu, and then click on "Export".

The operator will have the option to export the list of results in .csv and/or .json format.



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

| Name | Type | Provider | Size | Confidential | Provisioning on | Creation Date |
|---------------------|-----------|----------|------|--------------|-----------------|---------------|
| Audio Analytics | AIMODEL | CMP | - | Conventional | 03/03/2023 | 03/03/2023 |
| BLUEPRINT DEMO | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | 09/01/2023 |
| Blueprint DEMO path | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | 09/01/2023 |
| Blueprint Retail | BLUEPRINT | CMP | - | Conventional | 21/06/2023 | 21/06/2023 |
| MyApplication | BLUEPRINT | CMP | - | Conventional | 24/01/2023 | 24/01/2023 |
| PaaS - AI Platform | PAAS | CMP | - | Conventional | 14/06/2023 | 14/06/2023 |
| PaaS - IAM | PAAS | CMP | - | Conventional | 14/06/2023 | 14/06/2023 |
| PaaS - Kafka | PAAS | CMP | - | Conventional | 09/06/2023 | 09/06/2023 |

Figura 197 – Scaricare la lista di risultati

9.0.1.1.2 FORCED CATALOG UPDATE FUNCTIONALITY

Through the Force Sync functionality, it is possible to request a catalog update by clicking on the hamburger menu and then clicking on "Force Sync".

| Name | Type | Provider | Size | Confidential | Provisioning on | Creation Date |
|---------------------|-----------|----------|------|--------------|-----------------|---------------|
| Audio Analytics | AIMODEL | CMP | - | Conventional | 03/03/2023 | 03/03/2023 |
| BLUEPRINT DEMO | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | 09/01/2023 |
| Blueprint DEMO path | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | 09/01/2023 |
| Blueprint Retail | BLUEPRINT | CMP | - | Conventional | 21/06/2023 | 21/06/2023 |
| MyApplication | BLUEPRINT | CMP | - | Conventional | 24/01/2023 | 24/01/2023 |
| PaaS - AI Platform | PAAS | CMP | - | Conventional | 14/06/2023 | 14/06/2023 |
| PaaS - IAM | PAAS | CMP | - | Conventional | 14/06/2023 | 14/06/2023 |

Figura 198 – Funzionalità Force Sync

9.0.1.1.3 CATALOG RELATIONSHIP CREATION



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

To create a resource in the Catalog, always on the page, in the upper right corner, click on the hamburger menu, and then click on "Add Catalog Resource".

| Name | Type | Provider | Size | Confidential | Provisioning on | Creation Date |
|---------------------|-----------|----------|------|--------------|-----------------|---------------|
| Audio Analytics | AIMODEL | CMP | - | Conventional | 03/03/2023 | |
| BLUEPRINT DEMO | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | |
| Blueprint DEMO path | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | |
| Blueprint Retail | BLUEPRINT | CMP | - | Conventional | 21/06/2023 | |
| MyApplication | BLUEPRINT | CMP | - | Conventional | 24/01/2023 | |
| PaaS - AI Platform | PAAS | CMP | - | Conventional | 14/06/2023 | |
| PaaS - IAM | PAAS | CMP | - | Conventional | 14/06/2023 | |
| PaaS - Kafka | PAAS | CMP | - | Conventional | 09/06/2023 | |
| PaaS - Numpy | PAAS | CMP | - | Conventional | 16/05/2023 | |

Figura 199 – Opzione per aggiungere una risorsa

At this point, the user is on the page where they can select the type of resource to create.

Taxonomies

Type
VM

Next

Figura 200 – Selezione del tipo di risorsa da creare

From the dropdown menu, select the type of resource to create. Then, click the "Next" button. You will be on the resource compilation page.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 201 – Esempio di form per la creazione di una relazione

The individual parameters to be entered in the "Properties" section are specified in the table:

Mandatory parameters are indicated with *

| Name | Type | Description | Example |
|-----------------|---------|--|------------------|
| category | string | Enter the resource's category | CAT0004BT |
| Price list code | string | Enter the price list identifier code from which associations are derived | PRC005DE |
| confidential | boolean | If enabled, indicates that the resource is confidential | false |
| description | string | Enter a free description of the resource | Low end machine |
| Name* | string | Enter the resource name | 8Core16GB- small |
| RAM(GIB)* | integer | Enter here the quantity in GiB used by the machines included in the relationship | 16 |
| VCPU* | integer | Enter here the number of vCPUs used by the machines included in the relationship | 8 |

On the resource creation page, fill in all fields in the "Properties" section. After doing this, select one or more tags for the "Add SCMP tag..." field and fill in notes in the "Tags & Note" section.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed web interface for creating a new resource. At the top, there's a navigation bar with links for 'CMP Resources', 'Cloud SKUs', 'Cloud Resources', 'Services', and 'Blueprints'. Below the navigation, the path 'Catalog / CMP / Create' is visible. The main area is titled 'New resource Virtual Machine del Catalogo'. A large modal window is open, divided into several tabs: 'Properties' (which is active and shown in light blue), 'Tags & Notes', 'Relations', and 'Costs'. The 'Tags & Notes' tab contains fields for adding a CMP tag and entering notes. The 'Relations' tab is currently empty. At the bottom right of the modal are two buttons: 'Save' and 'Close'.

Figura 202 – Sezione tag e note

In the "Relations" section, open the left section. Subsequently, it is possible to use the "search" filters with free text or select a "System Type" from those available to filter the resource table.

Once the resource to be associated is identified, drag and drop it from the right side of the page to the left side.

It is possible to add only one resource per provider type. If the user tries to insert another resource from the same provider, a pop-up will appear inviting the user to add only one resource per provider.



The screenshot shows the 'Relations' section of the 'New resource Virtual Machine del Catalogo' creation form. On the left, a list of providers is shown under 'Provided by (Min: 0 Max: 99)'. On the right, a search interface allows selecting a provider from a list of resources that can be added, including Azure, AzureStack, and AzureStackHCI.

Figura 203 – Selezione del provider per associare le risorse

We can make a "single" association by entering only one machine in this section. In this way, the system allows us to manually select a customized price to associate with the resource in the "Cost" section below. To do this, select the billing interval (hourly, daily, weekly, monthly) and enter the cost relative to the selected period on the right.

The screenshot shows the 'Cost' section of the 'New resource Virtual Machine del Catalogo' creation form. A dropdown menu allows selecting a billing interval (Hourly, Daily, Weekly, Monthly), and a text input field shows a cost of €100. Buttons for 'Save' and 'Close' are at the bottom.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform


Figura 204 – Sezione costi delle relazioni

By selecting more than one machine per provider, the cost section is automatically hidden; the applied costs will be defined by the percentages configured in the subsystems.

| Type | Name | CPU | RAM |
|----------------------|--------------------|-----|---------|
| VMCatalogoOracle | BM.DenseIO.E4.128 | 128 | 2048 Gi |
| VMCatalogoOracle | BM.DenseIO2.52 | 52 | 768 Gi |
| VMCatalogoOracle | BM.Optimized3.36 | 36 | 512 Gi |
| VMCatalogoOracle | BM.Standard.A1.160 | 160 | 1024 Gi |
| VMCatalogoOracle | BM.Standard.E3.128 | 128 | 2048 Gi |
| VMCatalogoOracle | BM.Standard.E4.128 | 128 | 2048 Gi |
| VMCatalogoOracle | BM.Standard2.52 | 52 | 768 Gi |
| VMCatalogoOracle | BM.Standard3.64 | 64 | 1024 Gi |
| VMCatalogoAzure | Basic_A0 | 1 | 0 Gi |
| VMCatalogoAzureStack | Basic_A0 | 1 | 0 Gi |

Figura 205 – Risorse associate alla risorsa SCMP

Once the resources are related, an illustrative diagram will automatically be created in the 'Relations Chart' section.

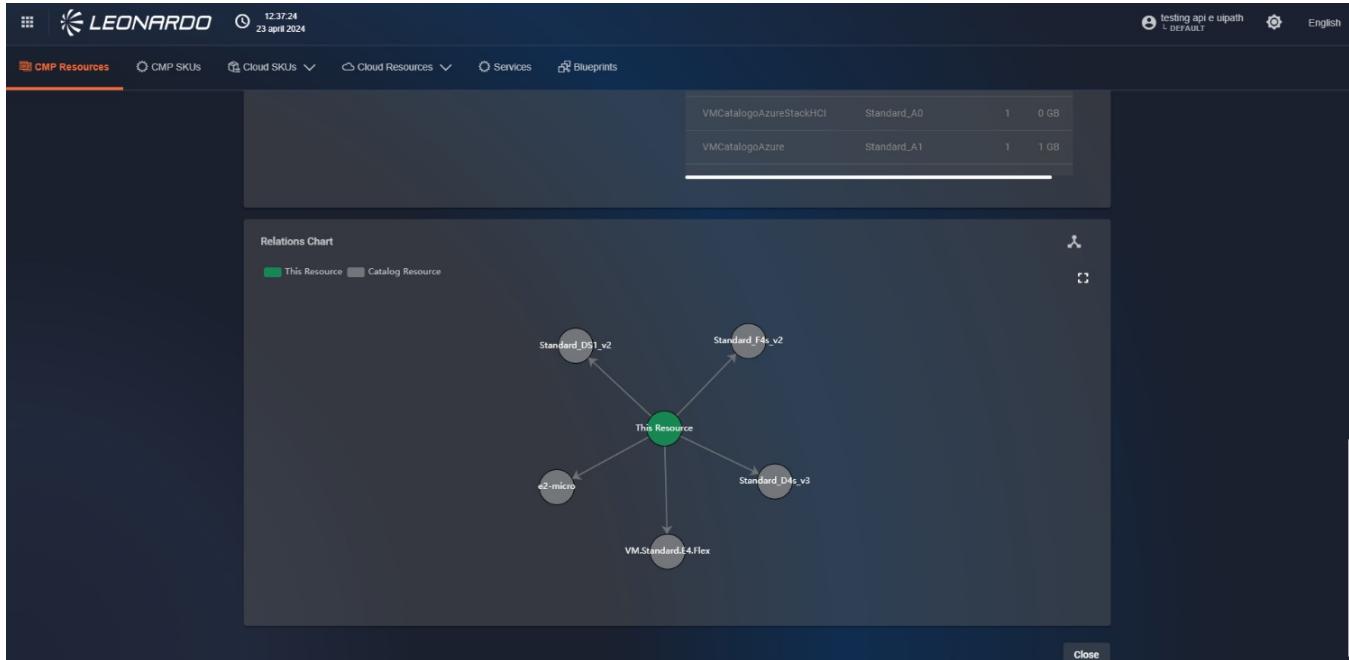

*Figura 206 – Creazione automatica del
Relation Chart*

Finally, in the bottom right, click the "Save" button to save the changes. A banner will appear at the bottom, notifying the user of the successful resource creation, and the user will be redirected to the page containing the list of resources.

9.0.1.1.4 USING THE CATALOG TABLE

9.0.1.1.4.1 Resource Summary View

To view the data of an SCMP resource, on the "Resources" page of Catalog, in the list of resources, click on the record of interest for a resource. A window will appear showing brief information about the identified resource: System, Name, Size, Update Date, RAM, and CPU as shown in the following image.



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

| Name | Type | Provider | Size | Confidential | Positioning on | Creation Date |
|---------------------|-----------|----------|------|--------------|----------------|---------------|
| Audio Analytics | AIMODEL | CMP | - | Conventional | 03/03/2023 | |
| BLUEPRINT DEMO | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | |
| Blueprint DEMO path | BLUEPRINT | CMP | - | Conventional | 21/06/2023 | |
| Blueprint Retail | BLUEPRINT | CMP | - | Conventional | 24/01/2023 | |
| MyApplication | BLUEPRINT | CMP | - | Conventional | 14/06/2023 | |
| PaaS - AI Platform | PAAS | CMP | - | Conventional | 14/06/2023 | |

Details for VM-AllProvider:

| System | CMP | Name | VM-AllProvider |
|-------------|--------------------------|----------|----------------|
| Name | VM-AllProvider | RAM(GiB) | 8 |
| Size | i3-micro.d2s_v3.e2-micro | vCPUs | 2 |
| Update Date | 23/06/2023 | | |

Resource distribution chart: 66.67% VMs, 33.33% Cluster Kubernetes.

Figura 207 – Dettaglio rapido delle risorse di catalogo

9.0.1.1.4.2 Viewing Catalog Relationships

To view the data of an SCMP resource, on the "Resources" page of Catalog, in the list of resources, click on the kebab menu for a resource and then click on "Show".

| Name | Type | Provider | Size | Confidential | Positioning on | Creation Date |
|---------------------|-----------|----------|------|--------------|----------------|---------------|
| Audio Analytics | AIMODEL | CMP | - | Conventional | 03/03/2023 | |
| BLUEPRINT DEMO | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | |
| Blueprint DEMO path | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | |
| Blueprint Retail | BLUEPRINT | CMP | - | Conventional | 21/06/2023 | |
| MyApplication | BLUEPRINT | CMP | - | Conventional | 24/01/2023 | |
| PaaS - AI Platform | PAAS | CMP | - | Conventional | 14/06/2023 | |
| PaaS - IAM | PAAS | CMP | - | Conventional | 14/06/2023 | |
| PaaS - Kafka | PAAS | CMP | - | Conventional | 09/06/2023 | |
| PaaS - Nginx | PAAS | CMP | - | Conventional | 10/05/2023 | |
| PaaS - Spark | PAAS | CMP | - | Conventional | 14/06/2023 | |

Resource distribution chart: 60% VMs, 40% Cluster Kubernetes.

Figura 208 – Accesso alla risorsa in modalità view

After doing this, the user is on the resource page in view mode, where they can see the data but cannot modify it.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a detailed view of a virtual machine resource in the catalog. The top navigation bar includes links for CMP, AWS, Azure, Azure Stack, Azure Stack HCI, AzureStack Hybrid Cloud, Google, OpenShift, VMWare, Blueprints, Services, Custom Services, AI Services, and PaaS. The main content area displays the following information:

| Virtual Machine del Catalogo (v1.1) | | Details | |
|-------------------------------------|----------------------------|----------|--------------------|
| System | CMP | Name | vm-small-all-Azure |
| Name | vm-small-all-Azure | RAM(GiB) | 8 |
| Size | Standard_D4msDs1_v2_F8s_v2 | N° VCPUs | 2 |
| Update Date | 06/06/2023 | | |

Below the table, there is a sidebar with links: Properties, Tags & Notes, Relations, Costs, and Relations Chart. A 'Close' button is located at the bottom right of the modal window.

Figura 209 – Dettaglio completo delle risorse di catalogo

The detail of a resource is divided into various sections:

- Details.
- Properties.
- Tags & Notes.
- Relations.
- Cost, if present.
- Relations Chart.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a detailed view of a catalog item named 'vm-small-all-Azure'. The 'Properties' tab is active, displaying configuration details such as Name, RAM, and vCPUs. The 'Details' tab shows basic information like System (CMP), Name (vm-small-all-Azure), RAM (8GB), and vCPUs (2). Other tabs include 'Tags & Notes', 'Relations', 'Costs', and 'Relations Chart'.

Figura 210 – Sezione proprietà degli elementi del catalogo

The screenshot shows the 'Tags & Notes' section for the same catalog item. It includes fields for 'Provider tags...', 'Add CMP tag...', and a 'Notes' area. Other tabs include 'Properties', 'Details', 'Relations', 'Costs', and 'Relations Chart'.

Figura 211 – Sezione Tags & Note degli elementi del catalogo

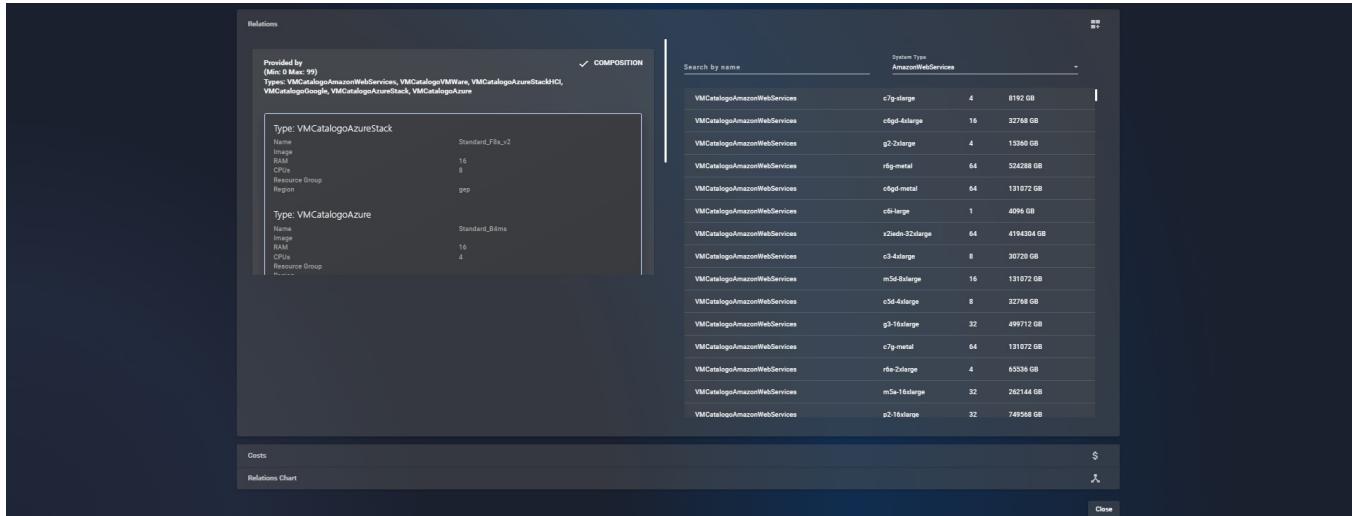


Figura 212 – Sezione delle relazioni del catalogo SCMP

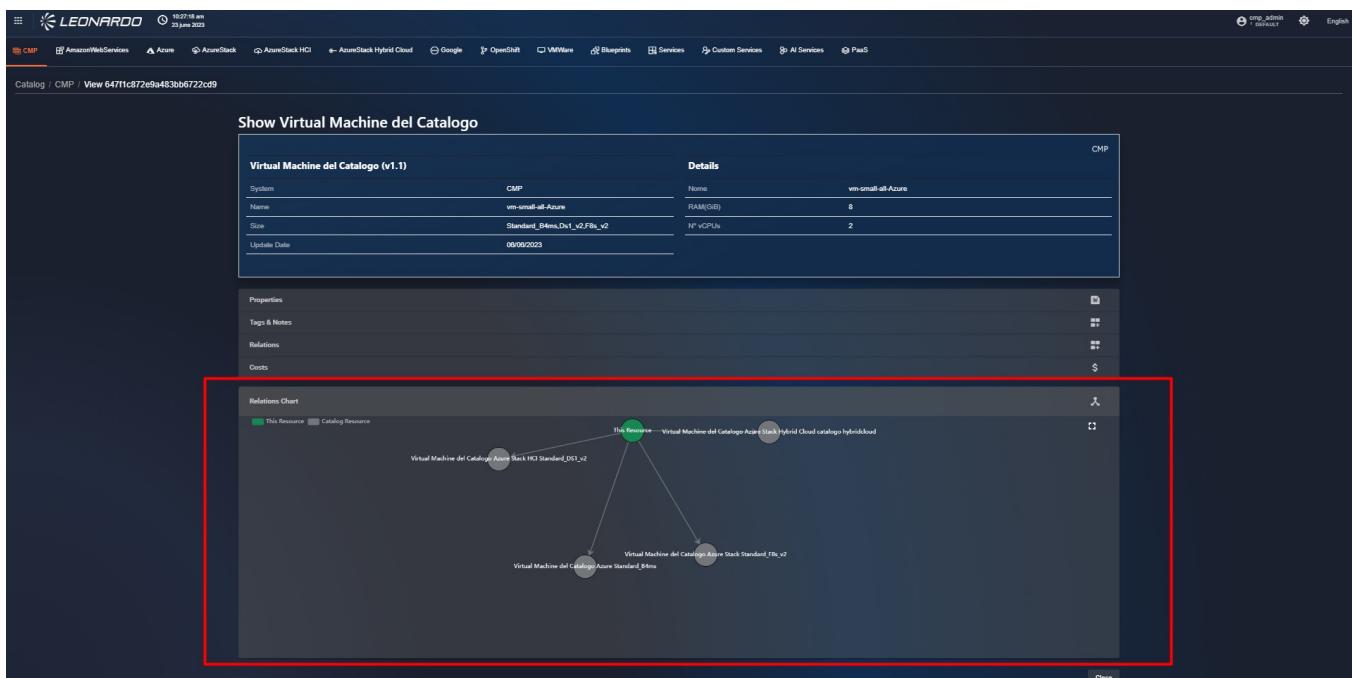


Figura 213 – Sezione Relations Chart delle risorse

In the bottom right, click the "Close" button. The user will be redirected to the "Resources" page of Catalog.

9.0.1.1.4.3 Editing Catalog Relationships



To modify an SCMP resource, on the "Resources" page of Catalog, in the list of resources, click on the kebab menu for a resource and then click on "Edit".

The screenshot shows the Leonardo SCMP interface. At the top, there's a navigation bar with various service icons like CMP, AWS, Azure, etc. Below it, a secondary navigation bar has 'Catalog' and 'CMP' tabs, with 'Catalog' being active. The main area is titled 'Catalog resources (20)' and contains a table of resources. The table columns include Name, Type, Provider, Size, Confidential, Provisioning on, Creation Date, and several actions represented by icons. A context menu is open over the 'MyApplication' row, with the 'Edit' option highlighted by a red box and a red arrow pointing to it. To the right of the table, there are two donut charts: one for VMs (blue) and Cluster Kubernetes (green), and another for Conventional resources (red). At the bottom of the table, there are pagination controls.

Figura 214 – Accesso alla risorsa in modalità edit

After doing this, the user is on the resource page in edit mode. Unlike 'Show' mode, in 'Edit' mode, it is possible to modify the Properties section and the Cost section.

In the bottom right, click the "Save" button. At this point, a banner will appear at the bottom, notifying the user of the successful resource update.

In addition, the user will be redirected to the "Resources" page of Catalog.



The screenshot shows the 'Properties' tab of a catalog resource. The resource name is 'uipathCat001'. The 'Name' field contains 'uipathRelation1'. The 'RAM(GiB)' field is set to '8'. The 'vCPUs' field is set to '4'. The 'Description' field contains 'descrizione relazione estesa'. There is also a 'Confidential' checkbox which is unchecked.

Figura 215 – Modifica della relazione

9.0.1.1.4.4 Deleting Catalog Relationships

To delete an SCMP resource, on the "Resources" page of Catalog, in the list of resources, click on the kebab menu for a resource and then click on "Delete".

The screenshot shows the 'Catalog / CMP' page. A context menu is open over a resource named 'MyApplication'. The 'Delete' option in the menu is highlighted with a red box. To the right of the table, there are two donut charts: one showing VMs and Cluster Kubernetes distribution, and another showing Conventional resources.

| Name | Type | Provider | Size | Confidential | Provisioning on | Creation Date |
|-----------------------|-----------|----------|------|--------------|-----------------|---------------|
| Audio Analytics | AMODEL | CMP | - | Conventional | 03/02/2023 | |
| BLUEPRINT DEMO | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | |
| Blueprint DEMO path | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | |
| MyApplication | BLUEPRINT | CMP | - | Conventional | 24/01/2023 | |
| PaaS - AI Platform | PAAS | CMP | - | Conventional | 14/06/2023 | |
| PaaS - IAM | PAAS | CMP | - | Conventional | 14/06/2023 | |
| PaaS - Kafka | PAAS | CMP | - | Conventional | 09/06/2023 | |
| PaaS - Nginx | PAAS | CMP | - | Conventional | 16/05/2023 | |
| PaaS - Spark | PAAS | CMP | - | Conventional | 14/06/2023 | |
| Pro Blueprint Edition | BLUEPRINT | CMP | - | Conventional | 30/01/2023 | |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 216 – Eliminazione di una risorsa

Once done, a modal appears where it is necessary to click the "Remove" button to confirm the resource deletion.

| Name | Type | AIModel | Status | Last Update | Actions | |
|---------------------|-----------|---------|--------|--------------|------------|---|
| Audio Analytics | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | ⋮ |
| BLUEPRINT DEMO | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | ⋮ |
| Blueprint DEMO path | BLUEPRINT | CMP | - | Conventional | 24/01/2023 | ⋮ |
| MyApplication | BLUEPRINT | CMP | - | Conventional | 14/06/2023 | ⋮ |
| PaaS - AI Platform | PAAS | CMP | - | Conventional | 14/06/2023 | ⋮ |
| PaaS - IAM | PAAS | CMP | - | Conventional | 09/06/2023 | ⋮ |
| PaaS - Kafka | PAAS | CMP | - | Conventional | 09/06/2023 | ⋮ |

Figura 217 – Conferma eliminazione della risorsa

9.0.1.2 Resources and relationships between SKUs

Within the SCMP, it is possible to configure an "SCMP SKU" type resource. This relationship allows mapping SKUs received from providers to define their costs and the unit of measure displayed in the system.

To access the SKUs page, click the "SCMP SKU" tab at the top of the Catalog functionality.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with tabs for 'CMP Resources' (selected), 'Cloud SKUs', 'Cloud Resources', 'Services', and 'Blueprints'. Below the navigation is a breadcrumb trail: 'Catalog / CMP SKUs'. Underneath the breadcrumb is a link 'SKU List (0)'. A red box highlights the 'CMP SKUs' tab, and a red arrow points to the 'SKU List (0)' link. The main content area has a header 'Filtering by: (No filter applied yet)'. It contains three search input fields: 'Search', 'Search by tags', and 'Search by Service Name'. Below these fields is a message 'No SKUs found'. At the bottom right, there are pagination controls for 'Items per page: 20' and '0 of 0'.

Figura 218 – Accesso a "SCMP SKU"

At the top, there is a filter section that allows searching by:

- "Search": allows entering free text for searching.
- "Search By tags": allows searching using tags associated with resources.
- "Search by Service name": allows searching by service name.

9.0.1.2.1 EXPORT OF CATALOG RESOURCES

To export the list of Catalog resources present in the list, always on the "SCMP" tab page, in the upper right corner, click on the hamburger menu, and then click on "Export".

The operator will have the option to export the list of results in .csv and/or .json format.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Type | Provider | Size | Confidential | Provisioning on | Creation Date | Actions |
|---------------------|-----------|----------|------|--------------|-----------------|---------------|---------|
| Audio Analytics | AIMODEL | CMP | - | Conventional | 2023-03-03 | 2023-03-03 | ⋮ |
| BLUEPRINT DEMO | BLUEPRINT | CMP | - | Conventional | 2023-06-09 | 2023-06-09 | ⋮ |
| Blueprint DEMO path | BLUEPRINT | CMP | - | Conventional | 2023-06-09 | 2023-06-09 | ⋮ |
| Blueprint Retail | BLUEPRINT | CMP | - | Conventional | 2023-06-21 | 2023-06-21 | ⋮ |
| MyApplication | BLUEPRINT | CMP | - | Conventional | 2023-01-24 | 2023-01-24 | ⋮ |
| PaaS - AI Platform | PAAS | CMP | - | Conventional | 2023-06-14 | 2023-06-14 | ⋮ |
| PaaS - IAM | PAAS | CMP | - | Conventional | 2023-06-14 | 2023-06-14 | ⋮ |
| PaaS - Kafka | PAAS | CMP | - | Conventional | 2023-06-09 | 2023-06-09 | ⋮ |

Figura 219 – Scaricare la lista di risultati

9.0.1.2.2 CREATING A CATALOG SKU RELATIONSHIP

To create a resource in the Catalog, always on the "SCMP" tab page, in the upper right corner, click on the hamburger menu, and then click on "Add Catalog Resource".



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

*Figura 220 – Opzione per aggiungere
una risorsa “SKU”*

At this point, the user is on the "SKU" resource creation page. Click on the accordions on the page to view their details.

The screenshot shows the 'New SKU' creation interface. The top navigation bar includes the Leonardo logo, a timestamp (09:55:41, 23 aprile 2024), and user information (testing api e upath tenant). The main menu has links for 'CMP Resources', 'CMP SKUs' (which is highlighted in orange), 'Cloud SKUs', 'Cloud Resources', 'Services', and 'Blueprints'. Below the menu, the breadcrumb path is 'Catalog / CMP SKUs / Create'. The central area is titled 'New SKU' and contains four expandable sections: 'Properties', 'Tags & Notes', 'Relations', and 'Costs'. At the bottom right are 'Save' and 'Close' buttons.

*Figura 221 – IPagina di creazione
“SKU”*

In the "Properties" section, fill in all fields defined in the table.

Mandatory parameters are indicated with *

| Name | Type | Description | Example |
|-----------------|--------|--|---|
| Price list code | string | Enter the price list identifier code from which associations are derived | PRI002FG |
| description | string | Enter a free description of the SKU | This sku is the basic v m on this p rovider |
| name * | string | Enter the SKU name | Simple vm sku |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Type | Description | Example |
|------------------------------|--------|--|------------------------|
| Service name | string | Enter the name of the service related to the SKU | enter the service name |
| unit | string | Enter text that will be used as the "unit of measure" displayed across all functionalities | MB/hour |
| Unit conversion Expression * | string | Enter the conversion formula between the value received from the provider and the value that will be used in the SCMP (conversion between the provider's unit of measure and the unit of measure indicated in the SKU relationship) "\$var" indicates the value received from the provider | \$var * 24 / 100 |

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there is a header with the Leonardo logo, the date (09.06.19, 23 April 2024), and some user information. Below the header, there is a navigation bar with links for CMP Resources, CMP SKUs (which is highlighted in orange), Cloud SKUs, Cloud Resources, Services, and Blueprints. The main area shows a breadcrumb path: Catalog / CMP SKUs / Create. A title 'New SKU' is displayed above a modal window. The modal has a tab labeled 'Properties'. Inside the properties section, there are fields for 'Price List Code', 'Description', 'Name *', 'Service Name', 'Unit', and 'Unit Conversion Expression *'. To the right of the 'Unit Conversion Expression' field is a button labeled 'TEST EXPRESSION'.

*Figura 222 – Compilazione dei campi,
selezione Properties*

After entering the conversion formula, it is necessary to click the "Test expression" button to verify its correctness.

If it has been entered correctly, the button will turn "Green" with "TEST OK" written on it; otherwise, it will turn "Red" with "KO". In this case, the possibility of saving the relationship is inhibited.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed web interface for creating a new SKU. At the top, there's a navigation bar with links for 'CMP Resources', 'CMP SKUs' (which is highlighted in orange), 'Cloud SKUs', 'Cloud Resources', 'Services', and 'Blueprints'. The main area has a title 'New SKU' and a 'Properties' section containing several input fields: 'Price List Code', 'Description', 'Name *', 'Service Name', 'Unit', and 'Unit Conversion Expression *' which contains the value '\$var * 24'. Below these fields is a large green button labeled 'TEST OK'. At the bottom of the form is a 'Tags & Notes' section.

Figura 223 – Conferma della formula di conversione

Subsequently, select one or more tags for the "Add SCMP tag..." field and fill in notes in the "Tags & Note" section.

In the "Relation" section, it is possible to select one or more SKUs from the various provider catalogs to relate them and unify their costs. To do this, click on the "Composition" section on the left; a dark section will open where, using drag and drop, we can move the available SKUs to the right section.

In the right section, filters can be used to display only relevant results. The available filters are: the origin provider, the service name, and a free text field (in yellow in the image).



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the 'Relations' section of the Secure Cloud Management Platform. On the left, there's a sidebar with 'Tags & Notes' and 'Relations'. The main area displays a list of resources related to the selected SKU. A yellow box highlights the search bar where 'Provider: Google' is typed. A red box highlights a specific item in the list: 'Licensing Fee for Standard Plan on VM with 12 vCPU or more'. A yellow arrow points from the top right towards the search bar.

Figura 224 – Drag and drop Relazioni
SKU

Once the resources are related, an illustrative diagram will automatically be created in the 'Relations Chart' section.

The screenshot shows the 'Relations Chart' section. It features a circular diagram with three nodes: a green circle labeled 'This Resource' at the top, and two pink circles labeled 'Licensing Fee for Standard Plan...' at the bottom. Arrows connect the green circle to both pink circles. A legend at the top left indicates that green represents 'This Resource' and pink represents 'SKU'. The interface includes a toolbar at the top and a navigation bar at the bottom.



Figura 225 – Creazione automatica del Relation Chart

Finally, click the save button to confirm the creation of the SKU relationship. Upon completion, you will return to the page containing the list of SKU relationships, where you can find the new relationship in the list.

9.0.1.2.3 USING THE CATALOG TABLE

9.0.1.2.3.1 Catalog Resource Summary View

To view the data of an SKU resource, in the list of resources, click on the record of interest for a resource. A checkbox will appear showing brief information about the identified resource: System, Name, Size, Update Date, name, and service as shown in the following image.

The screenshot shows the Leonardo Secure Cloud Management Platform interface. The top navigation bar includes links for CMP Resources, CMP SKUs (which is the active tab), Cloud SKUs, Cloud Resources, Services, and Blueprints. The top right corner shows a user profile with the name 'testing api e upath' and 'DEFAULT', and language settings for English. The main content area is titled 'Catalog / Azure SKUs' and shows a list titled 'SKUs List (216)'. On the left, there are filtering options: 'Filtering by: PROVIDER Azure' and search fields for 'Search' and 'Search by Service Name'. A modal window is open over the list, displaying detailed information for a specific SKU. The modal title is 'Sku del Catalogo Azure (v1.1)'. The 'Details' section contains the following data:

| Name | System | Service Name | Creation Date |
|--------------------|---|--|---------------------|
| 100 RU/s | Azure | 100 RU/s | 21/04/2024 06:00:33 |
| 100 RU/s | - | - | - |
| 100 RU/s | - | - | - |
| 15 vCPU VM License | SQL Database General Purpose - Serverless - Compute Gen5 - 1 vCore - Free - EU West | Azure Cosmos DB - 100 RU/s - US West | 01/02/2024 |
| 15 vCPU VM License | Azure Cosmos DB - 100 RU/s - US West | Red Hat Enterprise Linux - 5+ vCPU VM License | 21/04/2024 |
| 4 vCPU VM License | Azure Cosmos DB - 100 RU/s | Red Hat Enterprise Linux - 1.4 vCPU VM License | 19/04/2024 |
| 4 vCPU VM License | Red Hat Enterprise Linux - 1.4 vCPU VM License | Red Hat Enterprise Linux - 1.4 vCPU VM License | 19/04/2024 |

Figura 226 – Dettaglio rapido delle risorse SKU

9.0.1.2.3.2 Viewing Relationships in the Catalog

To view the data of an SKU resource, in the list of resources, click on the kebab menu for a resource and then click on "Show".



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Service Name | Creation Date |
|--------------------|---|---------------|
| 1 vCore - Free | SQL Database General Purpose - Serverless - Compute Gen5 - 1 vCore - Free - EU West | 01/03/2024 |
| 100 RU/s | Azure Cosmos DB - 100 RU/s - US West | 21/04/2024 |
| 100 RU/s | Azure Cosmos DB - 100 RU/s | 21/04/2024 |
| 16 vCPU VM License | Red Hat Enterprise Linux - 5+ vCPU VM License | 19/04/2024 |
| 4 vCPU VM License | Red Hat Enterprise Linux - 1-4 vCPU VM License | 19/04/2024 |

Figura 227 – Accesso alla risorsa in modalità view

After doing this, the user is on the resource page in view mode, where they can see the data but cannot modify it.

Figura 228 – Dettaglio completo delle



risorse di catalogo

The detail of a resource is divided into various sections:

- Details.
- Properties.
- Tags & Notes: where in the "Provider Tags..." field it is not possible to select a tag, as it is automatically obtained from the subsystem it belongs to; the "Add SCMP Tag..." field allows selecting tags from a list or entering one manually; in the Notes field, it is possible to enter a text note.
- Relations: where provider SKUs are present in relation.
- Cost.
- Relations Chart.

The screenshot shows the Leonardo Secure Cloud Management Platform interface. The top navigation bar includes the Leonardo logo, user information ('testing api e upath'), and language selection ('English'). The main menu has tabs for 'CMP Resources', 'CMP SKUs' (which is active), 'Cloud SKUs', 'Cloud Resources', 'Services', and 'Blueprints'. The left sidebar has sections for 'Properties', 'Tags & Notes', 'Relations', and 'Costs'. The main content area displays the properties of a catalog SKU named 'Balanced PD'. The properties listed are: Price List Code (MGDGGP020), Description (Balanced PD), Name (Balanced PD), Service Name (Balanced PD), Unit (gibibyte hour), and Unit Conversion Expression ((Svar / 30) / 24). A 'TEST EXPRESSION' button is also visible. At the bottom of the properties section, there are three small icons for 'Tags & Notes', 'Relations', and 'Costs'.

Figura 229 – Sezione proprietà degli elementi SKU di catalogo



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00


Secure Cloud Management Platform

The screenshot shows the 'Tags & Notes' section of the Leonardo platform. At the top, there is a unit conversion expression: $(\$var / 30) / 24$. Below this is a 'TEST EXPRESSION' button. The 'Tags & Notes' section contains fields for 'Add CMP tag...' and 'Notes', with a 'Save' button at the bottom right. Under 'Relations' and 'Costs', there are tabs for 'Relations Chart'. The 'Relations Chart' section displays a circular node labeled 'This Resource' connected by a red line to a small red square node labeled 'SKU'. The interface has a dark theme with orange highlights for active sections.

*Figura 230 – Sezione Tags & Note
degli elementi SKU di catalogo*

The screenshot shows the 'Relations' section of the Leonardo platform. It displays a 'Provided by' section with a maximum value of 99. The 'Type' is listed as 'SKUCatalogoGoogle'. To the right, there is a 'COMPOSITION' section with a search bar for 'Search by name'. Below it, there are dropdown menus for 'Provider' and 'Service Name'. A list of resources that can be added is shown, including '1 Year Starter Pack', '1 vCore - Free', '100 RU/s', '10000 Credit Plan usage Additional Credits', '100K ARR Additional Developer User License', '100K ARR Overages', '100K ARR Sub-Accounts', '150K ARR Additional Developer User License', and '150K ARR Overages'. The interface has a dark theme with orange highlights for active sections.

*Figura 231 – Sezione delle relazioni
degli SKU di catalogo*

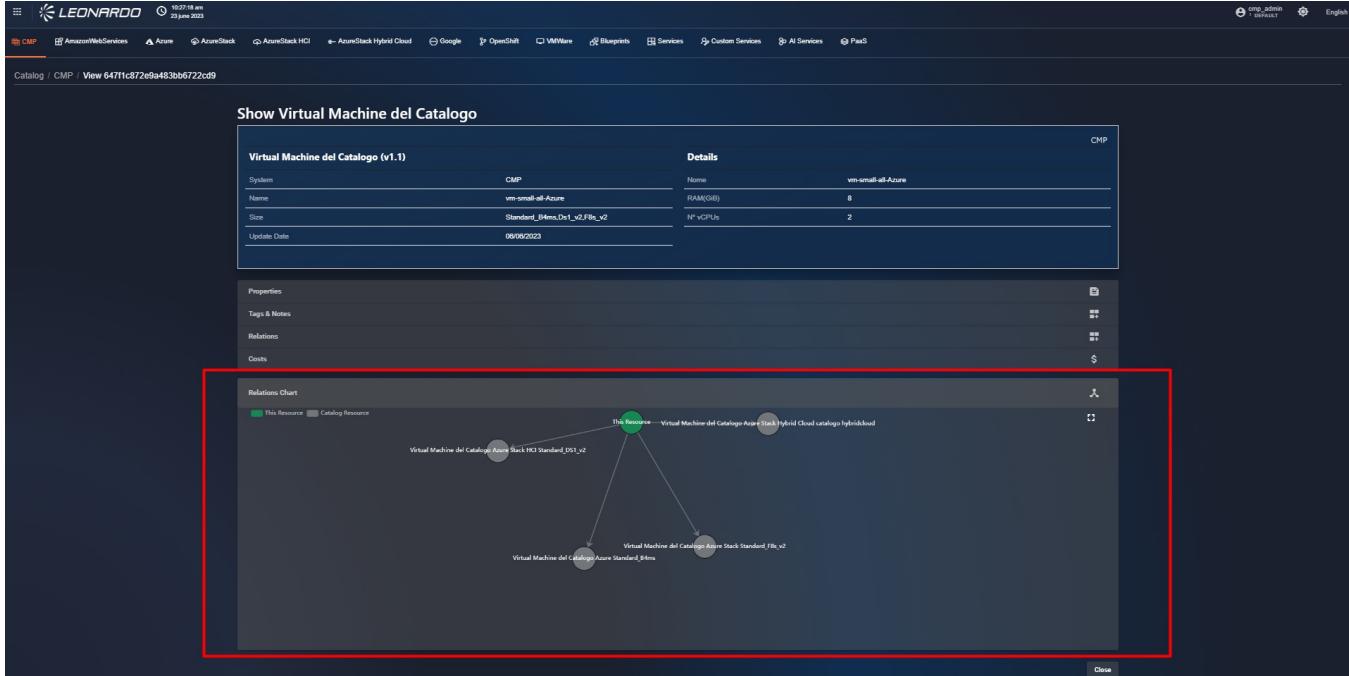

The screenshot shows a detailed view of a virtual machine resource within the Leonardo Secure Cloud Management Platform. At the top, there's a navigation bar with various cloud provider icons (AWS, Azure, Google, OpenShift, VMWare, Blueprints, Services, Custom Services, AI Services, Pack) and a language selection for English. Below the navigation is a breadcrumb trail: Catalog / CMP / View 64711c872e9a483bb6722cd9. The main content area has a title "Show Virtual Machine del Catalogo" and a sub-section "Virtual Machine del Catalogo (v1.1)". This section contains a table with details: System (CMP), Name (vm-small-all-Azure), RAM (8GB), Size (Standard_0Ms.0s_v2_Flex_v2), and Update Date (06/06/2023). To the right of the table is a "Details" panel showing Name (vm-small-all-Azure), RAM (8GB), and N° vGPUs (2). Below these are tabs for Properties, Tags & Notes, Relations, and Costs. A prominent red rectangular box highlights the "Relations" tab, which displays a "Relations Chart". The chart shows a network of resources: "Virtual Machine del Catalogo Azure Stack HC3 Standard_U01_v2" (green circle, labeled "This Resource"), "Virtual Machine del Catalogo Azure Stack Hybrid Cloud catalogo hybridcloud" (grey circle), and "Virtual Machine del Catalogo Azure standard_B0ms" (grey circle). Arrows indicate relationships between these resources. In the bottom right corner of the Relations Chart, there is a "Close" button.

*Figura 232 – Sezione Relations Chart
delle risorse*

In the bottom right, click the "Close" button. The user will be redirected to the page containing the list of resources.

9.0.1.2.3.3 Editing Catalog Relationships

To modify an SCMP resource, on the "Resources" page of Catalog, in the list of resources, click on the kebab menu for a resource and then click on "Edit".



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a web-based interface for managing cloud resources. At the top, there's a navigation bar with various service icons like CMP, AWS, Azure, etc. Below it, a sub-menu for 'Catalog' is active, showing 'Catalog resources (20)'. The main area displays a table of resources with columns for Name, Type, Provider, Size, Confidentiality, Provisioning on, and Creation Date. A context menu is open over the row for 'MyApplication', with options 'Show', 'Edit' (which is highlighted with a red box), 'Delete', and 'Instance'. To the right of the table, there are two donut charts: one for VMs (blue) and Cluster Kubernetes (green), and another for Conventional resources (red). The bottom of the screen shows pagination controls.

| Name | Type | Provider | Size | Confidential | Provisioning on | Creation Date | Actions |
|-----------------------|-----------|----------|------|--------------|-----------------|---------------|----------------|
| Audio Analytics | AIMODEL | CMP | - | Conventional | 03/03/2023 | | ⋮ |
| BLUEPRINT DEMO | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | | ⋮ |
| Blueprint DEMO path | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | | ⋮ |
| MyApplication | BLUEPRINT | CMP | - | Conventional | 24/01/2023 | | ⋮ |
| PaaS - AI Platform | PAAS | CMP | - | Conventional | 14/06/2023 | | ⋮ |
| PaaS - IAM | PAAS | CMP | - | Conventional | 14/06/2023 | | ⋮ |
| PaaS - Kafka | PAAS | CMP | - | Conventional | 09/06/2023 | | ⋮ |
| PaaS - Nginx | PAAS | CMP | - | Conventional | 16/05/2023 | | ⋮ |
| PaaS - Spark | PAAS | CMP | - | Conventional | 14/06/2023 | | ⋮ |
| Pro Blueprint Edition | BLUEPRINT | CMP | - | Conventional | 30/01/2023 | | ⋮ |

Figura 233 – Accesso alla risorsa in modalità edit

After doing this, the user is on the resource page in edit mode. Unlike 'Show' mode, in 'Edit' mode, it is possible to modify the resource parameters.

9.0.1.2.3.4 Deleting Catalog SKU Relationships

To delete a catalog SKU resource, in the list of resources, click on the kebab menu for a resource and then click on "Delete".



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Type | Provider | Size | Confidential | Provisioning on | Creation Date | Actions |
|-----------------------|-----------|----------|------|--------------|-----------------|---------------|----------------|
| Audio Analytics | AIMODEL | CMP | - | Conventional | 03/03/2023 | 03/03/2023 | ⋮ |
| BLUEPRINT DEMO | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | 09/01/2023 | ⋮ |
| Blueprint DEMO path | BLUEPRINT | CMP | - | Conventional | 09/01/2023 | 09/01/2023 | ⋮ |
| MyApplication | BLUEPRINT | CMP | - | Conventional | 24/01/2023 | 24/01/2023 | ⋮ |
| PaaS - AI Platform | PAAS | CMP | - | Conventional | 14/06/2023 | 14/06/2023 | ⋮ |
| PaaS - IAM | PAAS | CMP | - | Conventional | 14/06/2023 | 14/06/2023 | ⋮ |
| PaaS - Kafka | PAAS | CMP | - | Conventional | 09/06/2023 | 09/06/2023 | ⋮ |
| PaaS - Nginx | PAAS | CMP | - | Conventional | 16/05/2023 | 16/05/2023 | ⋮ |
| PaaS - Spark | PAAS | CMP | - | Conventional | 14/06/2023 | 14/06/2023 | ⋮ |
| Pro Blueprint Edition | BLUEPRINT | CMP | - | Conventional | 30/01/2023 | 30/01/2023 | ⋮ |

Figura 234 – Eliminazione di una risorsa SKU

Once done, a modal appears where it is necessary to click the "Remove" button to confirm the resource deletion.

Remove resource

IMPORTANT: Removing this resource problems to other linked resources could happen. Are you sure you really want to remove the resource Audio Analytics?

Cancel
Remove


Figura 235 – Conferma eliminazione della risorsa

9.0.1.3 Scheduled Import of Catalog Items

Manually entering catalog resources is a very long and costly operation. To simplify this, the user is given the possibility to insert an "Excel" file containing data that will then be automatically imported on the day indicated as "Start validity".

9.0.1.3.1 NEW IMPORT

To insert a new price list, it is necessary to click the "hamburger menu" available in the upper right corner of the catalog resources page and select "Import Catalogue".

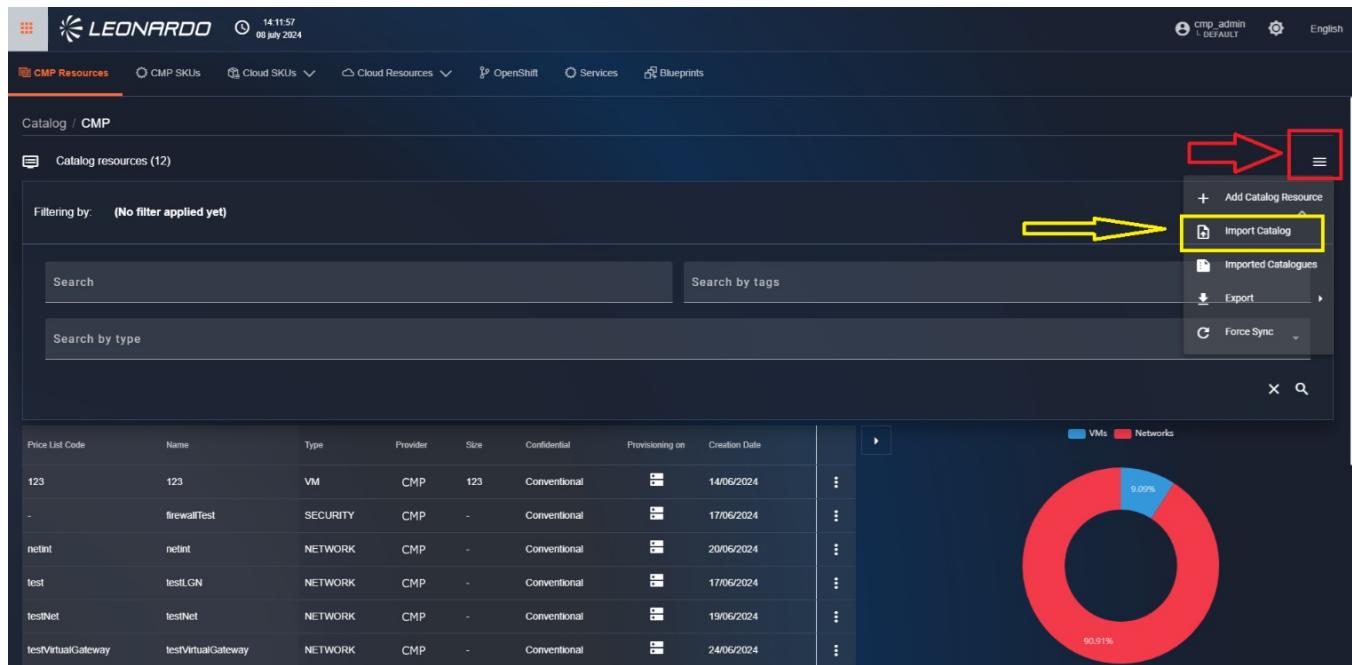

The screenshot shows the Leonardo Secure Cloud Management Platform interface. The top navigation bar includes the Leonardo logo, a date and time indicator (14:11:57, 08 July 2024), user information (cmp_admin, DEFAULT), and language selection (English). Below the navigation is a main menu with links to CMP Resources, CMP SKUs, Cloud SKUs, Cloud Resources, OpenShift, Services, and Blueprints. The current page is 'Catalog / CMP' with 'Catalog resources (12)' listed. On the right side, there is a sidebar menu with several options: 'Add Catalog Resource' (highlighted with a red box and arrow), 'Import Catalog' (highlighted with a yellow box and arrow), 'Imported Catalogues', 'Export', and 'Force Sync'. Below the sidebar is a table listing catalog resources with columns for Price List Code, Name, Type, Provider, Size, Confidential, Provisioning on, and Creation Date. At the bottom right of the page is a donut chart showing resource distribution between VMs (blue) and Networks (red).

Figura 236 – Accesso all "Importazione pianificata del catalogo"

After clicking the button, a modal will open, containing two buttons:

- "Resources": clicking this button indicates to the system that the inserted price list will contain resources.
- "SKUs": clicking this button indicates to the system that the inserted price list will contain SKU items.

Once the resource type to be created is selected, the page updates to show all mandatory parameters.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a header with the Leonardo logo, the date (14 18:01 08 July 2024), and user information (cmp_admin - DEFAULT, English). Below the header, the navigation bar includes 'CMP Resources', 'GMP SKUs', 'Cloud SKUs', 'Cloud Resources', 'OpenShift', 'Services', and 'Blueprints'. The main content area is titled 'Catalog' under 'CMP'. It shows a table of 'Catalog resources (12)' with columns: Price List Code, Name, Type, Provider, Size, Confidential, Provisioning on, and Creation Date. The table contains entries such as '123', 'firewallTest', 'netint', 'test', 'testNet', and 'testVirtualGateway'. To the right of the table is a donut chart showing resource distribution: 9.09% for VMs and 90.91% for Networks. A modal window titled 'Import Catalog' is overlaid on the page, asking 'What do you want to import?'.

| Price List Code | Name | Type | Provider | Size | Confidential | Provisioning on | Creation Date |
|--------------------|--------------------|----------|----------|------|--------------|-----------------|---------------|
| 123 | 123 | VM | CMP | 123 | Conventional | ... | 14/06/2024 |
| - | firewallTest | SECURITY | CMP | - | Conventional | ... | 17/06/2024 |
| netint | netint | NETWORK | CMP | - | Conventional | ... | 20/06/2024 |
| test | testLGN | NETWORK | CMP | - | Conventional | ... | 17/06/2024 |
| testNet | testNet | NETWORK | CMP | - | Conventional | ... | 19/06/2024 |
| testVirtualGateway | testVirtualGateway | NETWORK | CMP | - | Conventional | ... | 24/06/2024 |

Figura 237 – Scelta della tipologia di catalogo

Two parameters are present in the modal:

- Provider: Select the provider related to the price list that will be inserted.
- Valid From: It is possible to indicate a start validity date for the price list. On the day indicated in this variable, the system will automatically update the catalog resources to conform to the new price list.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

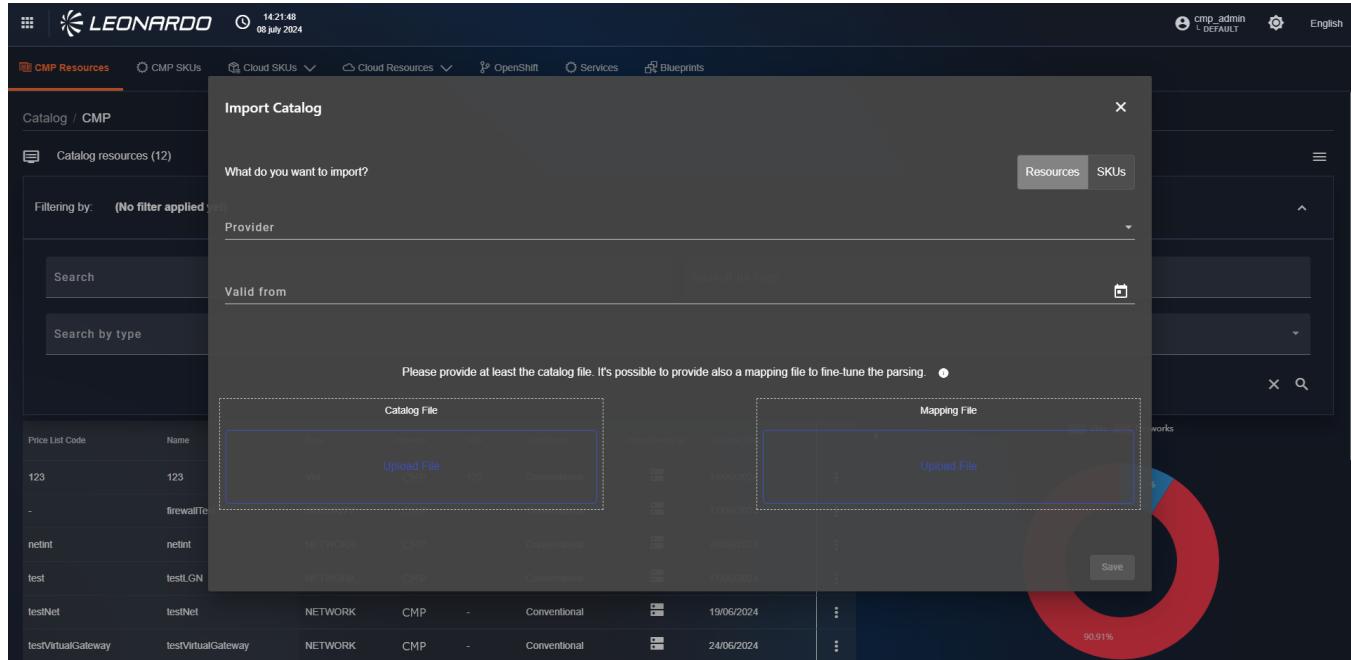


Figura 238 – Campi obbligatori per l'importazione

Furthermore, below the parameters, there are two sections for file upload. Clicking on the first square on the left will allow selecting an "XLS" file containing all the resources to be mapped. Clicking on the second square will allow inserting a mapping file, following the information shown in the "Help" section indicated with a "Question Mark" icon. Clicking on it will open a box, below the upload sections, containing all the information related to the mapping file to be inserted.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Import Catalog

Please provide at least the catalog file. It's possible to provide also a mapping file to fine-tune the parsing.

Catalog File

Mapping File

Upload File

Search

Mapping file has to be a csv and must contain the following columns of the catalog:

- name
- providerCode
- description
- price
- unit
- serviceName


Put a column in every row and specify which column of the catalog matches using a ';' as separator. For example:
unit;Unità di Misura

Figura 239 – Messaggio di aiuto per il file di Mapping

After entering all parameters, it will be possible to click the save button at the bottom, and we will be redirected to the imported catalogs management page, where it will be possible to monitor their insertion.

9.0.1.3.2 IMPORT MANAGEMENT

To insert a new price list, it is necessary to click the "hamburger menu" available in the upper right corner of the catalog resources page and select "Imported Catalogues".

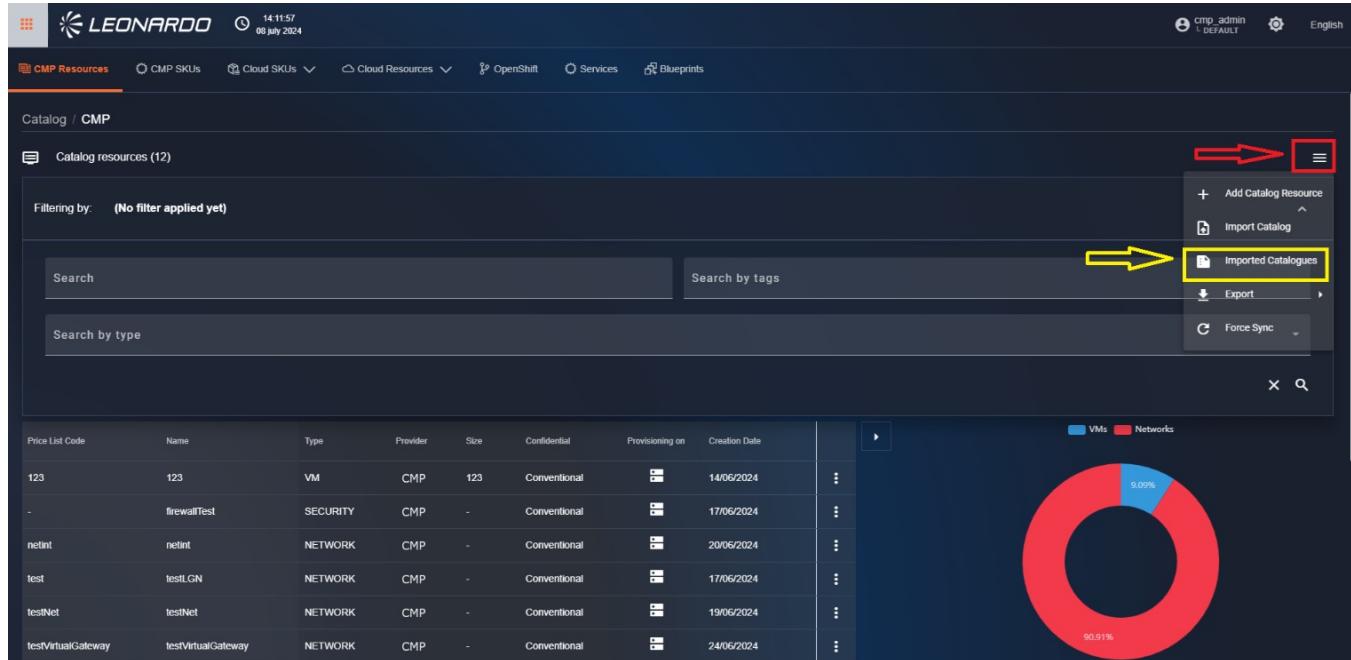

The screenshot shows the Leonardo Secure Cloud Management Platform's Catalog resources page. At the top, there are navigation links for CMP Resources, CMP SKUs, Cloud SKUs, Cloud Resources, OpenShift, Services, and Blueprints. The main area displays a table of catalog resources with columns for Price List Code, Name, Type, Provider, Size, Confidential, Provisioning on, and Creation Date. Below the table is a donut chart showing the distribution between VMs (9.09%) and Networks (90.91%). On the right side of the page, there is a sidebar with options for Add Catalog Resource, Import Catalog, Export, and Force Sync. A yellow arrow points to the 'Import Catalogues' button, which is highlighted with a yellow box. Another red arrow points to the 'Import Catalog' button.

| Price List Code | Name | Type | Provider | Size | Confidential | Provisioning on | Creation Date | Actions |
|--------------------|--------------------|----------|----------|------|--------------|-----------------|---------------|---------|
| 123 | 123 | VM | CMP | 123 | Conventional | 14/06/2024 | | ⋮ |
| - | firewallTest | SECURITY | CMP | - | Conventional | 17/06/2024 | | ⋮ |
| netint | netint | NETWORK | CMP | - | Conventional | 20/06/2024 | | ⋮ |
| test | testLGN | NETWORK | CMP | - | Conventional | 17/06/2024 | | ⋮ |
| testNet | testNet | NETWORK | CMP | - | Conventional | 19/06/2024 | | ⋮ |
| testVirtualGateway | testVirtualGateway | NETWORK | CMP | - | Conventional | 24/06/2024 | | ⋮ |

Figura 240 – Accesso ai cataloghi importati

The user will then be redirected to the page containing all previously imported catalogs. On this page, for each row, which corresponds to an Upload, it is possible to delete the file by clicking the "Three dots" button corresponding to the row and clicking "Delete" to remove it.

Catalogs can have 3 different states:

- Deleted: indicates that the file has been replaced with a subsequent version.
- Success: indicated with a green icon, indicates that the catalog is ready and will be used starting from the indicated day.
- In progress: indicated with a yellow icon, indicates that the system is checking the validity of the entered information.

On this page, we can also note that uploads made with the same file are saved using versions, so when an already existing catalog is inserted, it will be overwritten with a higher version, and previous versions will be deactivated.



| File Name | Provider | Valid from | Creation Date | Last update | Version | Status | Validity |
|---|----------|------------|---------------------|---------------------|---------|--|--------------------------------------|
| PSN - TIM - Espansione Managed ORACLE - v11b to PSN (version 1).xlsx | Oracle | 17/06/2024 | 27/06/2024 16:56:15 | 27/06/2024 16:56:15 | 4 | (1) | ● |
| PSN - TIM - Espansione Managed ORACLE - v11b to PSN (version 1).xlsx.xlsx | Oracle | 17/06/2024 | 27/06/2024 16:50:15 | 27/06/2024 16:50:16 | 3 | Deleted | ● |
| PSN - TIM - Espansione Managed ORACLE - v11b to PSN (version 1).xlsx.xlsx | Oracle | 17/06/2024 | 27/06/2024 16:49:36 | 27/06/2024 16:49:36 | 2 | Deleted | ● |
| PSN - TIM - Espansione Managed ORACLE - v11b to PSN (version 1).xlsx.xlsx | Oracle | 27/06/2024 | 27/06/2024 18:09:42 | 27/06/2024 18:09:42 | 2 | ✓ | ● |
| PSN_SPC_Azure_Listino_asof 20240327_v0.1 (1).xlsx | Azure | 27/06/2024 | 27/06/2024 14:45:56 | 27/06/2024 14:45:56 | 1 | Deleted | ● |
| PSN - TIM - Espansione Managed ORACLE - v11b to PSN (version 1).xlsx | Oracle | 17/06/2024 | 27/06/2024 16:49:24 | 27/06/2024 16:49:25 | 1 | Deleted | ● |
| PSN_SPC_Azure_Listino_asof 20240327_v0.1.xlsx | Azure | 01/07/2024 | 01/07/2024 09:24:56 | 01/07/2024 09:24:56 | 1 | Deleted | ● |
| PSN_SPC_Azure_Listino_tests.xlsx | Azure | 05/07/2024 | 05/07/2024 15:12:14 | 05/07/2024 15:12:14 | 1 | ✓ | ● |
| PSN - TIM - Espansione Managed ORACLE - v11b to PSN.xlsx | Oracle | 26/06/2024 | 26/06/2024 17:30:56 | 26/06/2024 17:30:56 | 0 | Deleted | ● |
| PSN - TIM - Espansione Managed ORACLE - v11b to PSN - Copia.xlsx | Oracle | 26/06/2024 | 26/06/2024 17:39:05 | 26/06/2024 17:39:05 | 0 | Deleted | ● |
| PSN - TIM - Espansione Managed ORACLE - v11b to PSN (version 1).xlsx | Oracle | 27/06/2024 | 27/06/2024 08:08:31 | 27/06/2024 08:08:31 | 0 | Deleted | ● |
| PSN_SPC_Azure_Listino_tests.xlsx | Azure | 27/06/2024 | 27/06/2024 11:05:46 | 27/06/2024 11:05:46 | 0 | Deleted | ● |
| PSN_SPC_Azure_Listino_asof 20240327_v0.1.xlsx | Azure | 27/06/2024 | 27/06/2024 14:35:09 | 27/06/2024 14:35:10 | 0 | Deleted | ● |
| PSN_SPC_Azure_Listino_asof 20240327_v0.1.xlsx | Azure | 27/06/2024 | 27/06/2024 14:58:32 | 27/06/2024 14:58:32 | 0 | Deleted | ● |

Figura 241 – Lista dei cataloghi importati

Clicking on a "Success" row in the table will open a modal. Inside, we can view a summary that contains, in addition to basic information, the number of elements, called "rows", that were found in the Excel file.

The rows available in the file can have 3 different states:

- Associated Rows: indicates that the system is able to both create the resource and associate it with a provider catalog size, allowing its use during provisioning.
- Success Rows: indicates that the system is able to create the resource but cannot establish a relationship with a provider resource.
- Failed Rows: indicates that the system cannot insert the resource.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the LEONARDO CMP Resources interface with the 'Imported Catalogues' page selected. A modal window titled 'Import Catalog Report' is open, displaying the following data:

| File Name | Status | Associated Rows |
|--|---------------|---------------------|
| PSN - TIM - Expansione Managed ORACLE - v11b to PSN (version 1).xlsx | Success | 16 |
| PSN - TIM - Expansione Managed ORACLE - v11b to PSN (version 1).xlsx | SKUs | 196 |
| PSN - TIM - Expansione Managed ORACLE - v11b to PSN (version 1).xlsx | Creation Date | 27/06/2024 18:09:42 |
| PSN - TIM - Expansione Managed ORACLE - v11b to PSN (version 1).xlsx | Last update | 27/06/2024 18:09:42 |

Below the report, a message states: "No error found in the import process." A red arrow points to a 'More details' button, which is highlighted with a red box.

At the bottom of the page, there is a table listing various catalog entries with columns: File Name, Provider, Valid from, Creation Date, Last update, Version, Status, and Validity. Most entries are marked as 'Deleted'.

Figura 242 – Dettagli dell' importazione

At the bottom, we can click the "More Details" button to view the details of the Excel file rows that were discarded by the system. Clicking on one of them allows us to view the row number, the name indicated in the file, and the error that prevented its insertion.

15:25:33
08 July 2024

cmp.admin
L DEFAULT

LEONARDO

CMP Resources

Catalog / CMP / Import

File Name: PSN_SPC Azure_Listino_testsku.xlsx

Provider: Azure

Validity: ●

Status: Success

Associated Rows: 141

Import Type: SKUs

Creation Date: 05/07/2024 15:12:14

Success Rows: 5652

Last update: 05/07/2024 15:12:14

Failed Rows: 543

Total Rows: 6195

No error found in the import process.

Less details

Find... (Search bar)

| Service & Operation | 0js | 1m 27s | 2m 55s | 4m 22s | 5m 49s |
|---|------|--------|--------|--------|--------|
| cmp-rm-gw process for filename PSN_SPC Azure_Listino_testsku.xlsx | 4.3s | | | | |
| cmp-rm-gw parsing excel... | | | | | 2.74ms |
| cmp-rm-gw row number processed : 5643 | | | | | 1.07ms |
| cmp-rm-gw row number processed : 5644 | | | | | 703μs |
| cmp-rm-gw row number processed : 5645 | | | | | 606μs |
| cmp-rm-gw row number processed : 5646 | | | | | 641μs |
| cmp-rm-gw row number processed : 5647 | | | | | 581μs |
| cmp-rm-gw row number processed : 5648 | | | | | 562μs |
| cmp-rm-gw row number processed : 5649 | | | | | 578μs |
| cmp-rm-gw row number processed : 5650 | | | | | 712μs |
| cmp-rm-gw row number processed : 5651 | | | | | 594μs |
| cmp-rm-gw row number processed : 5652 | | | | | 583μs |
| cmp-rm-gw row number processed : 5653 | | | | | 568μs |
| cmp-rm-gw row number processed : 5654 | | | | | 561μs |
| cmp-rm-gw row number processed : 5655 | | | | | 561μs |
| cmp-rm-gw row number processed : 5651 | | | | | 569μs |



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

Figura 243 – Dettagli delle righe dell'importazione

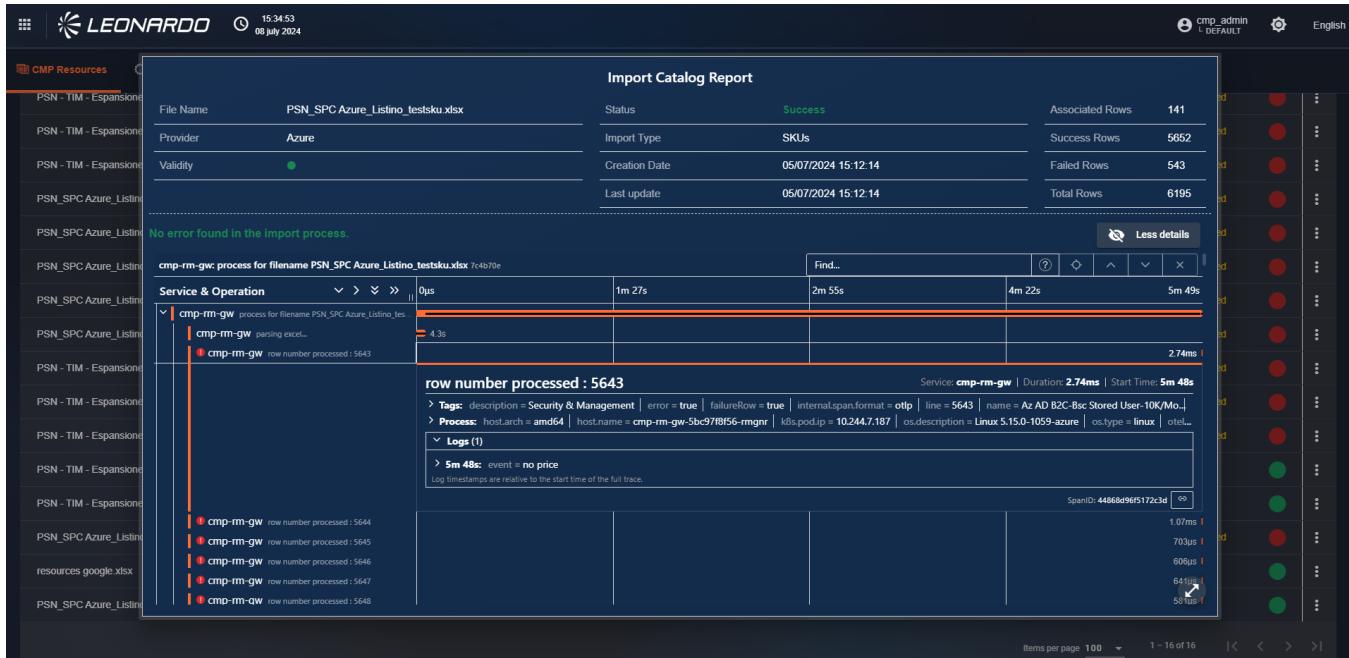


Figura 244 – Dettaglio dell'errore

9.0.2 Provider Catalog Item Management

Within the Catalog Module, it is possible to view the list and details of the "sizes" available on the various providers configured on the SCMP for both individual resources (VM, STORAGE, NETWORK, SECURITY) and resource groups "SKU".

9.0.2.1 Resources

To view the list of resources available for a provider, select the "Cloud resources" menu (in red in the image) at the top and select one of the available providers (in yellow in the image). The functionalities available on the pages of the different providers are identical.

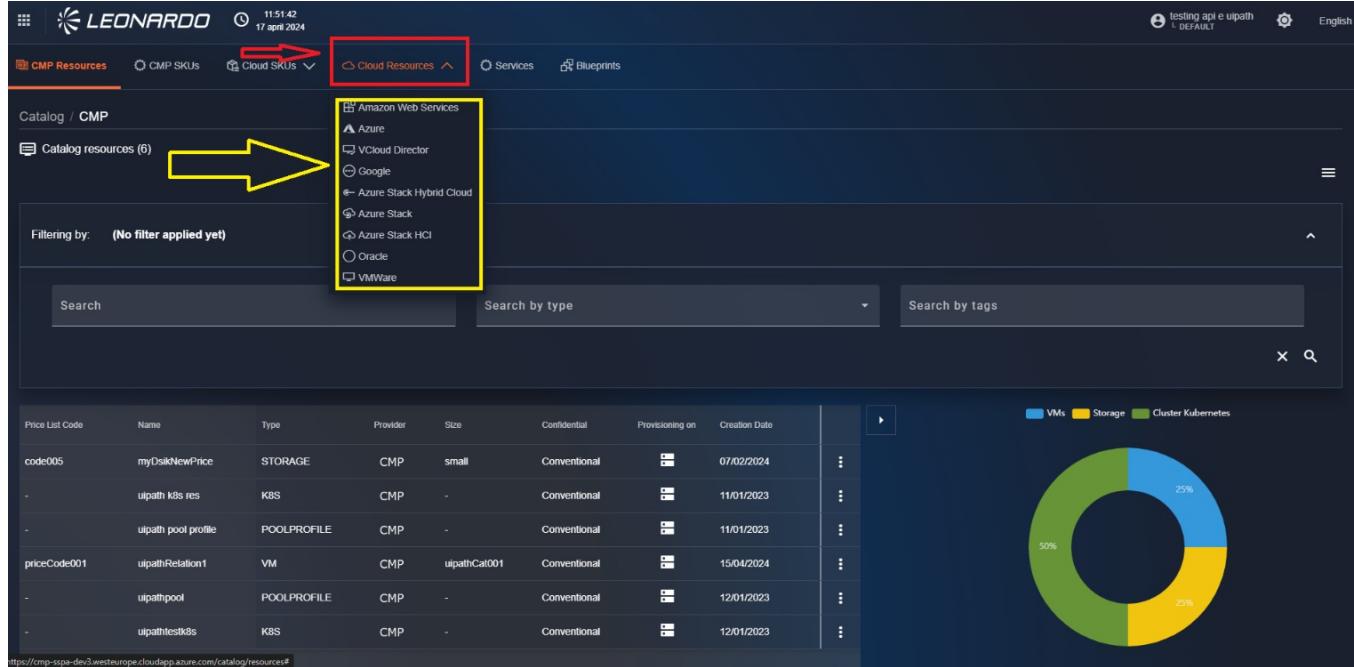


Figura 245 – Risorse del catalogo dei providers

9.0.2.1.1 EXPORT OF PROVIDER SIZES

To export the list of Catalog resources displayed on the page, in the upper right corner, click on the hamburger menu, and then click on "Export".

The operator will have the option to export the list of results in .csv and/or .json format.

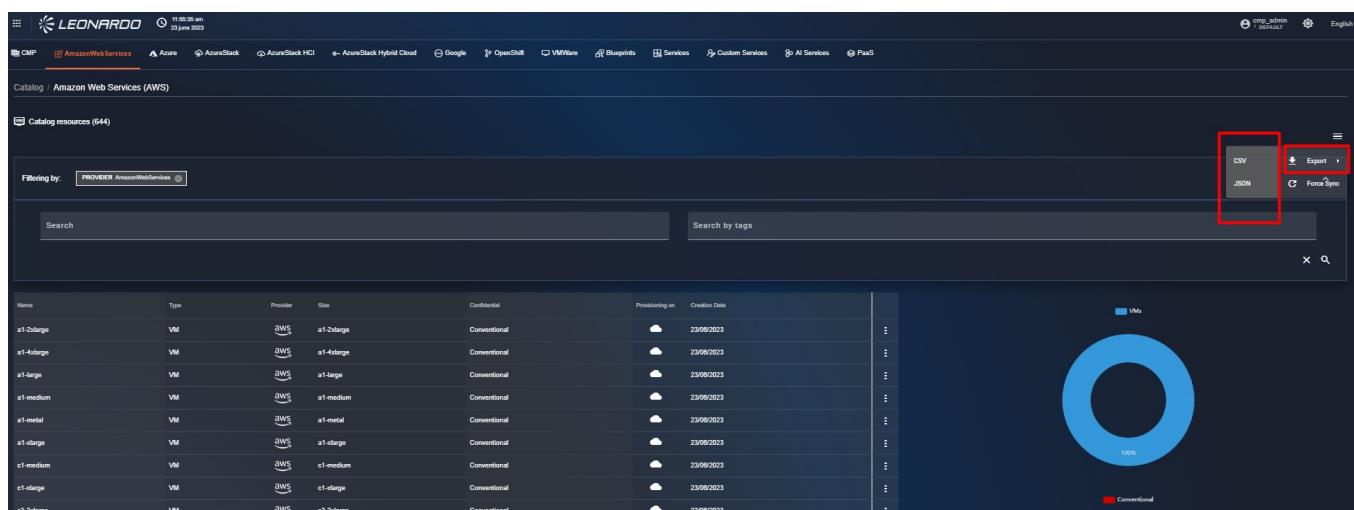


Figura 246 – Esportazione dei risultati



9.0.2.1.2 FORCED CATALOG AND COST UPDATE FUNCTIONALITY

It is possible to force the system so that, after a few minutes, all "sizes" and their associated costs are automatically updated. To do this, click on the hamburger menu in the upper right corner, and then click on "Force Sync".

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links for CMP, AmazonWebServices, Azure, AzureStack, AzureStack HCI, AzureStack Hybrid Cloud, Google, OpenShift, VMware, Blueprints, Services, Custom Services, AI Services, and PaaS. Below the navigation is a breadcrumb trail: Catalog / Amazon Web Services (AWS). The main area is titled 'Catalog resources (644)'. It features a search bar with 'Search' and 'Search by tags' fields, and a filter section with 'Filtering by: PROVIDER AmazonWebServices'. On the right side of the search bar, there's a 'Force Sync' button with a red box around it. Below the search bar is a table listing 10 VM resources from AWS, including columns for Name, Type, Provider, Size, Confidential, Provisioning on, and Creation Date. To the right of the table is a donut chart showing 100% for VMs and a small red segment for Conventional. At the bottom of the screenshot, there's a large blue circular progress bar.

Figura 247 – Funzionalità Force Sync

9.0.2.1.3 RESOURCE FILTERS

The user is given the possibility to filter the displayed resource lists. At the top of the page, there is a filter section. The available filters are:

- "search": allows searching for resources with free text.
- "search by type": allows searching for resources of a specific type only.
- "search by tags" allows searching for all resources containing a specific tag.

After entering one or more filters, click the "magnifying glass" button to perform the search.



Leonardo Cyber & Security Solutions

21 Nov 2025
08.00

Secure Cloud Management Platform

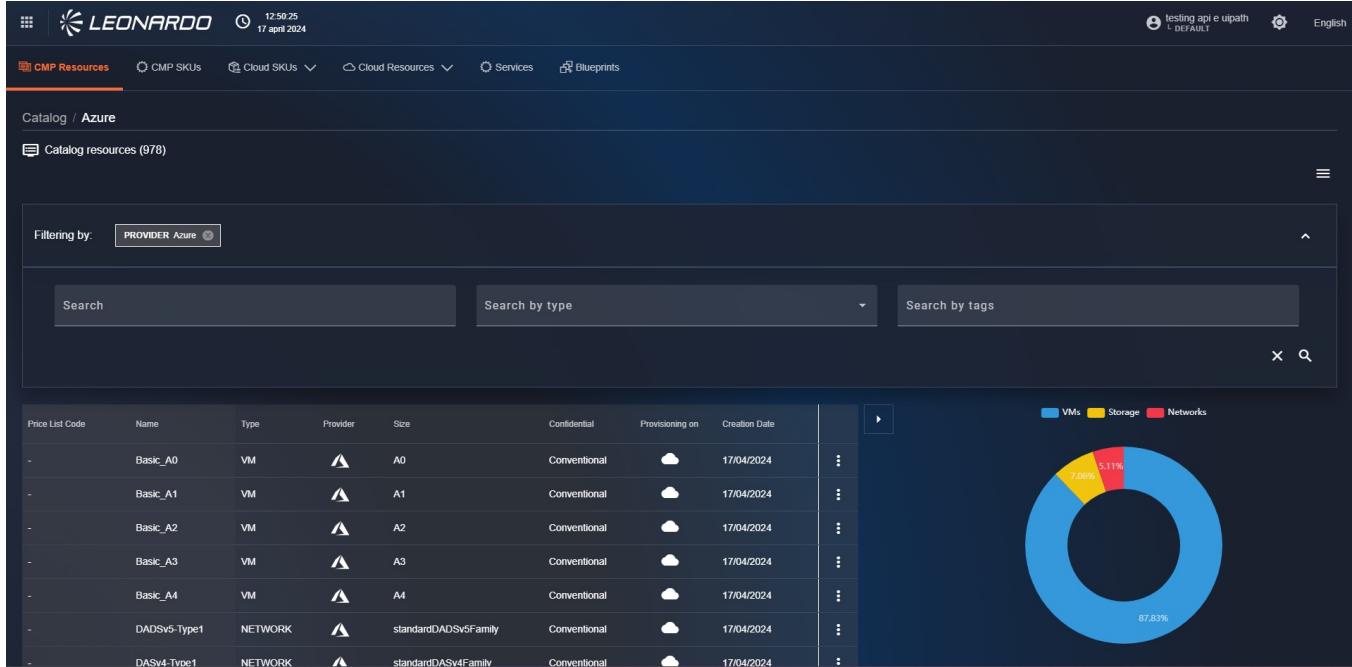


Figura 248 – Filtri del Catalogo

9.0.2.1.4 RESOURCE SUMMARY VIEW

To view a preview of a resource, click on the record of interest for a resource. A modal will appear showing the general information of the identified resource, including: System, Name, Size, Update Date, RAM, and CPU as shown in the following image.

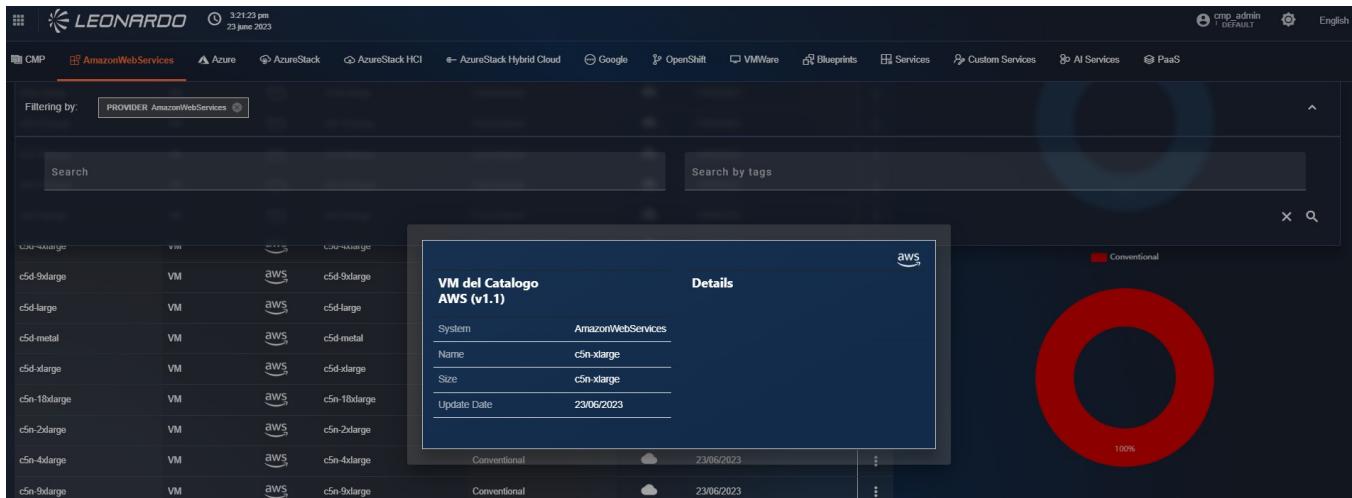


Figura 249 – Dettaglio rapido delle risorse di catalogo



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

9.0.2.1.5 VIEWING RESOURCE DETAILS

To view the data of a resource, click on the kebab menu for a resource and then click on "Show". After

| Name | Type | Provider | Size | Confidential | Positioning on | Creation Date | Actions |
|------------|------|----------|------------|--------------|----------------|---------------|---|
| a1-2xlarge | VM | aws | a1-2xlarge | Conventional | | 23/06/2023 | ⋮ Show ⋮ |
| a1-xlarge | VM | aws | a1-xlarge | Conventional | | 23/06/2023 | ⋮ ⋮ |
| a1-large | VM | aws | a1-large | Conventional | | 23/06/2023 | ⋮ ⋮ |
| a1-medium | VM | aws | a1-medium | Conventional | | 23/06/2023 | ⋮ ⋮ |
| a1-metal | VM | aws | a1-metal | Conventional | | 23/06/2023 | ⋮ ⋮ |
| a1-large | VM | aws | a1-xlarge | Conventional | | 23/06/2023 | ⋮ ⋮ |
| c1-medium | VM | aws | c1-medium | Conventional | | 23/06/2023 | ⋮ ⋮ |
| c1-large | VM | aws | c1-xlarge | Conventional | | 23/06/2023 | ⋮ ⋮ |
| c3-2xlarge | VM | aws | c3-2xlarge | Conventional | | 23/06/2023 | ⋮ ⋮ |
| c3-4xlarge | VM | aws | c3-4xlarge | Conventional | | 23/06/2023 | ⋮ ⋮ |

A circular chart on the right shows 100% VMs, with a small red bar indicating the Conventional category.

Figura 250 – Accesso alla risorsa in modalità view

doing this, the user is on the resource page in view mode, where they can see the data but cannot modify it.

| VM del Catalogo AWS (v1.1) | | Details |
|----------------------------|-------------------|---------|
| System | AmazonWebServices | |
| Name | a1-2xlarge | |
| Size | a1-2xlarge | |
| Update Date | 23/06/2023 | |

Properties, Tags & Notes, Costs

Figura 251 – Dettaglio Risorsa dal Modulo Catalog

The detail of a resource is divided into various sections:

- Details



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

- Properties
- Tags & Notes
- Cost

In the Cost section, it is possible to sequentially select the Region, Zone, and Cost type to obtain a preview of the costs related to the selected resource.

The screenshot shows a detailed view of a virtual machine entry from the AWS catalog. The main card displays basic information like System (AmazonWebServices), Name (a1-2xlarge), Size (a1-2xlarge), and Update Date (23/06/2023). Below this, a 'Costs' section is highlighted with a red box. It includes dropdown menus for Region (US East (N. Virginia)), Zone (Us-east-1b), and a reservation type (Reservation - Linux \$0.13 / 1 Hour). At the bottom right of this section is a 'Close' button.

Figura 252 – Sezione costi della risorsa

In the bottom right, click the "Close" button to return to the list.

9.0.2.2 “On-Premise” Resources

The management of resource catalogs in on-premise systems varies significantly, being specific to each system. In some cases, the catalog functionality is absent, while in others, it is available but does not allow automatic retrieval of resources.

The user is given the possibility to define a personalized "Cloud" catalog directly in the SCMP. In this way, it will then be possible to add the created resources to the relationships of "SCMP Catalog" resources.

To do this, it is first necessary to access the catalog resources tab of an on-premise provider. Specifically, we take "VMWare" as an example by selecting "VMWare" in the "Cloud resources" menu of the catalog module.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with icons for CMP Resources, CMP SKUs, Cloud SKUs, Services, and Blueprints. Below the navigation is a dropdown menu for 'Cloud Resources' which is currently expanded, showing options like Amazon Web Services, Azure, VCloud Director, Google, Azure Stack Hybrid Cloud, Azure Stack, Azure Stack HCI, Oracle, and VMWare. The 'VMWare' option is also highlighted with a red box. Below the dropdown is a search bar containing the text 'VMWare' and a 'Search by tags' field. On the left, there's a sidebar for 'Catalog / CMP' showing 'Catalog resources (28)' and a 'Filtering by' section with '(No filter applied yet)'. The main content area displays a table of catalog resources with columns for 'Price List Code' and 'Name'. The table includes rows for various VMWare compute types: n2-standard-4, n2d-highcpu-8, c2-standard-16, c2-standard-8, and e2-standard-2. To the right of the table is a donut chart showing resource distribution between VMs (blue) and Networks (red), with 72.22% for VMs and 27.78% for Networks. A legend at the top right of the chart identifies the colors.

Figura 253 – Accesso al catalogo On-premise

On the page, in the upper right, above the filter bar, we find a contextual menu. Click on the "Three lines" icon and select "Add catalog resource". In this way, we will be redirected to the provider-specific page for creating the catalog resource.

This screenshot shows the same Leonardo interface but on a specific provider page for VMWare. The navigation bar and sidebar are identical to the previous screenshot. The main content area shows a table with zero results found, indicating no catalog resources have been added for this provider. On the right side, there's a large 'N/A' placeholder with a dashed circle around it. The top right corner features a contextual menu with options like 'Add Catalog Resource', 'CSV', 'JSON', 'Export', and 'Force Sync', with 'Add Catalog Resource' being highlighted with a red box.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 254 – Creazione nuova risorsa

At this point, the user is on the page where they can select the type of resource to create.

Figura 255 – Selezione del tipo di risorsa da creare

From the dropdown menu, select the type of resource to create. Then, click the "Next" button. You will be on the resource compilation page.

Figura 256 – Esempio di form per la creazione di una risorsa



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

On this page, after opening the available sections, enter all necessary parameters. In the "Cost" section at the bottom, it will be possible to add a customized price to associate with the resource. To do this, you need to select the billing interval (hourly, daily, weekly, monthly) and enter the cost related to the selected period on the right.

The screenshot shows a dark-themed web interface for creating a new resource. At the top, there's a header with the Leonardo logo, the date '23 aprile 2024', and some user settings. Below the header, a navigation bar includes 'CMP Resources' (which is highlighted in orange), 'Cloud SKUs', 'Cloud Resources', 'Services', and 'Blueprints'. Underneath the navigation, a breadcrumb trail shows 'Catalog / CMP / Create'. The main content area has a title 'New resource Virtual Machine del Catalogo'. On the left, there are three tabs: 'Properties', 'Tags & Notes', and 'Relations'. On the right, there's a large input field for 'Costs' with a dropdown menu showing 'Hourly' selected, and a value of '€100' entered. Below the dropdown are buttons for 'Save' and 'Close'.

Figura 257 – Sezione costi delle risorse

9.0.2.3 Cloud SKU

To view the list of SKUs available for a provider, select the "Cloud SKU" menu (in red in the image) at the top and select one of the available providers (in yellow in the image). The functionalities available on the pages of the different providers are identical.



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

Filtering by: (No filter applied yet)

Search Search by type Search by tags

| Price List Code | Name | Type | Provider | Size | Confidential | Provisioning on | Creation Date |
|-----------------|-----------------|------|----------|--------------|--------------|-----------------|---------------|
| priceCode001 | uipathRelation1 | VM | CMP | uipathCat001 | Conventional | 16/04/2024 | |

Items per page: 20 | 1 - 1 of 1 | < < > >|

VMs 100%

Figura 258 – Risorse del catalogo dei providers

9.0.2.3.1 EXPORT OF AVAILABLE PROVIDER SIZES

To export the list of Catalog resources displayed on the page, in the upper right corner, click on the hamburger menu, and then click on "Export".

The operator will have the option to export the list of results in .csv and/or .json format.

Filtering by: PROVIDER AmazonWebServices

Search Search by tags

| Name | Type | Provider | Size | Confidential | Provisioning on | Creation Date |
|-------------|------|----------|-------------|--------------|-----------------|---------------|
| a1-2xlarge | VM | AWS | a1-2xlarge | Conventional | Cloud | 23/06/2023 |
| a1-4xlarge | VM | AWS | a1-4xlarge | Conventional | Cloud | 23/06/2023 |
| a1-large | VM | AWS | a1-large | Conventional | Cloud | 23/06/2023 |
| a1-medium | VM | AWS | a1-medium | Conventional | Cloud | 23/06/2023 |
| a1-metal | VM | AWS | a1-metal | Conventional | Cloud | 23/06/2023 |
| a1-xlarge | VM | AWS | a1-xlarge | Conventional | Cloud | 23/06/2023 |
| c1-medium | VM | AWS | c1-medium | Conventional | Cloud | 23/06/2023 |
| c1-large | VM | AWS | c1-large | Conventional | Cloud | 23/06/2023 |
| cr1-2xlarge | VM | AWS | cr1-2xlarge | Conventional | Cloud | 23/06/2023 |

VMs 100% Conventional

Figura 259 – Esportazione dei risultati



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

9.0.2.3.2 FORCED CATALOG UPDATE FUNCTIONALITY

It is possible to force the system so that, after a few minutes, all "sizes" and their associated costs are automatically updated. To do this, click on the hamburger menu in the upper right corner, and then click on "Force Sync".

The screenshot shows a web-based interface for managing cloud resources. At the top, there's a navigation bar with links for CMP, AmazonWebServices, Azure, AzureStack, AzureStack HCI, AzureStack Hybrid Cloud, Google, OpenShift, VMware, Blueprints, Services, Custom Services, AI Services, and PaaS. The user is currently viewing the Catalog resources for Amazon Web Services (AWS), which number 644. A filter bar at the top left allows filtering by provider, with 'AmazonWebServices' selected. On the right side of the header, there are user profile and language settings. Below the header, there are search and tag search fields. The main area displays a table of resources with columns for Name, Type, Provider, Size, Confidential, Provisioning on, and Creation Date. Each row in the table has a three-dot menu icon on the far right. To the right of the table, there's a circular progress bar indicating 100% completion for VMs, with a legend showing blue for VMs and red for Conventional. The entire interface has a dark-themed design.

Figura 260 – Funzionalità Force Sync

9.0.2.3.3 FILTERS FOR DISPLAYED RESOURCES

The user is given the possibility to filter the displayed resource lists. At the top of the page, there is a filter section. The available filters are:

- "search": allows searching for resources with free text.
- "search by Service name": allows searching for resources related to a specific service type only.
- "search by tags" allows searching for all resources containing a specific tag. After entering one or more filters, click the "magnifying glass" button to perform the search.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Service Name | Creation Date |
|--------------------|--|---------------|
| 100 RU/s | Azure Cosmos DB - 100 RU/s | 17/04/2024 |
| 100 RU/s | Azure Cosmos DB - 100 RU/s - US West | 17/04/2024 |
| 16 vCPU VM License | Red Hat Enterprise Linux - 5+ vCPU VM License | 17/04/2024 |
| 4 vCPU VM License | Red Hat Enterprise Linux - 1-4 vCPU VM License | 17/04/2024 |
| 8 vCPU VM License | Red Hat Enterprise Linux - 5+ vCPU VM License | 17/04/2024 |

Figura 261 – Filtri del Catalogo

9.0.2.3.4 CATALOG RESOURCE SUMMARY VIEW

To view a preview of a resource, click on the record of interest for a resource. A modal will appear showing the general information of the identified resource, including: System, Name, Size, Update Date, service name.

| Name | Service Name | Creation Date |
|--------------------|--|---------------|
| 100 RU/s | Azure Cosmos DB - 100 RU/s | 17/04/2024 |
| 100 RU/s | Azure Cosmos DB - 100 RU/s - US West | 17/04/2024 |
| 16 vCPU VM License | Red Hat Enterprise Linux - 5+ vCPU VM License | 17/04/2024 |
| 4 vCPU VM License | Red Hat Enterprise Linux - 1-4 vCPU VM License | 17/04/2024 |
| 8 vCPU VM License | Red Hat Enterprise Linux - 5+ vCPU VM License | 17/04/2024 |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 262 – Dettaglio rapido delle risorse di catalogo

9.0.2.3.5 VIEWING RESOURCE DETAILS IN THE CATALOG

To view the data of a resource, click on the kebab menu for a resource and then click on "Show". After doing this, the user is on the resource page in view mode, where they can see the data but cannot modify it.

| Name | Type | Provider | Size | Confidential | Provisioning on | Creation Date | Actions |
|------------|------|----------|------------|--------------|-----------------|---------------|---------|
| a1-2xlarge | VM | aws | a1-2xlarge | Conventional | Cloud | 23/06/2023 | ⋮ |
| a1-4xlarge | VM | aws | a1-4xlarge | Conventional | Cloud | 23/06/2023 | ⋮ |
| a1-large | VM | aws | a1-large | Conventional | Cloud | 23/06/2023 | ⋮ |
| a1-medium | VM | aws | a1-medium | Conventional | Cloud | 23/06/2023 | ⋮ |
| a1-metal | VM | aws | a1-metal | Conventional | Cloud | 23/06/2023 | ⋮ |
| a1-xlarge | VM | aws | a1-xlarge | Conventional | Cloud | 23/06/2023 | ⋮ |
| c1-medium | VM | aws | c1-medium | Conventional | Cloud | 23/06/2023 | ⋮ |
| c1-large | VM | aws | c1-large | Conventional | Cloud | 23/06/2023 | ⋮ |
| c3-2xlarge | VM | aws | c3-2xlarge | Conventional | Cloud | 23/06/2023 | ⋮ |
| c3-4xlarge | VM | aws | c3-4xlarge | Conventional | Cloud | 23/06/2023 | ⋮ |

Figura 263 – Accesso alla risorsa in modalità view

| Sku del Catalogo Google (v1.1) | | Details | |
|--------------------------------|---------------------|--------------|-----------------------|
| System | Google | Name | 1 Year Starter Pack |
| Name | 1 Year Starter Pack | Service Name | MongoDB Atlas Starter |
| Size | - | | |
| Update Date | 17/04/2024 02:25:25 | | |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 264 – Dettaglio Risorsa dal Modulo Catalog

The detail of a resource is divided into various sections:

- Details
- Properties
- Tags & Notes
- Cost

In the Cost section, it is possible to sequentially select the Region, Zone, and Cost type to obtain a preview of the costs related to the selected resource.

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with various cloud provider icons (CMP, AmazonWebServices, Azure, AzureStack, etc.) and user information (cmp_admin, DEFAULT, English). Below the navigation, a breadcrumb path indicates the current view: Catalog / Amazon Web Services (AWS) / View 643e7be8dc4fe35ba69b11d7. The main content area has a title "Show VM del Catalogo AWS". It contains several sections: "Details" (listing System: AmazonWebServices, Name: a1-2xlarge, Size: a1-2xlarge, Update Date: 23/06/2023), "Properties", "Tags & Notes" (highlighted with a red box), and "Costs". The "Costs" section includes dropdowns for "Region" (US East (N. Virginia)), "Zone" (Us-east-1b), and "Price" (Reservation - Linux \$0.13 / 1 Hour). A "Close" button is located at the bottom right of this section.

Figura 265 – Sezione costi della risorsa

In the bottom right, click the "Close" button to return to the list.

9.0.3 “Services and Blueprints” Item Management

9.0.3.1 Services

To access the "Services" functionality, click on the bento button in the upper left corner and then click on "Catalog".

CMP



 Authentication

 Monitoring

 Costs

 Inventory

① Security

Dashboard

Catalog

☒ Administration

🛡 Cloud Maturity Model

🔧 Provisioning

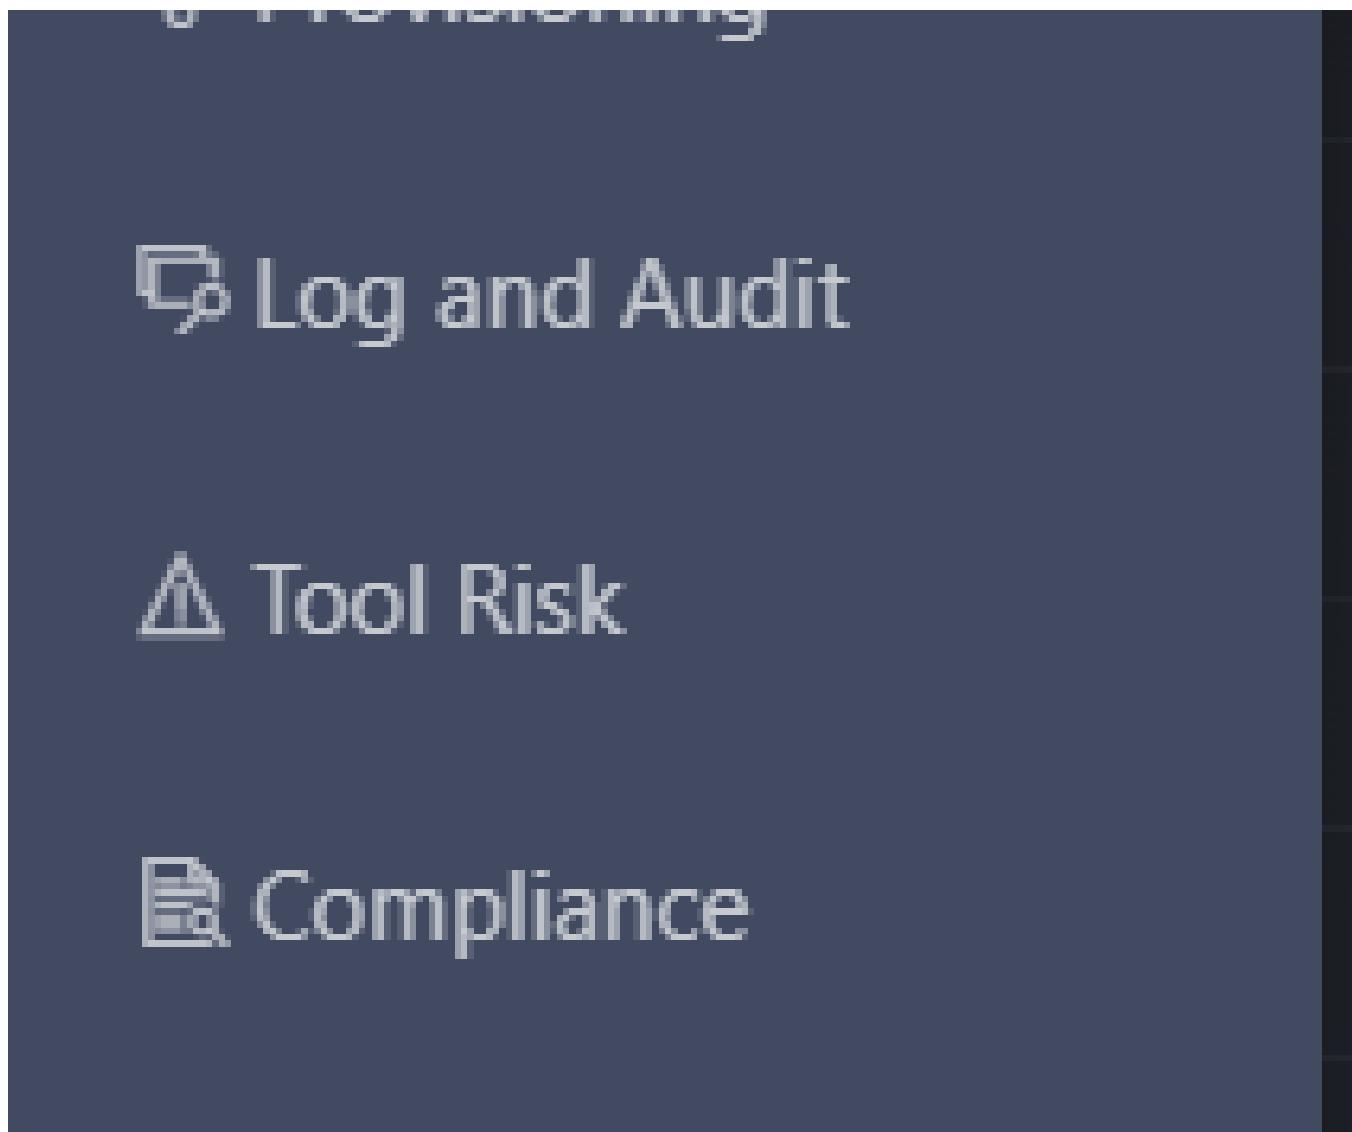


Figura 266 – Accesso ai "Services"

From the "SCMP" page, click on the tab that depicts three joined squares, 'Services', located above the breadcrumb path. After doing this, you will be on the 'Services' page, where a list of components called "Card" is displayed.

Each card refers to a specific type of service. Since there are many services, the system paginates them. At the bottom, we can use the "Item per page" field to display more results or use the arrows to navigate through the lists of services.



Figura 267 – Pagina dei servizi

9.0.3.1.1 "SERVICES" PAGE FILTERS

To facilitate the user in searching for a specific service, a side filter section has been added to the page. Inside, we can find three combinable filters:

- "Filter by Text": by entering text in this field, the list of services will be updated to show services that include the entered text in their title or description (orange in the image).
- "Categories": it is possible to filter the list by one or more service categories. The category is manually entered during the service creation phase (green in the image).
- "Tags": it is possible to select one or more tags to display only services that have been configured with that tag (red in the image).

By using the filters in combination, it will be possible to display only the services that satisfy all specified conditions. In other words, the query will return only the services that match all set criteria.

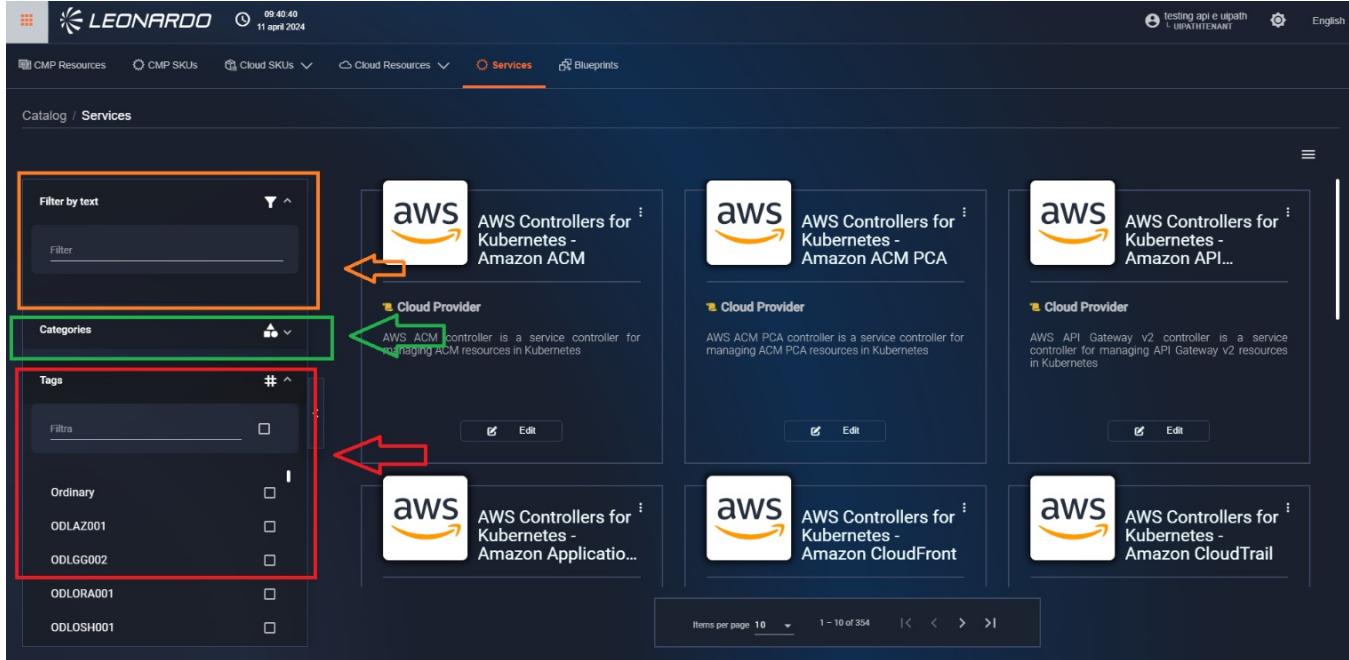


Figura 268 – Filtri disponibili

9.0.3.1.2 CREATING SERVICES

From the "Services" page, the user can create a Service by accessing the appropriate section as shown in the figure.

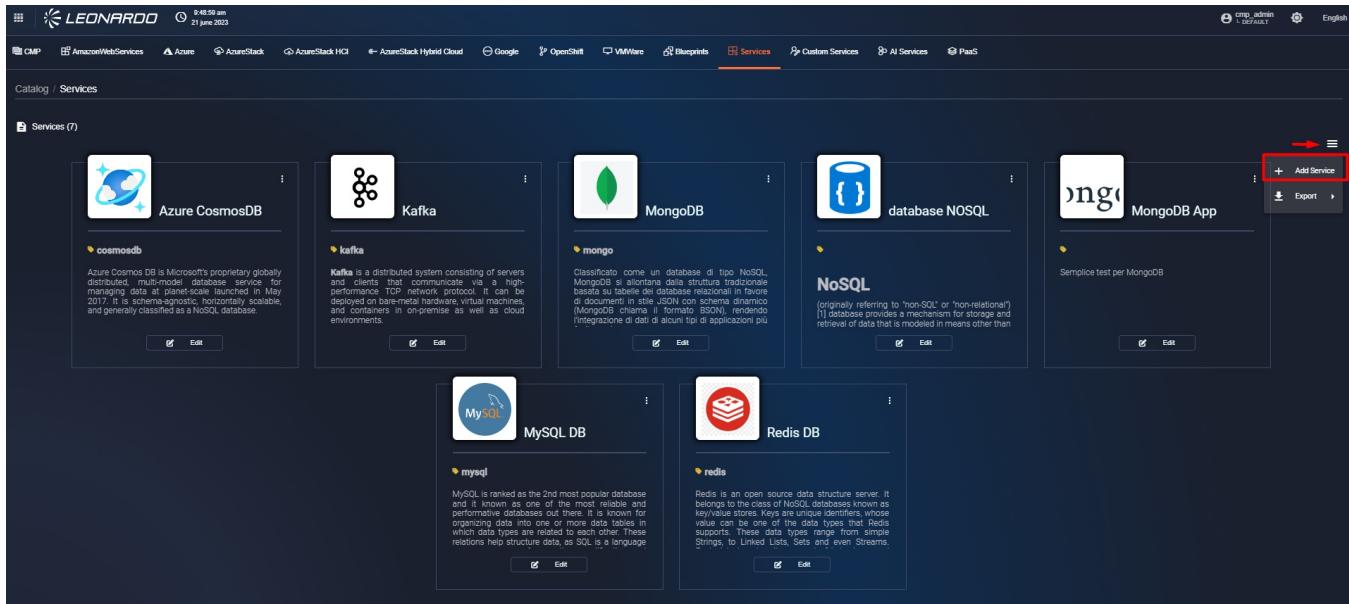


Figura 269 – Accesso al form di creazione del Service




Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

On the creation page, it is necessary to select a service type using the "Service Type" field to display its mandatory parameters.

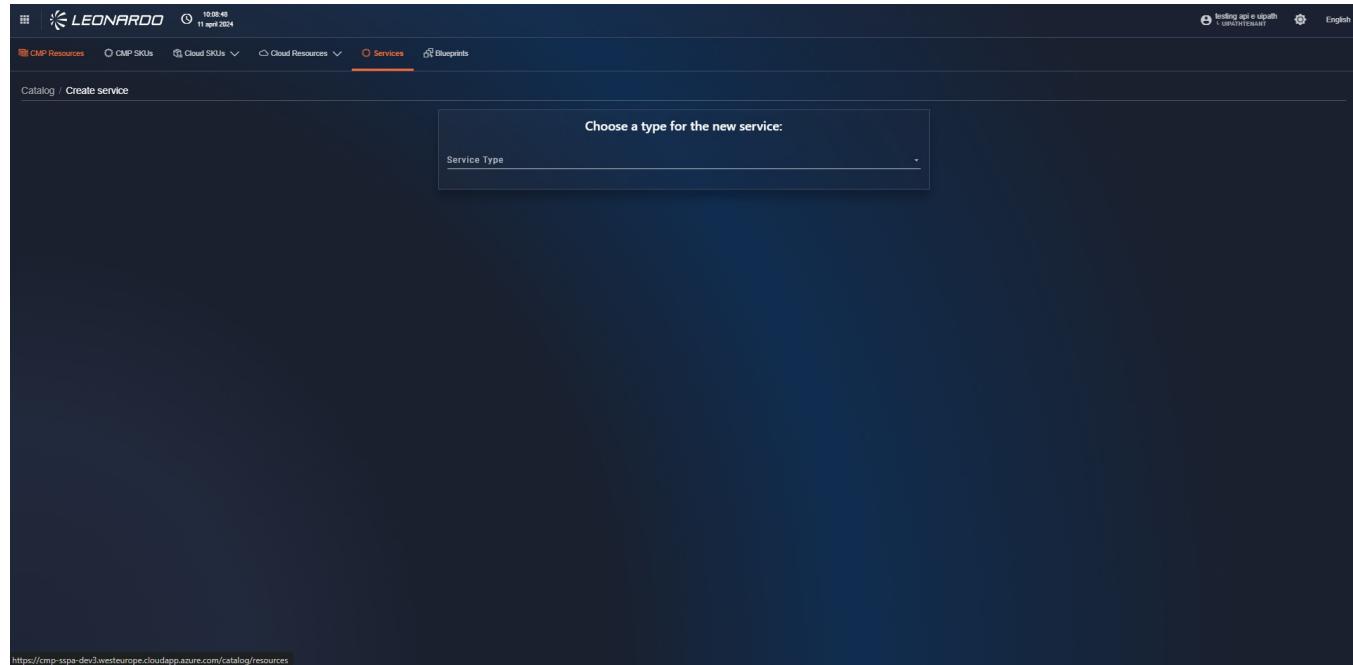

*Figura 270 – Selezione della tipologia
di servizio*

In the following paragraphs, we will analyze the individual service types in detail.

9.0.3.1.2.1 "Standard" Services

The first type of services available for the SCMP are "Standard" services. These services are natively integrated into the system, and their operation cannot be modified by the user.

List of services offered:

- CosmosDb Cassandra SQL
- CosmosDb Core SQL
- CosmosDb Mongo
- Kafka 3.2.1 on Ubuntu 20.04 LTS
- Kafka 3.2.1 on Ubuntu 22.04 LTS
- Mongo DB 5.0 on Ubuntu 20.04 LTS
- Mongo DB 6.0 on Ubuntu 20.04 LTS

- Mongo DB 6.0 on Ubuntu 22.04 LTS
- MySQL DB 8.0 on Ubuntu 20.04 LTS
- MySQL DB 8.0 on Ubuntu 22.04 LTS
- PostgreSQL 14 on Ubuntu 20.04 LTS
- PostgreSQL 14 on Ubuntu 22.04 LTS
- Redis DB 7.0 on Ubuntu 20.04 LTS
- Redis DB 7.0 on Ubuntu 22.04 LTS

To insert a new service, it is necessary to fill in all fields in the properties section, specifically:

- "Categories": enter free text in the field and select an already configured category from the dropdown, or it is possible to add a new category by clicking the "+" button in the dropdown (orange in the page).
- "Name": the name of the service that will be displayed on the corresponding card.
- "Description": the description of the service that will be shown on the relative card.
- "Upload File": by clicking this control, it will be possible to select an "image" type file from your PC that will be displayed on the service card.
- "Related Software": in this section, you can select one or more "Standard" software that will then be used during provisioning.

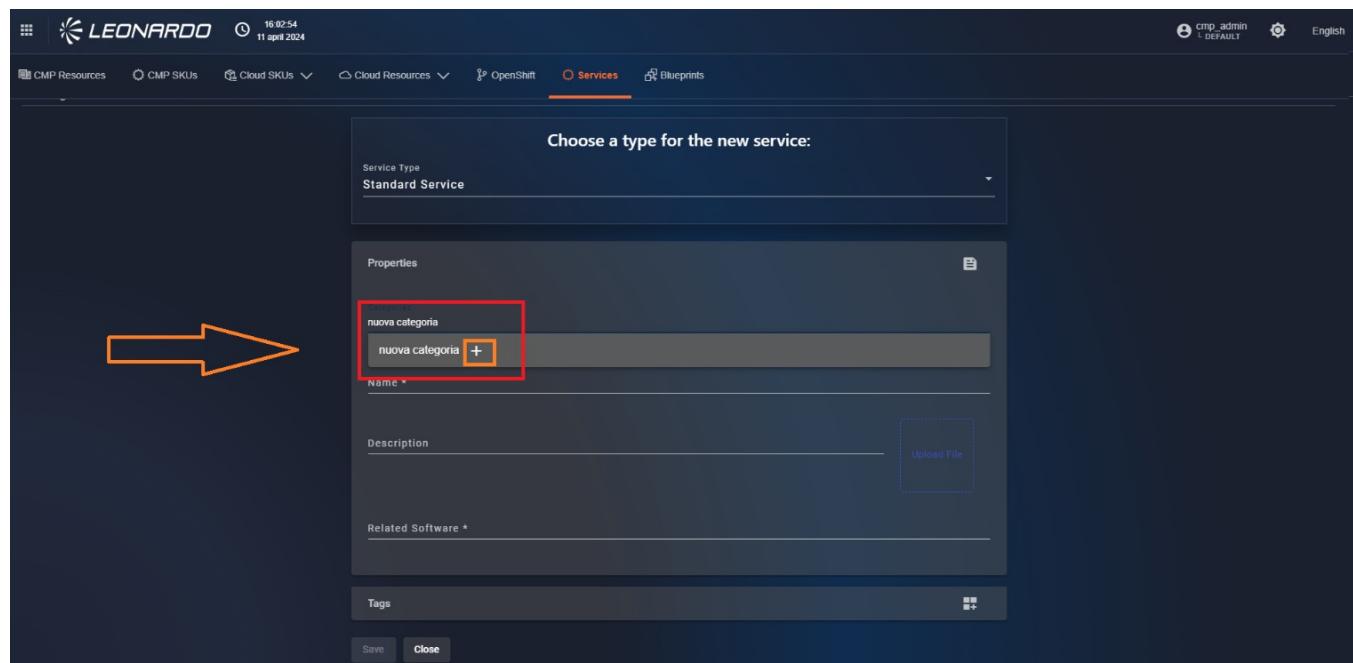


Figura 271 – Aggiunta nuova categoria



Once all data has been entered, the service can be saved using the "save" button in the bottom right. A confirmation modal will be displayed, and the user will be redirected to the list of available services.

9.0.3.1.2.2 "Custom" Services

The user is given the possibility to define "Custom" services by uploading a zip file containing all the necessary files for execution.

In this specific case, the SCMP system is only used to save the service and launch its execution, so it is not possible to check the correctness of the process, which will have to be managed by the user.

all are orchestrators, but with different functionalities and purposes:

1. Ansible:

- **Server and application orchestration:** Ansible automates the configuration and management of servers and applications across different platforms.
- **Executes YAML playbooks:** Ansible uses YAML playbooks to define instructions to be executed on servers.
- **Does not require an agent:** Ansible is agentless; it does not require software installation on the servers to be managed.

2. Bicep:

- **DSL language for Azure:** Bicep is an Azure-specific DSL that facilitates defining infrastructure as code.
- **Creates ARM templates:** Bicep translates files into ARM (Azure Resource Manager) templates that Azure uses to create resources.
- **Integrates with Azure DevOps:** Bicep integrates with Azure DevOps for lifecycle management.

3. Kubernetes:

- **Container orchestration:** Kubernetes is the leading platform for large-scale container orchestration.
- **Automates deployment and management:** Kubernetes automates the deployment, scaling, and management of containers in clusters.
- **Offers an ecosystem of tools:** Kubernetes offers a rich ecosystem of tools and libraries for container management.

4. Terraform:

- **Infrastructure as Code:** Terraform is an open-source tool for managing infrastructure as code.
- **Defines infrastructure in HCL files:** Terraform uses HCL configuration files to define the desired infrastructure.
- **Supports different providers:** Terraform supports a wide range of cloud and on-premise providers.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

In summary:

- **Ansible:** Ideal for automating server and application configuration.
- **Bicep:** Great for defining infrastructure on Azure in a readable way.
- **Kubernetes:** Powerful tool for large-scale container orchestration.
- **Terraform:** Flexible for managing infrastructure across multiple cloud providers or on-premise.

In the configuration of "Custom" services, we can identify a common section composed of the initial parameters:

- "Categories": enter free text in the field and select an already configured category from the dropdown, or it is possible to add a new category by clicking the "+" button in the dropdown.
- "Name": the name of the service that will be displayed on the corresponding card.
- "Description": the description of the service that will be shown on the relative card.

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with the Leonardo logo, user information (cmp.admin, L DEFAULT), and language selection (English). Below the navigation, a breadcrumb trail shows 'Catalog / Create service'. The main area has a title 'Choose a type for the new service:' followed by a dropdown menu with 'Custom Service' selected. Below this, a 'Properties' section is expanded, containing fields for 'Categories', 'Name *' (which is highlighted with a red box), 'Description' (also highlighted with a red box), 'Script Type *' (with a dropdown menu), and an 'Upload File' button. A red arrow points to the 'Properties' section from the left.


Figura 272 – Parametri generali dei
"Custom Services"

Subsequently, it is necessary to choose the type of "orchestrator" to use and insert the corresponding ".zip" file in the "Upload File" section. The specifications for each type are indicated below:

| Script type | Mandatory .zip file content |
|-------------|-----------------------------|
| Ansible | Instance.yaml - Vars.yaml |

| Script type | Mandatory .zip file content |
|-------------|-------------------------------------|
| Bicep | Main.bicep - Main.parameters.json |
| Kubernetes | Only .YAML files |
| Terraform | Main.tf - Variable.tf - Provider.tf |

In addition to the files described in the table, it is possible to add a ".png / .jpg / .img" file to the zip that will then be used as the image for the corresponding Card.

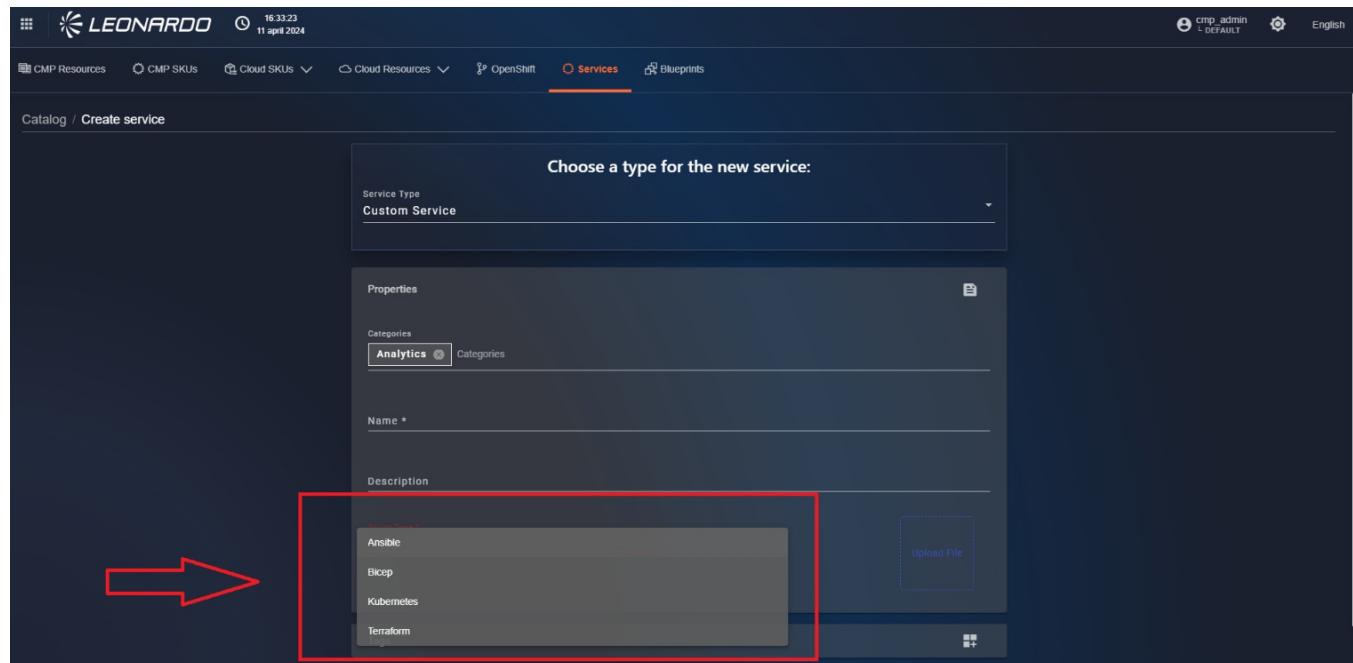

*Figura 273 – Selezione della tipologia
di Orchestratore*

Once all data has been entered, the service can be saved using the "save" button in the bottom right. A confirmation modal will be displayed, and the user will be redirected to the list of available services.

9.0.3.1.2.3 "Azure Pipeline" Services

The user is given the possibility to define "Azure Pipeline" services. This type of service allows the SCMP to invoke the execution of a remote DEVOPS pipeline usable through the provisioning functionality.

In the configuration of "Azure Pipeline" services, we can identify a general section composed of the parameters:

- "Categories": enter free text in the field and select an already configured category from the dropdown, or it is

possible to add a new category by clicking the "+" button in the dropdown. "Name": the name of the service that will be displayed on the corresponding card.

- "Description": the description of the service that will be shown on the relative card.

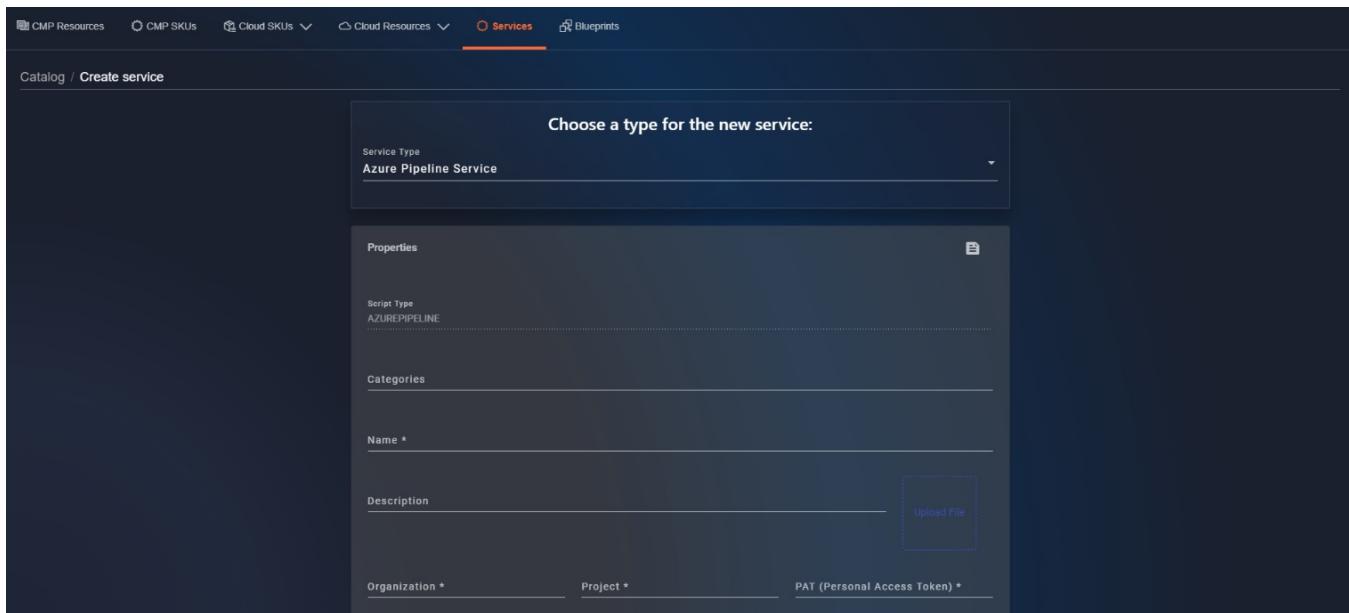


Figura 274 – Parametri generali "Azure pipeline service"

Also for this service, it will be possible, through the "Upload File" field, to insert a ".zip" file that contains a ".png / .jpg / .img" file within the zip, which will then be used as the image for the corresponding Card.

Subsequently, it will be necessary to fill in the specific parameters of the service, in particular, it will be necessary to insert:

- "Organization": the name of the DevOps organization where the pipeline resides.
- "Project": the name of the DevOps project where the pipeline resides.
- "PAT": the private personal access token generated from the "Azure DevOps" portal. Once these fields are filled, it is possible to click the "Test" button to verify the entered parameters.

If the entered data is not valid, various error messages will be displayed indicating which parameter is incorrect (e.g., "Specified Organization is not valid.") and the button will turn red with "KO" written. When all parameters are correct, the button will turn green with "OK" written.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

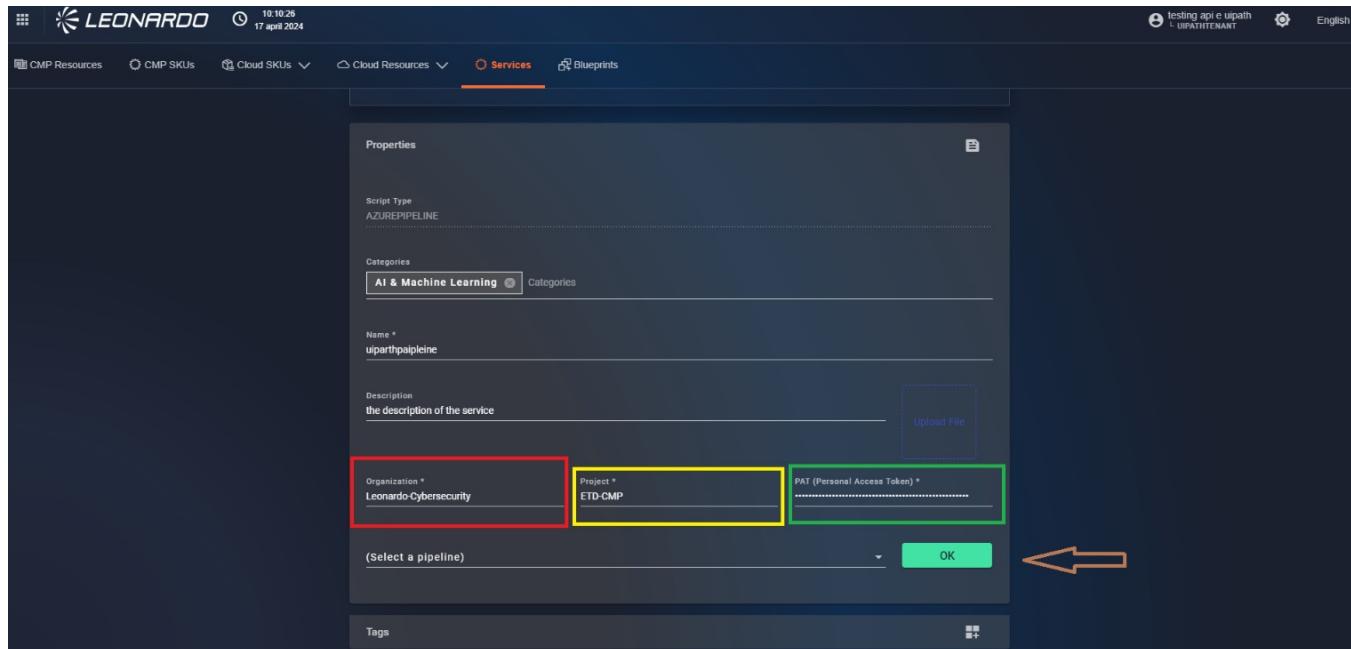


Figura 275 – Parametri specifici delle Pipeline

After successfully performing the test, it will be possible to select the pipeline to execute using the "Select Pipeline" field and clicking on an available option.

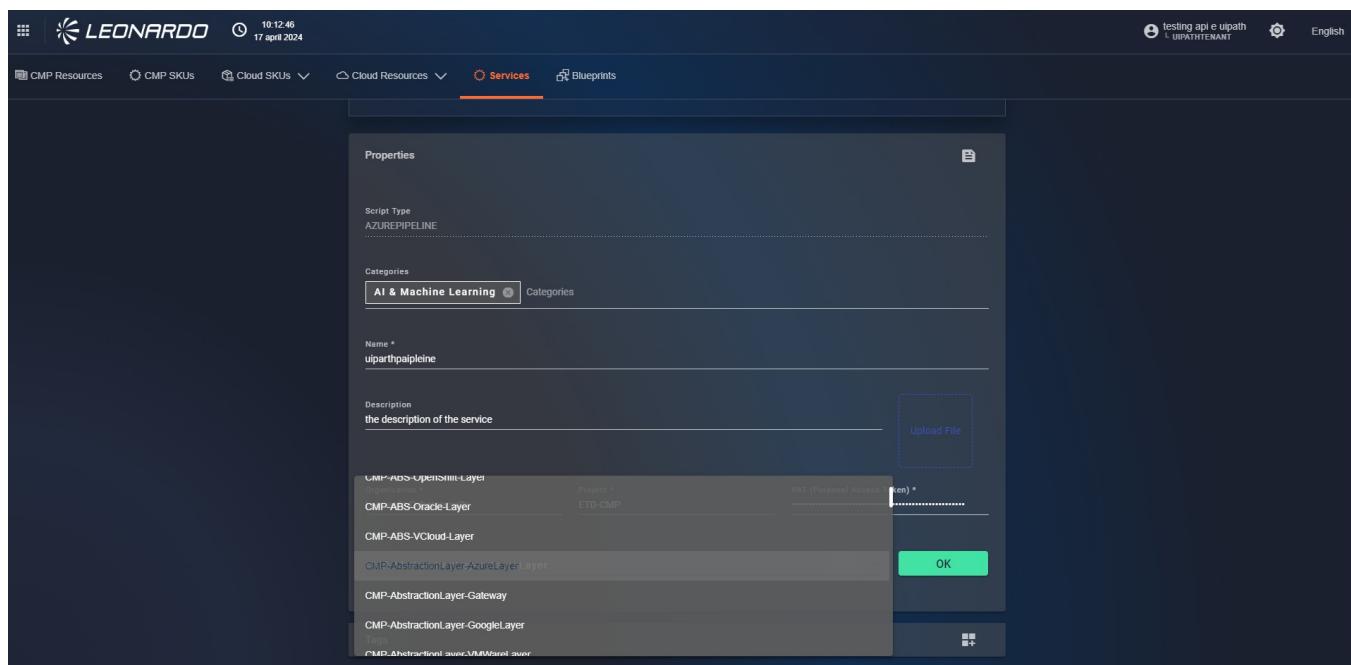




Figura 276 – Selezione della pipeline

Once all data has been entered, the service can be saved using the "save" button in the bottom right. A confirmation modal will be displayed, and the user will be redirected to the list of available services.

9.0.3.1.2.4 "HELM" Services

We can also configure "HELM" type services within the SCMP. For the configuration of these services, it is necessary to enter these parameters:

- "Categories": enter free text in the field and select an already configured category from the dropdown, or it is possible to add a new category by clicking the "+" button in the dropdown.
- "Chart name": the actual name of the HELM CHART that will be used.
- "Chart repository": the URL relative to the repository containing the HELM CHART to be used.
- "Repository username": if the repository indicated above is private, it will be necessary to provide a username to access the repository.
- "Repository password": if the repository indicated above is private, it will be necessary to provide the password for the user indicated above.
- "Chart version": indicates which version of the chart to use.
- "Cluster": indicates which cluster to install the application on.
- "Description": the description of the service that will be shown on the corresponding card.
- "Image": in this section, it is possible to insert a .png file that will be used as the service image on the interface.
- "Immutable": Selecting this flag during provisioning will prevent modification of settings, and the service will be automatically configured based on.
- "Namespace": enter the name for the namespace where the deployment should occur.
- "Name": the name of the service that will be displayed on the corresponding card.
- "Configurations": in this section, it is possible to upload the values.yaml file that will be used for provisioning.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there are navigation tabs: SCMP Resources, SCMP SKUs, Cloud Resources, Cloud SKUs, Services (which is highlighted in orange), Blueprints, and Reports. On the right side, there are user account and language settings. Below the tabs, the page title is "Catalog / Create service". A modal window is open, titled "Choose a type for the new service:", with "Helm Service" selected under "Service Type". The main form area has sections for "Properties" and "Categories". Under "Properties", fields include "Chart Name *", "Chart Repository", "Repository Password", "Repository Username", and "Chart Version *". The "Chart Version" field contains "latest".

Figura 277 – Parametri generali dei
"HELM Services"

For these services, it is also possible to prevent any kind of service modification by selecting the "immutable" option and entering a namespace and a cluster in which to deploy the applications.

This screenshot shows the same interface as the previous one, but with additional configuration options visible. The "Cluster" dropdown is set to "Cluster". Under "Description", there is a "Image" section with a "Upload File" button and an "Immutable" checkbox checked. In the "Namespace" section, there is a "Name *" field and a "Script Type * HELM" field. At the bottom, there is a "Configuration (values.yaml)" section with an "Upload File" button.

Figura 278 – Parametro "immutable"

Once all data has been entered, the service can be saved using the "save" button in the bottom right. A confirmation modal will be displayed, and the user will be redirected to the list of available services.

9.0.3.1.3 EDITING AND DELETING SERVICES

In addition to creating a Service, it is possible to view, modify, and delete it.

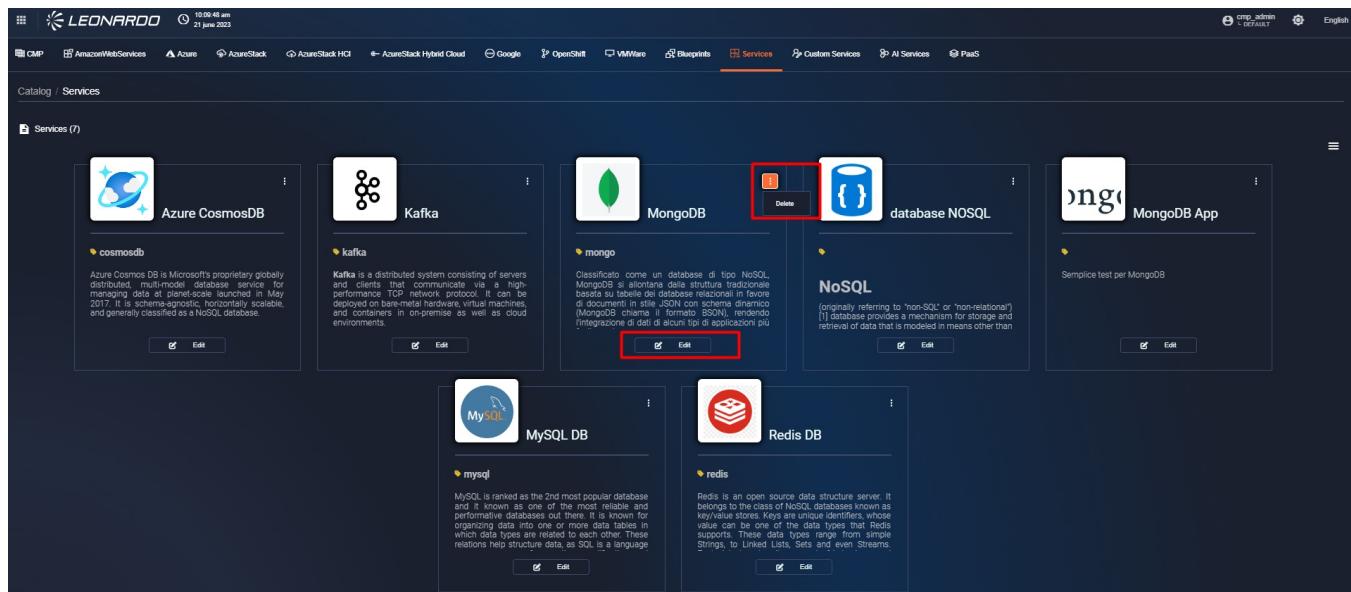


Figura 279 – Operazioni disponibili per i Services

- To modify the information of a "Service", click the "Edit" button within the card. Afterward, within the form, the user can modify the necessary data. After performing the edit operations, in the bottom right, click the "Submit" button. After doing this, the user is on the "Service" page.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

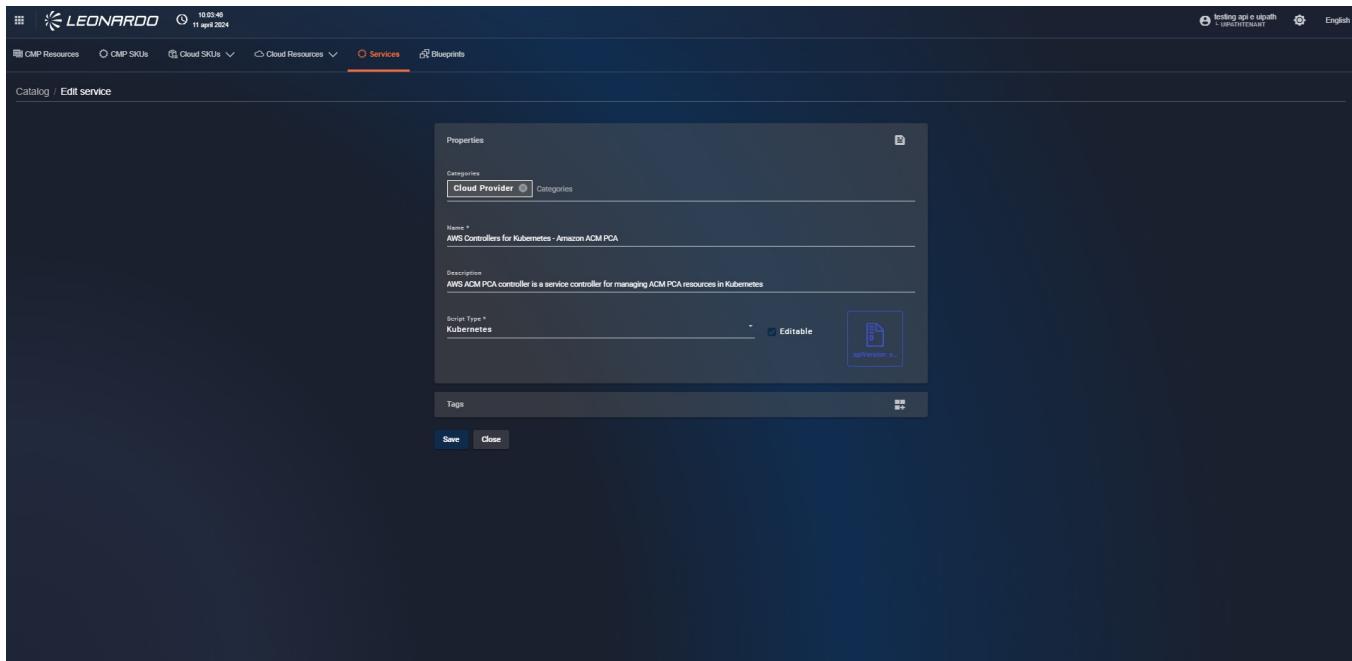


Figura 280 – Pagina di edit per un servizio

- To delete a "Service", click on the kebab menu of said service and then click on "Delete". After doing this, a confirmation modal for service deletion appears. At this point, it is necessary to click the "Remove" button.


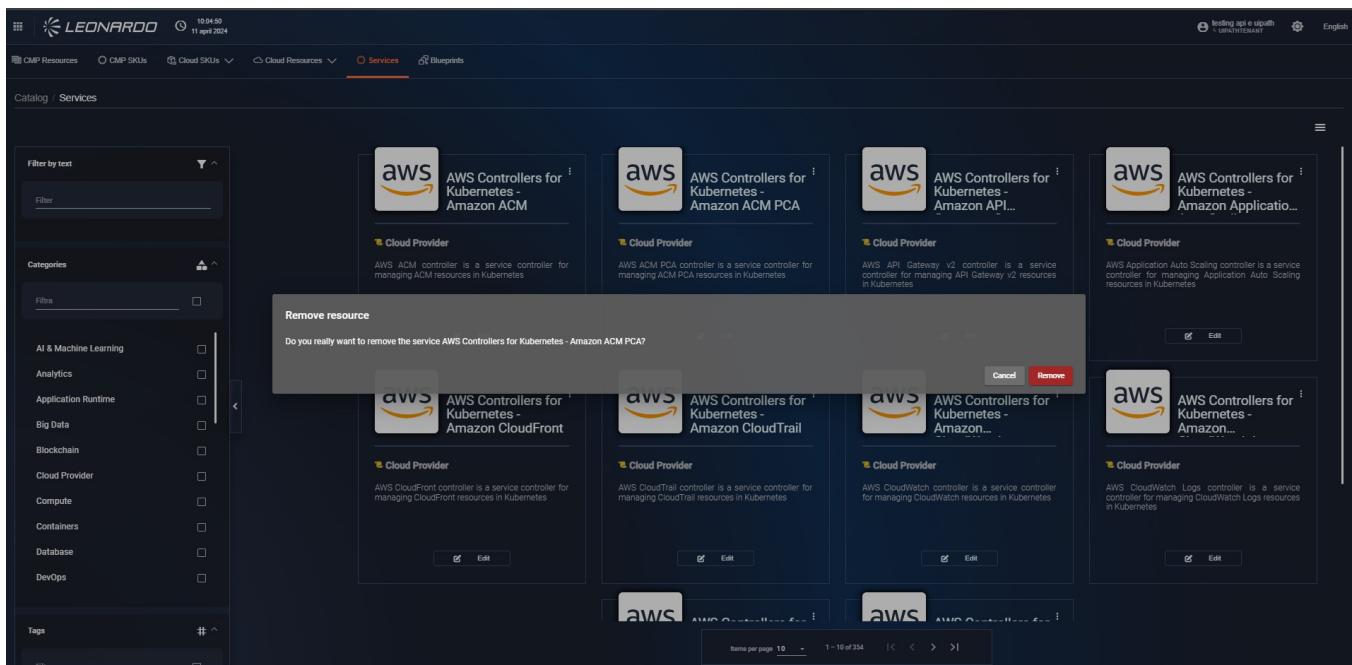


Figura 281 – Eliminazione di un servizio

9.0.3.2 Blueprint Management

To access the "Services" functionality, click on the bento button in the upper left corner and then click on "Catalog".

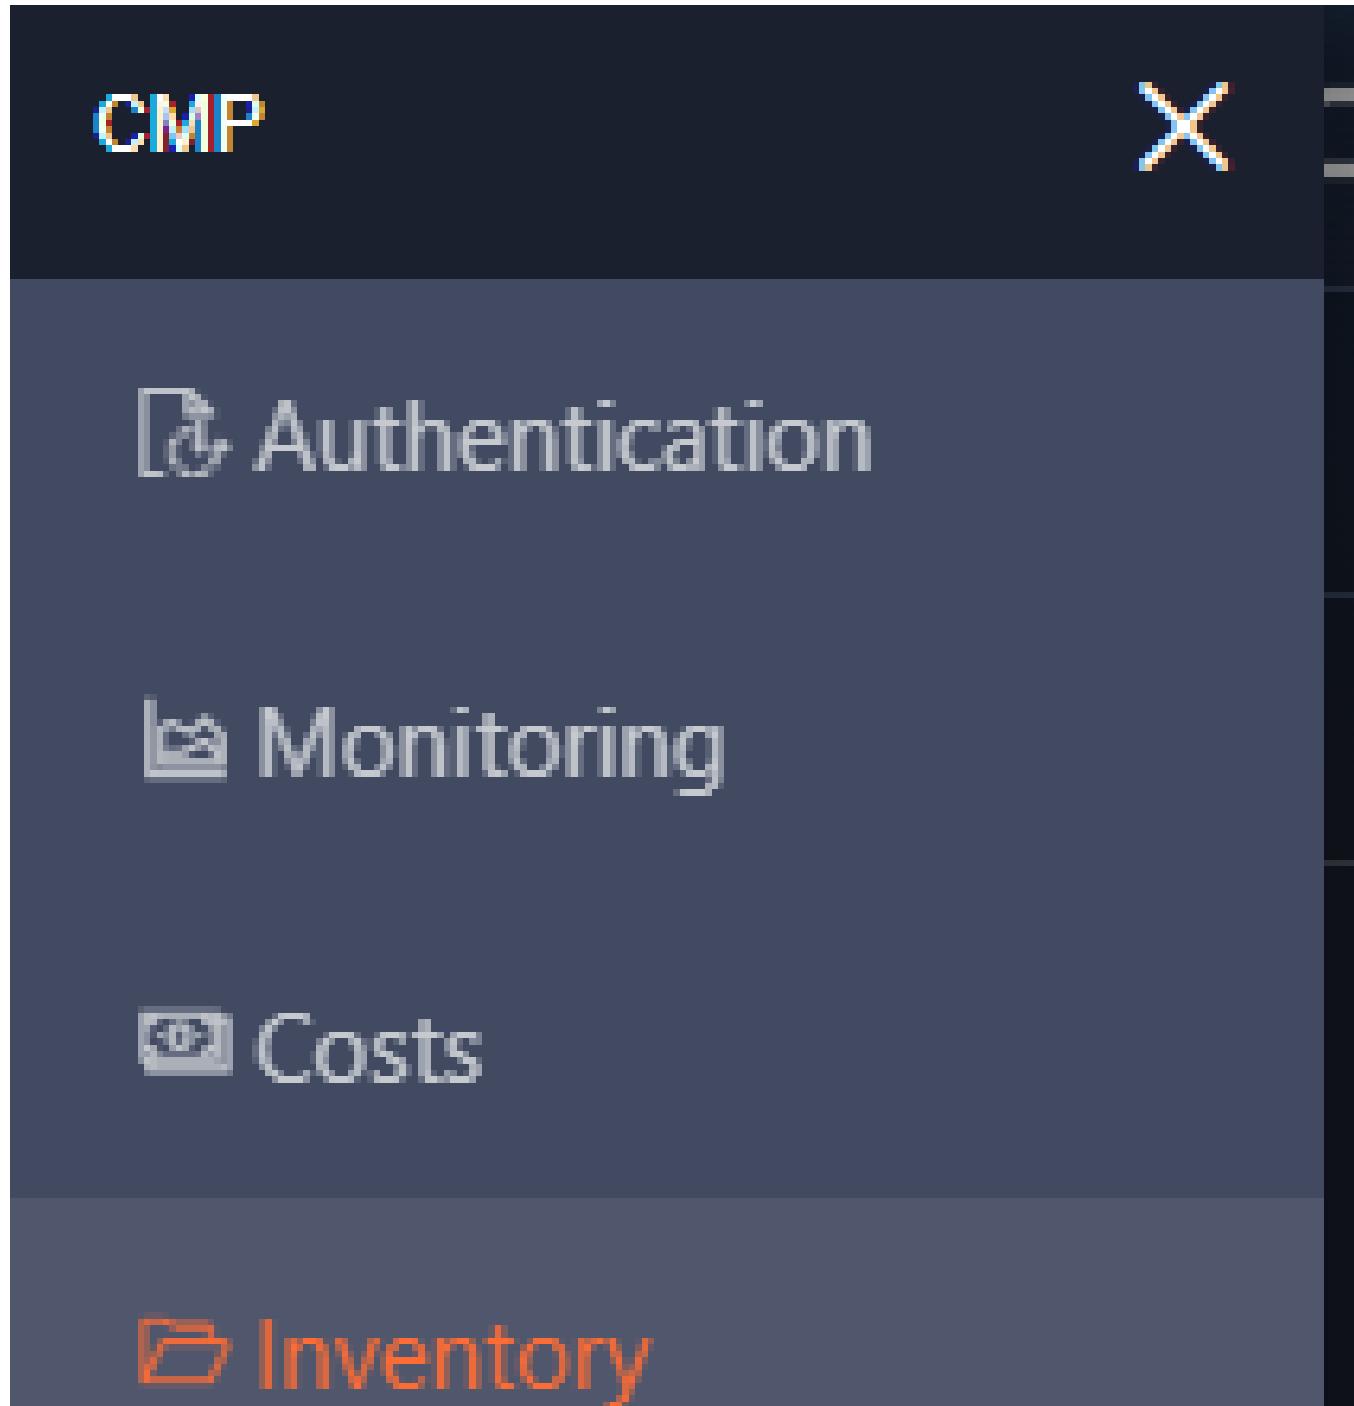

⊕ Security

GridLayout Dashboard

Catalog

Administrator

Cloud Maturity Model

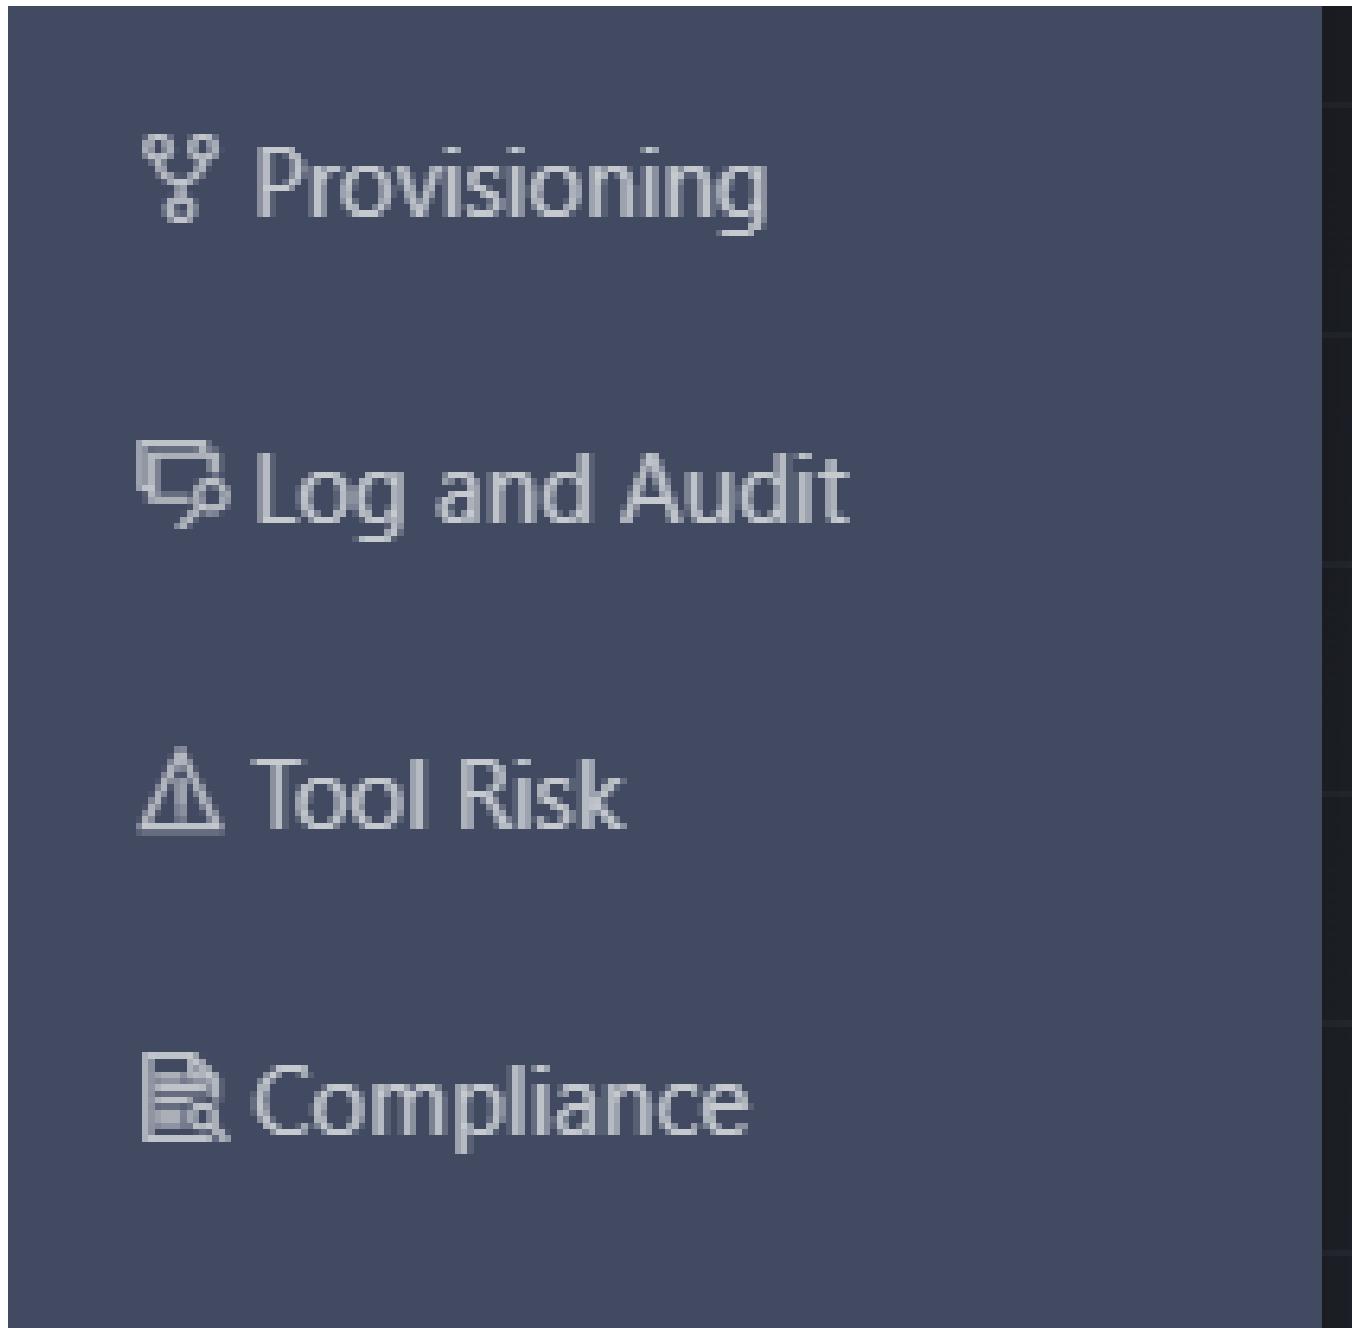


Figura 282 – Accesso alle "Blueprint"

From the "SCMP" page, click on the tab that depicts three joined squares, 'Blueprint', located above the breadcrumb path. After doing this, you will be on the 'Blueprint' page, where the list of blueprints configured in the system is displayed.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Description | Creation Date | Status |
|---|--|---------------------|--------|
| AKS Cluster & Helm Release | AKS Cluster & Helm Release | 08/02/2024 09:11:51 | ✓ |
| Blueprint with manual intervention | - | 16/02/2024 14:11:14 | ✓ |
| Docker development environment | Ubuntu VM setup for container development | 22/02/2024 09:53:31 | ✓ |
| Only manual | Blueprint with human tasks only | 13/03/2024 09:39:32 | ✓ |
| Onboarding Pubblica Amministrazione Secure Public Cloud GCP | Procedura di Onboarding nuova PA su Secure Public Cloud Google | 14/03/2024 12:13:38 | ✓ |
| Declarative blueprint | Blueprint with topology definition, but no provisioning plan | 28/03/2024 14:13:35 | ✓ |

Figura 283 – Pagina delle Blueprint

9.0.3.2.1 ADDING A NEW BLUEPRINT

From the "Blueprint" page, the user can create a new blueprint by accessing the appropriate section as shown in the figure, by clicking the "hamburger menu" in the upper right corner and selecting "Add Blueprint".

| Name | Description | Creation Date |
|-----------------|---------------|---------------------|
| manual | only manual | 10/04/2024 08:09:07 |
| name | dsescr | 10/04/2024 09:45:36 |
| myBlueprintName | description | 10/04/2024 09:46:13 |
| isAnewName | descrizione32 | 10/04/2024 09:46:51 |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 284 – Aggiunta nuova Blueprint

The user is redirected to step 1 of the "Blueprint" creation where all general information about the blueprint can be entered. After entering the data, click the "Save blueprint" button to save the blueprint draft. For details on the status, please refer to the next paragraph.

The screenshot shows a dark-themed web application interface. At the top, there's a navigation bar with links for 'CMP Resources', 'Cloud SKUs', 'Cloud Resources', 'Services', and 'Blueprints'. The 'Blueprints' link is underlined in red, indicating it's the active section. Below the navigation, a breadcrumb trail shows 'Catalog / Blueprints / Add Blueprint'. The main content area is titled '1 Definition' and contains several input fields: 'Description', 'Name *' (with a red asterisk indicating it's required), 'Notes', 'Tier', and 'Version'. At the bottom right of this form is a grey button labeled 'SAVE BLUEPRINT'.

Figura 285 – Blueprint step 1

A confirmation modal for insertion will open. Once "yes" is clicked to continue, the user will see step 2 of blueprint creation.

Clicking "No" will cancel the draft insertion.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

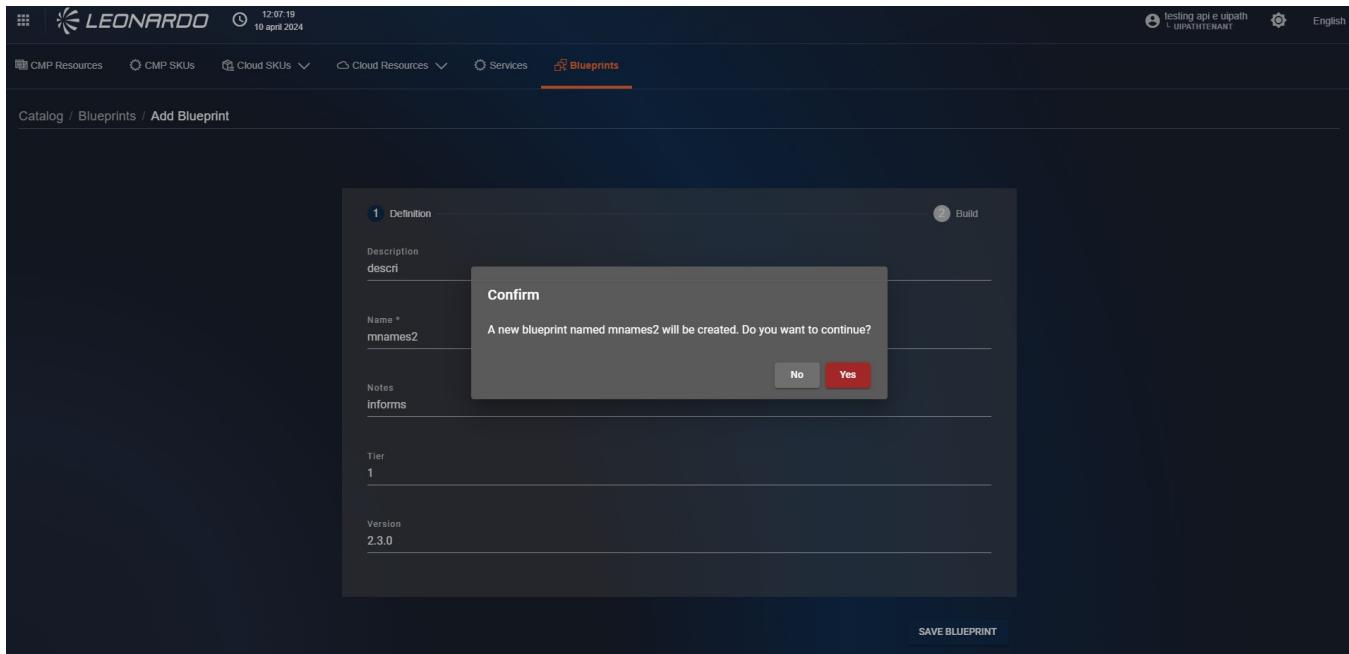


Figura 286 – Blueprint conferma della bozza

In step 2 of creating a Blueprint, it is necessary to click within the "Upload File" field and, using the Windows upload window, select the ".CSAR" file that contains the Blueprint.

After selecting a file, click the "Upload" button in the bottom right to start the file validation process, following the list of statuses in the paragraph below.

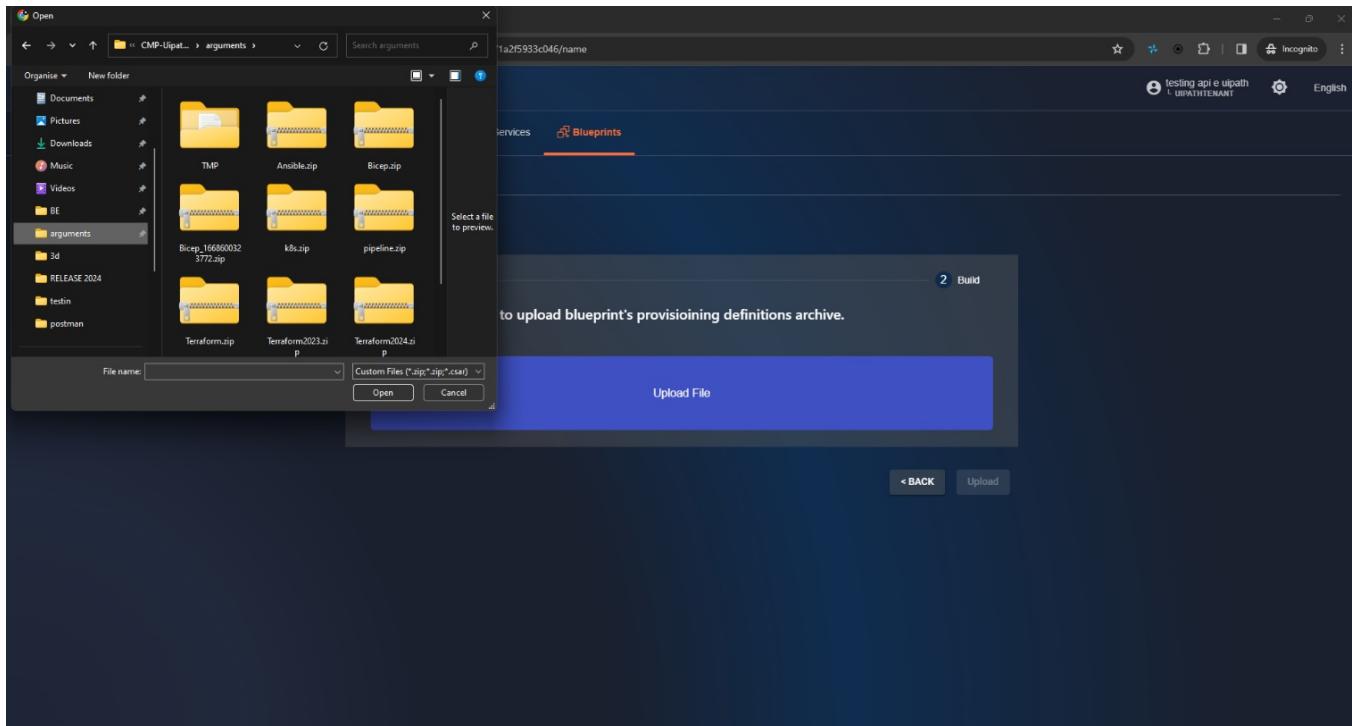


Figura 287 – Inserimento file

9.0.3.2.2 BLUEPRINT STATUS

Since "Blueprints" are complex objects that must be properly configured, a file validation system has been implemented to allow the use of only "Blueprint" services that are correctly configured.

Specifically, there are 4 possible "STATUSES":

1. READY TO USE (green checkmark): indicates that the blueprint is configured correctly and can be used during "Provisioning".
2. VERIFY (yellow circle): indicates that the SCMP is validating the content of the Blueprint.
3. FAILED (red "X"): indicates that the uploaded file is not valid and must be re-entered by the user after correction.
4. DRAFT (orange): indicates that the "blueprint" has been created as a draft but does not contain the necessary CSAR file. Once the file is inserted, the blueprint will change to VERIFY status.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a table of blueprints with columns for Name, Description, Creation Date, and Status. A purple callout box highlights the 'Status' column for the row 'myBlueprintName'. The status row contains three items: a green checkmark labeled 'Draft', a red X labeled 'Delete', and a yellow question mark labeled 'Edit'. A message at the bottom says 'Blueprint's archive upload success!' with an 'OK' button.

| Name | Description | Creation Date | Status |
|-----------------|---------------|---------------------|--------|
| manual | only manual | 10/04/2024 08:09:07 | |
| name | dscr | 10/04/2024 09:45:36 | |
| myBlueprintName | description | 10/04/2024 09:46:13 | |
| isAnewName | descrizione32 | 10/04/2024 09:46:51 | |


Figura 288 – Status delle Blueprint

9.0.3.2.3 VIEWING, EDITING, AND DELETING BLUEPRINTS

In the table of available blueprints, for each row, on the right, there is a contextual menu. Once opened, it contains three functionalities:

The "View" functionality: allows viewing the details of the blueprint. Once clicked, the user will be redirected to the blueprint viewing page.

- Properties: in this section, it is possible to modify the basic information of the blueprint (Figure 241).
- Provisioning plan: in this section, there is the bpmn graph which provides a graphical representation of the "steps" foreseen by the "Blueprint" (Figure 242). This section contains three buttons to modify the plan: the first, shaped like a "folder", allows uploading a new BPMN file to the edit page; the second, "download", allows downloading the currently displayed bpmn file; the third, on the right, "Upload", overwrites the current bpmn file available for the blueprint.
- Topology: The topology of a blueprint is the arrangement of components in a Kubernetes cluster. In this section, we can graphically visualize the system structure among different pods, services, and components (Figure 243).
- Update Model: in this section, it is possible to upload the CSAR file. By making this modification, the Blueprint will return to the "VERIFY" state to validate its content (Figure 244).

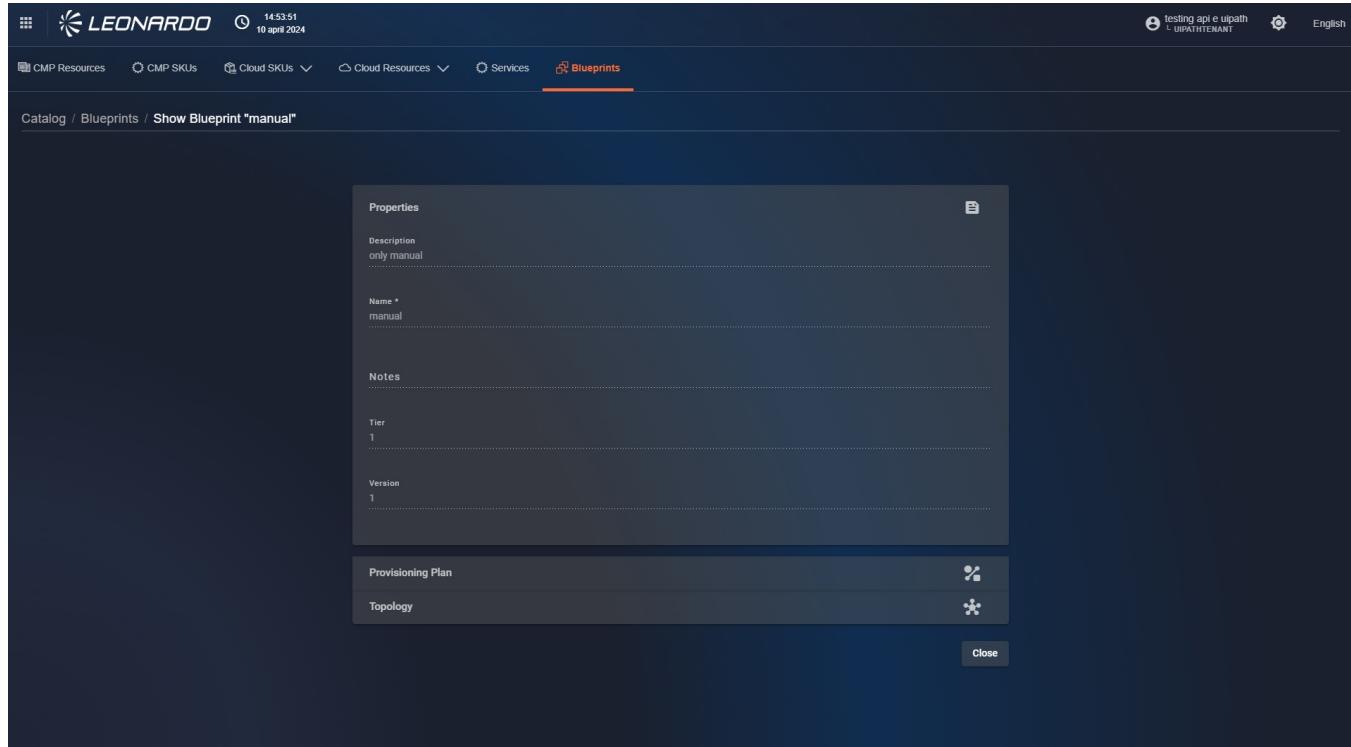

*Figura 289 – Sezioni della pagina
Blueprint "view"*

The "Edit" functionality allows viewing and modifying all blueprint parameters, including the related CSAR file. It contains the following sections:

- Properties: in this section, it is possible to modify the basic information of the blueprint.
- Provisioning plan: in this section, there is the bpmn graph which provides a graphical representation of the "steps" foreseen by the "Blueprint". This section contains three buttons to modify the plan: the first, shaped like a "folder", allows uploading a new BPMN file to the edit page; the second, "download", allows downloading the currently displayed bpmn file; the third, on the right, "Upload", overwrites the current bpmn file available for the blueprint.
- Topology: The topology of a blueprint is the arrangement of components in a Kubernetes cluster. In this section, we can graphically visualize the system structure among different pods, services, and components.
- Update Model: in this section, it is possible to upload the CSAR file. By making this modification, the Blueprint will return to the "VERIFY" state to validate its content.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed web application interface. At the top, there is a navigation bar with links for 'CMP Resources', 'CMP SKUs', 'Cloud SKUs', 'Cloud Resources', 'Services', and 'Blueprints'. The 'Blueprints' link is underlined, indicating it is the active section. Below the navigation, the URL 'Catalog / Blueprints / Edit Blueprint "isAnewName"' is visible. The main content area is titled 'Properties' and contains several input fields:

- Description: descrizione
- Name*: myblueprint
- Notes: noted
- Tier: 1
- Version: 2

Below the properties section, there are two tabs: 'Topology' and 'Provisioning Plan'. Each tab has a small icon next to its name.

Figura 290 – Sezioni della pagina
Blueprint "edit"

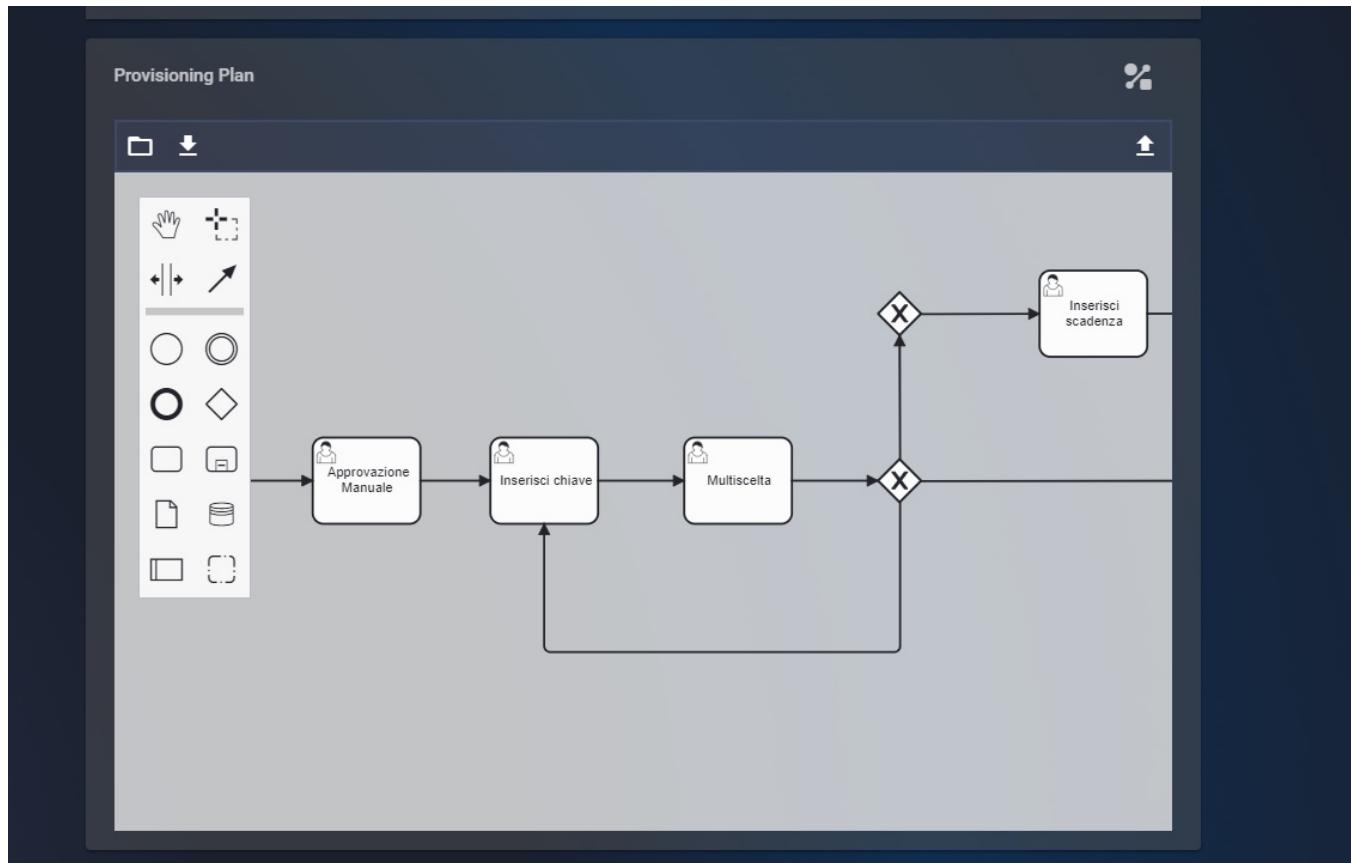


Figura 291 – Sezione Plan di una Blueprint

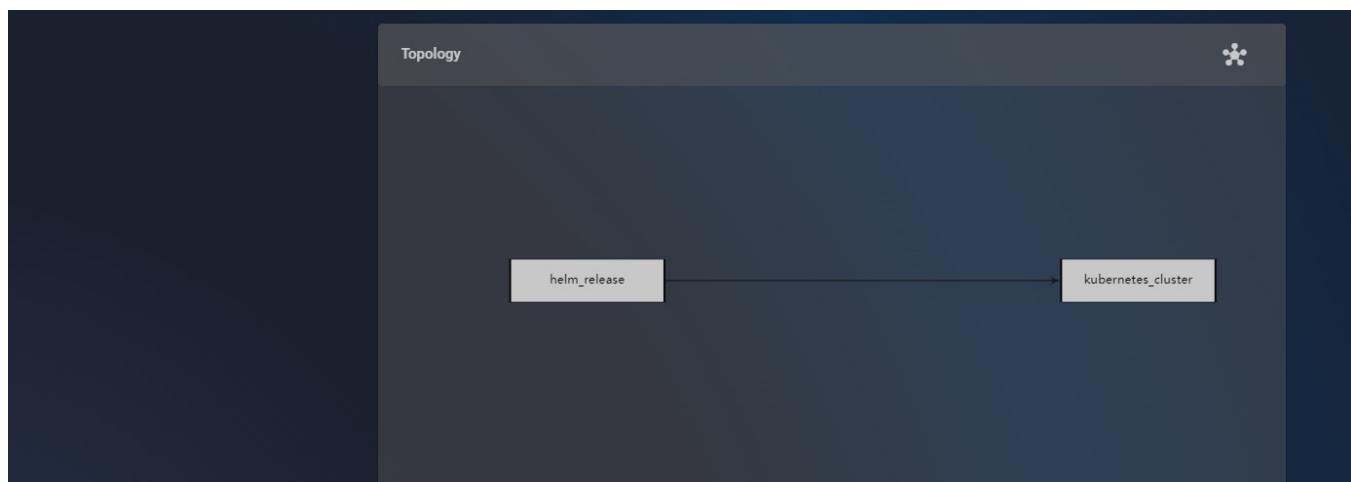


Figura 292 – Sezione Topology di una Blueprint



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

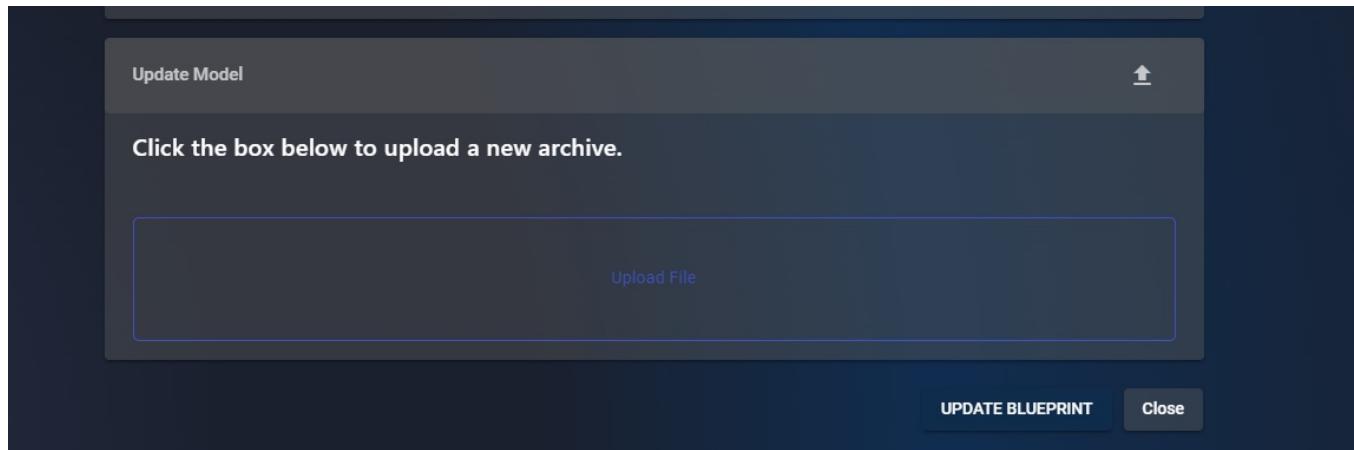


Figura 293 – Sezione Model di una Blueprint

The "Delete" functionality: allows permanently deleting the blueprint from the system. To do this, simply confirm the deletion by clicking the "Yes" button displayed in the deletion confirmation modal.

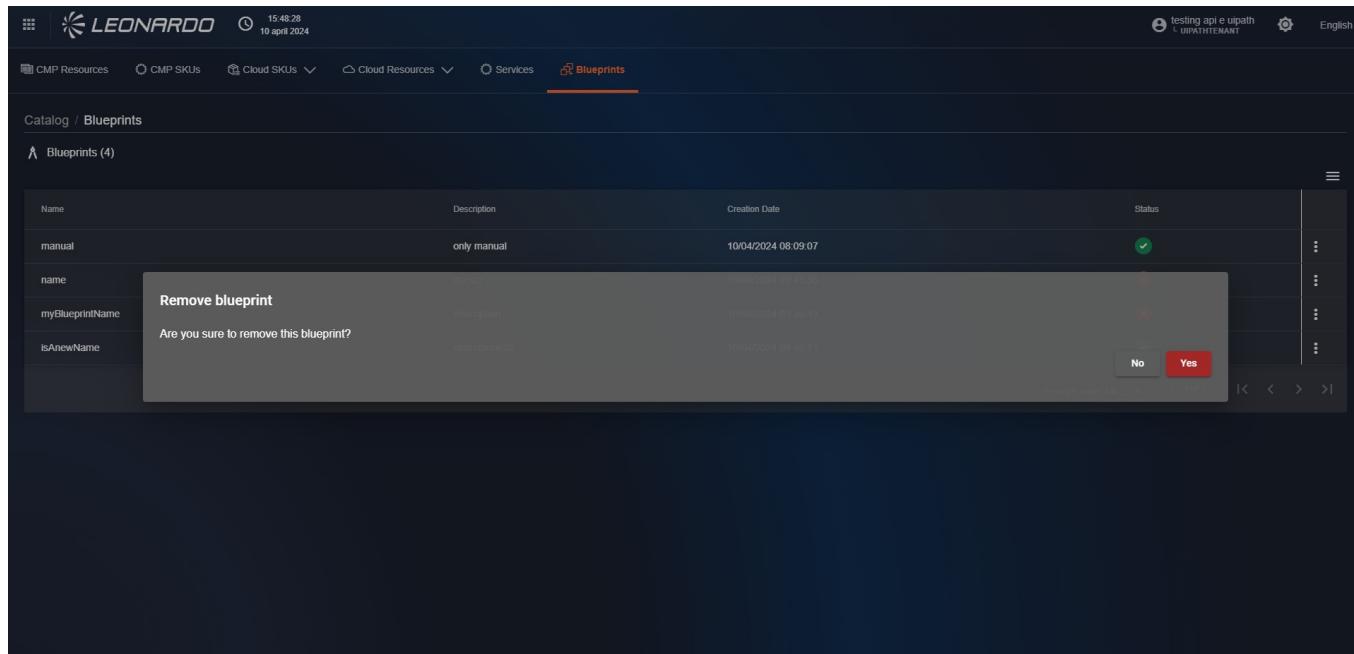


Figura 294 – Eliminazione di una Blueprint

9.0.4 Reporting Tools

The reporting functionality, specific to each feature, allows generating global reports of the information available for the various providers. Within the pages, the possibility will also be given to create files to facilitate information sharing.

To access the functionality, above the breadcrumb path, click on the "Reports" tab.

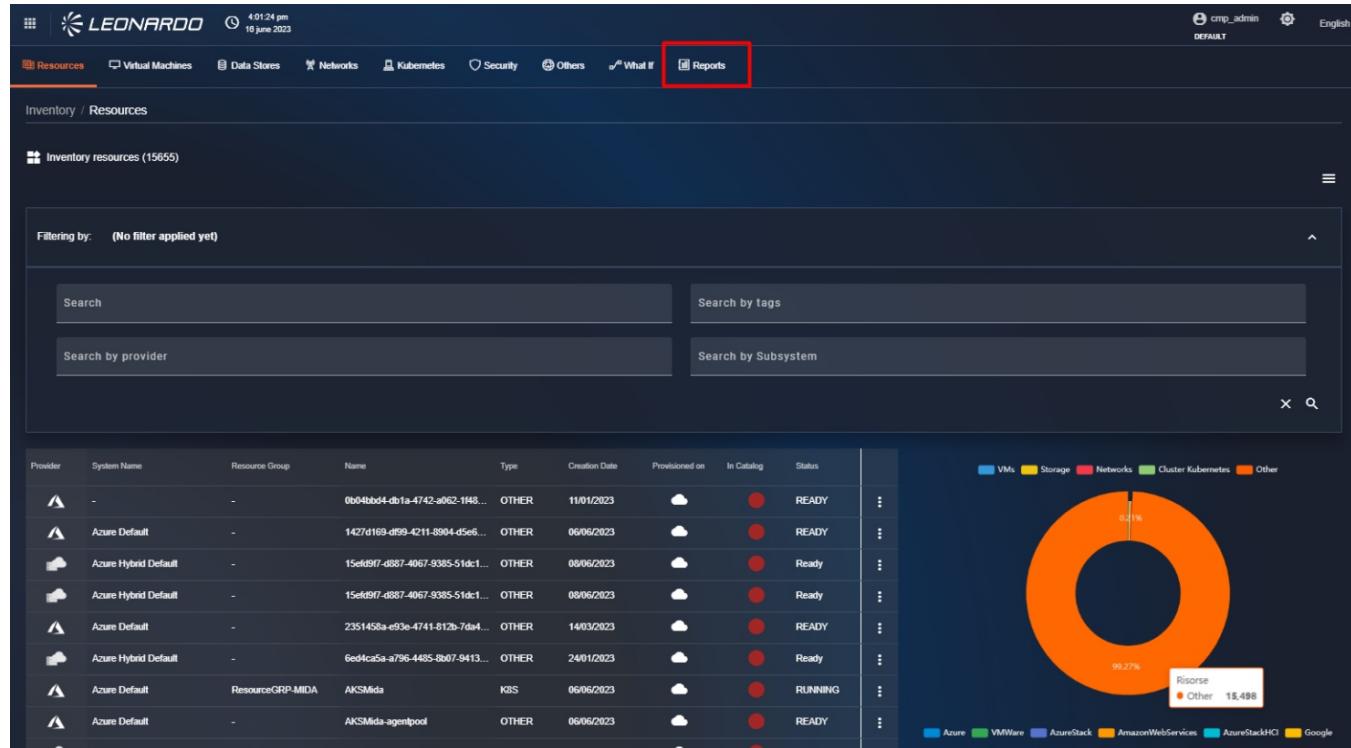


Figura 295 – Accesso al report di Catalogo

9.0.4.1 Available Report Types

CATALOG Missing SKU – List of provider SKUs not present in the SCMP catalog price list, if applicable. Consequently, the customer price for missing SKUs will be given by applying the discount/markup percentage configured in the Administration section.

9.0.4.2 Creating a Report

In the upper right of the page, we can click on the "New Report" button to start creating a report. Specifically, a modal will be displayed containing the list of available report types.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links for Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports. The Reports link is currently selected. Below the navigation, there's a breadcrumb trail: Inventory / Reports. The main area displays a table of existing reports, categorized as Ready or Scheduled. One report, 'Inventory Summary', is highlighted. A modal window titled 'New report' is overlaid on the page, containing a sub-modal for selecting a report type. This sub-modal lists 'Inventory Summary' and includes a note: 'Report about the number of resources related to specific filters'. At the bottom of the sub-modal are 'Cancel' and 'Configure' buttons.

Figura 296 – Creazione nuovo report

Once the report type is selected, click the "Configure" button to select the providers to include in the report. In the newly opened window, we find the "Provider" field which allows selecting one or more existing providers in the system. Subsequently, it is possible to select one or more subsystems to include in the report. If no providers are selected, no subsystem can be selected. Finally, there is a "tag" section to include only resources that have the entered tag.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed web interface for the Leonardo Secure Cloud Management Platform. At the top, there's a navigation bar with links for Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports. The Reports link is currently selected, indicated by an orange underline. Below the navigation, a sub-menu for 'Inventory / Reports' is open, showing 'Reports' as the active item. A modal dialog box titled 'Inventory' is displayed in the center. It contains fields for 'Provider' (set to 'Azure, Google'), 'Subsystem' (set to 'MAE LAB, CMPPROJECT-374610'), and 'Tags'. Under 'Report Type', the 'One-Shot' radio button is selected. A red 'Submit' button is at the bottom of the dialog. In the background, a table lists various reports with columns for 'Status' (all shown as 'READY') and 'Actions'. The table includes rows for different providers like AZURE, GOOGLE, OPENSHIFT and subsystems like MAE LAB.

Figura 297 – Configurazione del report

At this point, the user can choose between two different actions:

- Create a static report that will be saved in the system.
- Schedule a recurring report generation.

To confirm the creation of a static report, verify that "One-Shot" has been selected for the "Report type" field and click the "Submit" button at the bottom.

After a loading period, the newly generated report will be visible in the list.




Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

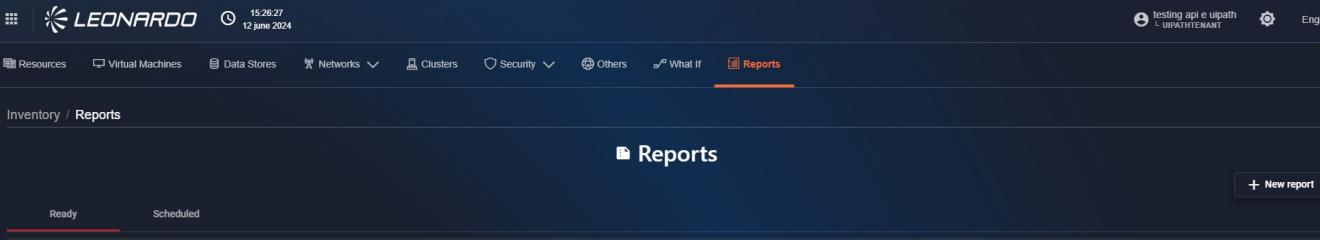

The screenshot shows the Leonardo Cloud Platform interface. At the top, there's a header bar with the Leonardo logo, system status (15:26:27, 12 June 2024), and user information (testing api e upath, L'UPATHITENANT, English). Below the header is a navigation bar with links: Resources, Virtual Machines, Data Stores, Networks (with a dropdown arrow), Clusters, Security (with a dropdown arrow), Others, What If, and Reports (which is highlighted with an orange underline). The main content area has a dark blue header with the title "Reports". Underneath, there are two tabs: "Ready" (which is selected) and "Scheduled". A button "+ New report" is located in the top right of this header. The main body contains a table with columns: Sub Category, Provider, Creation Date, Status, and Actions. The table lists 12 rows, all of which are "READY" and have three vertical dots in the "Actions" column. The "Provider" column consistently shows "AZURE, GOOGLE, OPENSHIFT".

| Sub Category | Provider | Creation Date | Status | Actions |
|--------------|--------------------------|-----------------------|--------|---------|
| SUMMARY | AZURE, GOOGLE | 12/06/2024 - 1:21 PM | READY | ⋮ |
| SUMMARY | AZURE | 12/06/2024 - 12:29 PM | READY | ⋮ |
| SUMMARY | AZURE | 12/06/2024 - 12:28 PM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 10:05 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 10:01 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 8:32 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 8:20 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 12:30 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 07/06/2024 - 12:30 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 05/06/2024 - 12:29 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 05/06/2024 - 12:29 AM | READY | ⋮ |

Figura 298 – Lista dei report effettuati

9.0.4.2.1 REPORT SCHEDULING

If, on the other hand, you want to schedule automatic report execution, you will need to select "Recurring" for the "Report Type" field. In this case, the window will update to show additional parameters for configuring the periodic report.

The parameters to be entered are:

- Period: allows selecting the frequency of report delivery (hourly, daily, ...).
 - "Receive only if not empty" if selected, the file will not be sent if it contains no information.
 - Report Language: allows selecting the language used in the report.
 - File format: allows selecting one or more file types to include in the email.
 - User E-mails: allows entering an email to which reports will be sent. After entering an email, it is necessary to press "Enter" on the keyboard to confirm its entry. Once pressed, the newly entered email will move to the bottom box, and the field will be cleared to allow the entry of a new email, if necessary.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the 'Costs' report configuration dialog. It includes fields for 'Report Type' (One-Shot or Recurring), 'Period' (e.g., 'Last 7 days'), 'Report's language' (English), 'File format' (Costs Details - Group By Resource), and 'User E-mails' (FmOps Report). A note at the bottom says 'Press ENTER for each email you want to confirm and add to the list of recipients. It's possible to add multiple emails.' Below the dialog, a table lists scheduled reports with columns for 'Status' (READY) and 'Actions' (three dots).

| | Status | Actions |
|-----|--------|---------|
| 1 | READY | ... |
| 2 | READY | ... |
| 3 | READY | ... |
| 4 | READY | ... |
| 5 | READY | ... |
| 6 | READY | ... |
| 7 | READY | ... |
| 8 | READY | ... |
| 9 | READY | ... |
| 10 | READY | ... |
| 11 | READY | ... |
| 12 | READY | ... |
| 13 | READY | ... |
| 14 | READY | ... |
| 15 | READY | ... |
| 16 | READY | ... |
| 17 | READY | ... |
| 18 | READY | ... |
| 19 | READY | ... |
| 20 | READY | ... |
| 21 | READY | ... |
| 22 | READY | ... |
| 23 | READY | ... |
| 24 | READY | ... |
| 25 | READY | ... |
| 26 | READY | ... |
| 27 | READY | ... |
| 28 | READY | ... |
| 29 | READY | ... |
| 30 | READY | ... |
| 31 | READY | ... |
| 32 | READY | ... |
| 33 | READY | ... |
| 34 | READY | ... |
| 35 | READY | ... |
| 36 | READY | ... |
| 37 | READY | ... |
| 38 | READY | ... |
| 39 | READY | ... |
| 40 | READY | ... |
| 41 | READY | ... |
| 42 | READY | ... |
| 43 | READY | ... |
| 44 | READY | ... |
| 45 | READY | ... |
| 46 | READY | ... |
| 47 | READY | ... |
| 48 | READY | ... |
| 49 | READY | ... |
| 50 | READY | ... |
| 51 | READY | ... |
| 52 | READY | ... |
| 53 | READY | ... |
| 54 | READY | ... |
| 55 | READY | ... |
| 56 | READY | ... |
| 57 | READY | ... |
| 58 | READY | ... |
| 59 | READY | ... |
| 60 | READY | ... |
| 61 | READY | ... |
| 62 | READY | ... |
| 63 | READY | ... |
| 64 | READY | ... |
| 65 | READY | ... |
| 66 | READY | ... |
| 67 | READY | ... |
| 68 | READY | ... |
| 69 | READY | ... |
| 70 | READY | ... |
| 71 | READY | ... |
| 72 | READY | ... |
| 73 | READY | ... |
| 74 | READY | ... |
| 75 | READY | ... |
| 76 | READY | ... |
| 77 | READY | ... |
| 78 | READY | ... |
| 79 | READY | ... |
| 80 | READY | ... |
| 81 | READY | ... |
| 82 | READY | ... |
| 83 | READY | ... |
| 84 | READY | ... |
| 85 | READY | ... |
| 86 | READY | ... |
| 87 | READY | ... |
| 88 | READY | ... |
| 89 | READY | ... |
| 90 | READY | ... |
| 91 | READY | ... |
| 92 | READY | ... |
| 93 | READY | ... |
| 94 | READY | ... |
| 95 | READY | ... |
| 96 | READY | ... |
| 97 | READY | ... |
| 98 | READY | ... |
| 99 | READY | ... |
| 100 | READY | ... |
| 101 | READY | ... |
| 102 | READY | ... |
| 103 | READY | ... |
| 104 | READY | ... |
| 105 | READY | ... |
| 106 | READY | ... |
| 107 | READY | ... |
| 108 | READY | ... |
| 109 | READY | ... |
| 110 | READY | ... |
| 111 | READY | ... |
| 112 | READY | ... |
| 113 | READY | ... |
| 114 | READY | ... |
| 115 | READY | ... |
| 116 | READY | ... |
| 117 | READY | ... |
| 118 | READY | ... |
| 119 | READY | ... |
| 120 | READY | ... |
| 121 | READY | ... |
| 122 | READY | ... |
| 123 | READY | ... |
| 124 | READY | ... |
| 125 | READY | ... |
| 126 | READY | ... |
| 127 | READY | ... |
| 128 | READY | ... |
| 129 | READY | ... |
| 130 | READY | ... |
| 131 | READY | ... |
| 132 | READY | ... |
| 133 | READY | ... |
| 134 | READY | ... |
| 135 | READY | ... |
| 136 | READY | ... |
| 137 | READY | ... |
| 138 | READY | ... |
| 139 | READY | ... |
| 140 | READY | ... |
| 141 | READY | ... |
| 142 | READY | ... |
| 143 | READY | ... |
| 144 | READY | ... |
| 145 | READY | ... |
| 146 | READY | ... |
| 147 | READY | ... |
| 148 | READY | ... |
| 149 | READY | ... |
| 150 | READY | ... |
| 151 | READY | ... |
| 152 | READY | ... |
| 153 | READY | ... |
| 154 | READY | ... |
| 155 | READY | ... |
| 156 | READY | ... |
| 157 | READY | ... |
| 158 | READY | ... |
| 159 | READY | ... |
| 160 | READY | ... |
| 161 | READY | ... |
| 162 | READY | ... |
| 163 | READY | ... |
| 164 | READY | ... |
| 165 | READY | ... |
| 166 | READY | ... |
| 167 | READY | ... |
| 168 | READY | ... |
| 169 | READY | ... |
| 170 | READY | ... |
| 171 | READY | ... |
| 172 | READY | ... |
| 173 | READY | ... |
| 174 | READY | ... |
| 175 | READY | ... |
| 176 | READY | ... |
| 177 | READY | ... |
| 178 | READY | ... |
| 179 | READY | ... |
| 180 | READY | ... |
| 181 | READY | ... |
| 182 | READY | ... |
| 183 | READY | ... |
| 184 | READY | ... |
| 185 | READY | ... |
| 186 | READY | ... |
| 187 | READY | ... |
| 188 | READY | ... |
| 189 | READY | ... |
| 190 | READY | ... |
| 191 | READY | ... |
| 192 | READY | ... |
| 193 | READY | ... |
| 194 | READY | ... |
| 195 | READY | ... |
| 196 | READY | ... |
| 197 | READY | ... |
| 198 | READY | ... |
| 199 | READY | ... |
| 200 | READY | ... |
| 201 | READY | ... |
| 202 | READY | ... |
| 203 | READY | ... |
| 204 | READY | ... |
| 205 | READY | ... |
| 206 | READY | ... |
| 207 | READY | ... |
| 208 | READY | ... |
| 209 | READY | ... |
| 210 | READY | ... |
| 211 | READY | ... |
| 212 | READY | ... |
| 213 | READY | ... |
| 214 | READY | ... |
| 215 | READY | ... |
| 216 | READY | ... |
| 217 | READY | ... |
| 218 | READY | ... |
| 219 | READY | ... |
| 220 | READY | ... |
| 221 | READY | ... |
| 222 | READY | ... |
| 223 | READY | ... |
| 224 | READY | ... |
| 225 | READY | ... |
| 226 | READY | ... |
| 227 | READY | ... |
| 228 | READY | ... |
| 229 | READY | ... |
| 230 | READY | ... |
| 231 | READY | ... |
| 232 | READY | ... |
| 233 | READY | ... |
| 234 | READY | ... |
| 235 | READY | ... |
| 236 | READY | ... |
| 237 | READY | ... |
| 238 | READY | ... |
| 239 | READY | ... |
| 240 | READY | ... |
| 241 | READY | ... |
| 242 | READY | ... |
| 243 | READY | ... |
| 244 | READY | ... |
| 245 | READY | ... |
| 246 | READY | ... |
| 247 | READY | ... |
| 248 | READY | ... |
| 249 | READY | ... |
| 250 | READY | ... |
| 251 | READY | ... |
| 252 | READY | ... |
| 253 | READY | ... |
| 254 | READY | ... |
| 255 | READY | ... |
| 256 | READY | ... |
| 257 | READY | ... |
| 258 | READY | ... |
| 259 | READY | ... |
| 260 | READY | ... |
| 261 | READY | ... |
| 262 | READY | ... |
| 263 | READY | ... |
| 264 | READY | ... |
| 265 | READY | ... |
| 266 | READY | ... |
| 267 | READY | ... |
| 268 | READY | ... |
| 269 | READY | ... |
| 270 | READY | ... |
| 271 | READY | ... |
| 272 | READY | ... |
| 273 | READY | ... |
| 274 | READY | ... |
| 275 | READY | ... |
| 276 | READY | ... |
| 277 | READY | ... |
| 278 | READY | ... |
| 279 | READY | ... |
| 280 | READY | ... |
| 281 | READY | ... |
| 282 | READY | ... |
| 283 | READY | ... |
| 284 | READY | ... |
| 285 | READY | ... |
| 286 | READY | ... |
| 287 | READY | ... |
| 288 | READY | ... |
| 289 | READY | ... |
| 290 | READY | ... |
| 291 | READY | ... |
| 292 | READY | ... |
| 293 | READY | ... |
| 294 | READY | ... |
| 295 | READY | ... |
| 296 | READY | ... |
| 297 | READY | ... |
| 298 | READY | ... |
| 299 | READY | ... |
| 300 | READY | ... |
| 301 | READY | ... |
| 302 | READY | ... |
| 303 | READY | ... |
| 304 | READY | ... |
| 305 | READY | ... |
| 306 | READY | ... |
| 307 | READY | ... |
| 308 | READY | ... |
| 309 | READY | ... |
| 310 | READY | ... |
| 311 | READY | ... |
| 312 | READY | ... |
| 313 | READY | ... |
| 314 | READY | ... |
| 315 | READY | ... |
| 316 | READY | ... |
| 317 | READY | ... |
| 318 | READY | ... |
| 319 | READY | ... |
| 320 | READY | ... |
| 321 | READY | ... |
| 322 | READY | ... |
| 323 | READY | ... |
| 324 | READY | ... |
| 325 | READY | ... |
| 326 | READY | ... |
| 327 | READY | ... |
| 328 | READY | ... |
| 329 | READY | ... |
| 330 | READY | ... |
| 331 | READY | ... |
| 332 | READY | ... |
| 333 | READY | ... |
| 334 | READY | ... |
| 335 | READY | ... |
| 336 | READY | ... |
| 337 | READY | ... |
| 338 | READY | ... |
| 339 | READY | ... |
| 340 | READY | ... |
| 341 | READY | ... |
| 342 | READY | ... |
| 343 | READY | ... |
| 344 | READY | ... |
| 345 | READY | ... |
| 346 | READY | ... |
| 347 | READY | ... |
| 348 | READY | ... |
| 349 | READY | ... |
| 350 | READY | ... |
| 351 | READY | ... |
| 352 | READY | ... |
| 353 | READY | ... |
| 354 | READY | ... |
| 355 | READY | ... |
| 356 | READY | ... |
| 357 | READY | ... |
| 358 | READY | ... |
| 359 | READY | ... |
| 360 | READY | ... |
| 361 | READY | ... |
| 362 | READY | ... |
| 363 | READY | ... |
| 364 | READY | ... |
| 365 | READY | ... |
| 366 | READY | ... |
| 367 | READY | ... |
| 368 | READY | ... |
| 369 | READY | ... |
| 370 | READY | ... |
| 371 | READY | ... |
| 372 | READY | ... |
| 373 | READY | ... |
| 374 | READY | ... |
| 375 | READY | ... |
| 376 | READY | ... |
| 377 | READY | ... |
| 378 | READY | ... |
| 379 | READY | ... |
| 380 | READY | ... |
| 381 | READY | ... |
| 382 | READY | ... |
| 383 | READY | ... |
| 384 | READY | ... |
| 385 | READY | ... |
| 386 | READY | ... |
| 387 | READY | ... |
| 388 | READY | ... |
| 389 | READY | ... |
| 390 | READY | ... |
| 391 | READY | ... |
| 392 | READY | ... |
| 393 | READY | ... |
| 394 | READY | ... |
| 395 | READY | ... |
| 396 | READY | ... |
| 397 | READY | ... |
| 398 | READY | ... |
| 399 | READY | ... |
| 400 | READY | ... |
| 401 | READY | ... |
| 402 | READY | ... |
| 403 | READY | ... |
| 404 | READY | ... |
| 405 | READY | ... |
| 406 | READY | ... |
| 407 | READY | ... |
| 408 | READY | ... |
| 409 | READY | ... |
| 410 | READY | ... |
| 411 | READY | ... |
| 412 | READY | ... |
| 413 | READY | ... |
| 414 | READY | ... |
| 415 | READY | ... |
| 416 | READY | ... |
| 417 | READY | ... |
| 418 | READY | ... |
| 419 | READY | ... |
| 420 | READY | ... |
| 421 | READY | ... |
| 422 | READY | ... |
| 423 | READY | ... |
| 424 | READY | ... |
| 425 | READY | ... |
| 426 | READY | ... |
| 427 | READY | ... |
| 428 | READY | ... |
| 429 | READY | ... |
| 430 | READY | ... |
| 431 | READY | ... |
| 432 | READY | ... |
| 433 | READY | ... |
| 434 | READY | ... |
| 435 | READY | ... |
| 436 | READY | ... |
| 437 | READY | ... |
| 438 | READY | ... |
| 439 | READY | ... |
| 440 | READY | ... |
| 441 | READY | ... |
| 442 | READY | ... |
| 443 | READY | ... |
| 444 | READY | ... |
| 445 | READY | ... |
| 446 | READY | ... |
| 447 | READY | ... |
| 448 | READY | ... |
| 449 | READY | ... |
| 450 | READY | ... |
| 451 | READY | ... |
| 452 | READY | ... |
| 453 | READY | ... |
| 454 | READY | ... |
| 455 | READY | ... |
| 456 | READY | ... |
| 457 | READY | ... |
| 458 | READY | ... |
| 459 | READY | ... |
| 460 | READY | ... |
| 461 | READY | ... |
| 462 | READY | ... |
| 463 | READY | ... |
| 464 | READY | ... |
| 465 | READY | ... |
| 466 | READY | ... |
| 467 | READY | ... |
| 468 | READY | ... |
| 469 | READY | ... |
| 470 | | |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 300 – Lista dei report effettuati

9.0.4.2.2 LIST OF SCHEDULED REPORTS

To view the list of scheduled reports, select the "Scheduled" tab in the upper left of the reports page.

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with various links like Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports. The Reports link is underlined in orange. Below the navigation, it says 'Inventory / Reports'. On the left, there are two tabs: 'Ready' and 'Scheduled', with 'Scheduled' being the active one. There's also a 'New report' button. The main area displays a table with columns: Period (Hourly), Language (EN), Recipients (noame@gmail.com), and Last sent (12/06/2024 - 1:21 PM). At the bottom right, there are pagination controls for items per page (20) and a total count of 1 item.

Figura 301 – Lista dei report schedulati

On this page, you will find the list and related information of the scheduled reports present in the system. For each result, it is possible, by clicking the "Three dots" button on the right, to perform three operations:

- View the last generated report.
- Edit the schedule settings; it will not be possible to modify the selected providers or subsystems.
- Delete the schedule to stop sending emails.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 302 – Modifica di una schedule

9.0.4.2.3 USING REPORTS

Clicking on a row of a static report, or using the "Show report" button available for scheduled reports, will display the detail page of the selected report.

In the summary of the Inventory report, there is a "Stats" section which contains the number of disks, interfaces, networks, and virtual machines belonging to the selected provider.

Below the "Stats" section, there are the filters used by the user to generate the report.

Below the filters, there is a summary table of resources belonging to the providers. On the right, there are two buttons: "PRINT" and "EXPORT".

Clicking the "PRINT" button, a print preview modal appears. To print the report, click the "Print" button in the bottom right, at which point the printing of said report will begin.

Clicking the "EXPORT" button, it is possible to export the report in ".csv", ".json", or ".pdf" format.

To return to the "Results" tab, in the bottom right, click the "CLOSE" button or in the upper left, click the left-pointing arrow, next to the report title.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links for Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports. The Reports link is underlined, indicating it's the active section. Below the navigation is a breadcrumb trail: Inventory / Reports / Report 6669a0d3aae316468b3c8b34. The main content area is titled "Report Inventory Summary". It features a "Stats" section with five boxes: 1 VMs, 1 Disks, 1 Networks, 0 Interfaces, and 0 K8Ss. Below this is a table titled "PROVIDER: AZURE, GOOGLE | SUBSYSTEM: MAE LAB,CMPPROJECT-374610". The table has columns for Type Provider, Subsystem Name, VMs, Disks, Networks, Interfaces, and K8Ss. It lists two entries: Azure (MAE LAB) with 14 VMs, 16 Disks, 14 Networks, 0 Interfaces, and 0 K8Ss; and Google (CMPPROJECT-374610) with 1 VM, 1 Disk, 1 Network, 0 Interfaces, and 0 K8Ss. At the bottom right of the table are buttons for "PRINT" and "EXPORT".

| Type Provider | Subsystem Name | VMs | Disks | Networks | Interfaces | K8Ss |
|---------------|-------------------|-----|-------|----------|------------|------|
| Azure | MAE LAB | 14 | 16 | 14 | 0 | 0 |
| Google | CMPPROJECT-374610 | 1 | 1 | 1 | 0 | 0 |

Figura 303 – Dettagli dei report



Cost and Usages

SCMP collects, through the APIs made available by the providers, the cost details of inventory assets.

In the event that providers do not expose cost data, this data can be editorially entered into the catalog so that it can then be counted within this functionality.

Costs are collected with a breakdown by daily cost and by resource. Subsequently, as with the metrics section, the data is normalized and aggregated to allow for a uniform dashboard visualization.

■ Attention

As also indicated on the cost dashboards, data related to the last 48 hours has not yet been confirmed by the respective providers. We can use this table as a reference, but for details, it is necessary to check the specific provider's documentation.

For example:

| Cloud Provider | Tool/Method | Update Times | Notes |
|----------------|------------------------------|-------------------------------|--|
| Azure | Cost using export file | 6/7 days | in the first 6 days of the following month, the costs of the previous month are consolidated |
| Azure | Cost Management | 8-24 hours | Consolidated data updated within 24/48 hours; greater delay compared to others. |
| Google Cloud | Billing Dashboard | A few hours, maximum 24 hours | Near real-time updates; consolidation up to 24 hours. |
| Google Cloud | BigQuery Export | Every hour | Minimum delay for advanced analysis via BigQuery. |
| Oracle Cloud | Cost Analysis | 4-6 hours, maximum 24 hours | some services may have greater delays. |
| AWS | Cost Explorer | 8-24 hours | Aggregated data updated within 12-24 hours. |
| AWS | Cost and Usage Reports (CUR) | 8-24 hours | Detailed reports with similar delay. |
| AWS | CloudWatch Metrics (Billing) | Every 6 hours | Near real-time monitoring. |

| Cloud Provider | Tool/Method | Update Times | Notes |
|----------------|---------------|--------------|--|
| AWS | Budget Alerts | 3-5 hours | Rapid notifications when budget thresholds are exceeded. |

Cost Dashboard

To access the cost section, use the menu as shown in the figure.



Figura 304 – Access to Costs

At this point, the user will find themselves within the "Dashboard" tab page of costs. On this screen, we can note in order:

- The "Cost trend" value, which indicates the total costs for the selected period.
- The "Cost difference" value, which indicates the markup applied in the selected period.
- A "Cloud provider Spend" bar chart, which indicates the cost billed to the client for each provider in the selected period.
- An "Effective Spend" bar chart, which indicates the effective cost of resources on the provider.

At the bottom, there will be several resource aggregation charts, for example, by Region or Service Type, as indicated by the respective cloud providers, and as we will analyze later, it will be possible to customize the available charts and sections.



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

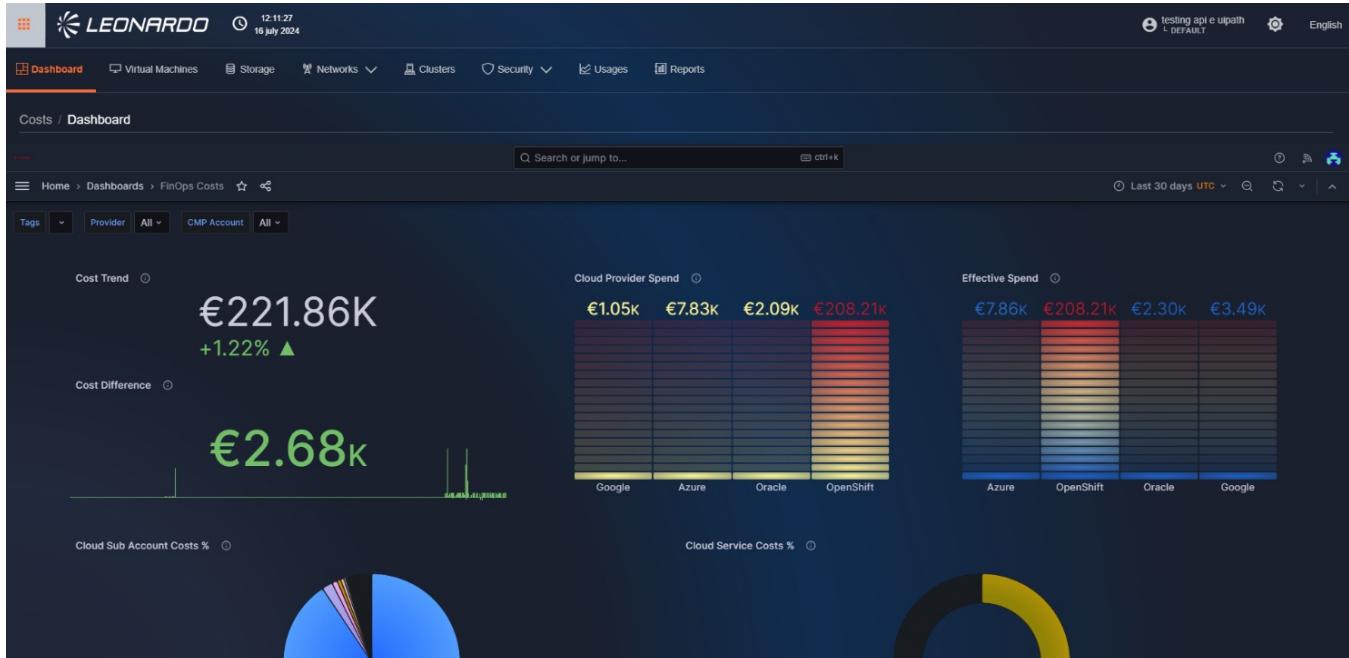


Figura 305 – Cost Dashboard

In the cost functionality, it is possible to filter by resource type using the tab bar at the top, while for a general view, the dashboard can be used.

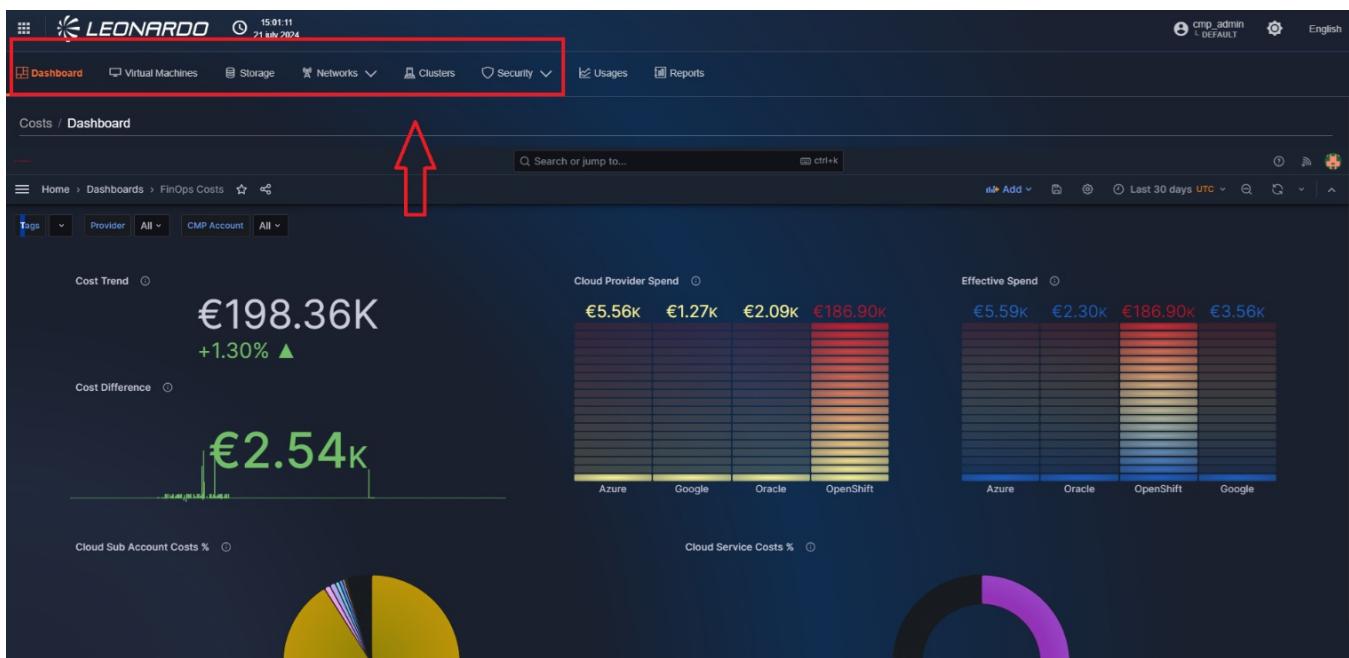


Figura 306 – Filter by resource type

Cost Section Filters

Within the page, a series of filters are available that can be selected simultaneously to filter the dashboard results.

The main filter is the display period, which can be found in the upper right. Clicking on it will open a selection window (in yellow in the figure) where it will be possible to either enter a custom time range, using the "From" and "To" fields on the left, or select a "smart" time range by clicking directly on the desired choice in the scrollable section on the right.

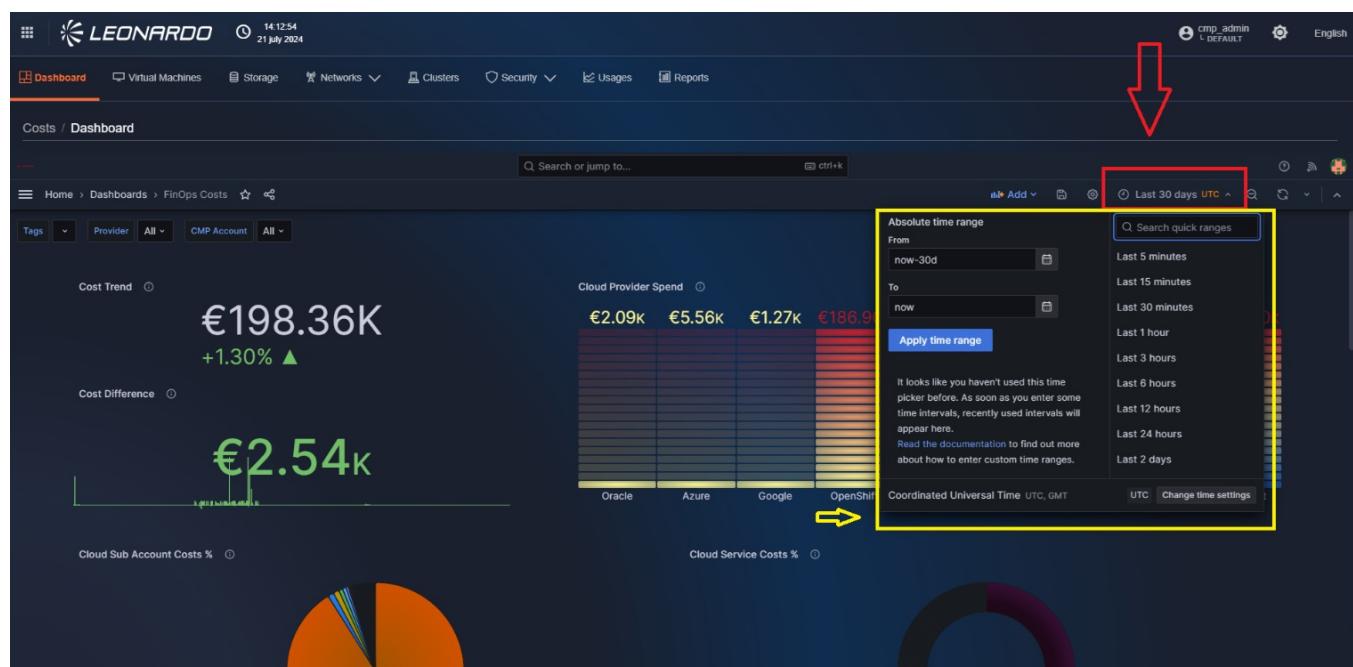


Figura 307 – Cost time filter

A series of filters are available in the upper left of the page, allowing you to filter the retrieved resources. Specifically, you can filter by:

- Tag
- Provider type
- Subsystem name.

These filters allow multiple values to be selected and can be combined to achieve the desired granularity



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

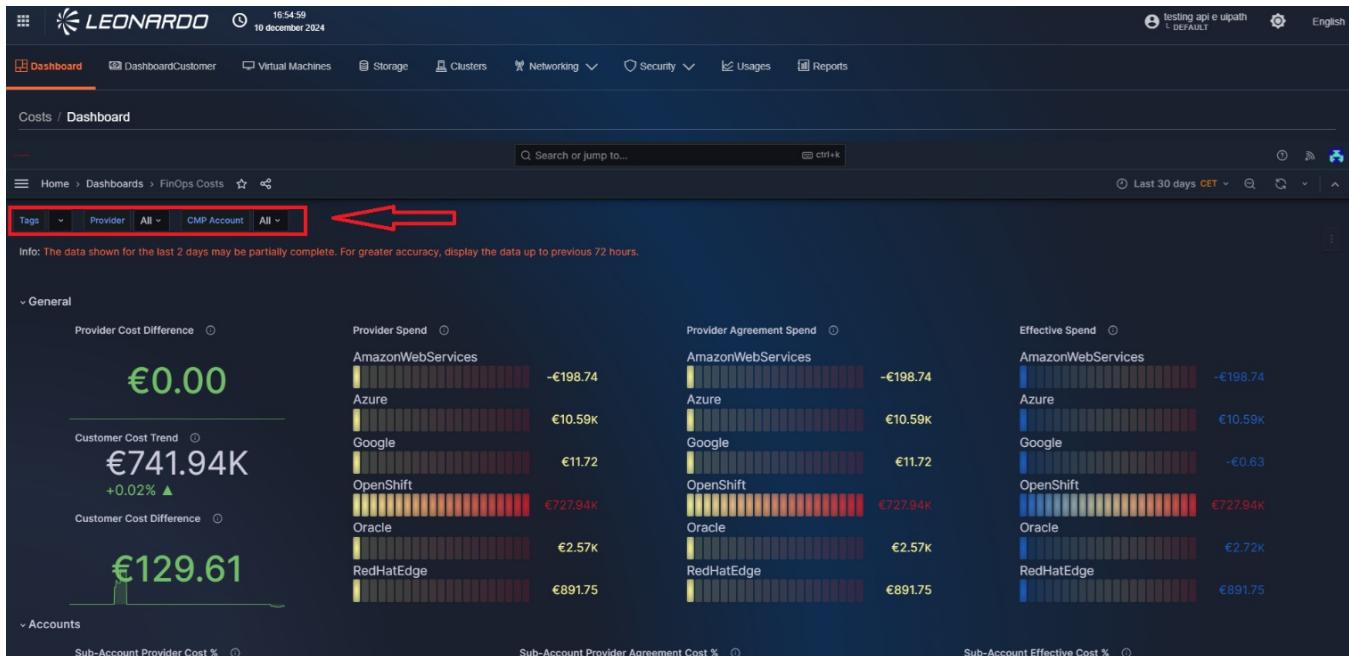


Figura 308 – Cost functionality filters

Overview of the data shown

"GENERAL" SECTION

In the first section, summary charts representing provider and SCMP costs are shown to the user based on the applied filters.

In detail:

- Provider Cost Difference:** chart containing the cost difference between the sum of the original provider costs and the sum of the costs agreed upon with the provider.
Useful for identifying savings obtained through negotiation or resale compared to list prices.
- Customer Cost Difference:** chart containing the cost difference between the sum of SCMP costs charged to the customer and the sum of the original provider costs.
Used to monitor profit margins and the competitiveness of prices offered to the customer.
- Customer Cost Trend:** chart containing the total SCMP costs charged to the customer, with the respective profit/loss percentage.
Allows observing economic trends over time and detecting cost peaks or anomalies.
- Provider Spend:** chart containing the sum of original costs for each provider.
Allows identifying which providers the spending is concentrated on and the level of dependency.

- **Provider Agreement Spend:** chart containing the sum of agreed costs for each provider.
Useful for comparing the effectiveness of commercial agreements with each provider.
- **Effective Spend:** chart containing the sum of SCMP costs charged to the customer for each provider.
Helps evaluate the profitability obtained from each provider.

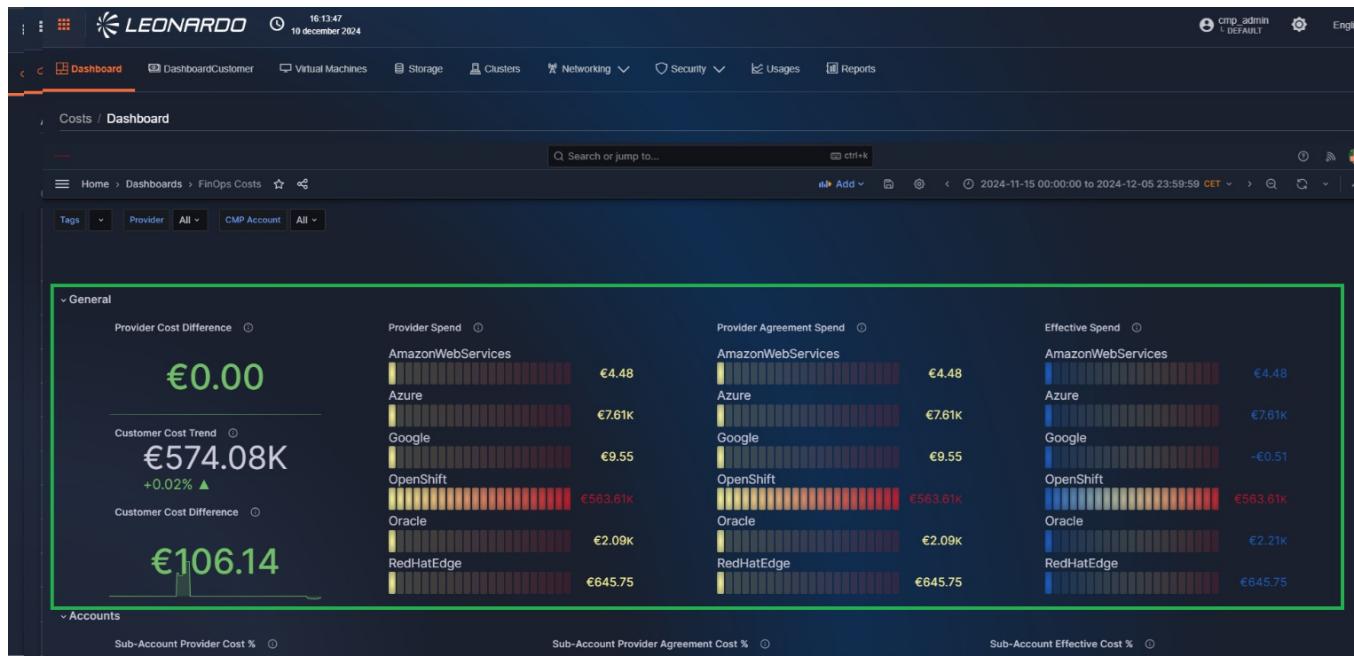


Figura 309 – General

"ACCOUNTS" SECTION

In the second section, charts focused on the costs generated by each subordinate account of each provider are shown to the user.

In detail:

- **Sub-Account Provider Cost %:** Percentage of the total provider cost, for each account.
Used to identify the most expensive accounts and analyze the distributed economic load.
- **Sub-Account Provider Agreement Cost %:** Percentage of the total agreed provider cost, for each subordinate account.
Useful for checking which accounts benefit from more significant discounts.
- **Sub-Account Effective Cost %:** Percentage of the total SCMP cost charged to the customer, for each subordinate account.
Allows seeing which accounts generate more revenue.

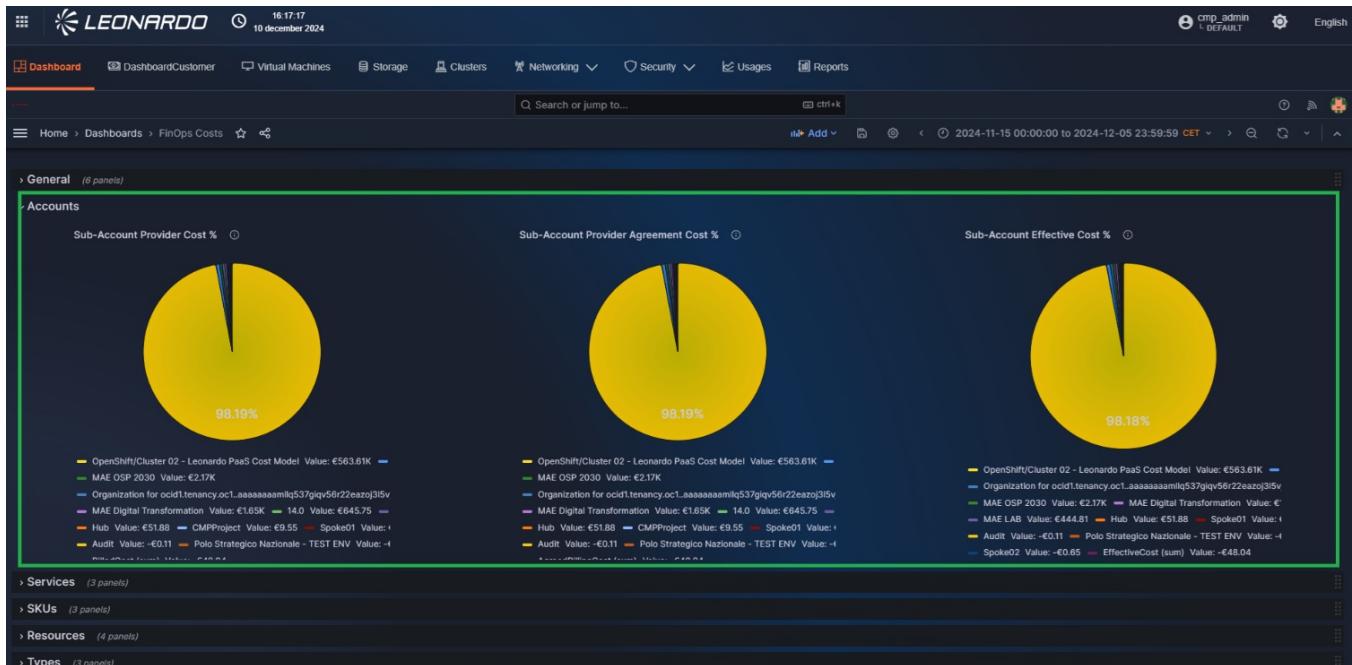


Figura 310 – Accounts

"SERVICES" SECTION

In the third section, charts focused on the costs generated by each cloud service of each provider are shown to the user.

In detail:

- **Service Provider Cost %:** Percentage of the total provider cost, for each service.
Allows understanding which services (e.g., compute, storage, network) have the most impact on costs.
- **Service Provider Agreement Cost %:** Percentage of the total agreed provider cost, for each service.
Useful for analyzing the effectiveness of negotiations on various services.
- **Service Effective Cost %:** Percentage of the total SCMP cost charged to the customer, for each service.
Provides a clear view of the main revenue sources per service.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

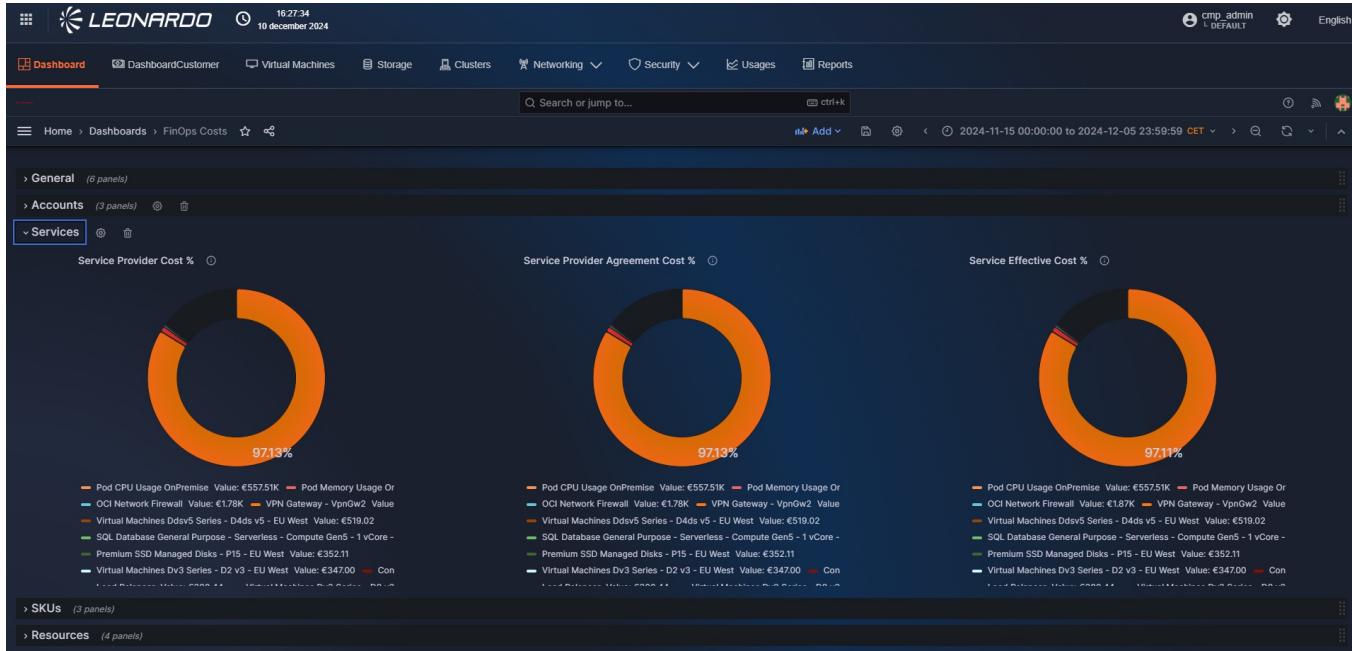


Figura 311 – Services

"SKUs" SECTION

In the fourth section, charts focused on the costs generated by each SKU of each provider are shown to the user.

In detail:

- Sku Provider Cost %:** Percentage of the total provider cost, for each SKU.
Allows detailed cost analysis at the billing unit level.
- Sku Provider Agreement Cost %:** Percentage of the total agreed provider cost, for each SKU.
Useful for evaluating whether individual SKUs also benefit from discounts and optimizations.
- Sku Effective Cost %:** Percentage of the total SCMP cost charged to the customer, for each SKU.
Helps highlight any imbalances in margins at the SKU level.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

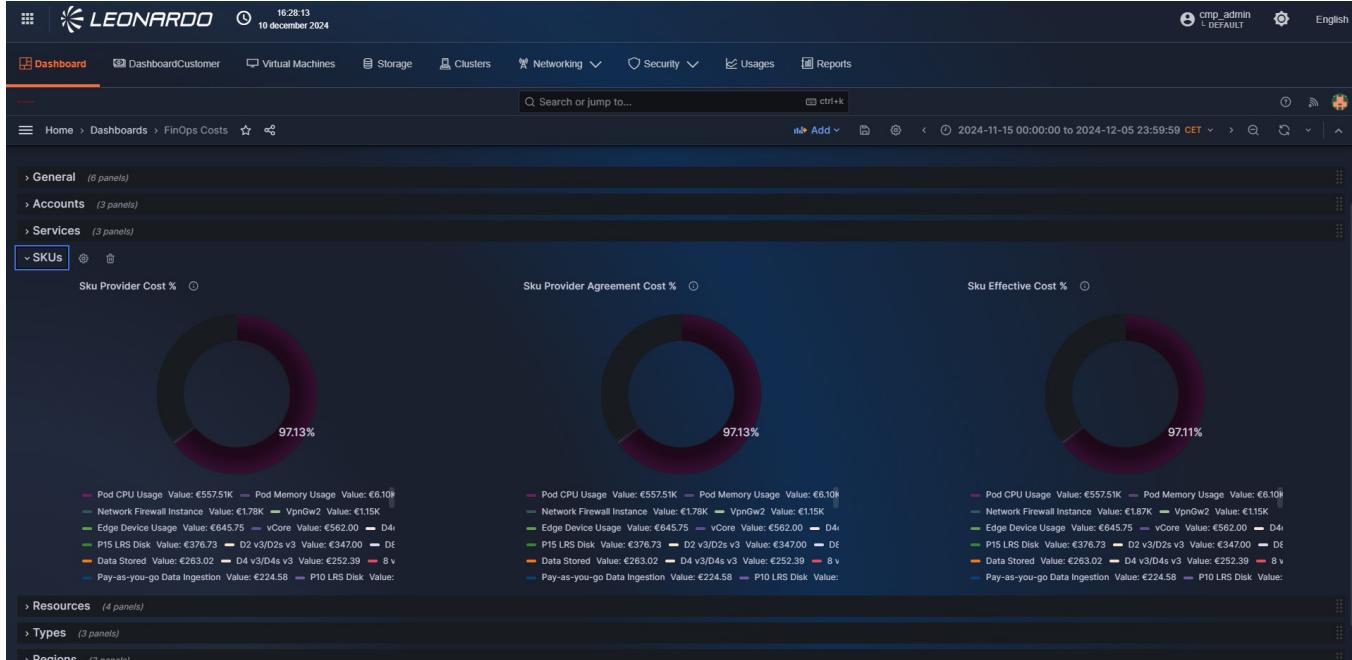


Figura 312 – Skus

"RESOURCES" SECTION

In the fifth section, charts focused on the costs generated by each resource of each provider are shown to the user.

In detail:

- **Resource Provider Cost %:** Percentage of the total provider cost, for each resource.
Allows the identification of particularly expensive or underutilized resources.
- **Resource Provider Agreement Cost %:** Percentage of the total agreed provider cost, for each resource.
Allows seeing if discounts are distributed equally among resources.
- **Resource Effective Cost %:** Percentage of the total SCMP cost charged to the customer, for each resource.
Provides visibility into the profitability of individual resources.

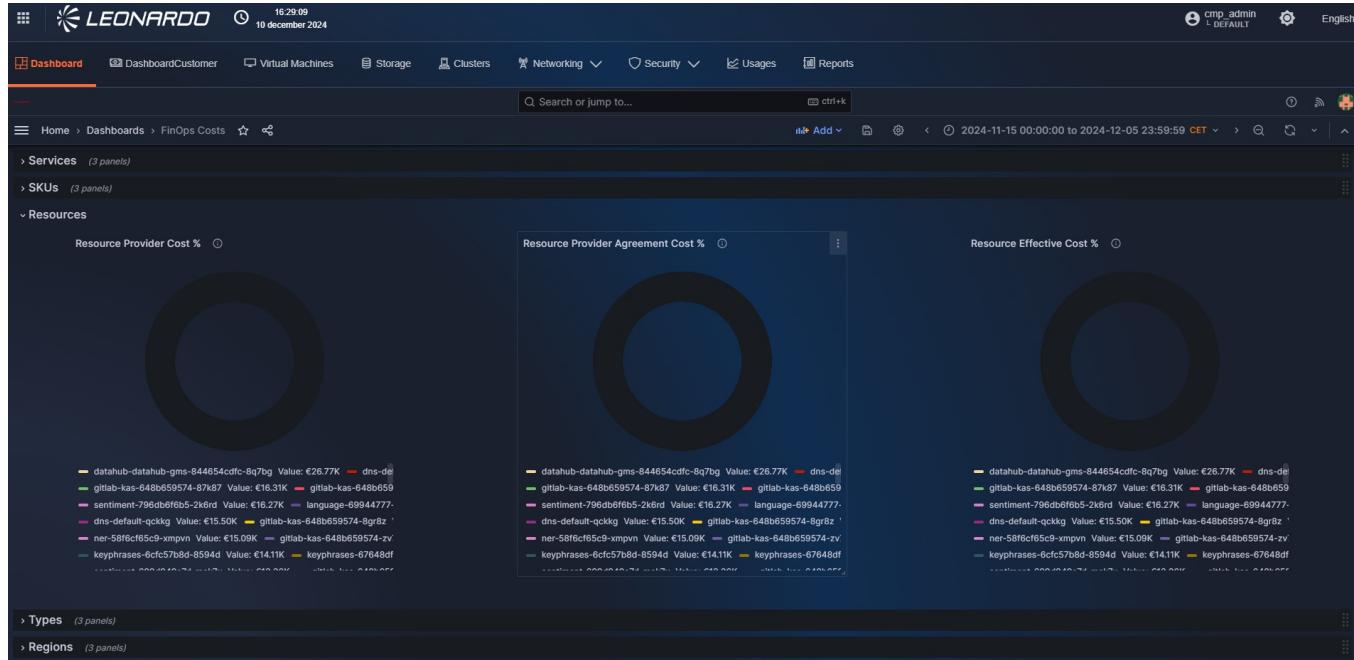


Figura 313 – Resources

"TYPES" SECTION

In the sixth section, charts focused on the costs generated by each inventory resource type of each provider are shown to the user.

In detail:

- **Resource Type Provider Cost %:** Percentage of the total provider cost, for each resource type.
Offers an aggregated view useful for cost planning.
- **Resource Type Provider Agreement Cost %:** Percentage of the total agreed provider cost, for each resource type.
Helps understand which types are most optimized through agreements.
- **Resource Type Effective Cost %:** Percentage of the total SCMP cost charged to the customer, for each resource type.
Allows measuring the commercial weight of each category.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

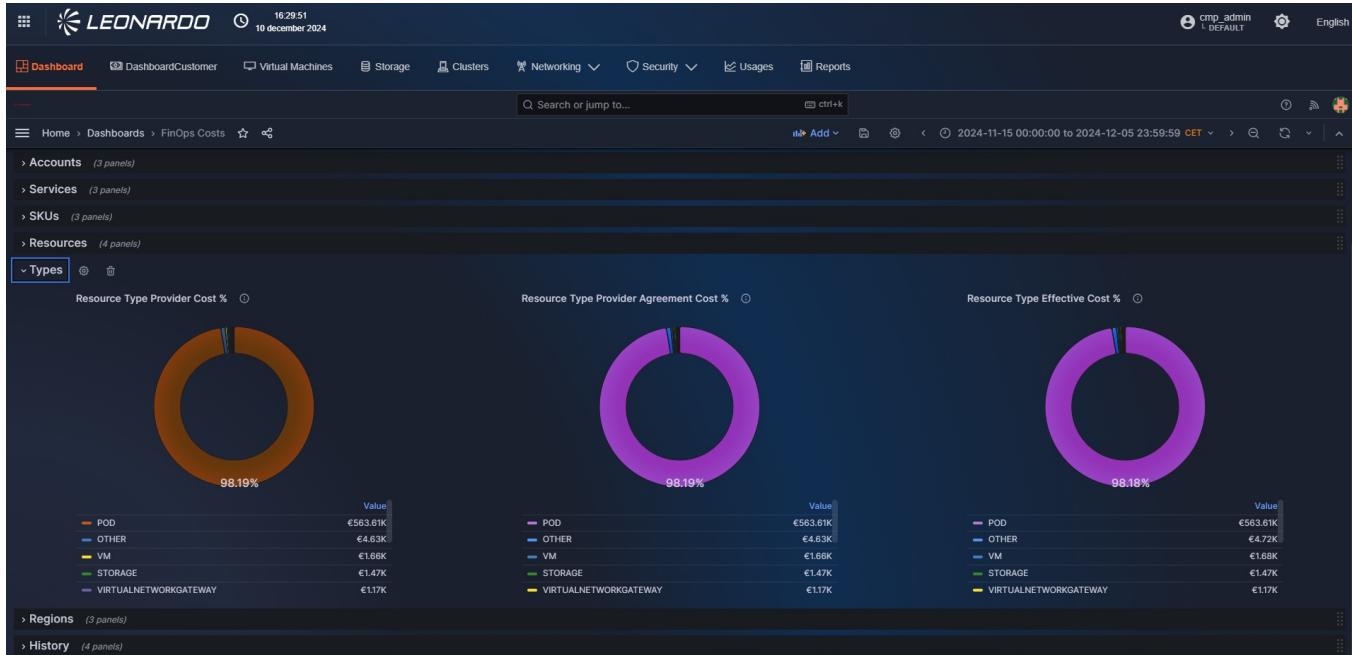


Figura 314 – Types

"REGIONS" SECTION

In the seventh section, charts focused on the costs generated in each region of each provider are shown to the user.

In detail:

- **Regional Provider Cost %:** Percentage of the total provider cost, for each region.
Indicates where resources are geographically located and their associated expenses.
- **Regional Provider Agreement Cost %:** Percentage of the total agreed provider cost, for each region.
Allows evaluating the convenience of chosen regions based on discounts.
- **Regional Effective Cost %:** Percentage of the total SCMP cost charged to the customer, for each region.
Useful for analyzing the distribution of revenue by geographical area.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

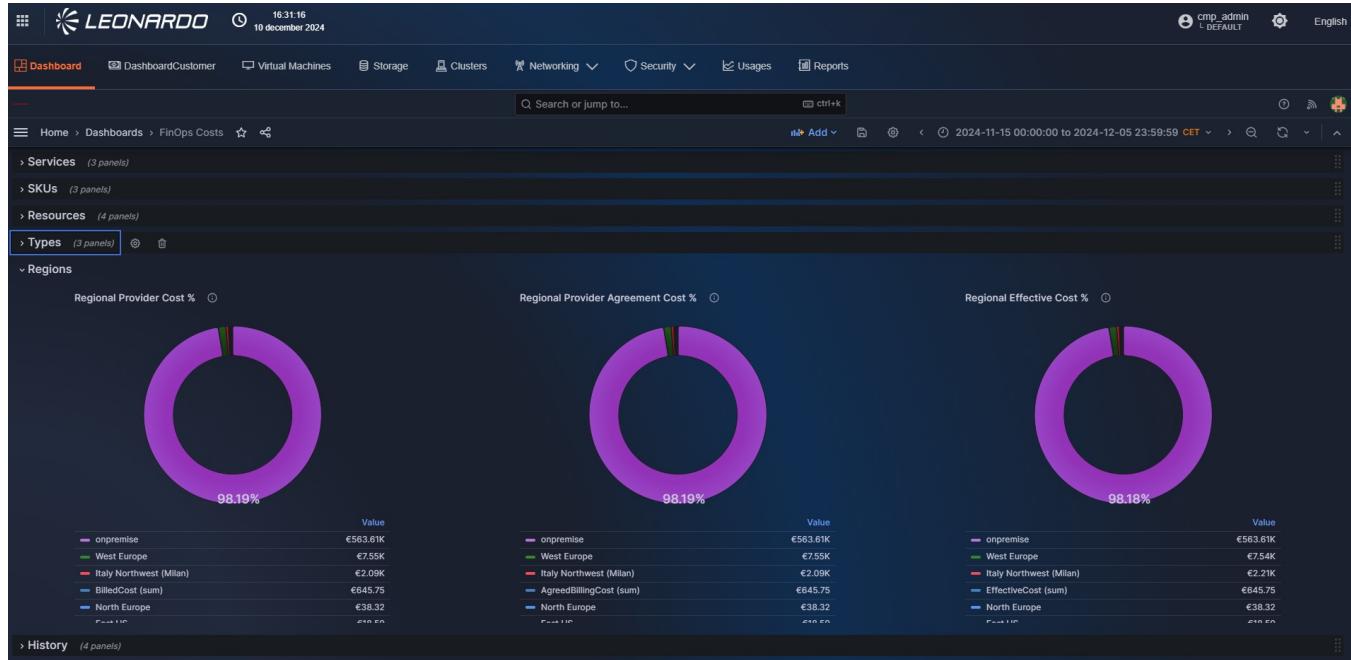


Figura 315 – Regions

"HISTORY" SECTION

Finally, in the eighth section, charts focused on the historical costs of each billing account, generated by each subsystem integrated into the SCMP, are shown to the user.

In detail:

- **System Costs Details:** Comparison between the total provider cost, the total agreed provider cost, and the total customer cost, for all subsystems integrated into the SCMP.
Fundamental for retrospective analysis and for evaluating the economic sustainability of the system.
- **Historical Provider Billing Costs:** History of the trend of total costs for each cloud billing account.
Helps predict future trends and anticipate spending or budget issues.



Figura 316 – History

Limited view for the customer

If a user configured with the "LIMITED" parameter is used to access the cost dashboard, the charts available on the dashboard will only relate to the recalculated SCMP costs, while the actual costs received from the providers will not be visible as they are superfluous, as can be seen in the image.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform



Figura 317 – Limited cost dashboard

"Usage" Dashboard

In addition to the main cost dashboard and its related detailed dashboards by resource type, in the SCMP Costs module, the user can view an additional dashboard, focused on the consumption of inventory resources integrated into the platform.

By navigating to the Usages section of the module, generic and detailed information on the consumption of individual integrated services/SKUs and their respective resources will be shown.

To access the functionality, above the breadcrumb path, click on the "Usages" tab.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

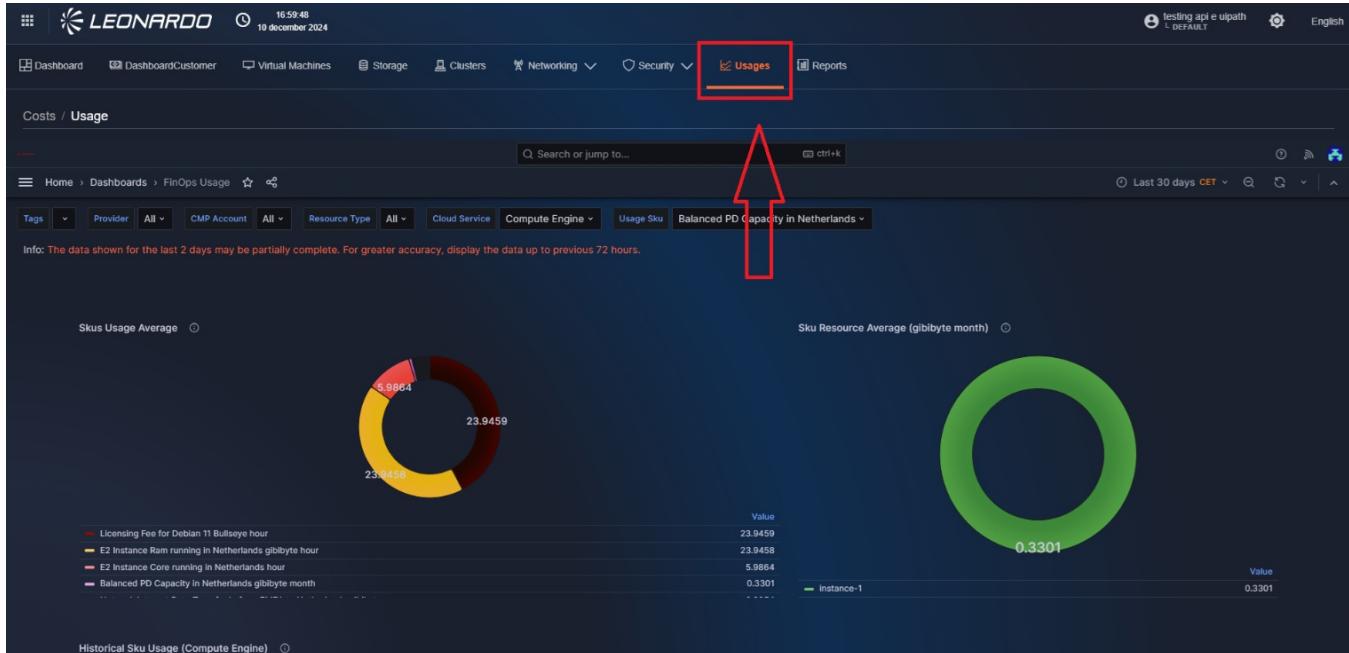


Figura 318 – Access to "Usages"

Usage section filters

Within the page, a series of filters are available that can be selected simultaneously to filter the dashboard results.

The main filter is the display period, which can be found in the upper right. Clicking on it will open a selection window (in yellow in the figure) where it will be possible to either enter a custom time range, using the "From" and "To" fields on the left, or select a "smart" time range by clicking directly on the desired choice in the scrollable section on the right.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

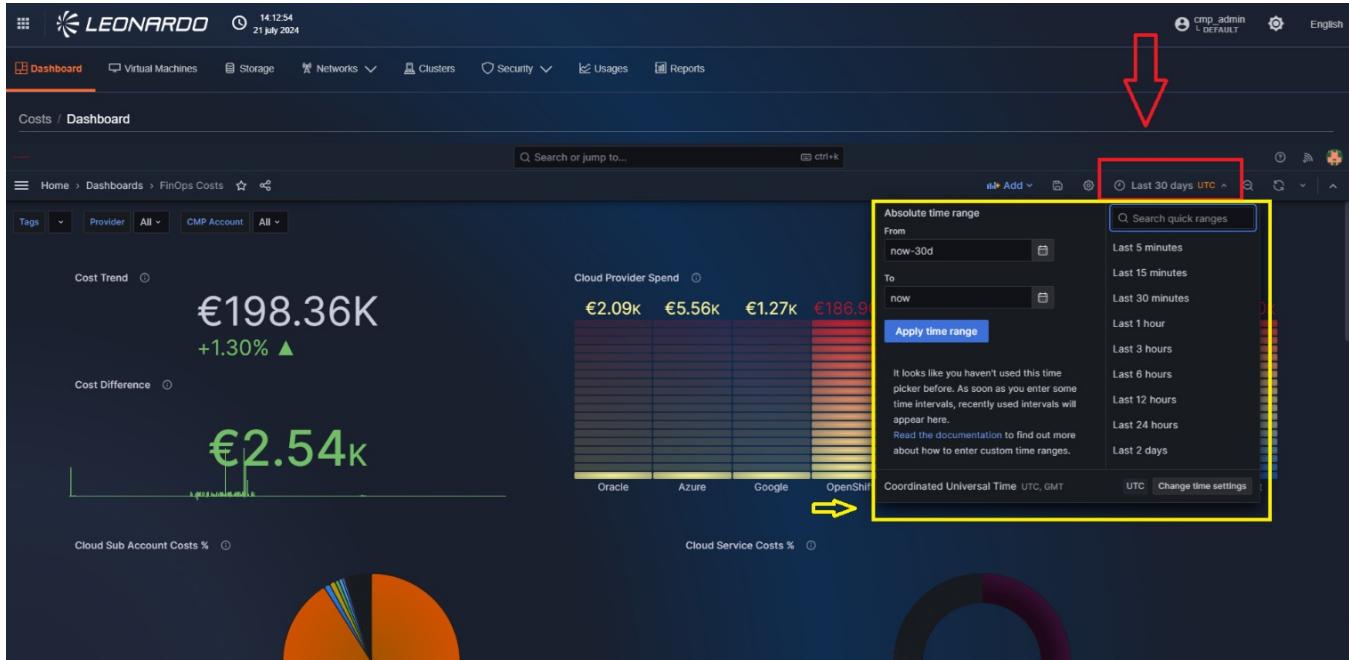


Figura 319 – Usage time filter

A series of filters are available in the upper left of the page, allowing you to filter the retrieved resources. Specifically, you can filter by:

- Tag
- Provider type
- Subsystem name.
- Resource type
- Cloud service name
- Cloud SKU name

These filters allow multiple values to be selected and can be combined to achieve the desired granularity.



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

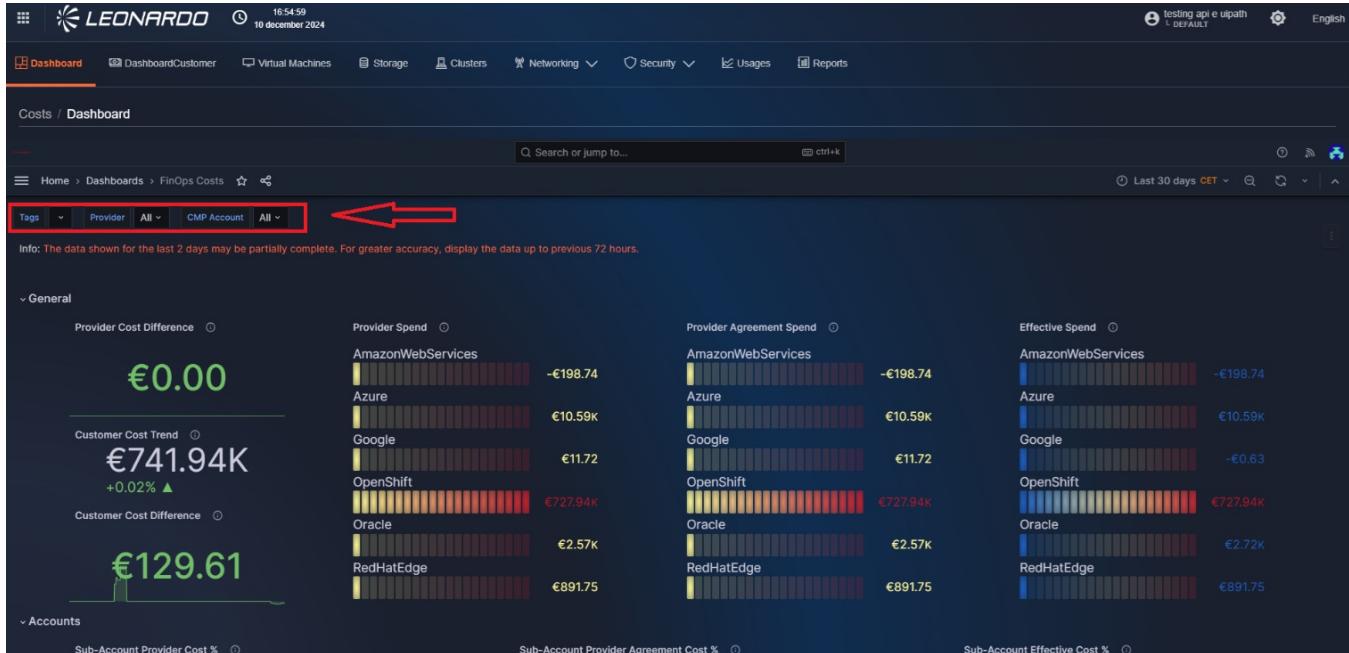


Figura 320 – Cost functionality filters

Overview of the data shown in the costs section

"SKUS USAGE AVERAGE" SECTION

The first chart represents the daily average consumed by each SKU. It is a summary chart that shows the user the general trend of consumption.

For each SKU, in fact, the average consumption and the unit of measure are indicated, within the specified time range, to briefly show which of them are, on average, most used and consequently which of them could generate higher costs for the user.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

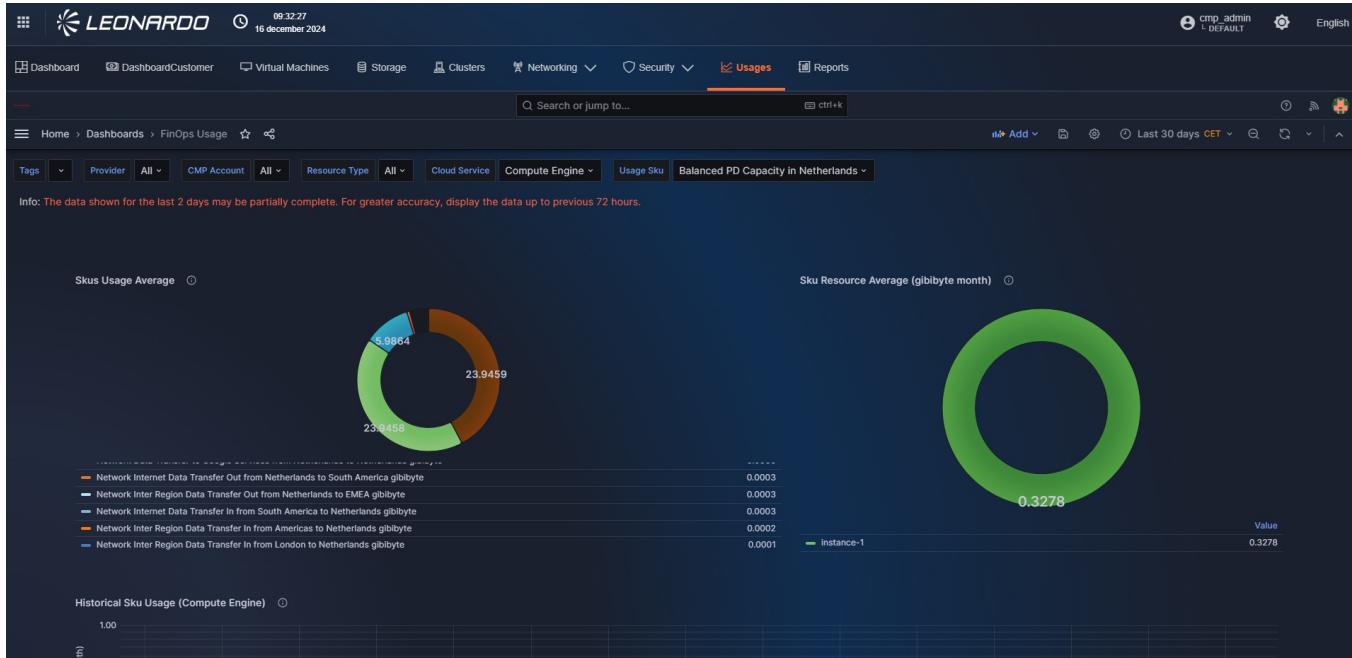


Figura 321 – "SKUs Usage" Section

"SKU RESOURCE AVERAGE" SECTION

The second chart, on the other hand, is focused on the SKU selected as a filter by the user and shows the daily average consumed by each resource, correlated to the specific SKU.

It too can be classified as a summary chart that provides the user with which resources for a given SKU are, on average, most used and consequently which of them could generate higher costs for the user.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

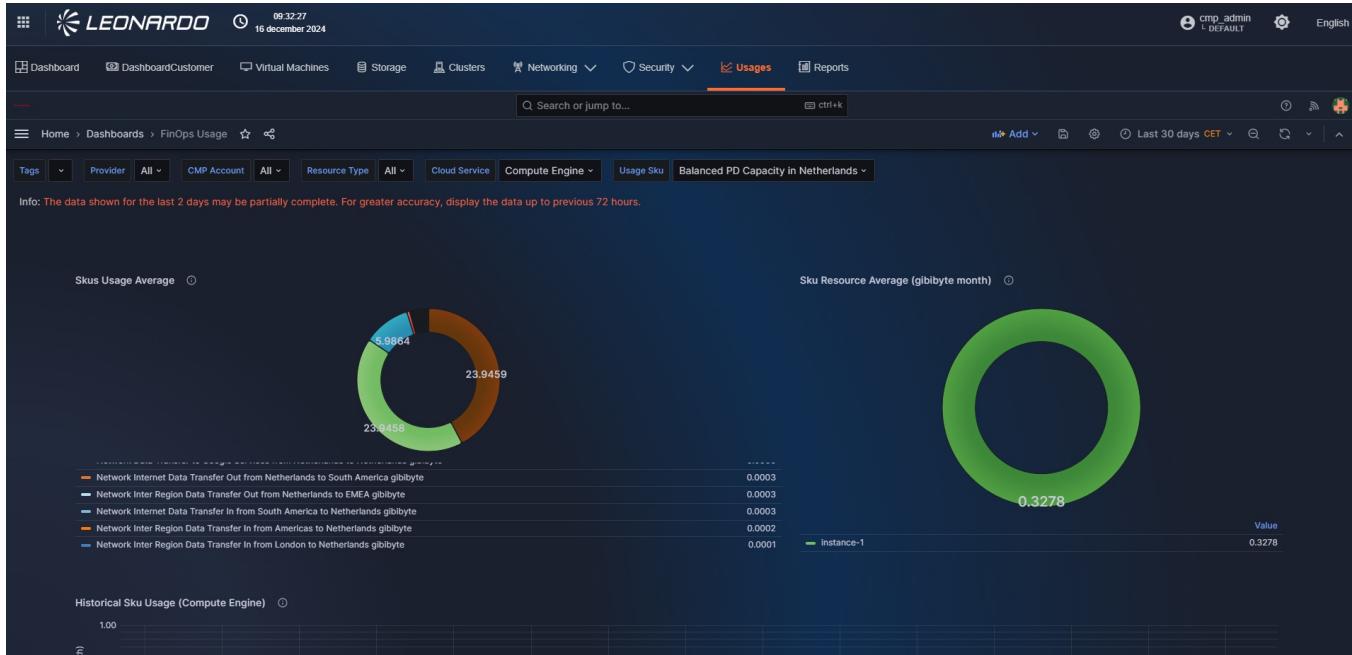


Figura 322 – "SKU resource" Section

"HISTORICAL SKU USAGE" SECTION

The first temporal chart shows the daily consumption trend of the specific SKU, selected as a filter in the dashboard.

In the case shown, a constant consumption (in hours) over time is highlighted, useful for the user for subsequent analysis phases.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

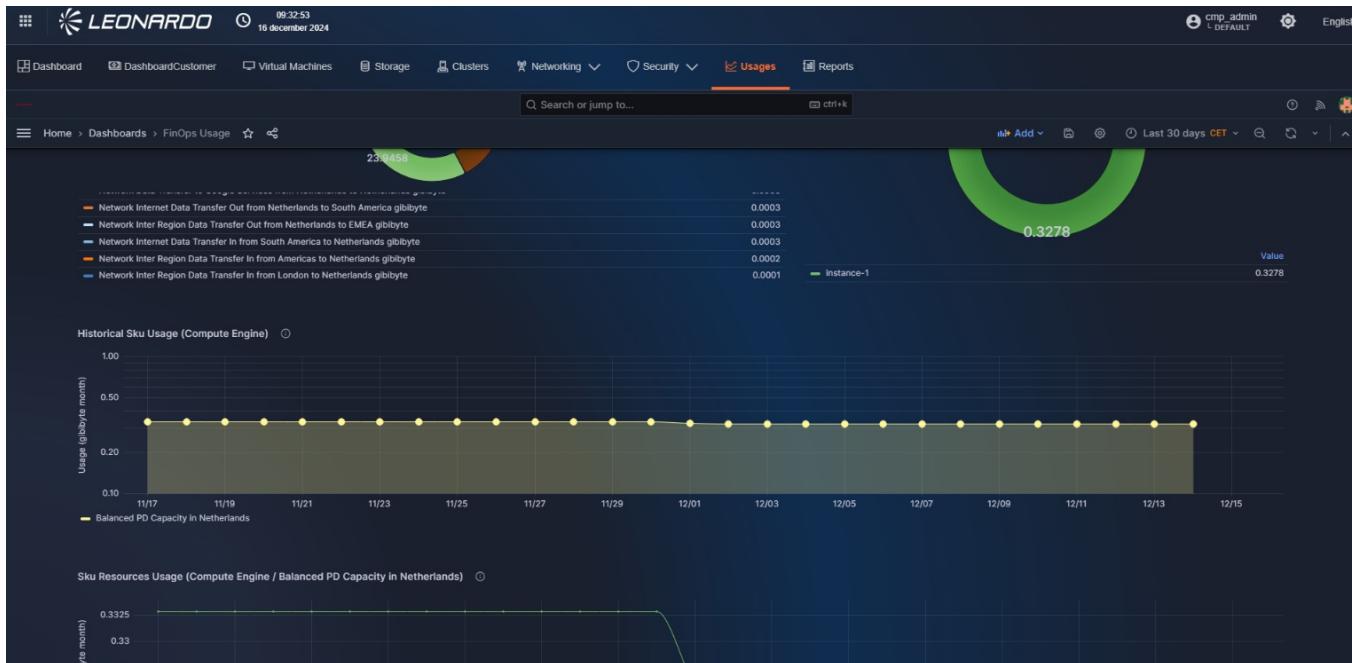


Figura 323 – "Historical SKU" Section

"SKU RESOURCES USAGE" SECTION

The second temporal chart, on the other hand, shows the daily consumption trend of the specific SKU, for each resource related to it.

This chart, therefore, shows the user the historical detail of the previous chart, highlighting which resources are involved in the consumption of the specific SKU and to what extent.

This last chart is particularly useful to the user because it highlights which resources are actually used within a specific SKU and, consequently, which of them could lead to higher costs for the user or be paid for without even being used.



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform



Figura 324 – "SKU Resources" Section

Cost and Usage dashboard customization

For dashboard customization, please consult the official guide

Reporting Tools

The reporting functionality, specific per feature, allows generating global reports of the information available for the various providers. Within the pages, the possibility to create files to facilitate information sharing will also be provided.

To access the functionality, above the breadcrumb path, click on the "Reports" tab

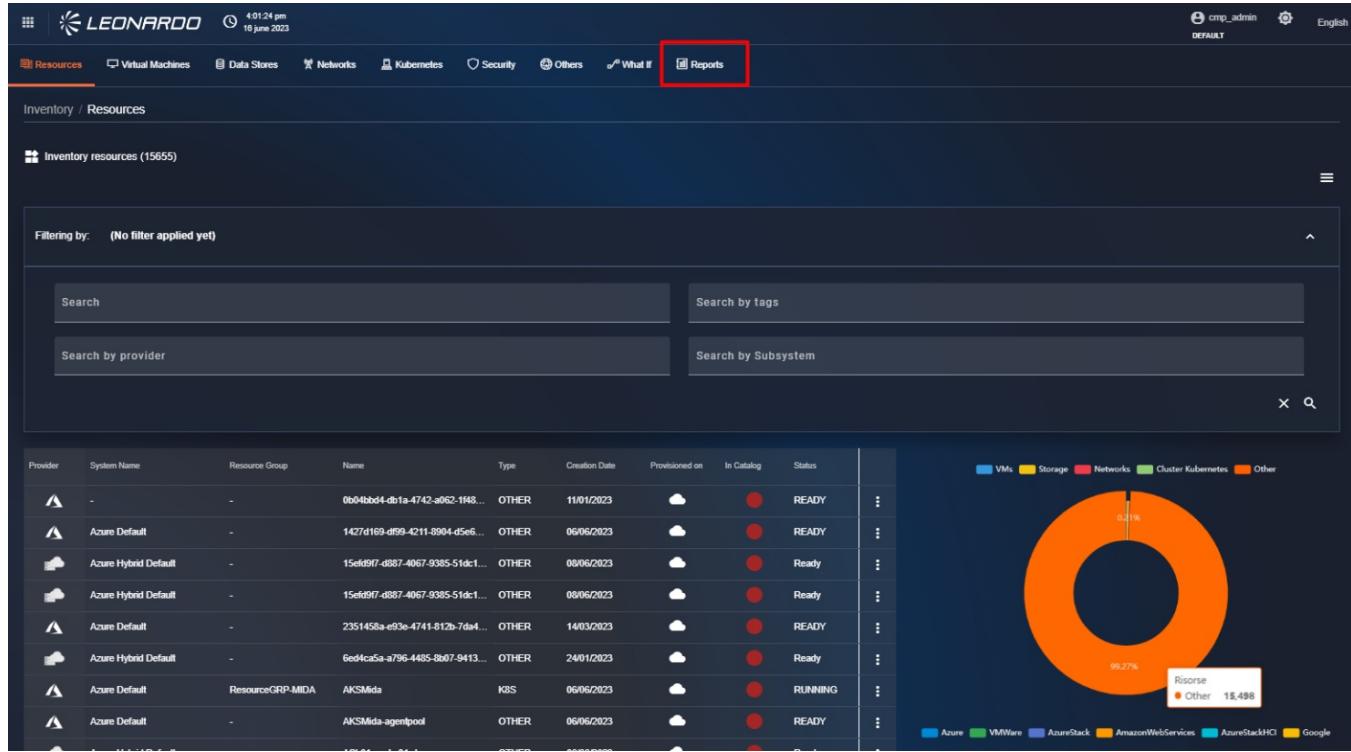


Figura 325 – Access to Catalog report

Available report types

- **Cost Summary** – Summary of total cost per service, based on the selected filter combination.
- **Cost Summary – Group by Resource Type** – Summary of total cost per service, with an indication of the number of resources involved, based on the selected filter combination.
- Cost Details – Detail of daily regional cost per resource, based on the selected filter combination.
- **Cost Details – Group by Resource Type** – Detail of total daily cost per service, with an indication of the number of resources involved, based on the selected filter combination.
- **FinOps Report** – Summary of total costs and total resource usage according to the FinOps FOCUS standard, for financial optimization of cloud services, based on the selected filter combination.

Creating a report

In the upper right of the page, we can click on the "New Report" button to start creating a report. Specifically, a modal window appears containing the list of available report types.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links for Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports. The Reports link is currently selected. Below the navigation, there's a breadcrumb trail: Inventory / Reports. The main area is titled 'Reports' and shows a list of existing reports under the 'Ready' tab. Each report entry includes the Sub Category (e.g., SUMMARY), Provider (e.g., AZURE, GOOGLE, OPENSHIFT), Creation Date, Status (READY), and an Actions button. A modal window titled 'New report' is overlaid on the page. It contains a sub-titel 'Select a report type from the list:' and a list item 'Inventory Summary' with the description 'Report about the number of resources related to specific filters'. At the bottom of the modal are 'Cancel' and 'Configure' buttons.

Figura 326 – New report creation

Once the report type is selected, click on the “Configure” button to select the providers to include in the report. In the newly opened window, you will find the “Provider” field, which allows you to select one or more pre-existing providers in the system. Subsequently, it is possible to select one or more subsystems to include in the report; if no providers are selected, no subsystem can be selected. Finally, there is a “tag” section to include only resources that have the entered tag.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed web interface for the Leonardo Secure Cloud Management Platform. At the top, there's a navigation bar with links for Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports. The Reports link is currently selected. Below the navigation is a sub-menu for Inventory / Reports. A modal dialog box titled "Reports" is open in the center. Inside the dialog, there's a section for "Inventory" with fields for "Provider" (set to "Azure, Google") and "Subsystem" (set to "MAE LAB, CMPPROJECT-374610"). There are also sections for "Tags" and "Report Type" (with "One-Shot" selected). At the bottom of the dialog is a red "Submit" button. In the background, there's a table listing various reports with columns for "Status" (all listed as "READY") and "Actions". The table includes rows for "SUMMARY" reports from "AZURE", "AZURE, GOOGLE, OPENSHIFT", and "AZURE, GOOGLE, OPENSHIFTS", as well as a single row for "AZURE, GOOGLE, KUBERNETES, OPENSHIFT".

Figura 327 – Report configuration

At this point, the user can choose between two different actions:

- Create a static report that will be saved in the system.
- Schedule a job that generates the report periodically.

To confirm the creation of a static report, verify that "One-Shot" has been selected for the "Report type" field and click the "Submit" button at the bottom.

After a loading period, the newly generated report will be visible in the list.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Sub Category | Provider | Creation Date | Status | Actions |
|--------------|--------------------------|-----------------------|--------|---------|
| SUMMARY | AZURE, GOOGLE | 12/06/2024 - 1:21 PM | READY | ⋮ |
| SUMMARY | AZURE | 12/06/2024 - 12:29 PM | READY | ⋮ |
| SUMMARY | AZURE | 12/06/2024 - 12:28 PM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 10:05 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 10:01 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 8:32 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 8:20 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 12:30 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 07/06/2024 - 12:30 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 06/06/2024 - 12:29 AM | READY | ⋮ |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 05/06/2024 - 12:29 AM | READY | ⋮ |
| SUMMARY | | 04/06/2024 - 12:29 AM | READY | ⋮ |

Figura 328 – List of generated reports

REPORT SCHEDULING

If, instead, you want to schedule automatic report execution, you will need to select “Recurring” for the “Report Type” field. In this case, the window updates to show additional parameters for configuring the periodic report.

The parameters to enter are:

- Period: allows selecting the report sending frequency (hourly, daily, ...).
- “Receive only if not empty” if selected, the file will not be sent when no information is present inside
- Report Language: allows selecting the language used in the report.
- File format: allows selecting one or more file types to include in the email.
- User E-mails: allows entering an email address to send reports to. After entering an email, it is necessary to press “Enter” on the keyboard to confirm its insertion. Once pressed, the newly entered email will move to the bottom box, and the field will be cleared to allow the insertion, if necessary, of a new email.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| | Status | Actions |
|----|--------|---------|
| 1 | READY | ... |
| 2 | READY | ... |
| 3 | READY | ... |
| 4 | READY | ... |
| 5 | READY | ... |
| 6 | READY | ... |
| 7 | READY | ... |
| 8 | READY | ... |
| 9 | READY | ... |
| 10 | READY | ... |
| 11 | READY | ... |

Figura 329 – Scheduled report parameters

Having configured all parameters, the “Submit” button will become clickable. Click it to confirm the insertion, and after a loading period, the newly generated report will be visible in the list.

| Sub Category | Provider | Creation Date | Status | Actions |
|--------------|--------------------------|-----------------------|--------|---------|
| SUMMARY | AZURE, GOOGLE | 12/06/2024 - 1:21 PM | READY | ... |
| SUMMARY | AZURE | 12/06/2024 - 12:29 PM | READY | ... |
| SUMMARY | AZURE | 12/06/2024 - 12:28 PM | READY | ... |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 10:05 AM | READY | ... |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 10:01 AM | READY | ... |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 8:32 AM | READY | ... |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 8:20 AM | READY | ... |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 10/06/2024 - 12:30 AM | READY | ... |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 07/06/2024 - 12:30 AM | READY | ... |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 06/06/2024 - 12:29 AM | READY | ... |
| SUMMARY | AZURE, GOOGLE, OPENSHIFT | 05/06/2024 - 12:29 AM | READY | ... |



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 330 – List of generated reports

LIST OF SCHEDULED REPORTS

To view the list of scheduled reports, select the “Scheduled” tab located at the top left of the reports page.

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with various links like Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports. The Reports link is underlined in orange. Below the navigation, there's a sub-menu for Inventory / Reports. On the right, there's a large title 'Reports' with a 'New report' button. Underneath, there's a table with columns: Period, Language, Recipients, Last sent, and Actions. The first row shows 'Hourly', 'EN', 'noame@gmail.com', and '12/06/2024 - 1:21 PM'. To the right of the table, there are pagination controls for 'Items per page' (set to 20), '1 - 1 of 1', and navigation arrows. A red box highlights the 'Scheduled' tab in the sub-menu, and a red arrow points to it from the left.

Figura 331 – List of scheduled reports

On this page, you will find the list and related information of the scheduled reports present in the system. For each result, by clicking the “Three dots” button on the right, three operations can be performed:

- View the last generated report.
- Edit the schedule settings; it will not be possible to modify the selected providers or subsystems.
- Delete the schedule to stop sending emails.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 332 – Editing a schedule

REPORT USAGE

By clicking on the row of a static report, or using the "Show report" button available for scheduled reports, you will be able to view the detail page of the selected report.

Within the Inventory report summary, there is a "Stats" section which includes the number of disks, interfaces, networks, and virtual machines belonging to the selected provider.

Below the "Stats" section, there are the filters used by the user to generate the report.

Below the filters, there is a summary table of resources belonging to the providers. On the right, there are two buttons: "PRINT" and "EXPORT".

Clicking the "PRINT" button brings up a print preview modal. To print the report, click the "Stampa" (Print) button in the lower right; at this point, the printing of the aforementioned will start.

Clicking the "EXPORT" button allows exporting the report in ".csv", ".json" or ".pdf" format.

To return to the "Results" tab, click the "CLOSE" button in the lower right, or click the left-pointing arrow in the upper left, next to the report title.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with links for Resources, Virtual Machines, Data Stores, Networks, Clusters, Security, Others, What If, and Reports. The Reports link is underlined, indicating it's the active section. Below the navigation is a breadcrumb trail: Inventory / Reports / Report 6669a0d3aae316468b3c8b34. The main content area is titled "Report Inventory Summary". It features a "Stats" section with five boxes: 1 VMs, 1 Disks, 1 Networks, 0 Interfaces, and 0 K8Ss. Below this is a table titled "PROVIDER: AZURE, GOOGLE | SUBSYSTEM: MAE LAB,CMPPROJECT-374610". The table has columns for Type Provider, Subsystem Name, VMs, Disks, Networks, Interfaces, and K8Ss. It lists two entries: Azure (MAE LAB) with 14 VMs, 16 Disks, 14 Networks, 0 Interfaces, and 0 K8Ss; and Google (CMPPROJECT-374610) with 1 VM, 1 Disk, 1 Network, 0 Interfaces, and 0 K8Ss. At the bottom right of the table, there are buttons for "PRINT" and "EXPORT".

| Type Provider | Subsystem Name | VMs | Disks | Networks | Interfaces | K8Ss |
|---------------|-------------------|-----|-------|----------|------------|------|
| Azure | MAE LAB | 14 | 16 | 14 | 0 | 0 |
| Google | CMPPROJECT-374610 | 1 | 1 | 1 | 0 | 0 |


Figura 333 – Report details

11 Provisioning

Provisioning is one of the most important functionalities of SCMP. Through these modules, it is possible to allocate runtime assets within the providers managed by SCMP.

To use this functionality, relations must be defined within the SCMP.

This constraint was made available to bind certain characteristics to provisioning; for example, the VM size is not selectable during provisioning but is among the predefined characteristics by administrators within the catalog.

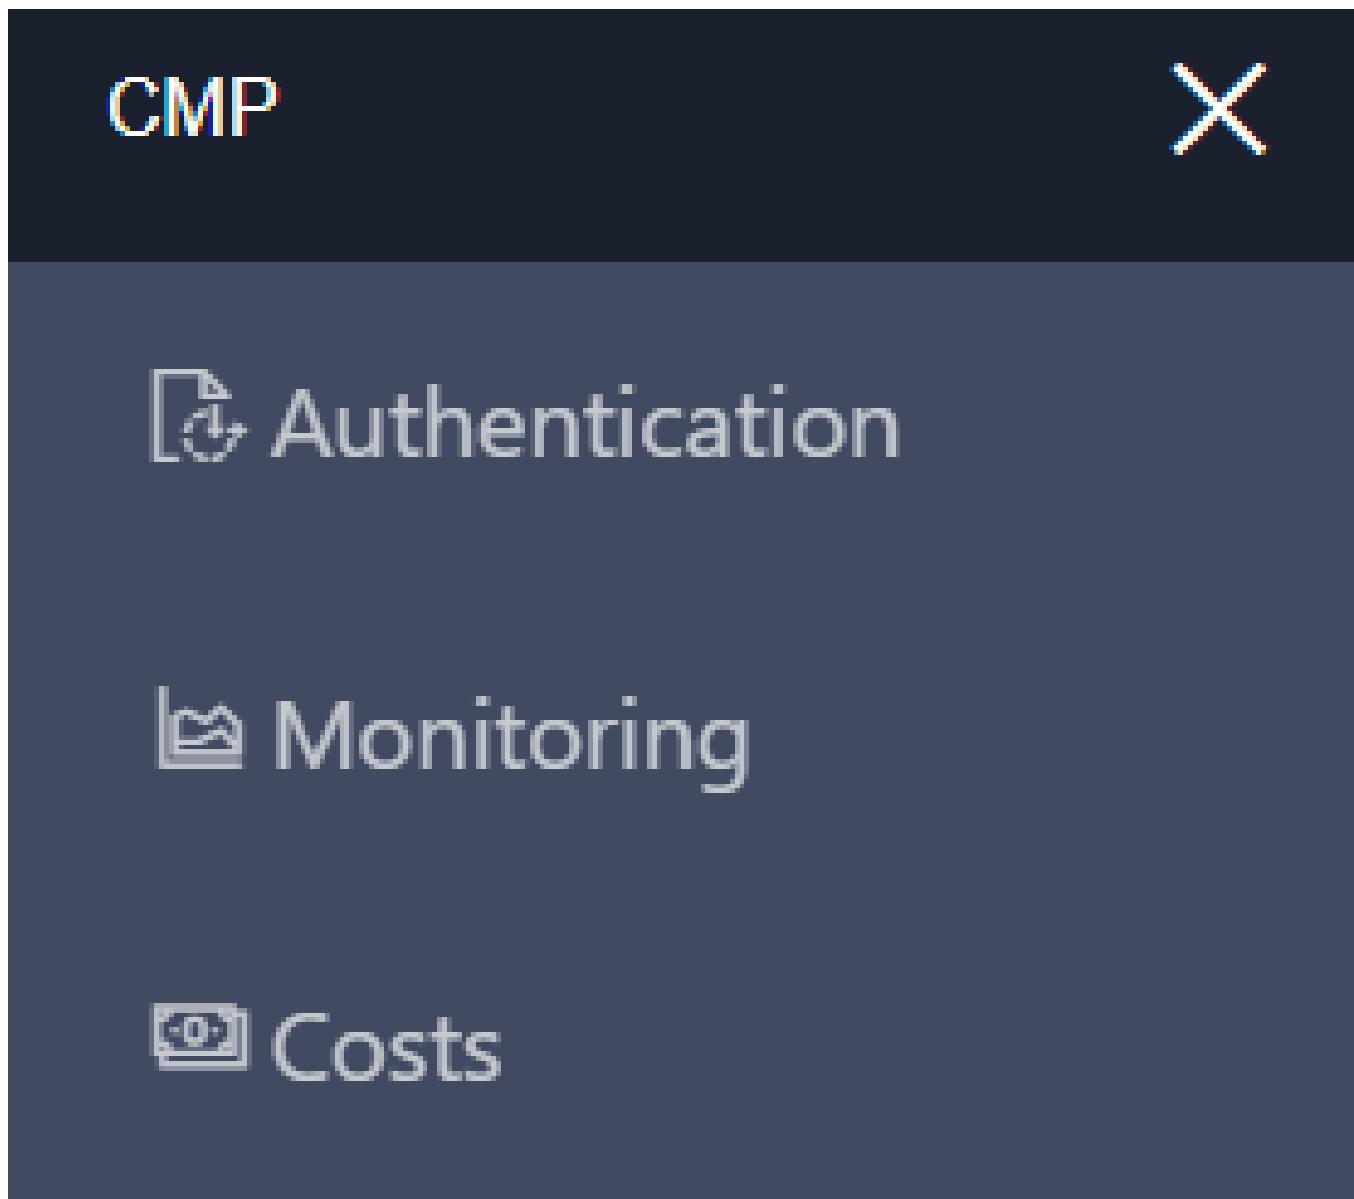

 **Inventory**

 **Security**


 **Dashboard**

 **Catalog**

 **Administration**

Cloud Maturity Model

♀ Provisioning

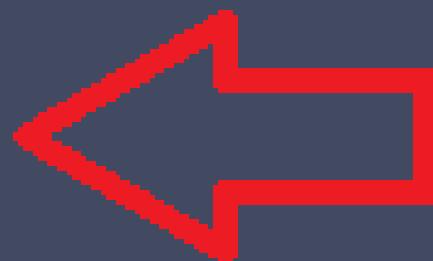

⌚ Log and Audit

⚠ Tool Risk

📋 Compliance



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform



Figura 334 – Access to "Provisioning"

11.0.1 Dashboard

Accessing the functionality, the first available page is the Dashboard of provisionings carried out within the system.

The page presents a series of graphs, filters, and the list of provisionings performed.

The graphs allow visualizing the information present in the table, grouped by:

- The total of all provisionings carried out, divided by type.
- The status of provisionings carried out, divided by outcome and category of the provisioned asset.


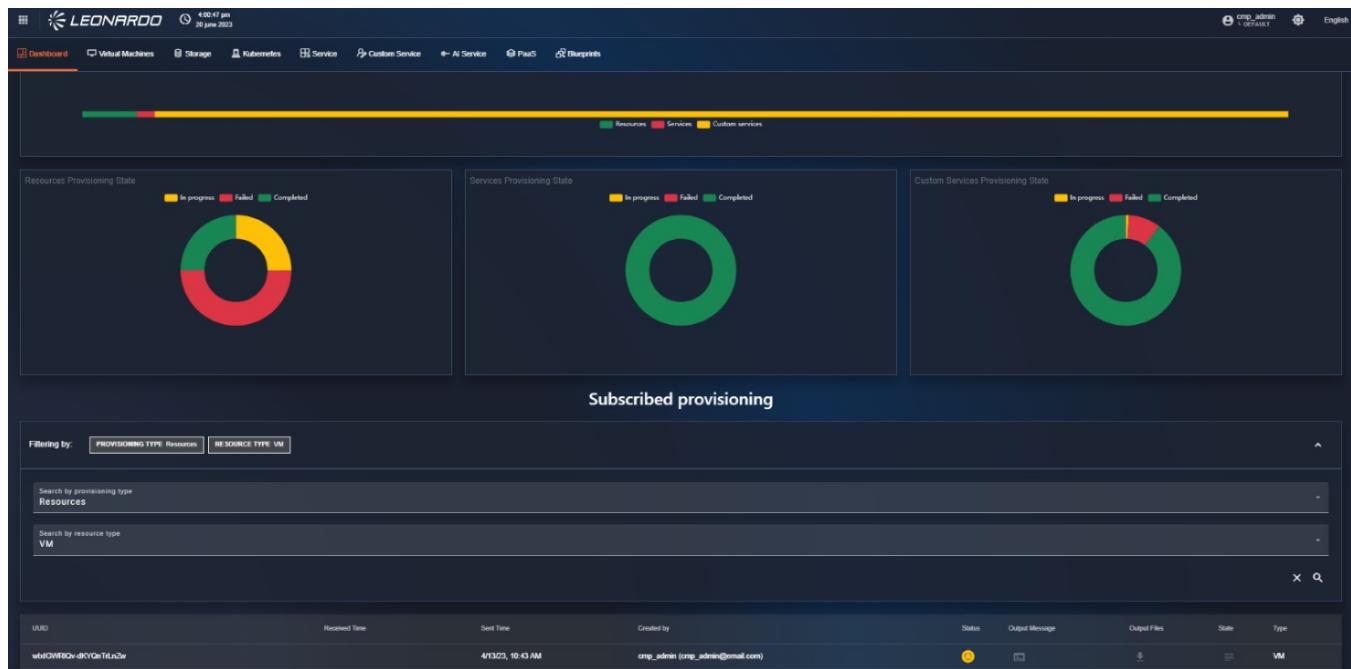


Figura 335 – Provisioning page graphs

At the bottom of the page, we can use the filters section to modify the results present in the table. The "Provisioning Type" filter is the main filter that allows selecting the type of asset to display, specifically:

- Selecting "Resources" adds a filter that allows selecting the type of resource for which you want to display the provisioning status. By default, the system shows the list of provisioned VMs.
- Selecting "Services" and "Custom services" has no additional filters, and the list is updated with only provisionings related to Services.
- Selecting "Blueprint" adds a filter that allows changing the flow (i.e., the type of blueprint to display), and the table is modified to show only flows not yet completed. Above the table, there is a control that allows changing tabs, to switch from "in progress" flows to "Completed" flows.

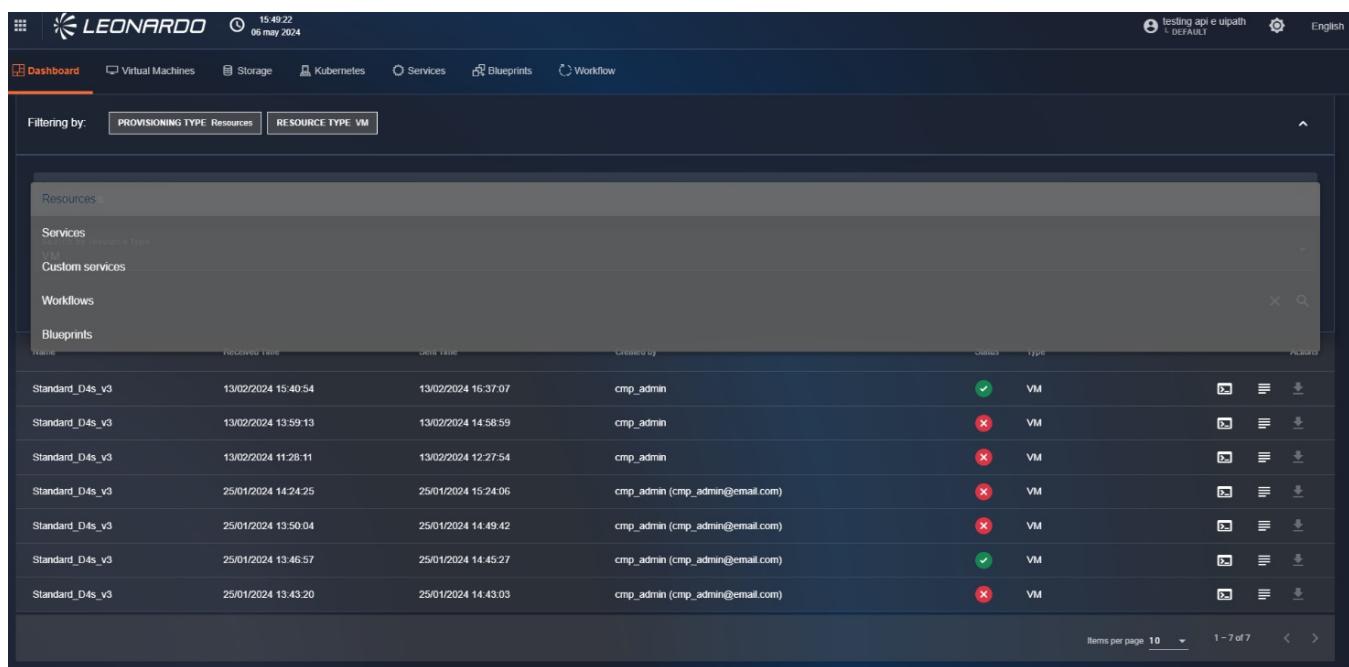

| Name | Received Time | Sent Time | Created by | Status | Type | Actions |
|-----------------|---------------------|---------------------|---------------------------------|--------|------|-----------|
| Standard_D4s_v3 | 13/02/2024 15:40:54 | 13/02/2024 16:37:07 | cmp_admin | ✓ | VM | [Actions] |
| Standard_D4s_v3 | 13/02/2024 13:59:13 | 13/02/2024 14:58:59 | cmp_admin | ✗ | VM | [Actions] |
| Standard_D4s_v3 | 13/02/2024 11:28:11 | 13/02/2024 12:27:54 | cmp_admin | ✗ | VM | [Actions] |
| Standard_D4s_v3 | 25/01/2024 14:24:25 | 25/01/2024 15:24:06 | cmp_admin (cmp_admin@email.com) | ✗ | VM | [Actions] |
| Standard_D4s_v3 | 25/01/2024 13:50:04 | 25/01/2024 14:49:42 | cmp_admin (cmp_admin@email.com) | ✗ | VM | [Actions] |
| Standard_D4s_v3 | 25/01/2024 13:46:57 | 25/01/2024 14:45:27 | cmp_admin (cmp_admin@email.com) | ✓ | VM | [Actions] |
| Standard_D4s_v3 | 25/01/2024 13:43:20 | 25/01/2024 14:43:03 | cmp_admin (cmp_admin@email.com) | ✗ | VM | [Actions] |

Figura 336 – Filter by asset type

11.0.2 Provisioning Table Specifications

11.0.2.1 "Resources", "Services", "Custom Services"

The list has the following attributes when "Resources", "Services", "Custom Services" is selected as a filter:

- Uuid, Provisioning identifier;
- Provisioning completion date;
- Provisioning request date;
- User who created the instance;
- Status;



- Output of provisioning systems;
- Detailed provisioning Json;
- Status information;
- Resource type.

| UUID | Received Time | Sent Time | Created by | Status | Output Message | Output Files | State | Type |
|------------------------|-------------------|-------------------|---------------------------------|---------------------------------------|--|--|---|------|
| wxtGWRtQv-dkYQnTrLnZw | 4/13/23, 10:43 AM | | cmp_admin (cmp_admin@email.com) | ? | Download | Download | Graph | VM |
| PbxnPXXNS0m8nKq3h7lp-A | 3/10/23, 11:13 AM | 3/10/23, 11:13 AM | cmp_admin (cmp_admin@email.com) | ✓ | Download | Download | Graph | VM |
| 5zcav6HITBSMTk9zxh7BEg | 1/30/23, 12:03 PM | 1/30/23, 12:03 PM | cmp_admin (cmp_admin@email.com) | ✗ | Download | Download | Graph | VM |
| G_MjB0RyGYnSL02PzYcg | 1/30/23, 12:01 PM | 1/30/23, 12:00 PM | cmp_admin (cmp_admin@email.com) | ✗ | Download | Download | Graph | VM |
| pc_lNFOQmuZl6WwQpnbXA | 1/30/23, 11:33 AM | 1/30/23, 11:33 AM | cmp_admin (cmp_admin@email.com) | ✗ | Download | Download | Graph | VM |
| T8Fgg466Rzy5smb6Af9maw | 1/12/23, 9:30 AM | 1/12/23, 9:29 AM | cmp_admin (cmp_admin@email.com) | ✗ | Download | Download | Graph | VM |
| pQqRnCqERBacWb1PgYHq7Q | | | cmp_admin (cmp_admin@email.com) | ? | Download | Download | Graph | VM |

Figura 337 – “Resources” Table

When in this view, the following operations can be performed:

- By clicking on the row of a failed provisioning, it is possible to modify and re-execute it.
- By clicking on the "Output Message" icon corresponding to a provisioning, it is possible to view the response received from the "Terraform" module.
- By clicking the "Download" button, it is possible to download the files returned by the functionality.
- By clicking the "State" button, it is possible to view the graph and the list of provisioned resources.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the 'Subscribed provisioning' section of the Leonardo Secure Cloud Management Platform. It displays two entries in a table:

| UUID | Received Time | Sent Time | Created by | Status | Output Message | Output Files | State | Type |
|-----------------------|-------------------|-------------------|---------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|------|
| w1xGWRiQv-dKYQnTlLnZw | 4/13/23, 10:43 AM | | cmp_admin (cmp_admin@email.com) | ? | ? | ? | ? | VM |
| PtxhPXNNSo8nKq3H7lp-A | 3/10/23, 11:13 AM | 3/10/23, 11:13 AM | cmp_admin (cmp_admin@email.com) | ✓ | ✓ | ✓ | ✓ | VM |

A modal window for the second entry (PtxhPXNNSo8nKq3H7lp-A) is open, displaying a Terraform execution message:

```

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
+ create

Terraform will perform the following actions:

# vsphere_virtual_machine.VMWarePro2023 will be created
+ resource "vsphere_virtual_machine" "VMWarePro2023" {
    + annotation
        = (known after apply)
    + boot_retry_delay
        = 10000
    + change_version
        = (known after apply)
    + cpu_limit
        = -1
    + cpu_share_count
        = (known after apply)
    + cpu_share_level
        = "normal"
    + datastore_id
        = "datastore-3011"
    + default_ip_address
        = (known after apply)
}
  
```

Figura 338 – Terraform message visualization

The screenshot shows the 'Subscribed provisioning' section of the Leonardo Secure Cloud Management Platform. It displays two entries in a table:

| UUID | Received Time | Sent Time | Created by | Status | Output Message | Output Files | State | Type |
|-----------------------|-------------------|-------------------|---------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|------|
| w1xGWRiQv-dKYQnTlLnZw | 4/13/23, 10:43 AM | | cmp_admin (cmp_admin@email.com) | ? | ? | ? | ? | VM |
| PtxhPXNNSo8nKq3H7lp-A | 3/10/23, 11:13 AM | 3/10/23, 11:13 AM | cmp_admin (cmp_admin@email.com) | ✓ | ✓ | ✓ | ✓ | VM |

A modal window for the second entry (PtxhPXNNSo8nKq3H7lp-A) is open, displaying a resource graph visualization. The graph shows a central node labeled 'Provisioning' connected to four other nodes: 'VMWarePro2023' (blue circle), 'datastore' (yellow circle), 'network' (red circle), and 'datacenter' (orange circle). A legend at the bottom right indicates the colors for different resource types: Provisioning (green), Other (orange), Storage (yellow), Network (red), and VM (blue).

Figura 339 – Resource graph visualization



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

11.0.2.2 Auto uninstall of HELM services

When we select "Custom services" as a filter type, we can notice a new "Uninstall" button displayed with a "Stop" icon.

| Name | Received Time | Sent Time | Created by | Status | Engine | Actions |
|------------------|---------------------|---------------------|--|--------------------------------------|--------|---|
| Audio Analytics | 04/06/2025 16:32:27 | 04/06/2025 16:32:22 | cmp_api_test (giammarco.piccoliext2@leonardocompany.com) | ✓ | | [Uninstall] |
| Audio Analytics | 30/05/2025 11:28:38 | 30/05/2025 11:23:46 | cmp_admin | ■ | | [Uninstall (only Helm copies)] |
| Nginx Helm chart | 30/05/2025 10:46:36 | 30/05/2025 10:43:41 | cmp_api_test (giammarco.piccoliext2@leonardocompany.com) | ■ | | [Uninstall] |
| Audio Analytics | 30/05/2025 10:00:28 | 30/05/2025 09:59:51 | cmp_admin | ■ | | [Uninstall] |
| Audio Analytics | 30/05/2025 09:56:43 | 30/05/2025 09:56:07 | cmp_admin | ■ | | [Uninstall] |
| Audio Analytics | 30/05/2025 09:55:39 | 30/05/2025 09:55:36 | cmp_admin | ✖ | | [Uninstall] |
| Nginx Helm chart | 30/05/2025 09:54:55 | 30/05/2025 09:54:40 | cmp_admin | ✖ | | [Uninstall] |
| Audio Analytics | 29/05/2025 14:37:01 | 29/05/2025 14:34:10 | cmp_admin | ■ | | [Uninstall] |

Figura 340 – Uninstall HELM service

Clicking the button will ask for confirmation of deletion. Upon confirmation, SCMP will delete all HELM resources deployed in the indicated namespace.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with various icons and links like 'Dashboard', 'Virtual Machines', 'Data Stores', 'Edge', 'Networking', 'Security', 'Kubernetes', 'Services', 'Blueprints', and 'Workflow'. The date '12.07.18 05 June 2025' is also visible. In the center, the title 'Subscribed provisioning' is displayed above a table. The table has columns for 'Name', 'Received Time', 'Sent Time', 'Created by', 'Status', 'Engine', and 'Actions'. There are several rows of data, mostly for 'Audio Analytics' and 'Nginx Helm chart'. Overlaid on the table is a modal dialog with a dark background and white text. It says 'Uninstall Helm Chart' at the top and 'Are you sure you want to uninstall this Helm chart?' in the middle. At the bottom of the dialog are two buttons: 'No' (grey) and 'Yes' (red). The 'Yes' button is highlighted.

| Name | Received Time | Sent Time | Created by | Status | Engine | Actions |
|------------------|---------------------|---------------------|---|---------------------------------------|--------|---|
| Audio Analytics | 04/06/2025 16:32:27 | 04/06/2025 16:32:22 | cmp_api_test (giammarco.piccoli.ext2@leonardocompany.com) | ✓ | helm | [] [] [] [] |
| Audio Analytics | 30/05/2025 11:28:38 | 30/05/2025 11:23:46 | cmp_admin | [] | helm | [] [] [] [] |
| Nginx Helm chart | 30/05/2025 10:46:36 | 30/05/2025 10:43:41 | cmp_api_test (giammarco.piccoli.ext2@leonardocompany.com) | [] | helm | [] [] [] [] |
| Audio Analytics | 30/05/2025 10:00:28 | 30/05/2025 09:59:51 | cmp_admin | [] | helm | [] [] [] [] |
| Audio Analytics | 30/05/2025 09:56:43 | 30/05/2025 09:56:07 | cmp_admin | [] | helm | [] [] [] [] |
| Audio Analytics | 30/05/2025 09:55:39 | 30/05/2025 09:55:36 | cmp_admin | ✖ | helm | [] [] [] [] |
| Nginx Helm chart | 30/05/2025 09:54:55 | 30/05/2025 09:54:40 | cmp_admin | ✖ | helm | [] [] [] [] |
| Audio Analytics | 29/05/2025 14:37:01 | 29/05/2025 14:34:10 | cmp_admin | [] | helm | [] [] [] [] |

Figura 341 – Uninstall confirmation

11.0.2.3 Blueprint

The list has the following attributes when "Blueprint" is selected as a filter:

- Blueprint Name
- Creation Date
- User who provisioned the blueprint

Above the table, we can notice two tabs. By clicking on them, the table is filtered respectively for Blueprints to be completed and Completed Blueprints (in red in the image).



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a web interface for managing cloud resources. At the top, there's a navigation bar with links for Dashboard, Virtual Machines, Storage, Kubernetes, Services, Blueprints (which is the active tab), and Workflow. The main title is "Subscribed provisioning". Below the title, there's a filtering section with a dropdown set to "Blueprints". A red arrow points from the "To be completed" tab to the "Completed/Failed" tab. The main content area displays a table of provisioning details:

| Name | Creation date | Created by |
|--------------------------------|---------------------|------------|
| Docker development environment | 18/03/2024 09:46:30 | cmp_admin |
| Docker development environment | 14/03/2024 09:29:13 | cmp_admin |
| Only manual | 14/03/2024 09:12:56 | cmp_admin |

*Figura 342 – “Provisioning blueprint”
table tabs*

In this view, it is possible to click on a table row to view the blueprint details.

When the selected blueprint is "to be completed," we will be redirected to the blueprint provisioning page where we can perform the necessary operations for completion.



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

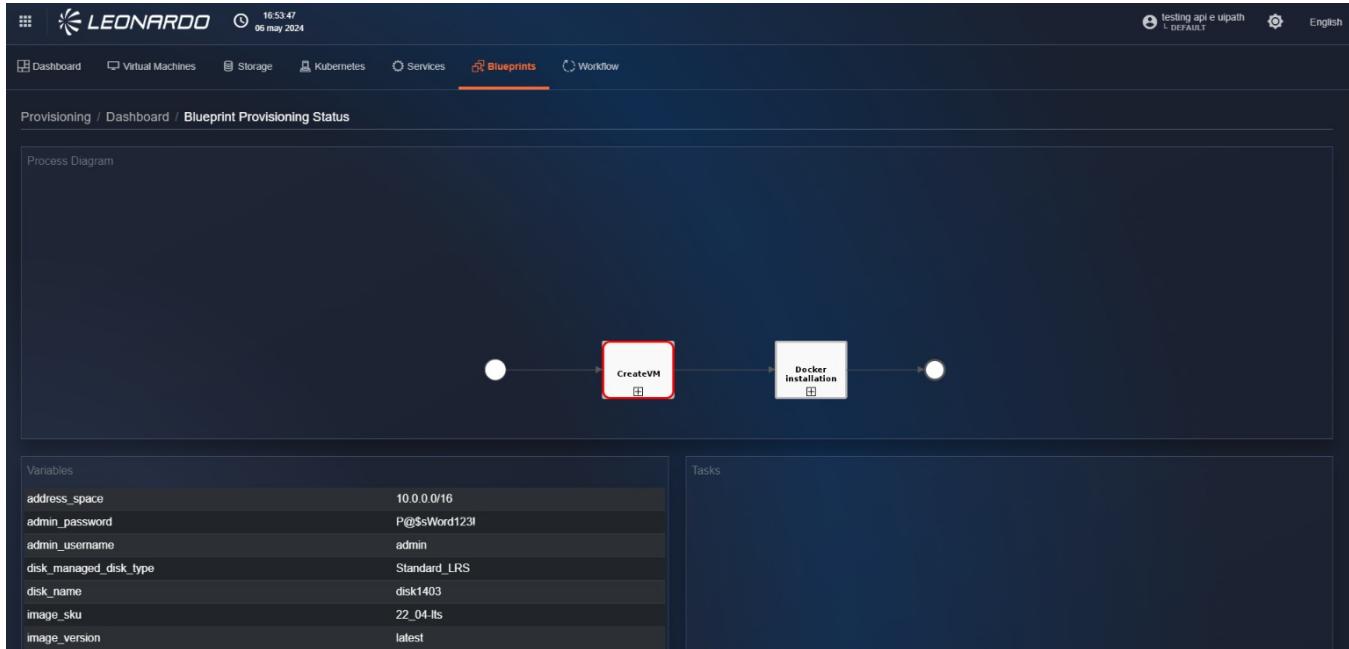


Figura 343 – “To be completed” flow visualization

If a completed blueprint is selected instead, we will be redirected to the blueprint provisioning details page where the prediction "flow" will not be displayed because it has already been completed.

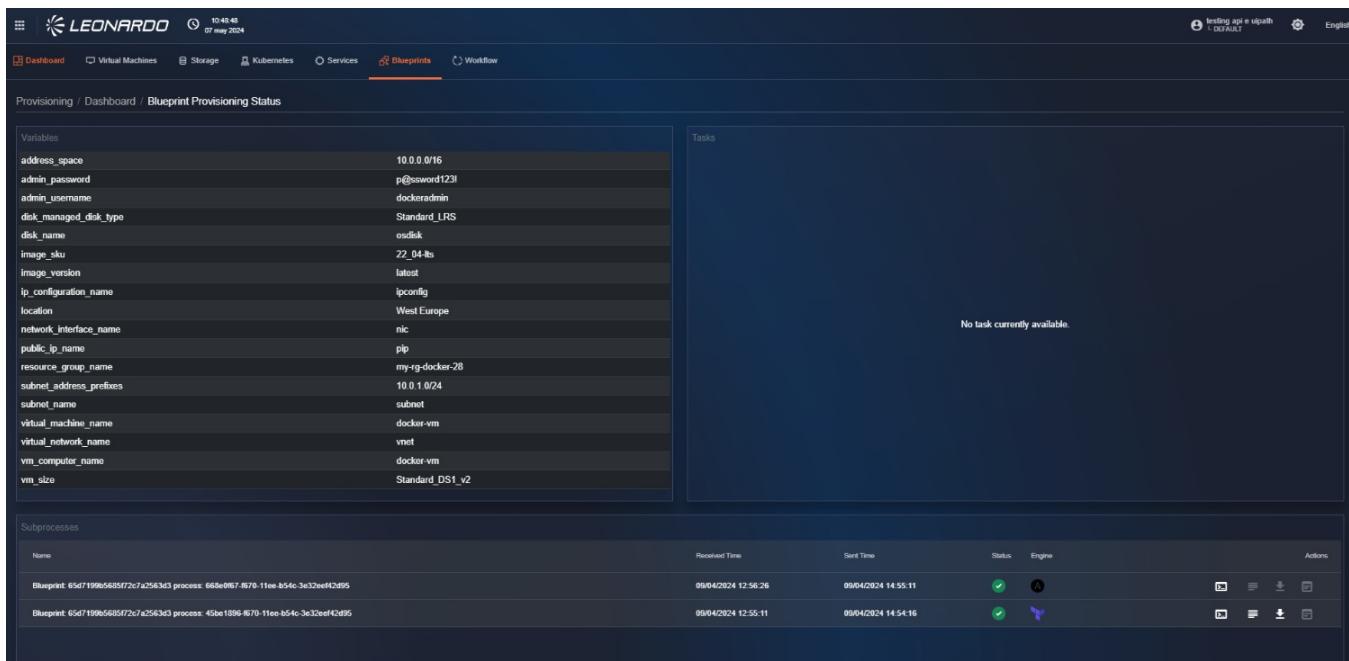


Figura 344 – “Completed” flow visualization


11.0.3 Creation of Provisionings

11.0.3.1 Provisioning of "Physical Resources"

Using the tabs in the provisioning functionality, it is possible to view the lists of provisionable resources within the SCMP, such as Virtual Machines, Storage, and Kubernetes.

To view elements within the result lists, it is necessary that a relation exists in the SCMP catalog with the catalog resource of the provider to be provisioned.

The functionalities available for these elements are identical; only the parameters to be entered in the creation steps change.

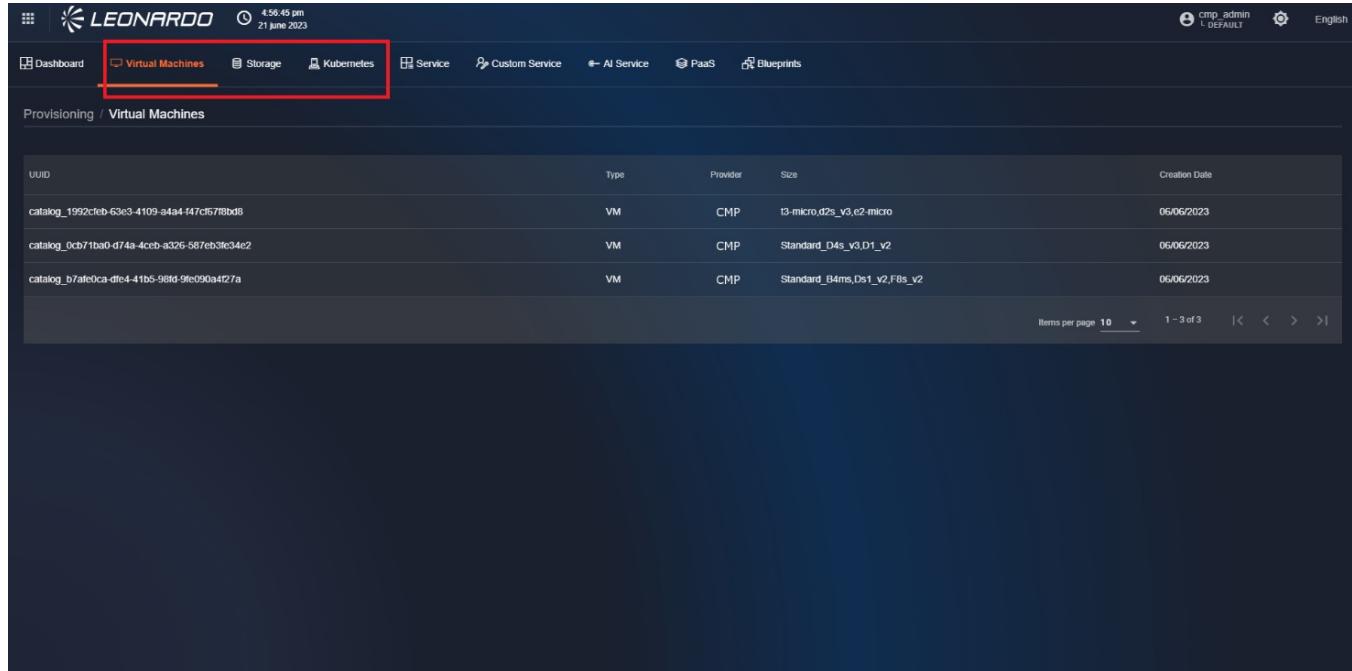

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there is a header with the Leonardo logo, the date and time (4:56:45 pm, 21 June 2023), and user information (cmp_admin, L DEFAULT, English). Below the header is a navigation bar with several tabs: Dashboard, Virtual Machines (which is highlighted with a red box), Storage, Kubernetes, Service, Custom Service, AI Service, PaaS, and Blueprints. The main content area is titled 'Provisioning / Virtual Machines'. It displays a table with three rows of VM data:

| UUID | Type | Provider | Size | Creation Date |
|--|------|----------|-----------------------------|---------------|
| catalog_1992cfeb-63e3-4109-a4a4-147cf57f8bd8 | VM | CMP | t3-micro,d2s_v3,e2-micro | 06/06/2023 |
| catalog_0cb71ba0-d74a-4ceb-a326-587eb3fe34e2 | VM | CMP | Standard_D4s_v3.01_v2 | 06/06/2023 |
| catalog_b7afe0ca-dfe4-41b5-98fd-9fe090a4d27a | VM | CMP | Standard_B4ms,Ds1_v2,F8s_v2 | 06/06/2023 |

At the bottom right of the table, there are pagination controls: 'Items per page' set to 10, and page indicators showing '1 - 3 of 3'.

Figura 345 – Tabs for resource creation

11.0.3.1.1 VIRTUAL MACHINES



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

To start provisioning a resource, click on the corresponding row to view the page containing step 1 of provisioning creation. In this step, it is necessary to select, using the dropdown on the left, the "target" subsystem where the resources are to be provisioned. Once selected, an information mirror will be displayed on the right indicating the characteristics of the resource that will be provisioned. To continue, click the "Next" button at the bottom right to go to step 2 "Config" page.

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a header with the Leonardo logo, the date (07 may 2024), and time (11:20:33). Below the header, a navigation bar includes links for Dashboard, Virtual Machines (which is highlighted in red), Storage, Kubernetes, Services, Blueprints, and Workflow. The main content area is titled 'Provisioning / Virtual Machines / 6620d77dc532870f91e5ed34 / Add'. A progress bar at the top indicates Step 1: Subsystem. The 'Subsystem' dropdown is set to 'CONSIP Management'. To the right, a summary box displays the selected configuration: 'Standard_B8ms (Azure)', 'Total CPU: 8', 'Name: Standard_B8ms', 'Total RAM: 32 GB', and 'Size: B8ms'. Below the summary box are buttons for 'Config', 'System Type', 'CMP', 'Description' (set to 'Virtual Machine del Catalogo'), and 'Next'. There's also a 'Reset' button on the left side of the summary box.

Figura 346 – Selection of the “target” subsystem, provisioning step 1

On the "Config" page of step 2, fill in all mandatory fields in all sections of the form. At the bottom left, click the "Reset" button to reset all fields on the page.

Instead, on the right, click the "Submit" button to go to step 3 "Plan".



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a web-based interface for creating a new virtual machine. At the top, there's a header with the Leonardo logo, the date (07 December 2022), and time (12:48:40 pm). The main area is titled 'new virtual machine'. It has two main sections: 'Configuration Options' and 'Network'. In 'Configuration Options', there are fields for 'Virtual Machine Name *', 'Resource Group *', 'Storage Type (Disk for OS) *', 'Storage Size (Disk for OS) GB' (set to 10), and 'Image *'. There's also a checkbox for 'Assign Public Ip'. In the 'Network' section, there are dropdown menus for 'Network' and 'Subnet', and a checkbox for 'Create new network'. On the left side, there's a sidebar with various icons and a 'Subsystem' button.

This screenshot shows a continuation of the configuration process. It's a 'User name for access' configuration form. It includes fields for 'User name for access *' and 'Password *'. Below these, there's a 'Tags' field. At the bottom, there are 'Reset' and 'Submit' buttons.

Figura 347 – Filling in the resource prediction form fields

After clicking the "Submit" button, the user is redirected to the "Plan" page of step 3 where we can view the provisioning plan sent by Terraform, which indicates all the parameters of the resources that will be configured, and at the bottom, there is a list with a cost perspective.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a header with the Leonardo logo, date (29 October 2022), time (5:57:25 pm), user (cmp_admin), and language (English). The main area has tabs for 'Subsystem' (selected), 'Config', and 'Plan'. The 'Plan' tab is active, displaying a Terraform execution plan. It shows actions for creating a resource: azurerm_linux_virtual_machine. The code includes variables like admin_password, admin_username, allow_extension_operations, computer_name, disable_password_authentication, extensions_time_budget, id, location, and max_bid_price. Below the code, a 'Costs' section lists consumption and reservation costs for Linux virtual machines over different time periods. At the bottom right of the 'Plan' tab, there are 'Back', 'Reset', and 'Apply' buttons.

Figura 348 – Forecast screen

Still from the "Plan" page of step 3, at the bottom right, there are three buttons: "Back", "Reset", and "Apply". If you click the "Back" button, the user returns to the "Config" page of step 2 where parameters can be modified.

If you click the "Reset" button, the user is redirected to the "Subscription" page of step 1 where it is necessary to select a subsystem, and then enter the parameters on the "Config" page of step 2.

Finally, if you click the "Apply" button, the forecast is saved, and the user is redirected to the "Dashboard" tab page where the user verifies the presence of the newly created forecast.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

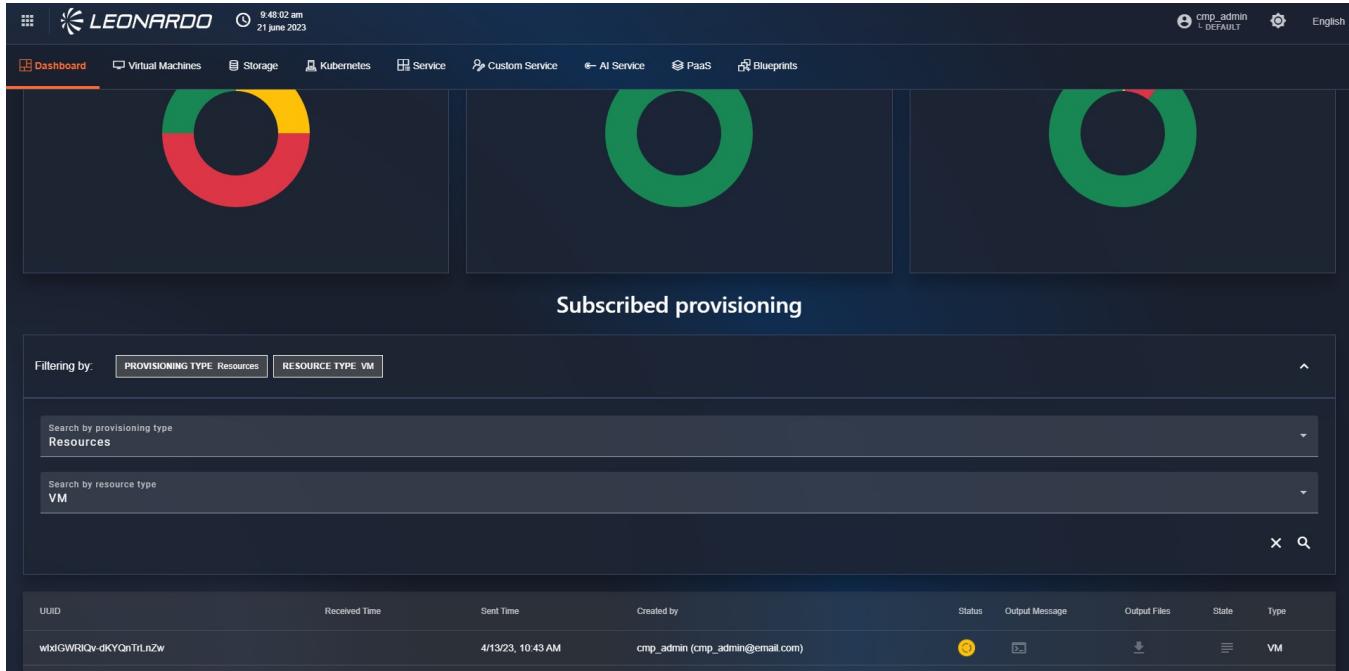


Figura 349 – List of provisioning performed

11.0.3.2 Provisioning of "Services"

To access the services page, click on the tab that depicts a shelf located in the top menu. After doing this, you will find yourself on the "Service" page.

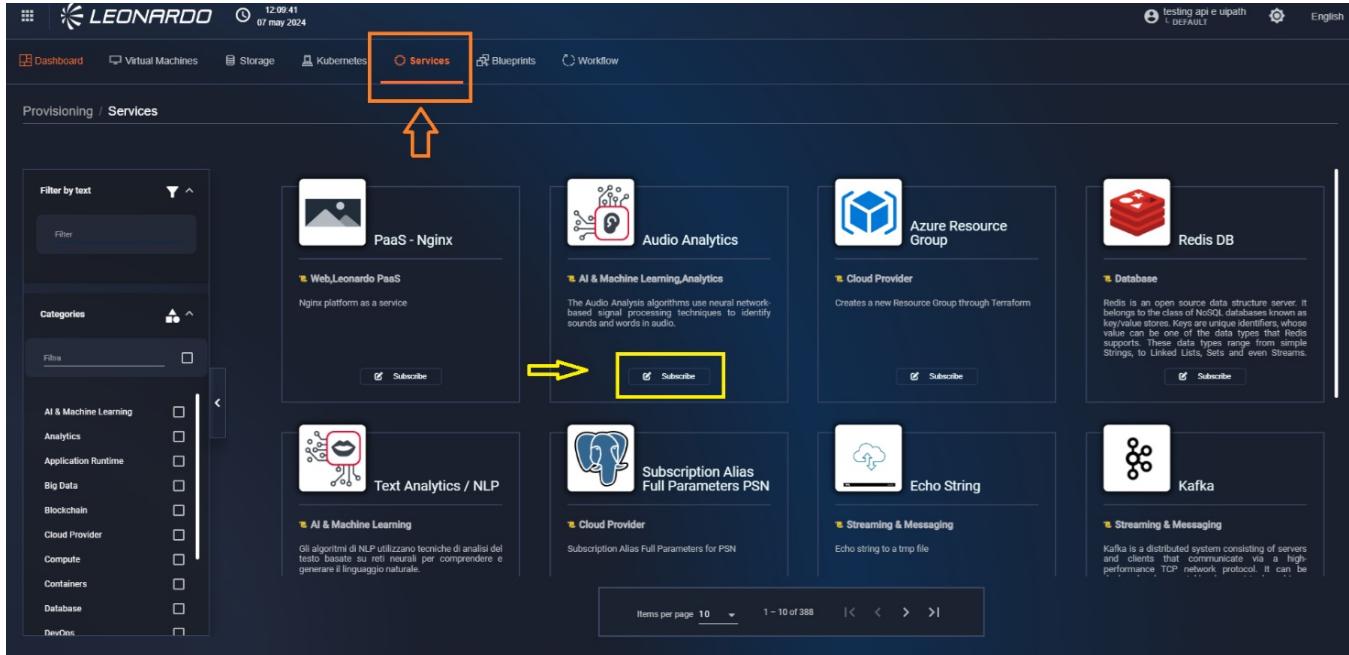


Figura 350 – List of cards

On the page, a list of components called "Card" is displayed. Each card refers to a specific type of service; in particular, the following information is displayed:

- Service name;
- Service icon;
- Type of script used for service provisioning;
- Service description;
- "Subscribe" button to proceed with service creation.

Depending on the type of service selected, the steps for provisioning change; these will be analyzed in detail below.

11.0.3.2.1 "STANDARD" SERVICES

Click the "Subscribe" button corresponding to a "standard" service. The user will be redirected to step 1 of the service creation page, and all instantiable versions of the service by SCMP will be displayed. In particular, various blocks will be shown, each with a list of configurations:

- Name and version of the service that will be instantiated.
- Name and version of the operating system that will be installed on the machine.
- Belonging provider on which the service will be provisioned.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a web-based interface for provisioning a Kafka service. At the top, there's a navigation bar with tabs: Dashboard, Virtual Machines, Storage, Kubernetes, Service (which is highlighted in orange), Custom Service, AI Service, PaaS, and Blueprints. On the far right, it shows the user 'cmp_admin' with a 'L DEFAULT' role, a gear icon for settings, and the language 'English'. Below the navigation, the URL 'Provisioning / Service / Subscribe service' is visible. The main content area has three tabs at the top: '1 Configuration' (selected), '2 Details', and '3 Summary'. The 'Configuration' tab contains the heading 'Subscribe a Kafka' and a sub-instruction 'Select the customization you prefer from list:'. Underneath, there's a section titled 'Available options:' with two items listed:

- Redis DB 7.0** [redis] [redshift]
OS: ubuntu-20_04-lts | Version: 3.2.1 | Available on: Azure
Redis version 7.0 on Ubuntu 20.04 LTS
- Redis DB 7.0** [redis] [redshift]
OS: ubuntu-22_04-lts | Version: 3.2.1 | Available on: Azure
Redis version 7.0 on Ubuntu 22.04 LTS

Below these options, it says 'Option selected: (None)' and has a 'Continue' button on the right.

Figura 351 – Provisioning of a "standard" service

Select a software version and press the "Continue" button; the user is redirected to step 2 of service provisioning.

In step 2, it will be necessary to select a subsystem and fill out the form with the details of the chosen subsystem.

This screenshot shows the second step of the Kafka configuration process. The top navigation bar and tabs are identical to the previous screenshot. The main content area is titled 'Configuration Options' and contains several input fields:

- Account Name * (text input field)
- Resource Group * (dropdown menu)
- Location * (dropdown menu)
- Failover Location * (dropdown menu)
- Database Name * (text input field)
- Throughput (RU/s) (text input field, currently set to 400)
- Tags (text input field)

At the bottom left is a 'Reset' button, and at the bottom right is a 'Submit' button.

Figura 352 – Configuration of a



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

"standard" service

After completing all the form fields, click "Submit".

A request will be sent to the Terraform service, which will validate the activation configuration of the indicated flow and return the result.

The screenshot shows the 'Service' tab selected in the navigation bar. Below it, the path 'Provisioning / Service / Subscribe service' is visible. The main area displays a 'Configuration' summary. It includes a note about Terraform generating an execution plan and performing actions. A code block shows the Terraform configuration for creating an Azure Cosmos DB account:

```
# azurerm_cosmosdb_account.account-name will be created
+ resource "azurerm_cosmosdb_account" "account-name" {
    + access_key_metadata_writes_enabled = true
    + analytical_storage_enabled       = false
    + connection_strings              = (sensitive value)
    + create_mode                      = (known after apply)
```

At the bottom right of the summary are 'Back' and 'Apply' buttons.

Figura 353 – Service configuration
summary

Click "Apply" to validate the flow and activate the service subscription.

The dashboard page will open with the list of all subscribed services and their relative statuses. Specifically, the newly provisioned service will have a "Running" status in yellow, and subsequently, depending on the result, the status will also be updated to "Completed" in green or "Error" in red.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed dashboard with the Leonardo logo at the top. The top navigation bar includes links for Dashboard, Virtual Machines, Storage, Kubernetes, Service, Custom Service, AI Service, PaaS, and Blueprints. On the left, there's a sidebar with a 'Filtering by' dropdown set to 'PROVISIONING TYPE Services'. Below it is a search bar with the placeholder 'Search by provisioning type Services'. The main area displays a table of service subscriptions:

| UUID | Received Time | Sent Time | Created by | Status | Output Message | Output Files | State | Type |
|------------------------|-------------------|-------------------|---------------------------------|-------------------------------------|-------------------------------------|--------------------------------------|-------------------------------------|---------|
| DSQblikPQuq0UVjDJRNQJQ | 6/23/23, 12:23 PM | 6/23/23, 12:22 PM | cmp_admin (cmp_admin@email.com) | X | ☒ | ⬇️ | ☰ | SERVICE |
| VJwINV74QF23OS0pn9FJyA | 4/13/23, 10:32 AM | 4/13/23, 10:25 AM | cmp_admin (cmp_admin@email.com) | ✓ | ☒ | ⬇️ | ☰ | VM |
| YB6bDobKQxukQCP40VUa1g | 1/30/23, 12:29 PM | 1/30/23, 12:27 PM | cmp_admin (cmp_admin@email.com) | ✓ | ☒ | ⬇️ | ☰ | VM |

Figura 354 – Dashboard with the list of all subscribed services and their relative statuses

11.0.3.2.2 "CUSTOM" SERVICES

Click the "Subscribe" button corresponding to a "custom" service. The user will be redirected to step 1 of the service creation page where the subsystem can be selected, in which to perform the provisioning, from the dropdown in the center of the page.

The screenshot shows a configuration page for a custom service. At the top, it says 'Configuration' and 'Preview'. Below that, a message reads 'Please select the subsystem on which executing this operation:'. A dropdown menu labeled 'Subsystem' is shown, with 'Subsystems' listed as an option. The background is dark blue.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 355 – Provisioning of a “Custom” service

By selecting the subsystem, the page updates to proceed to step 2 of service provisioning.

In this step 2, it will be necessary to fill out the form with the specific configuration parameters of the selected service.

The screenshot shows a configuration interface for a "Custom Service". The top navigation bar includes links for Dashboard, Virtual Machines, Storage, Kubernetes, Service (which is highlighted in orange), Custom Service, AI Service, PaaS, and Blueprints. The main section is titled "Configuration Options" and contains the following fields:

- Account Name *
- Resource Group *
- Location *
- Failover Location *
- Database Name *
- Throughput (RU/s)
400
- Tags

At the bottom are two buttons: "Reset" and "Submit".

Figura 356 – Configuration of a “custom” service

After completing all the form fields, click "Launch".

A request will be sent to the Terraform service, which will validate the activation configuration of the indicated flow and return the result.



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

The screenshot shows the "Service" tab selected in the navigation bar. The main content area is titled "Configuration" and includes tabs for "Details" and "Summary". The "Summary" tab is active, displaying the following text:

```

Terraform used the selected providers to generate the following execution
plan. Resource actions are indicated with the following symbols:
+ create

Terraform will perform the following actions:

# azurerm_cosmosdb_account.account-name will be created
+ resource "azurerm_cosmosdb_account" "account-name" {
    + access_key_metadata_writes_enabled      = true
    + analytical_storage_enabled              = false
    + connection_strings                    = (sensitive value)
    + create_mode                           = (known after apply)
}

```

At the bottom right of the summary section are "Back" and "Apply" buttons.

*Figura 357 – Service configuration
summary*

Click "Apply" to validate the flow and start the automatic configuration operations.

The dashboard page will open with the list of all subscribed services and their relative statuses.

Specifically, the newly provisioned service will have a "Running" status in yellow, and subsequently, depending on the result, the status will also be updated to "Completed" in green or "Error" in red.

The dashboard shows a list of services. The table has the following columns: UUID, Received Time, Sent Time, Created by, Status, Output Message, Output Files, State, and Type. The services listed are:

| UUID | Received Time | Sent Time | Created by | Status | Output Message | Output Files | State | Type |
|------------------------|-------------------|-------------------|---------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|---------|
| DSQblikPQuq0UVjDJRNQJQ | 6/23/23, 12:23 PM | 6/23/23, 12:22 PM | cmp_admin (cmp_admin@email.com) | ✖ | ✉ | ⬇ | ✖ | SERVICE |
| VJwINV74QF23OS0pn9FJyA | 4/13/23, 10:32 AM | 4/13/23, 10:25 AM | cmp_admin (cmp_admin@email.com) | ✓ | ✉ | ⬇ | ✓ | VM |
| YB6bDobKxukQCP40VuA1g | 1/30/23, 12:29 PM | 1/30/23, 12:27 PM | cmp_admin (cmp_admin@email.com) | ✓ | ✉ | ⬇ | ✓ | VM |

*Figura 358 – Dashboard with the list of
all subscribed services and their relative*



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

statuses

11.0.3.2.3 "AZURE PIPELINE" SERVICES

Click the "Subscribe" button corresponding to an "Azure Pipeline" service. The user will be redirected to step 1 of the service creation page. From the dropdown in the center of the page, select the "Branch" of the pipeline to execute.

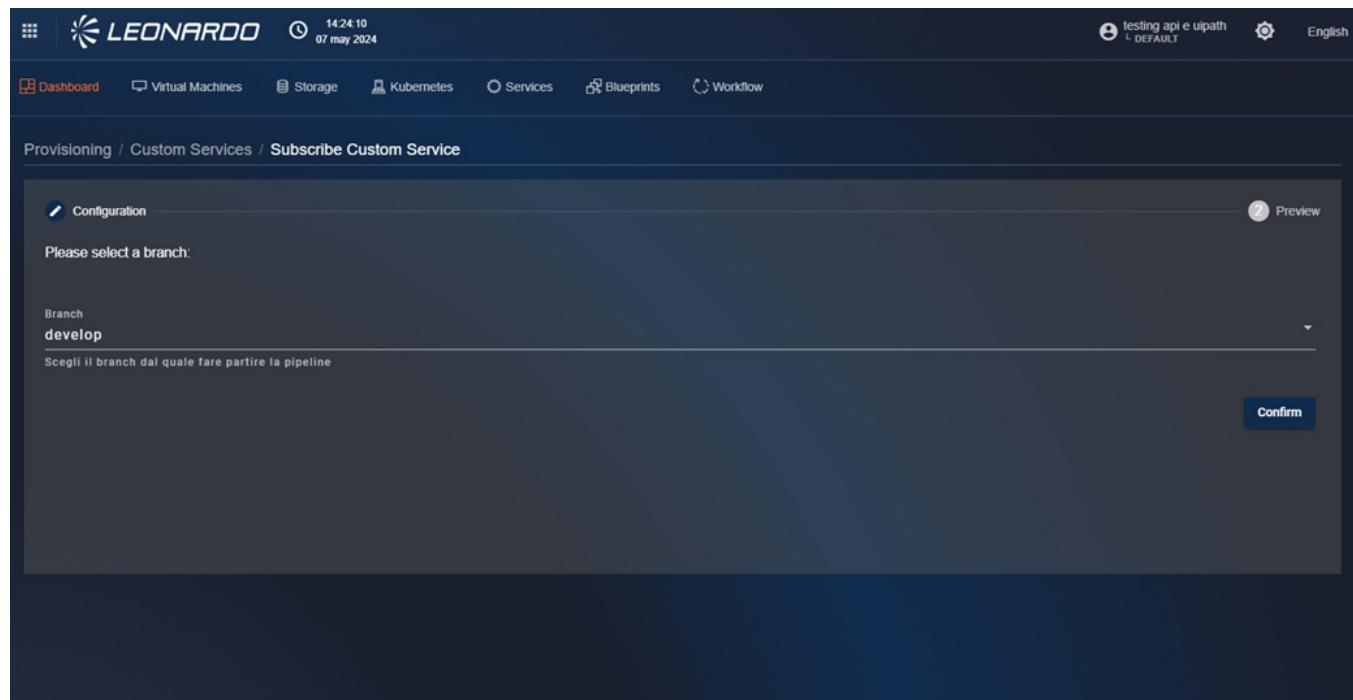


Figura 359 – Provisioning of an "Azure pipeline" service

By selecting the branch, the page updates to proceed to step 2 of service creation.

In this step 2, it will be necessary to fill out the form with the configuration parameters retrieved directly from the Pipeline that will be executed.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

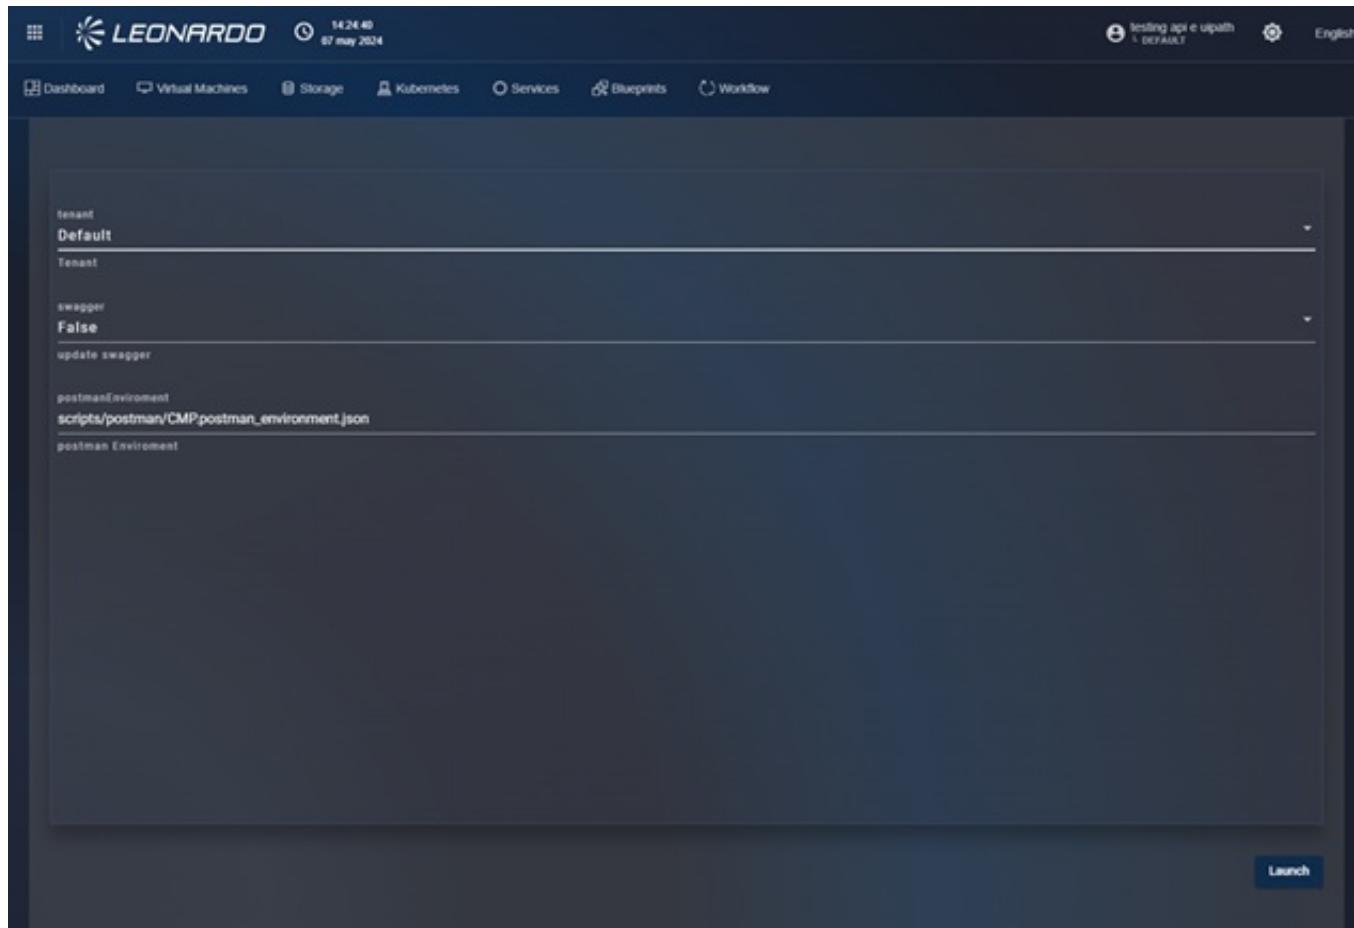


Figura 360 – Configuration of an "Azure pipeline" service

After completing all the form fields, click "Launch" to send the pipeline start request. The dashboard page will open with the list of all subscribed services and their relative statuses.

Specifically, the newly provisioned service will have a "Running" status in yellow, and subsequently, depending on the result, the status will also be updated to "Completed" in green or "Error" in red.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed dashboard with a top navigation bar featuring the Leonardo logo, the date (23 June 2023), time (4:23:56 pm), user (cmp_admin), and language (English). Below the navigation is a horizontal menu with links: Dashboard (highlighted in orange), Virtual Machines, Storage, Kubernetes, Service, Custom Service, AI Service, PaaS, and Blueprints. A search bar labeled 'Search by provisioning type' with the value 'Services' is present. A filtering section shows 'Filtering by: PROVISIONING TYPE Services'. The main content area displays a table of service subscriptions:

| UUID | Received Time | Sent Time | Created by | Status | Output Message | Output Files | State | Type |
|------------------------|-------------------|-------------------|---------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|---------|
| DSQblikPQuq0UVjDJRNQJQ | 6/23/23, 12:23 PM | 6/23/23, 12:22 PM | cmp_admin (cmp_admin@email.com) | X | ☒ | ⬇ | ☰ | SERVICE |
| VJwINV74QF23OS0pn9FJyA | 4/13/23, 10:32 AM | 4/13/23, 10:25 AM | cmp_admin (cmp_admin@email.com) | ✓ | ☒ | ⬇ | ☰ | VM |
| YB6bDobKQxukQCP40VUa1g | 1/30/23, 12:29 PM | 1/30/23, 12:27 PM | cmp_admin (cmp_admin@email.com) | ✓ | ☒ | ⬇ | ☰ | VM |

Figura 361 – Dashboard with the list of all subscribed services and their relative statuses

11.0.3.2.4 "PAAS" AND "AI SERVICES"

Click the "Subscribe" button corresponding to a "PaaS" service. The user will be redirected to step 1 of the service creation page where it will be necessary to fill out the form with the specific configuration parameters of the selected service.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed web interface for provisioning a PaaS service. At the top, there's a header with the Leonardo logo, the date '07 may 2024', and a user profile. Below the header, a navigation bar includes links for Dashboard, Virtual Machines, Storage, Kubernetes, Services, Blueprints, and Workflow. The main content area shows a breadcrumb trail: Provisioning / PaaS Services / Subscribe PaaS Service. A step indicator '1 Configuration' is shown. The configuration form contains the following fields:

- method: POST (Http Method)
- endpoint: http://nuvolaris.apps.clu02.paas-psn.priv:80/api/v1/web/nuvolaris/workflow/wfm (Endpoint)
- REPLICAS: 1

Figura 362 – Configuration of a "PaaS" service

After completing all the form fields, click "Launch".

The dashboard page will open with the list of all subscribed services and their relative statuses.

Specifically, the newly provisioned service will have a "Running" status in yellow, and subsequently, depending on the result, the status will also be updated to "Completed" in green or "Error" in red.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed dashboard with the Leonardo logo at the top. The top navigation bar includes links for Dashboard, Virtual Machines, Storage, Kubernetes, Service, Custom Service, AI Service, PaaS, and Blueprints. On the left, there's a sidebar with a 'Filtering by' dropdown set to 'PROVISIONING TYPE Services'. Below it is a search bar with 'Services' selected. The main area displays a table of service subscriptions:

| UUID | Received Time | Sent Time | Created by | Status | Output Message | Output Files | State | Type |
|------------------------|-------------------|-------------------|---------------------------------|-------------------------------------|-------------------------------------|--------------------------------------|-------------------------------------|---------|
| DSQblikPQuq0UVjDJRNQJQ | 6/23/23, 12:23 PM | 6/23/23, 12:22 PM | cmp_admin (cmp_admin@email.com) | X | ☒ | ⬇️ | ☰ | SERVICE |
| VJwINV74QF23OS0pn9FJyA | 4/13/23, 10:32 AM | 4/13/23, 10:25 AM | cmp_admin (cmp_admin@email.com) | ✓ | ☒ | ⬇️ | ☰ | VM |
| YB6bDobKQxukQCP40VUa1g | 1/30/23, 12:29 PM | 1/30/23, 12:27 PM | cmp_admin (cmp_admin@email.com) | ✓ | ☒ | ⬇️ | ☰ | VM |

Figura 363 – Dashboard with the list of all subscribed services and their relative statuses

11.0.3.2.5 "HELM" SERVICES

Click the "Subscribe" button corresponding to a "HELM" service. The user will be redirected to step 1 of the service creation page where it will be necessary to select the cluster on which to perform the provisioning.

The screenshot shows a configuration page for subscribing a custom service. At the top, it says 'Provisioning / Services / Subscribe Custom Service'. The 'Services' tab is active. The main form asks 'Please select the subsystem on which executing this operation:' and has a dropdown for 'Subsystem' set to 'MAE CMP'. Below it is another dropdown for 'Cluster'.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 364 – Cluster selection

Fill out the form with the specific configuration parameters of the selected service. Also, add the "values.yaml" file at the bottom, which contains all the configuration parameters necessary for the service.

The screenshot shows a dark-themed web interface for managing services. At the top, there's a navigation bar with links for Dashboard, Virtual Machines, Storage, Networking, Security, Kubernetes, Services (which is highlighted in orange), Blueprints, and Workflow. Below the navigation, a breadcrumb trail indicates the user is in 'Provisioning / Services / Subscribe Custom Service'. The main area is titled 'Configuration' and shows a section for 'Deploy on: CMP-DEV3'. It includes fields for 'Release Name' and 'Release Namespace', both currently empty. There's also a large text input area with a placeholder 'Click here to upload a file' where a 'values.yaml' file would be uploaded. The overall layout is clean and modern, typical of enterprise management tools.

Figura 365 – Configuration of "HELM" parameters

After completing all the form fields, click "Launch".

The dashboard page will open with the list of all subscribed services and their relative statuses.

Specifically, the newly provisioned service will have a "Running" status in yellow, and subsequently, depending on the result, the status will also be updated to "Completed" in green or "Error" in red.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed dashboard with the Leonardo logo at the top. The top navigation bar includes links for Dashboard, Virtual Machines, Storage, Kubernetes, Service, Custom Service, AI Service, PaaS, and Blueprints. On the left, there's a sidebar with a 'Filtering by' dropdown set to 'PROVISIONING TYPE Services'. Below it is a search bar with the placeholder 'Search by provisioning type Services'. The main content area displays a table of service details:

| UUID | Received Time | Sent Time | Created by | Status | Output Message | Output Files | State | Type |
|------------------------|-------------------|-------------------|---------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|---------|
| DSQblikPQuq0UVjDJRNQJQ | 6/23/23, 12:23 PM | 6/23/23, 12:22 PM | cmp_admin (cmp_admin@email.com) | X | ☒ | ⬇ | ☰ | SERVICE |
| VJwINv74QF23OS0pn9FJyA | 4/13/23, 10:32 AM | 4/13/23, 10:25 AM | cmp_admin (cmp_admin@email.com) | ✓ | ☒ | ⬇ | ☰ | VM |
| YB6bDobKQxukQCP40VUa1g | 1/30/23, 12:29 PM | 1/30/23, 12:27 PM | cmp_admin (cmp_admin@email.com) | ✓ | ☒ | ⬇ | ☰ | VM |

Figura 366 – Dashboard with the list of all subscribed services and their relative statuses

11.0.3.2.6 "IMMUTABLE" HELM SERVICES

If the "immutable" flag was selected for the HELM service during creation, the user is not given the option to view and modify the service information, thus allowing for a "one-Click" installation. Once "subscribe" is selected, the system automatically begins provisioning and returns the user to the dashboard page to monitor the results.

This screenshot is identical to Figura 366, showing the same dashboard layout and service list. The table data is as follows:

| UUID | Received Time | Sent Time | Created by | Status | Output Message | Output Files | State | Type |
|------------------------|-------------------|-------------------|---------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|---------|
| DSQblikPQuq0UVjDJRNQJQ | 6/23/23, 12:23 PM | 6/23/23, 12:22 PM | cmp_admin (cmp_admin@email.com) | X | ☒ | ⬇ | ☰ | SERVICE |
| VJwINv74QF23OS0pn9FJyA | 4/13/23, 10:32 AM | 4/13/23, 10:25 AM | cmp_admin (cmp_admin@email.com) | ✓ | ☒ | ⬇ | ☰ | VM |
| YB6bDobKQxukQCP40VUa1g | 1/30/23, 12:29 PM | 1/30/23, 12:27 PM | cmp_admin (cmp_admin@email.com) | ✓ | ☒ | ⬇ | ☰ | VM |

Figura 367 – Dashboard with the list of all subscribed services and their relative

statuses

11.0.3.3 Provisioning of "Edge" device images

To access the "Edge" provisioning page, click on the tab of the same name in the top menu.

After doing this, we will be taken to the "Edge" page of the provisioning module.

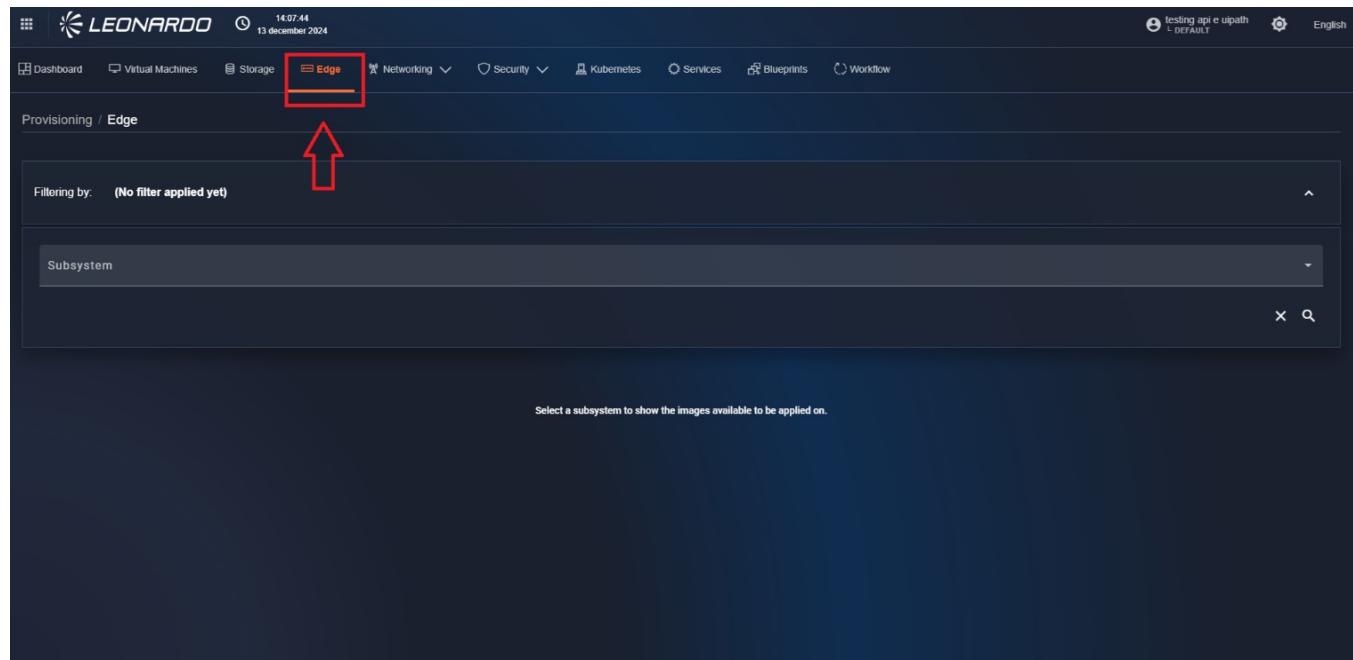


Figura 368 – Access to Edge provisioning

At first glance, the page may appear empty, but by selecting a configured EDGE subsystem from the "Subsystem" filter, all available images in the subsystem will be displayed below.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. The top navigation bar includes links for Dashboard, Virtual Machines, Storage, Edge (which is highlighted in red), Networking, Security, Kubernetes, Services, Blueprints, and Workflow. The timestamp in the top right corner is 09:38:40, 16 December 2024. The user is logged in as cmp_admin with a default role. The language is set to English. The main content area is titled 'Provisioning / Edge'. A filtering bar at the top left says 'Filtering by: SUBSYSTEM EdgeRHEL'. Below it, a dropdown menu shows 'Subsystem' and 'EdgeRHEL'. On the left, a sidebar lists 'Available Images' with several options: -EdgeMonitoring_v1, -Test_v1, -pensaEdgeTest01_v1, -thinkedge_v1, rhel9/x86_64/edge-EdgeMonitoring_v2, rhel9/x86_64/edge-pensaEdgeTest01_v10, and rhel9/x86_64/edge-pensaEdgeTest01_v11.

Figura 369 – Images available in the system

By selecting one of the available images, a section will open on the right that allows selecting a compatible inventory machine from the list.

After selecting a machine, we can confirm the operation using the "Apply" button.

We will be returned to the "dashboard" section of the "Provisioning" module where we can view the outcome of the operations.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform's Edge provisioning interface. At the top, there's a navigation bar with tabs for Dashboard, Virtual Machines, Storage, Edge (which is active), Networking, Security, Kubernetes, Services, Blueprints, and Workflow. Below the navigation is a breadcrumb trail: Provisioning / Edge. A filtering bar shows 'SUBSYSTEM EdgeRHEL'. The main area is titled 'Available Images' and lists several RHEL images: rhel/9/x86_64/edge-pensaEdgeTest01_v2, rhel/9/x86_64/edge-pensaEdgeTest01_v20, rhel/9/x86_64/edge-pensaEdgeTest01_v21, rhel/9/x86_64/edge-pensaEdgeTest01_v3, rhel/9/x86_64/edge-pensaEdgeTest01_v7, rhel/9/x86_64/edge-pensaEdgeTest01_v8, and rhel/9/x86_64/edge-pensaEdgeTest01_v9. One image, 'rhel/9/x86_64/edge-pensaEdgeTest01_v21', is highlighted. To its right, a section titled 'Select one or more devices to apply the image to:' shows a dropdown menu set to 'Device rheledge01'. At the bottom right of this section is a large red 'Apply' button.

Figura 370 – Confirmation of "Edge" provisioning

11.0.3.4 Creation of a "Blueprint" provisioning request

To access the services page, click on the "blueprint" tab in the top menu. After doing this, you will find yourself on the "Blueprints" page.

On the page, a list of components called "Card" is displayed. Each card refers to a specific type of service; in particular, the following information is displayed:

- Service name.
- Service icon.
- Type of script used for service provisioning.
- Service description.
- "Subscribe" button to proceed with service creation.

Depending on the blueprint selected, the parameters for provisioning change, while the functionalities remain unchanged.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows the Leonardo Secure Cloud Management Platform interface. At the top, there's a navigation bar with tabs for Dashboard, Virtual Machines, Storage, Kubernetes, Services (which is highlighted with an orange box), Blueprints (which is also highlighted with an orange box), and Workflow. Below the navigation bar, the page title is "Provisioning / Services". On the left, there's a sidebar with a "Filter by text" input field and a "Categories" section containing a list of service types like AI & Machine Learning, Analytics, Application Runtime, Big Data, Blockchain, Cloud Provider, Compute, Containers, Database, and DevOps. The main content area displays a grid of blueprints. One blueprint, "Text Analytics / NLP", has a yellow arrow pointing to its "Subscribe" button. Other visible blueprints include PaaS - Nginx, Audio Analytics, Azure Resource Group, Redis DB, Subscription Alias Full Parameters PSN, Echo String, and Kafka. Each blueprint card includes a brief description and a "Subscribe" button.

Figura 371 – List of blueprints

11.0.3.4.1 "BLUEPRINT" EXECUTION REQUEST

Click the "Subscribe" button corresponding to a "Blueprint". The user will be redirected to step 1 of the creation page. In this step, it is necessary to select the subsystem in which provisioning is to be performed from the dropdown.

The screenshot shows the "Subscribe Blueprint" creation page. The top navigation bar has tabs for Dashboard, Virtual Machines, Storage, Kubernetes, Services, Blueprints (selected and highlighted with an orange underline), and Workflow. The page title is "Provisioning / Blueprints / Subscribe Blueprint". The main content area contains the following text: "Fill out the following steps in order to deploy the blueprint". Step 1: "Select a subsystem" with a dropdown menu showing "Subsystem * OpenShift Default". Step 2: "Fill out your parameters". Step 3: "Start provisioning".



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Figura 372 – Step 1 of Blueprint creation

By selecting a subsystem, the page will move to step 2 of creation where it will be necessary to fill out the form with the specific configuration parameters of the selected blueprint.

Fill out the following steps in order to deploy the blueprint.

1 Select a subsystem

2 Fill out your parameters

k_node_count *

3

Numero di nodi

k_node_size *

Standard_DS2_v2

Dimensione dei nodi

helm_release_name *

Nome della release helm

helm_chart *

Nome della chart helm

helm_chart_version *

Versione della chart helm

k_cluster_name *

kubernetes-cluster

Nome del cluster Kubernetes

helm_repository *

Figura 373 – Step 2 of "Blueprint" creation

Once the parameters have been entered, you can click the "Start" button at the bottom right to initiate provisioning. After a few seconds, you will be redirected to the "Dashboard" page, filtered for "Blueprints to be completed".




Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

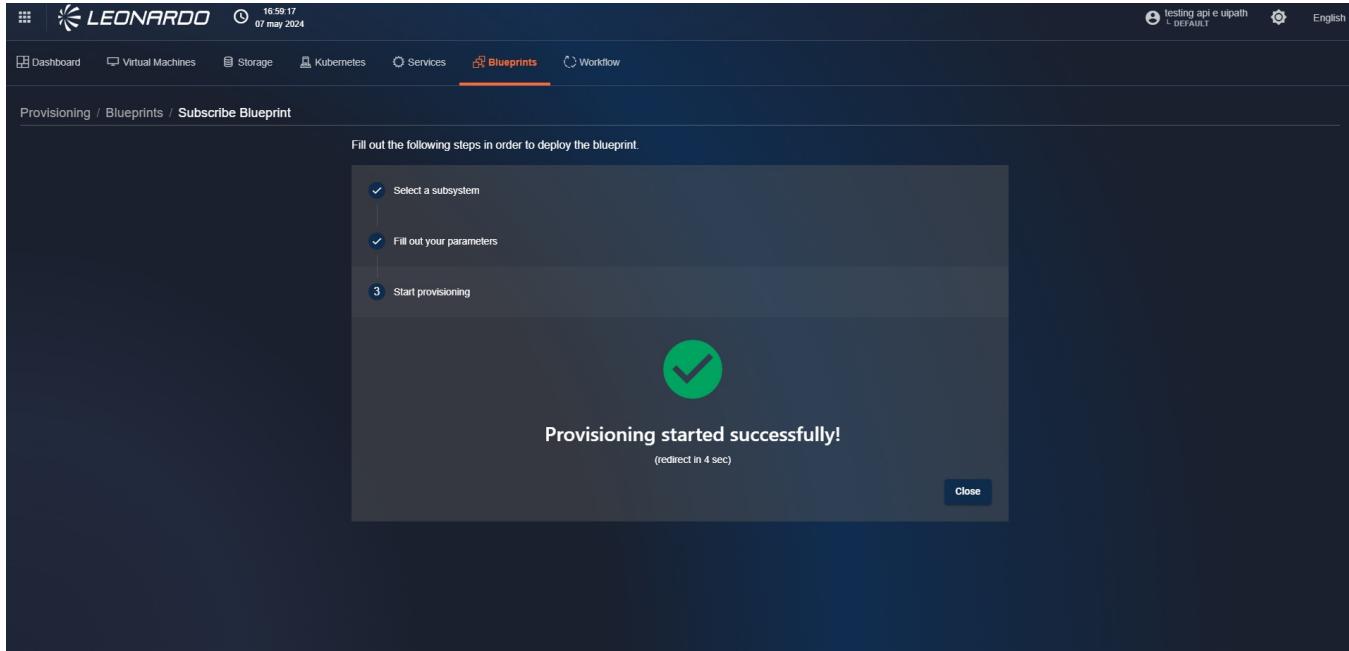

*Figura 374 – Blueprint Request sent
successfully*

11.0.3.4.2 "TO BE COMPLETED" BLUEPRINT MANAGEMENT PAGE

To work on the blueprint, it is necessary to select a "to be completed" blueprint from the dashboard. Clicking on the corresponding row will display its management page.

This page is divided into sections, specifically:

- "Process Diagram": This section displays an image that graphically represents all the steps to be executed in the blueprint. Additionally, the step currently in execution is indicated in red.
- "Variables": In this section, we can view all parameters entered manually or automatically during the blueprint execution.
- "Task": In this section, it is possible to manage the blueprint steps that require manual intervention using the available controls.
- "Subprocess": In this section, we can view the status of all automatic operations performed during the blueprint execution.

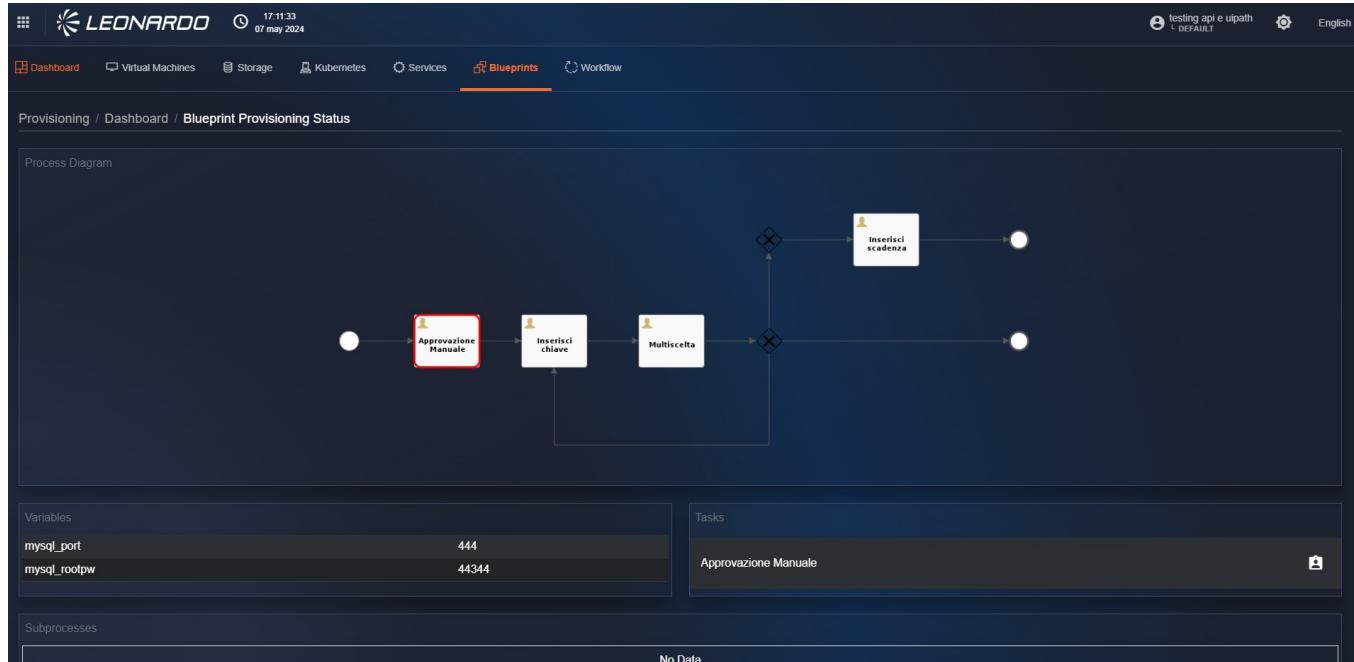


Figura 375 – Provisioning plan flow

The execution, and therefore the corresponding change, between the Blueprint steps can be carried out in two ways: automatically or manually, exactly as described within the Blueprint itself.

11.0.3.4.2.1 Automatic steps

The system automatically manages the creation, configuration of resources, and deployment of applications. The status and result of these steps are visible in the "Subprocess" section below.

For each row in the table, by clicking the buttons on the right, it is possible to verify the generated output message and download its content.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| subnet_name | virtual_machine_name | virtual_network_name | vm_computer_name | vm_size |
|-------------|----------------------|----------------------|------------------|-----------------|
| subnet | docker-vm | vnet | docker-vm | Standard_DS1_v2 |
| | | | | |
| | | | | |
| | | | | |

| Name | Received Time | Sent Time | Status | Engine | Actions |
|---|---------------------|---------------------|--------|--------|---------|
| Blueprint: 65d7199b5685f7c7a2563d3 process: 668e0f67-f670-11ee-b54c-3e32eeff42d95 | 09/04/2024 12:56:26 | 09/04/2024 14:55:11 | ✓ | A | |
| Blueprint: 65d7199b5685f7c7a2563d3 process: 45be1896-f670-11ee-b54c-3e32eeff42d95 | 09/04/2024 12:55:11 | 09/04/2024 14:54:16 | ✓ | B | |

*Figura 376 – Blueprint subprocesses
section*

11.0.3.4.2.2 Manual steps

Manual tasks, when present and required in the blueprint, will appear in the relevant section. To work on it, it is first necessary to click the "Assign" button (red in the figure) to take charge of the task.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

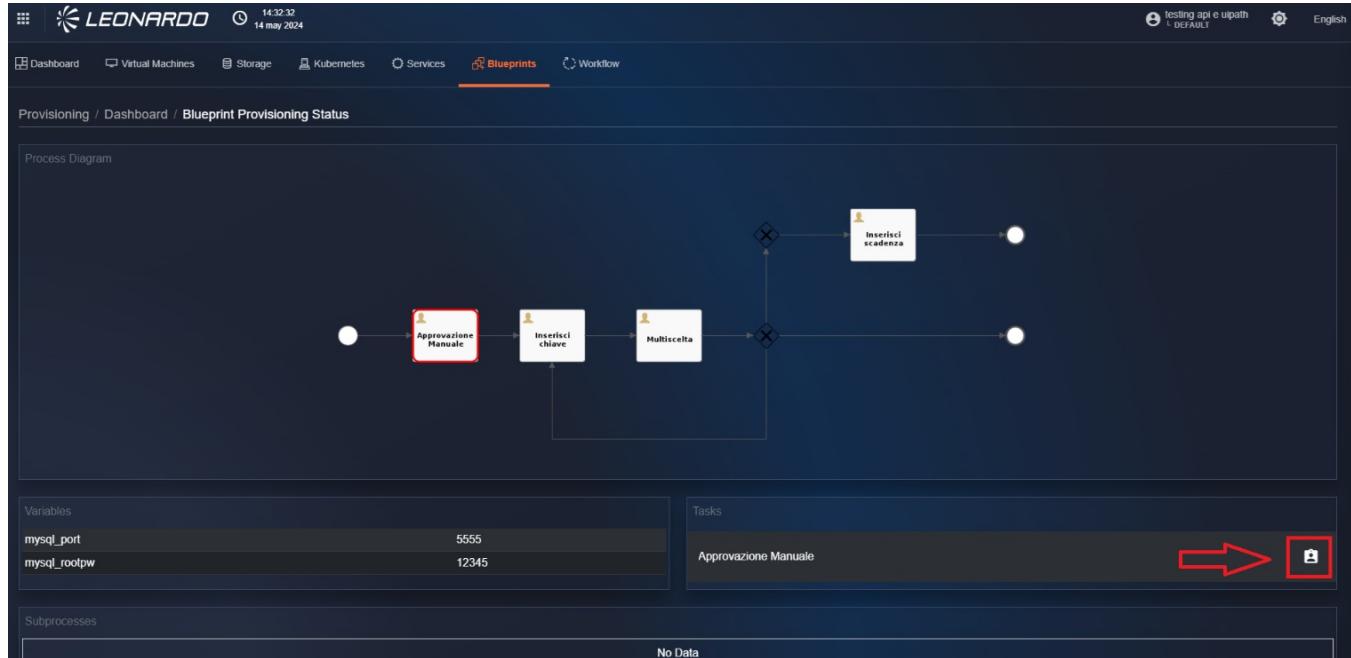


Figura 377 – Task assignment to the user

A confirmation modal for assignment will be displayed. By clicking "Yes", the task will be taken over by the user and cannot be worked on by a different user.

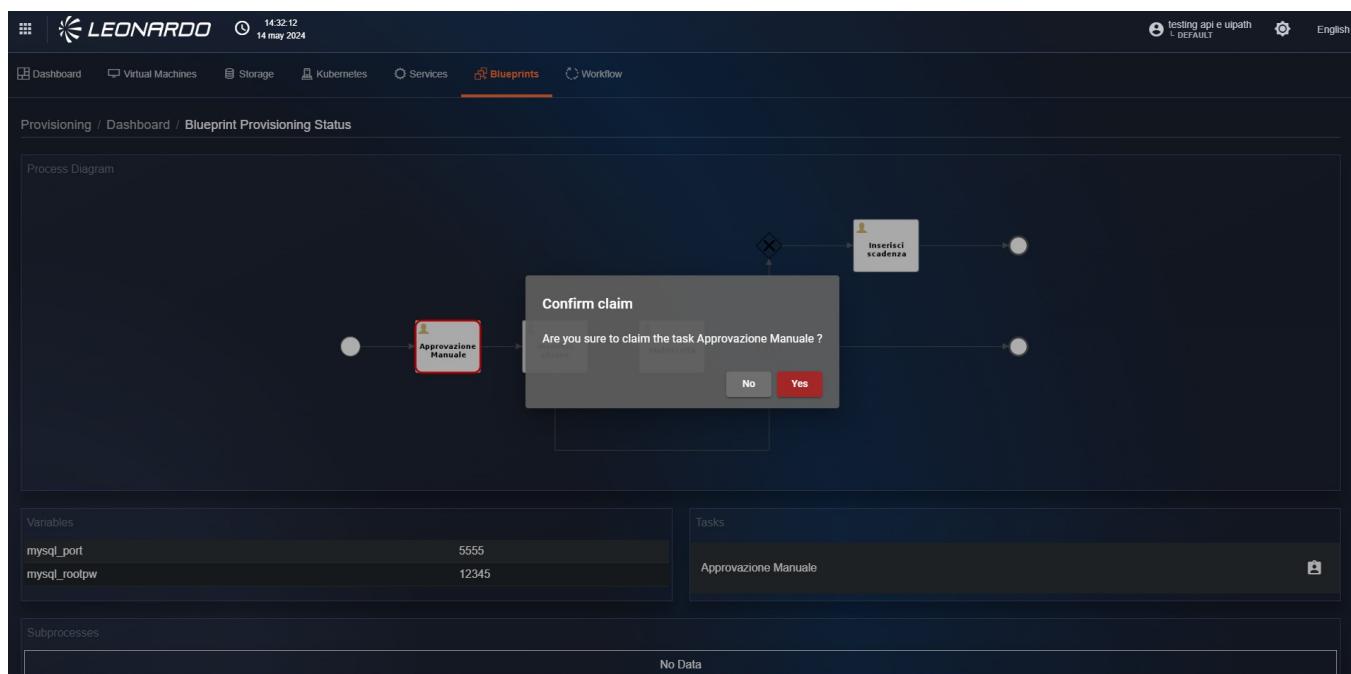


Figura 378 – Assignment confirmation

A confirmation message will appear at the bottom, and we can note that the "Task" section has been updated. On the left, below the task name, the relevant assignee is indicated, and on the right, there are 2 buttons:

- "Remove assignment" (red in the figure).
- "Complete manual task" (yellow in the figure).

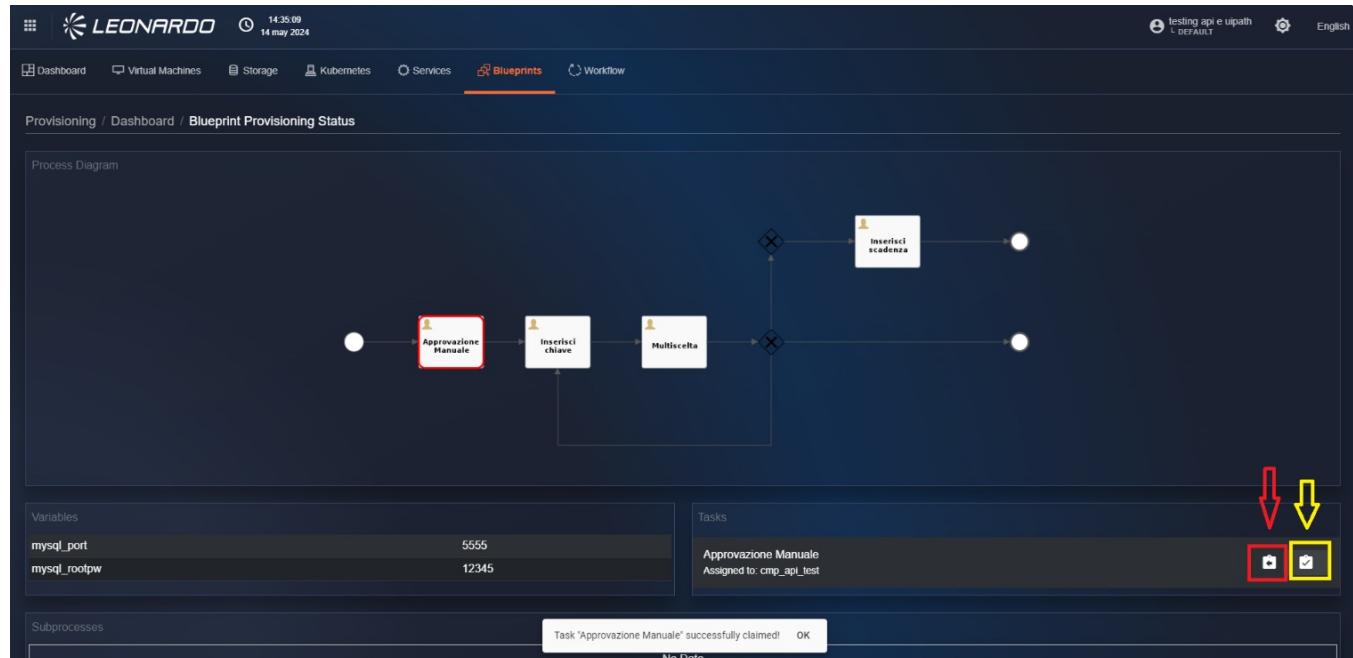


Figura 379 – Task management buttons

Clicking "Remove assignment" will open a confirmation modal. Clicking "Yes" will make the task available to other users who can take charge of it.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

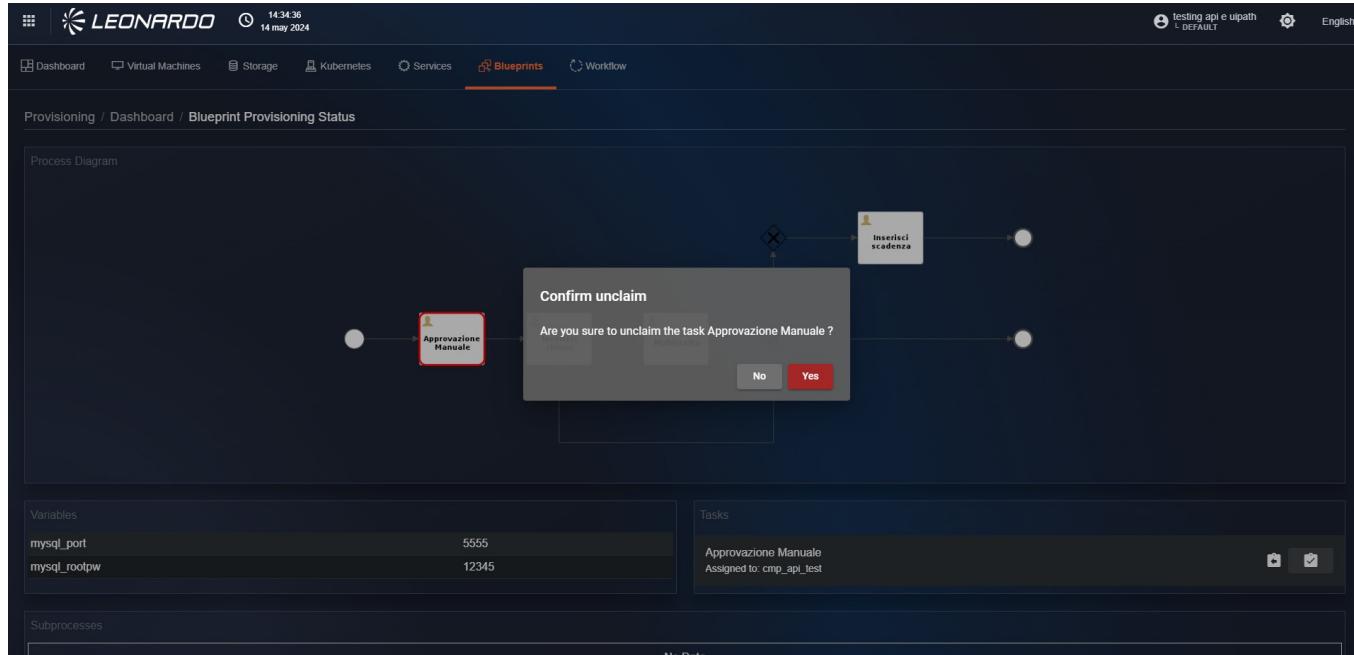


Figura 380 – Task release

Clicking the "Complete task" button will open a modal containing one or more customizable fields. The fields can be of different types.

We can enter numeric, boolean, and text fields. Once entered, it is possible to confirm by clicking the "Continue" button at the bottom right.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

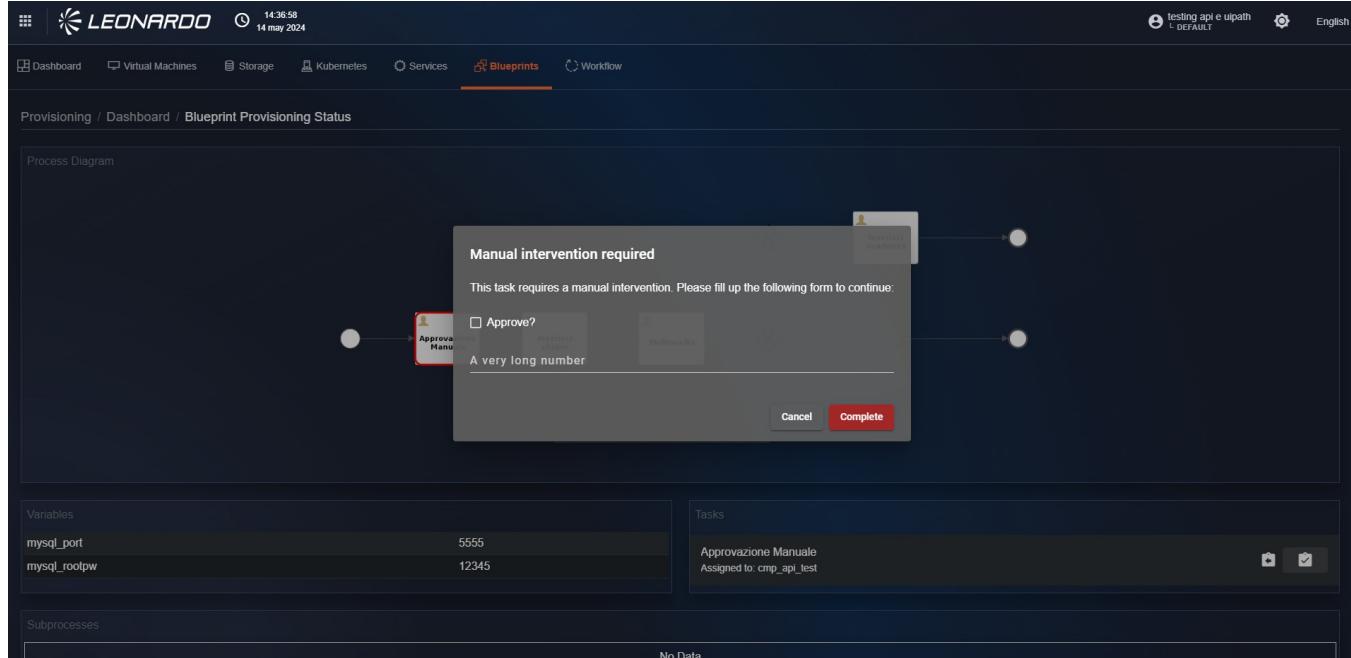


Figura 381 – Numeric fields of blueprints

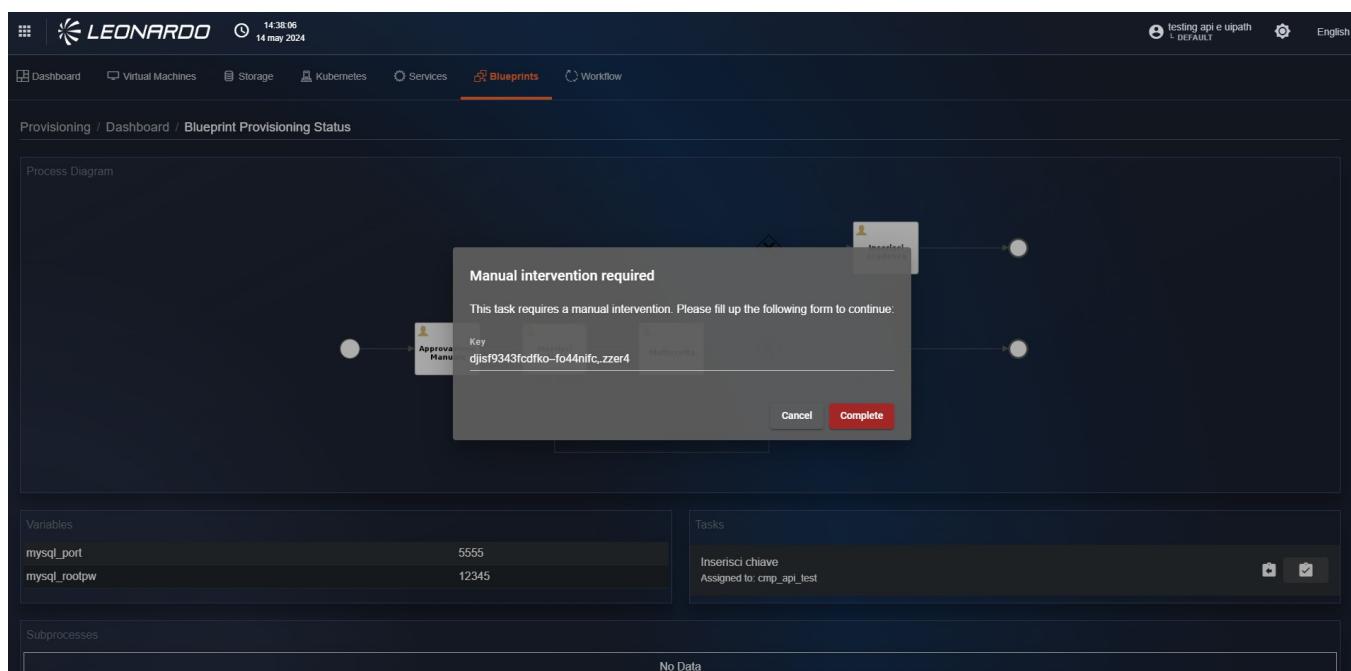


Figura 382 – Text fields in Blueprints

Once pressed, we can see that the BPMN graph on the page has been updated and that the next step of the blueprint is active and has a red outline.

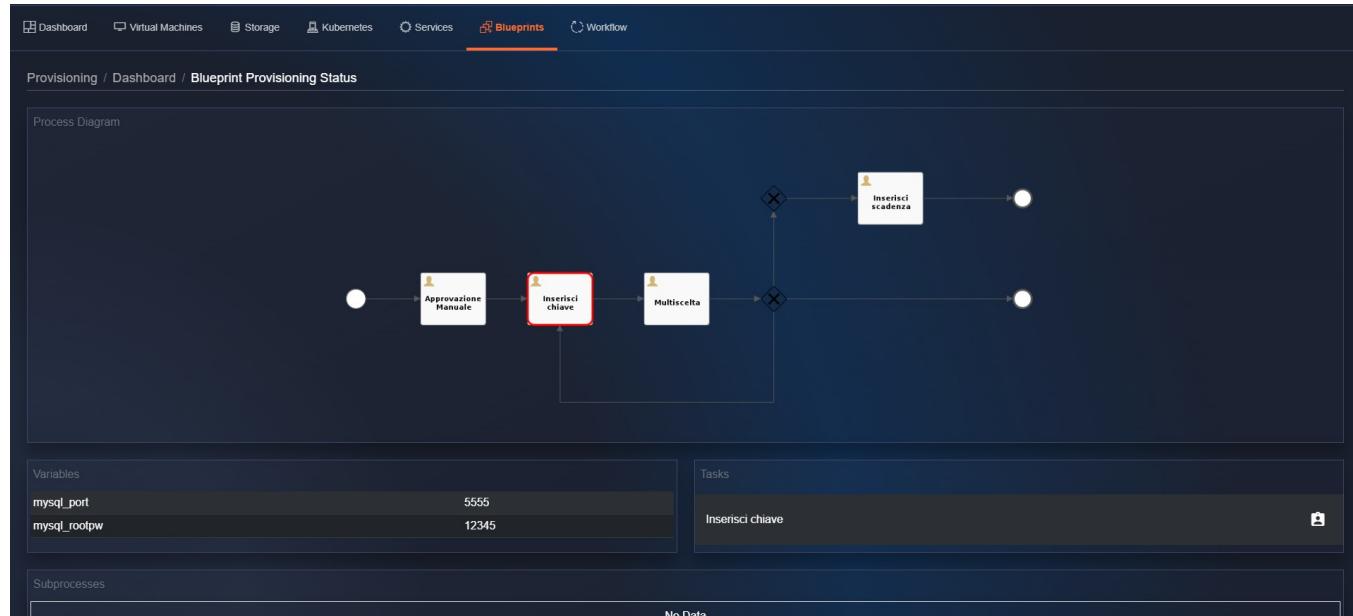


Figura 383 – Next step

All manual tasks present in the blueprint will follow the procedure described previously; therefore, regardless of the type of data to be entered, it is always necessary to assign the task to oneself.

It is possible to insert a temporal field within the manual steps of blueprints, using a calendar it will be possible to manually select the correct day and time.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

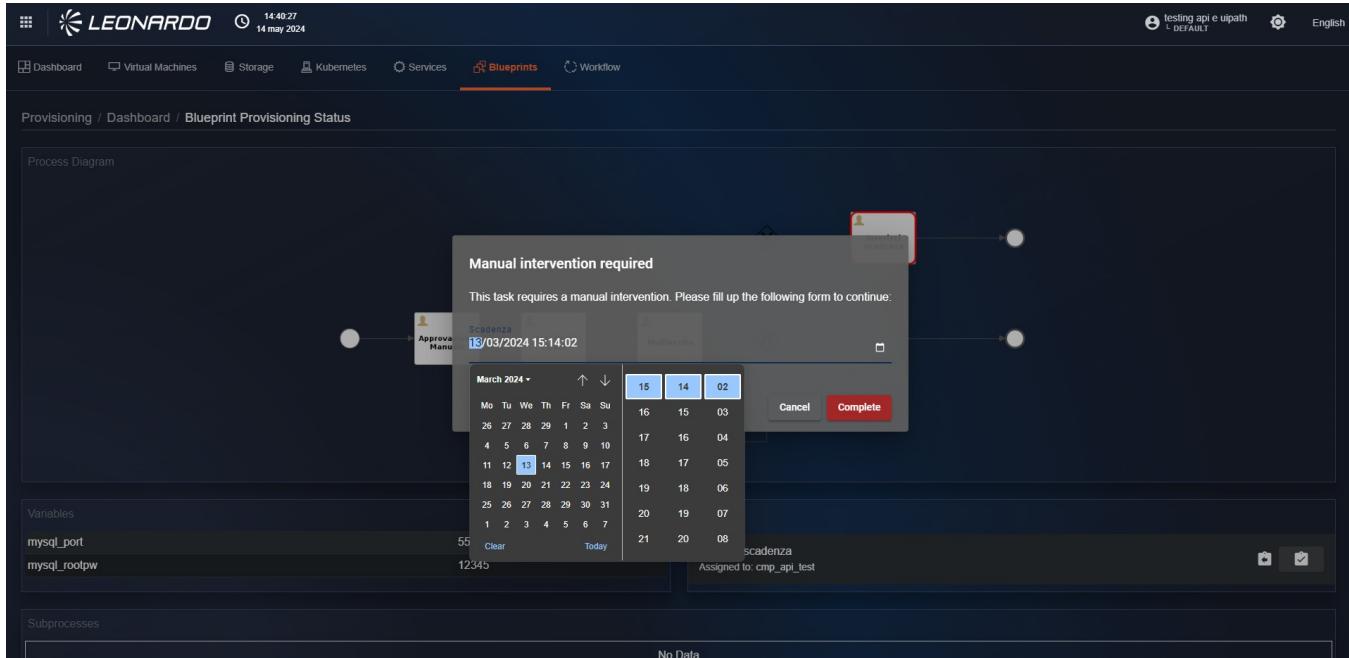


Figura 384 – Date field in tasks

The last type of step that we can find within the blueprints is the "Multi-choice" field. This field allows managing the blueprint's flow.

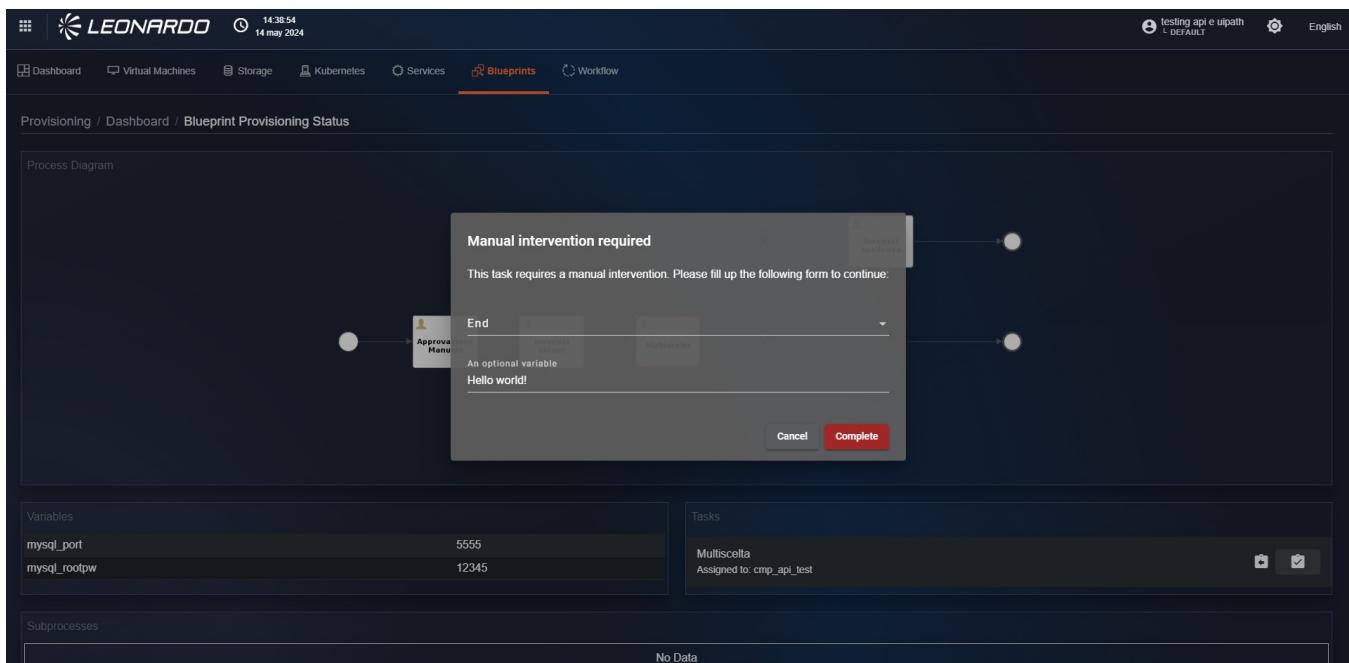


Figura 385 – Multi-choice field

This field is of "Selection" type, so it will not be possible to enter a custom value, but selectable options will be proposed. Specifically, we can find three choices:

- "Repeat": allows re-executing the previous steps as described in the blueprint (path in pink in the figure).
- "End": allows concluding the blueprint execution without performing further operations (path in yellow in the figure).
- "Insert date": allows moving to a subsequent step of the blueprint (path in green in the figure).

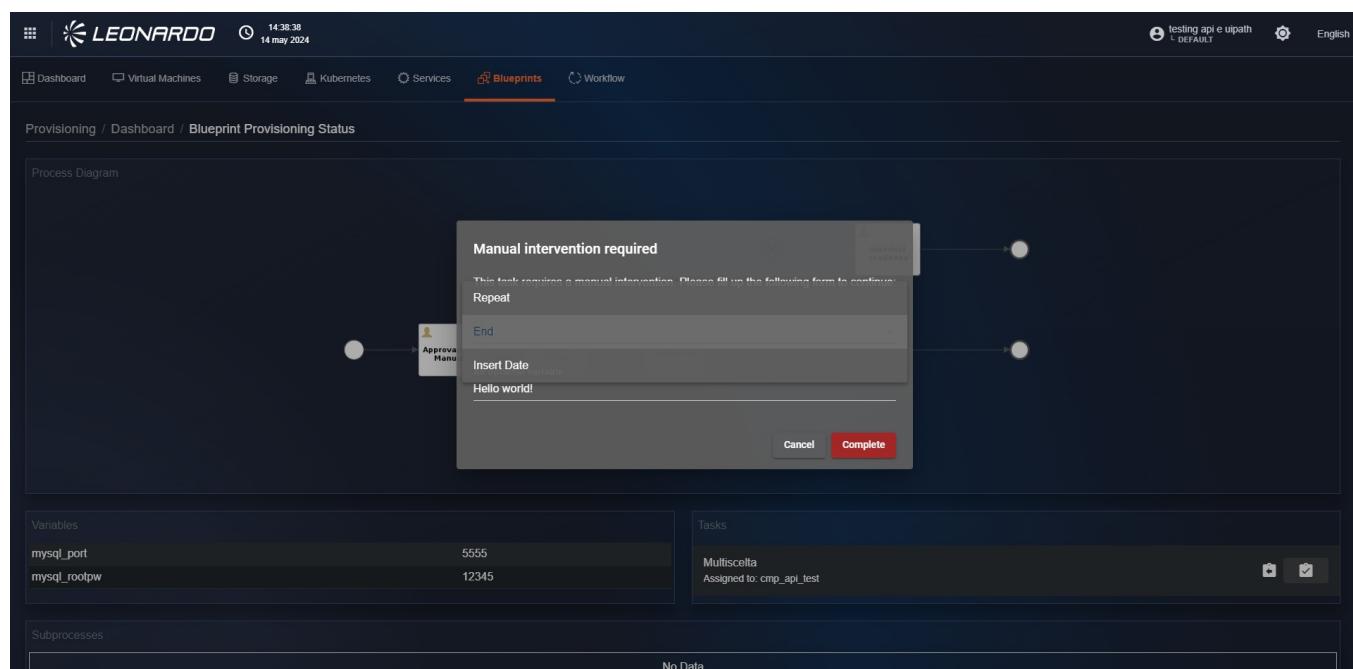


Figura 386 – Multi-choice field values

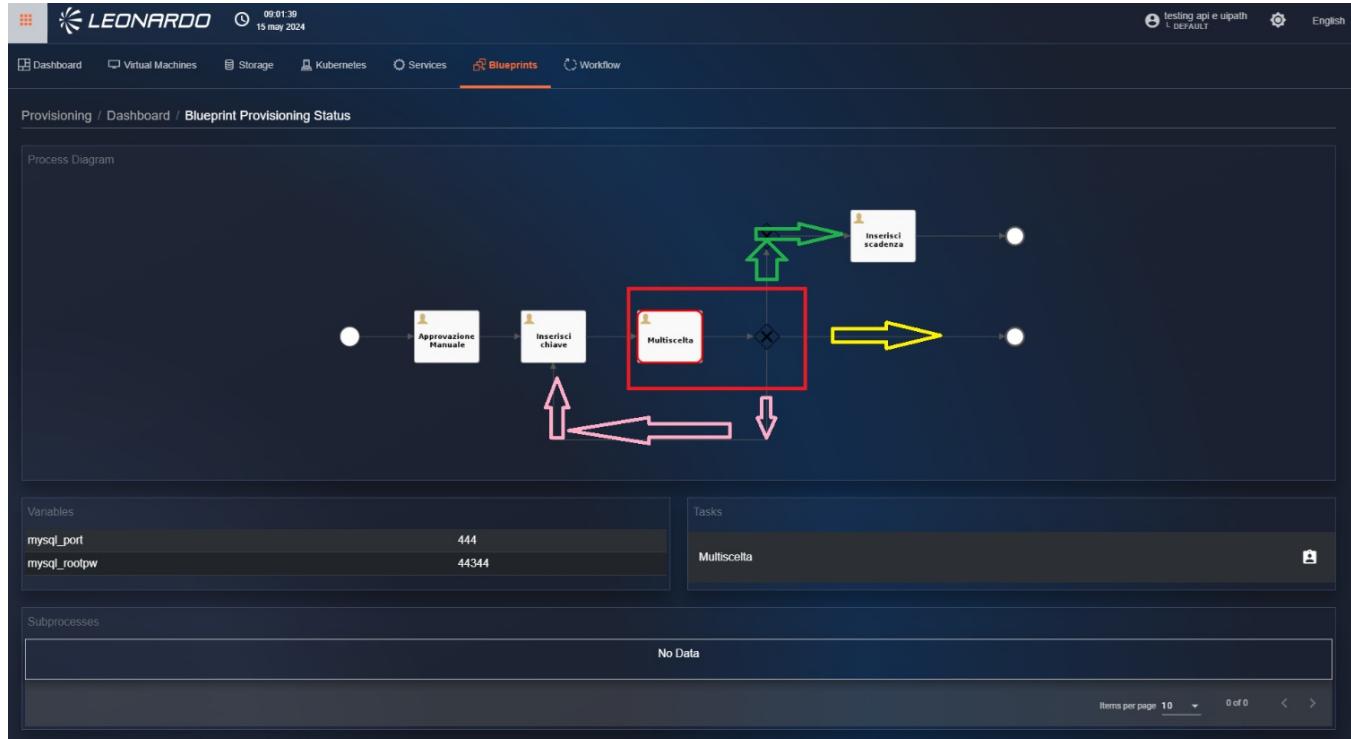


Figura 387 – Possible state changes for
Multi-choice

Once all blueprint steps are completed, the graph will be automatically removed from the page, and in the step section, it will no longer be possible to take charge of an operation. Furthermore, in the "sub-processes" section, we will be able to view the result of all automated steps in the blueprint.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a dark-themed web interface for managing cloud resources. At the top, there's a navigation bar with icons for Dashboard, Virtual Machines, Storage, Kubernetes, Services, **Blueprints** (which is highlighted in orange), and Workflow. Below the navigation, the URL is shown as Provisioning / Dashboard / Blueprint Provisioning Status. On the left, there's a sidebar with sections for Variables and Subprocesses. The Variables section contains two entries: mysql_port with value 5555 and mysql_rootpw with value 12345. The Subprocesses section says 'No Data'. To the right, there's a large panel titled 'Tasks' which displays the message 'No task currently available.' At the bottom right of the main content area, there are buttons for 'Items per page' (set to 10), 'Close', and navigation arrows.

Figura 388 – Blueprint completion

11.0.3.5 Modification of a performed provisioning

For a provisioning that has been carried out and has failed, it is possible to modify it.

Provisioning modification is only available for resource types.

To start modifying a provisioning, click on a failed forecast.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| UUID | Received Time | Sent Time | Created by | Status | Success | Output Message | State | Type |
|------------------------|--------------------|--------------------|---------------------------------|-----------|---------|----------------|-------|------|
| OH6yw9_oQxqUo7Dlc42g | 12/2/22, 3:22 PM | 12/2/22, 3:21 PM | cmp_admin (cmp_admin@email.com) | Completed | ✓ | | | VM |
| zMPHlaRr-mu6JZ21MuZA | 11/29/22, 10:51 AM | 11/29/22, 10:49 AM | cmp_admin (cmp_admin@email.com) | Completed | ✓ | | | VM |
| GplL7KWyTNS_tNbmslR8pQ | 11/29/22, 10:40 AM | 11/29/22, 10:39 AM | cmp_admin (cmp_admin@email.com) | Failed | ✗ | | | VM |
| p33VepWxTl6zB3YafpaHQ | 11/29/22, 10:37 AM | 11/29/22, 10:36 AM | cmp_admin (cmp_admin@email.com) | Failed | ✗ | | | VM |

Figura 389 – Start modification of a Provisioning

After doing so, you will find yourself on the "Config" page of step 2 where you can modify the previously entered parameters.

new virtual machine

Configuration Options

- Virtual Machine Name: VMsmall
- Resource Group: terraform
- Storage Type (Disk for OS): Standard LRS
- Storage Size (Disk for OS) GB: 50
- Image: WindowsServer-2019-Datacenter
- Assign Public Ip

Network

- Network: CMP-DEV3-VNET
- Subnet: workersubnet
- Create new network

Figura 390 – Configuration parameters



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a user interface for modifying parameters. At the top, there is a button labeled "Add storage". Below it, a section titled "User name for access" contains a text input field with "admin123" and a password input field with masked text. A "Tags" section is present below the password field. At the bottom of the screen are two buttons: "Reset" on the left and "Submit" on the right.

Figura 391 – Modification of parameters

After modifying the necessary parameters, at the bottom right, click the "Submit" button.

By doing so, you will find yourself on the "Plan" page of step 3, where the forecast is present, and below, the quote table.

At the bottom right, click the "Apply" button. After clicking the "Apply" button, you will find yourself on the "Dashboard" tab page.

Subsequently, from the "Dashboard" page, the user notes that the modification was successful.

It is also possible to modify a failed provisioning for other elements managed by SCMP.

The screenshot shows a provisioning summary page. At the top, there is a header with the Leonardo logo and a timestamp. Below the header, a navigation bar indicates the current location: Provisioning / Virtual Machines / 7LFHR5VDSVq0Gr9qcTJbEg / edit. The main content area displays a Terraform execution plan. It starts with a message about providers generating an execution plan and resource actions. Below this, it lists actions for creating a MongoDB resource. The actions include fields like admin_password, admin_username, allow_extension_operations, computer_name, disable_password_authentication, extensions_time_budget, id, location, max_bid_price, name, network_interface_ids, and patch_mode. At the bottom of the page, there is a "Costs" section with a table showing consumption and reservation details. The table has columns for Type, Amount, Unit, OS, Zone, Reservation Term, Description, Meter ID, and Tier Minimum Units. The data includes three rows: one for CONSUMPTION (€0.15, 1 Hour, LINUX), one for RESERVATION (€0.06, 3 Years, LINUX), and another for RESERVATION (€0.09, 1 Year, LINUX). At the very bottom, there are "Back" and "Apply" buttons.

Figura 392 – Provisioning summary and



Leonardo Cyber & Security Solutions


21 Nov 2025
08.00

Secure Cloud Management Platform

quote table

Backup and disaster recovery

The "Backup & Disaster Recovery" functionality allows the user to view an overview of the data available and configured in the CommVaults that have been correctly inserted into the "Administration" functionality. To access the functionality, it is necessary to click on the button available in the main menu. .

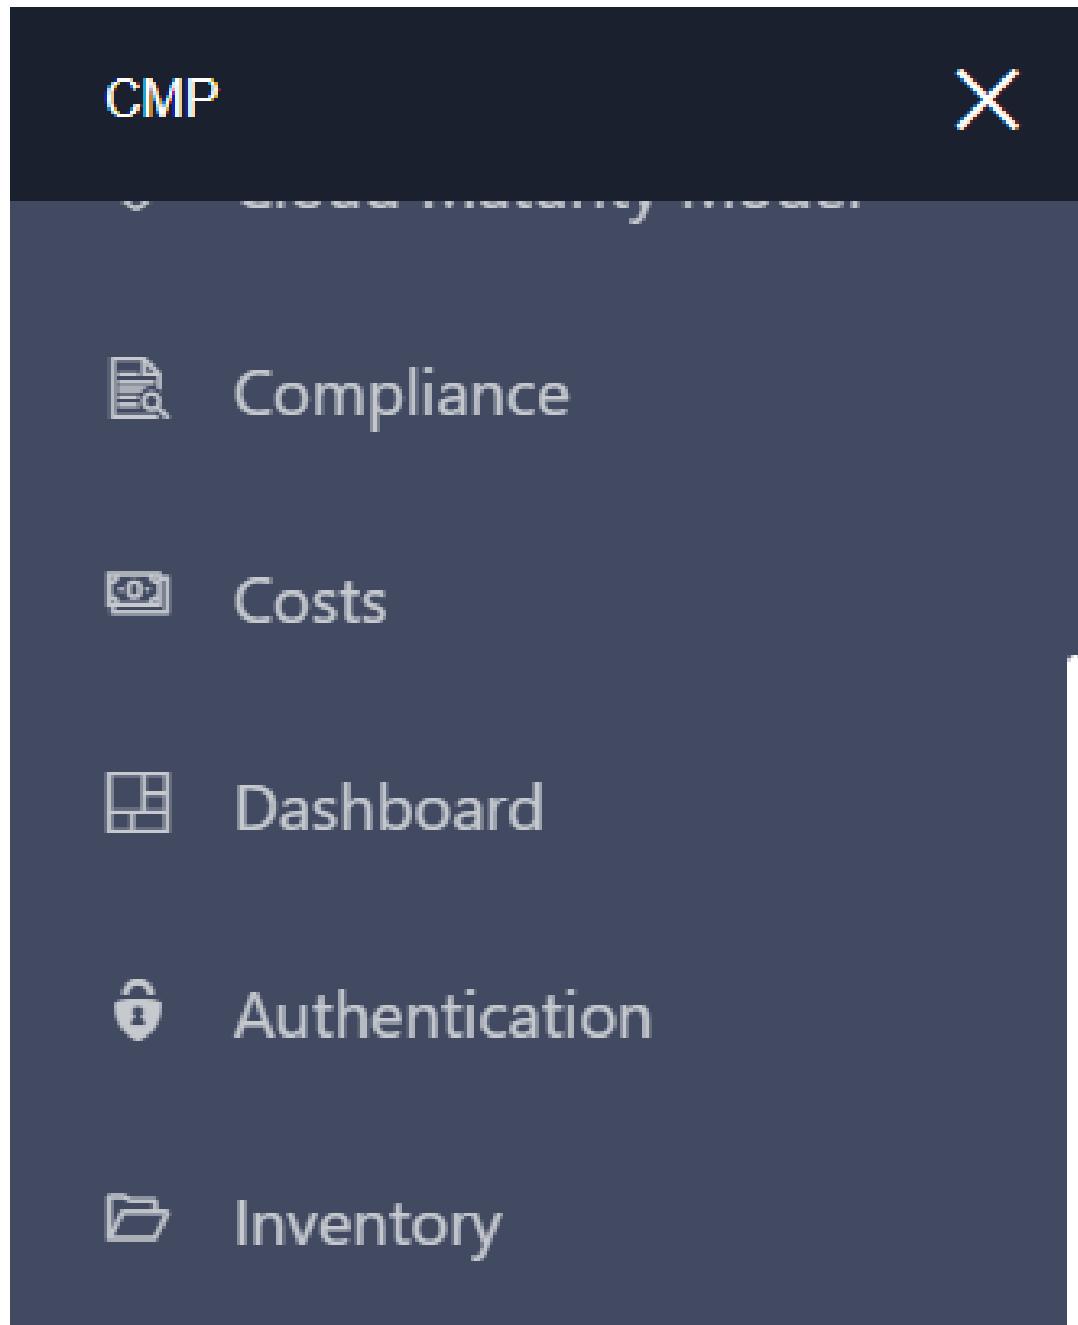

 Log And Audit

 Monitoring

 Provisioning

 Tool Risk

 Security

 Tenants

 Qualizer One View

 Backup & Disaster


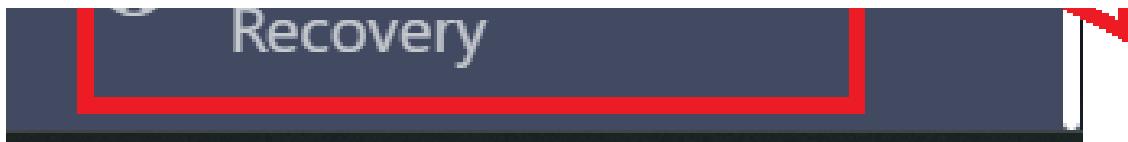


Figura 393 – Access to Backup & Disaster Recovery

Dashboard

The dashboard, divided into sections, offers a general overview of the content of the CommVaults; subsequently, to consult the details of each section, it is necessary to use the tabs at the top.

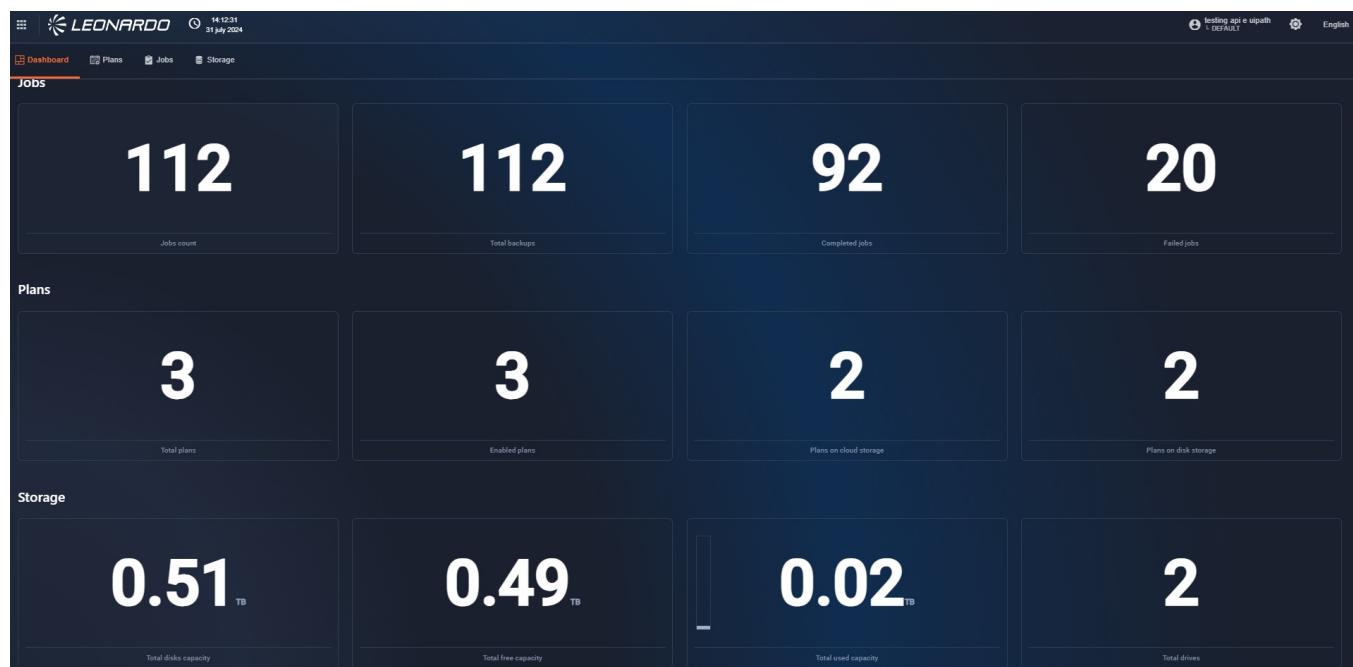

*Figura 394 – D.R. functionality
Dashboard*

Plans

The "Plans" page contains, in addition to a filter that allows selecting the CommVault for which we want to view the details, the list of configured plans.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Plan ID | Name | Type |
|---------|--------------------|--------|
| 1 | 1_settimana_disk | Server |
| 2 | 1_settimana_cloud | Server |
| 3 | 1_settimana_weekly | Server |

Figura 395 – List of plans

By clicking on an element of the table, which represents a "plan", a window with the details of the selected plan will be displayed; furthermore, by clicking on the name of the displayed storage, the user will be redirected to the storage details.

Figura 396 – Details of the Plans

Jobs

The "Jobs" page contains, in addition to a filter that allows selecting the CommVault for which we want to view the details, the list of results of the jobs performed by the CommVault.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

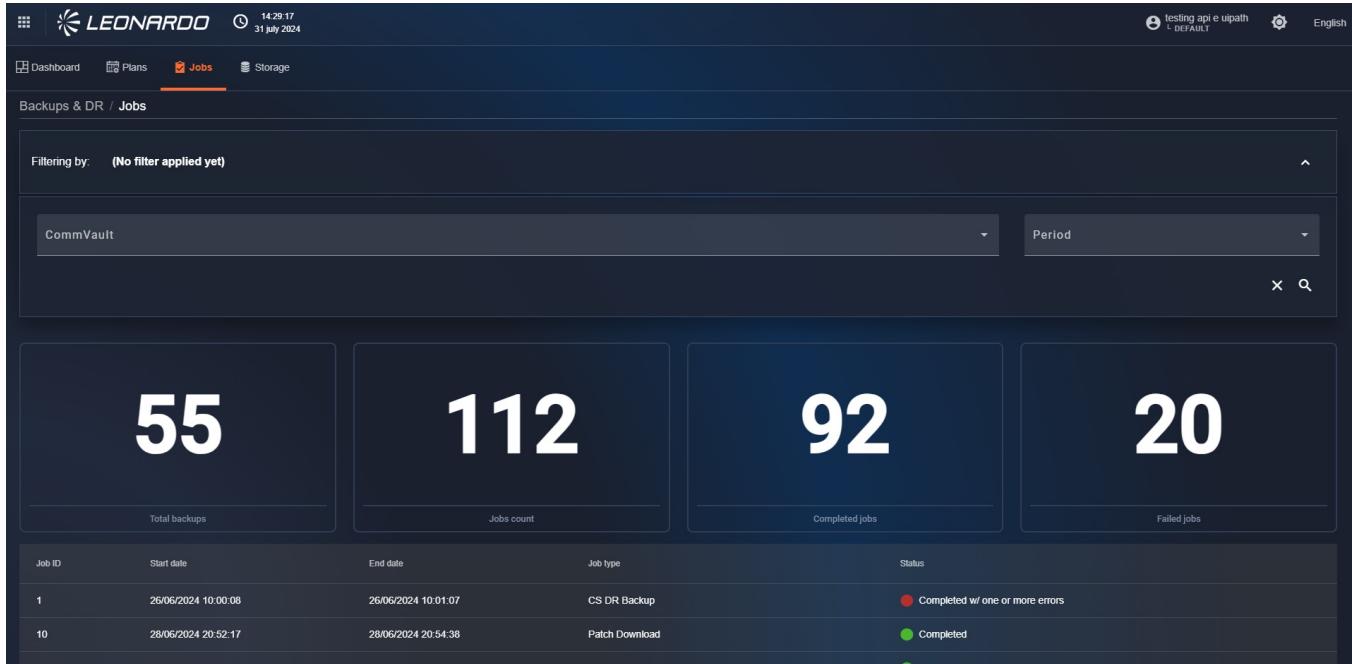


Figura 397 – List of Jobs performed

By clicking on an element of the table representing a "Job", a window with the details will be displayed.

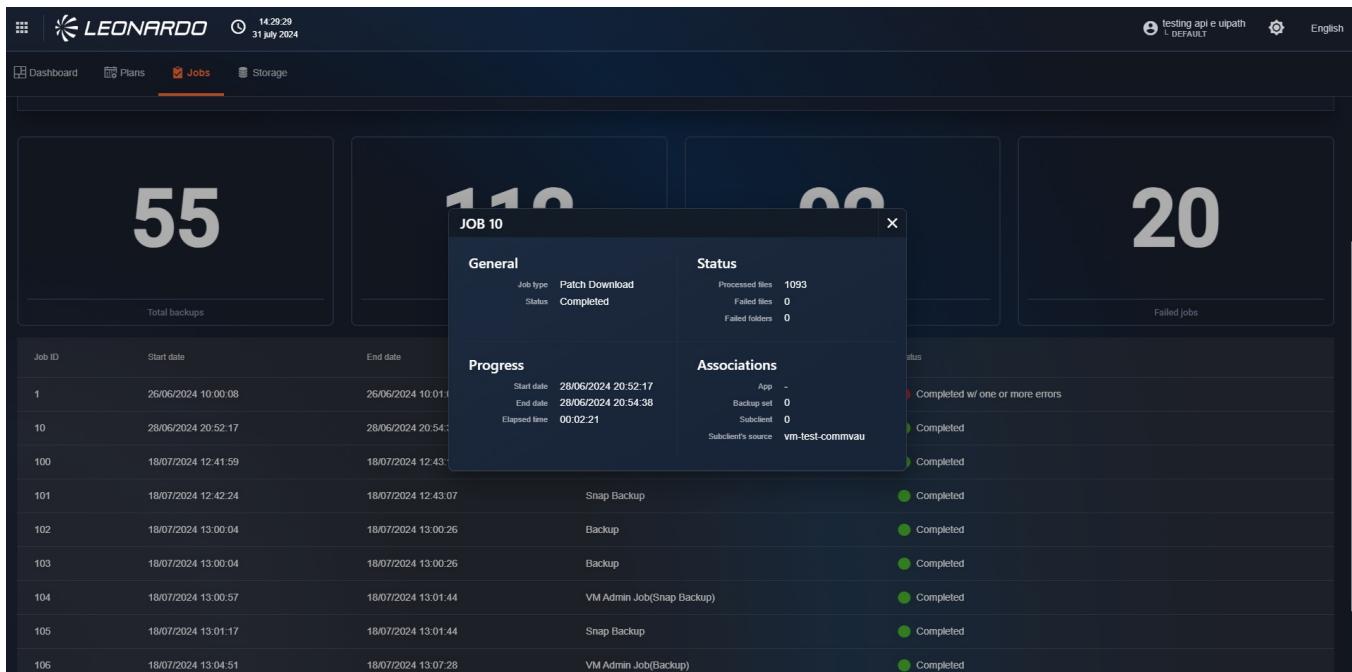


Figura 398 – Job Details



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

Storage

The "Storage" page contains, in addition to a filter that allows selecting the CommVault for which we want to view the details, the list and information on storage and their relative capacities.

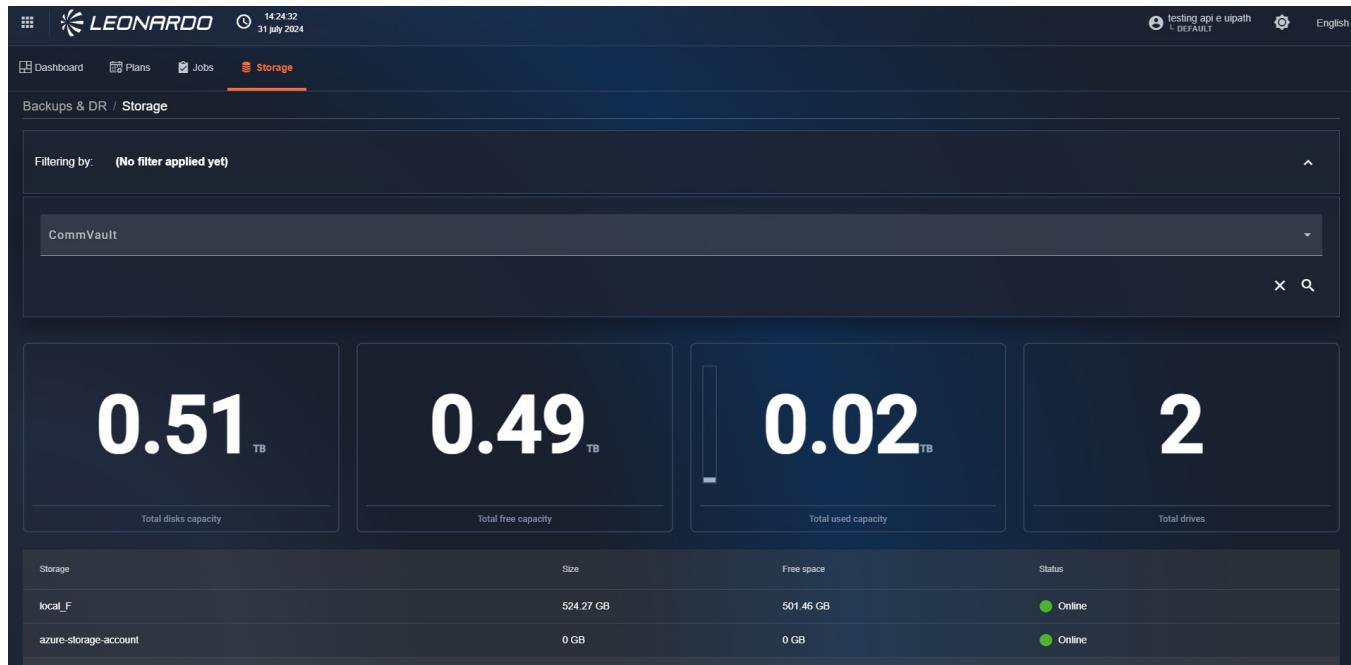


Figura 399 – List of available storage

By clicking on an element of the table, which represents a "storage", a window with the details will be displayed; furthermore, by clicking on the name of the displayed "plan", the user will be redirected to its details.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

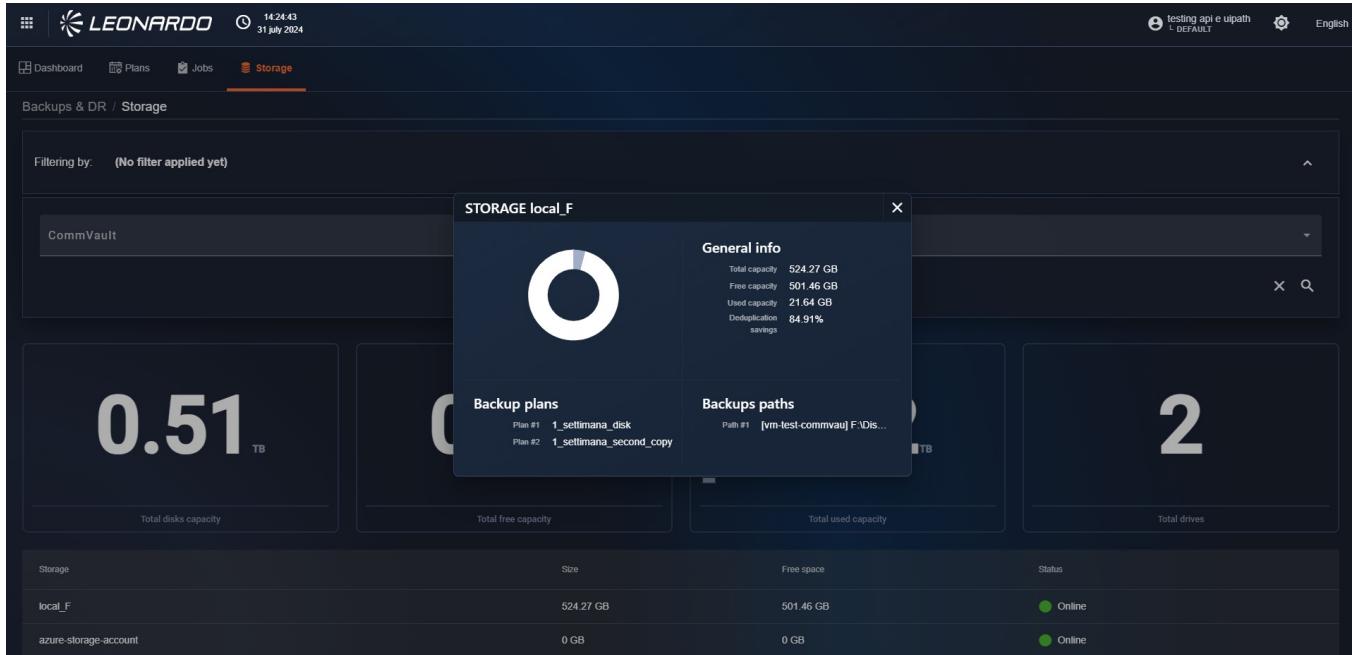


Figura 400 – Storage details

Shared Features

This section outlines some general behaviors.

Multilingual Support

The operator interface is available in two languages (English – Italian) and the operator can choose the language simply by selecting the text in the top left of the screen.

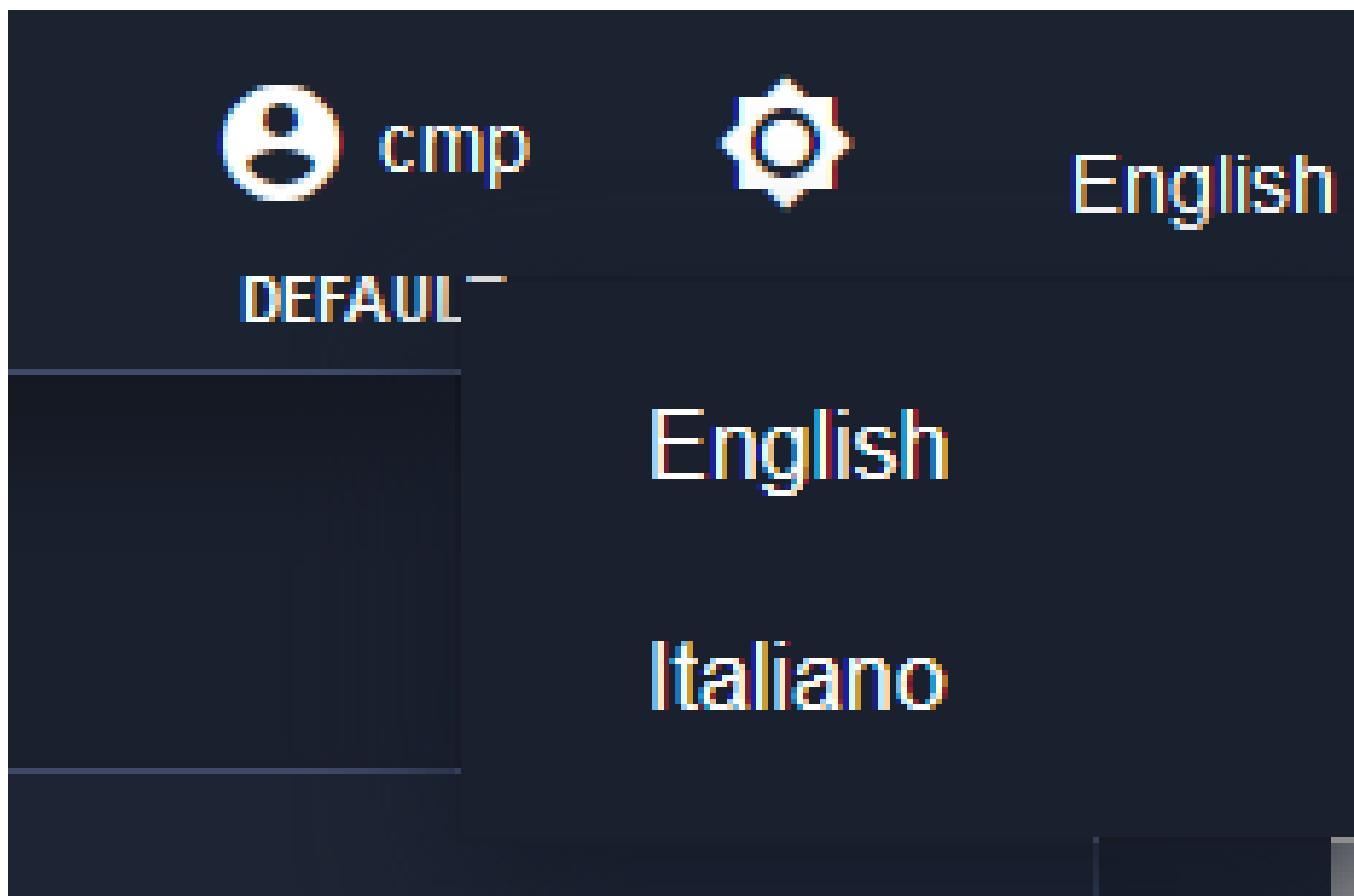


Figura 401 – Menu to change the language

Filter Reset



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

For the Monitoring, Costs, Inventory, Catalog, and Security functionalities, within the filters, it is possible to reset them and the lists by clicking on the button depicting an "X", located below the calendar filter.

The screenshot shows the Leonardo SCMP platform's monitoring dashboard. At the top, there's a header with the Leonardo logo, the date and time (5:01:59 pm, 12 september 2022), and user information (cmp, English). Below the header is a sidebar with various icons. The main content area has a title 'Monitoring / Dashboard / Virtual Machine'. It features a 'Filtering by:' section with dropdowns for 'DATE RANGE' (01/09/2022 - 12/09/2022), 'GRANULARITY' (30 Minutes), and 'TYPE VM'. There are also dropdowns for 'Provider', 'Subsystem', 'Resource', 'Metric Name', and a date range selector. A search bar with a magnifying glass icon is at the bottom right. A message at the bottom center says 'Please select Resource UUID and a Metric to show the chart!'

Figura 402 – Filter settings detail

Light mode

To activate light mode across the entire SCMP platform, in the top right of the menu bar, click on the button depicting the sun as shown below.

The screenshot shows the Leonardo SCMP platform in light mode. The overall theme is lighter, with white backgrounds and light-colored text. The top bar and sidebar icons are visible. The main content area shows an 'Inventory' section with a large circular chart labeled 'CMP' and a legend for 'STORAGE', 'VM', 'K8S', and 'NETWORK'. The number '575' is displayed in the center of the chart. An arrow points to the sun icon in the top right corner of the menu bar, which is used to switch between light and dark modes.



Leonardo Cyber & Security Solutions

21 Nov 2025
08.00

Secure Cloud Management Platform

Figura 403 – Activating light mode

To deactivate light mode, click on the button depicting the moon as shown in.

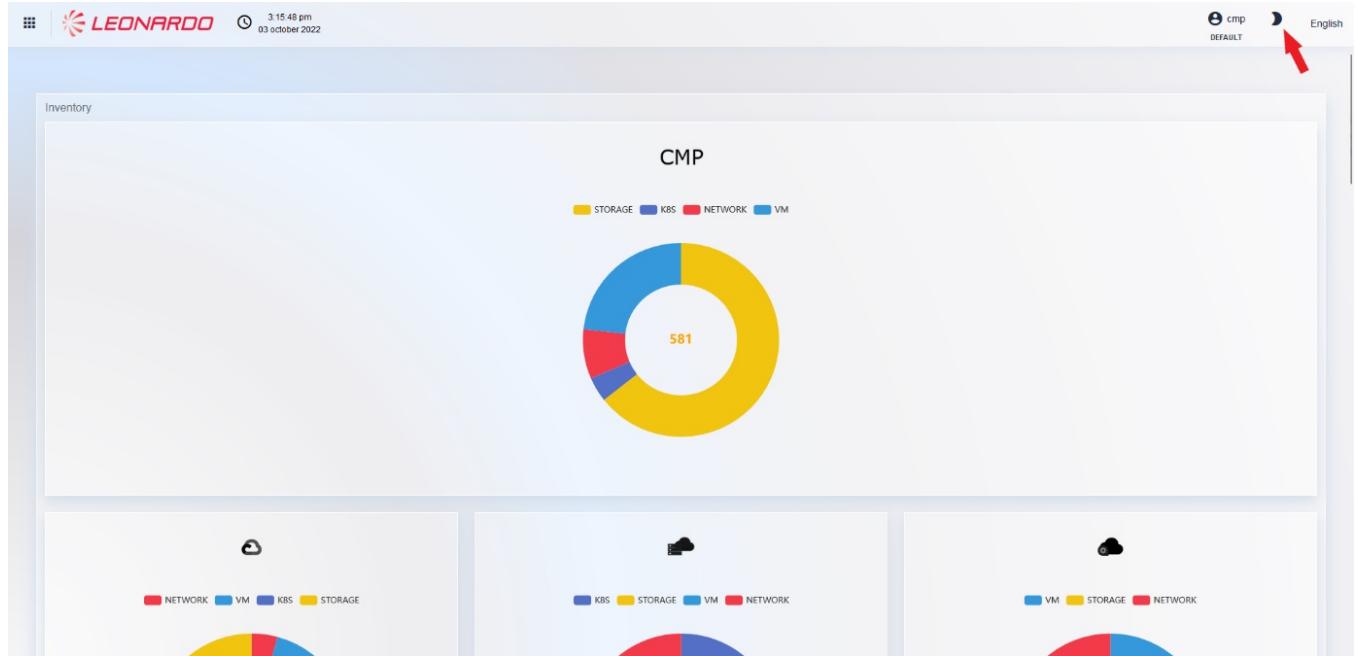


Figura 404 – Deactivating light mode

Switch Tenant

To switch from one Tenant to another, click on the button depicting a person icon. At this point, a dropdown menu appears where you need to click on "Switch Tenant".



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Name | Description | Creation Date | Status |
|-----------------|---------------|---------------------|--------|
| manual | only manual | 10/04/2024 08:09:07 | ✓ |
| name | dscr | 10/04/2024 09:45:36 | ✗ |
| myBlueprintName | description | 10/04/2024 09:46:13 | ? |
| isAnewName | descrizione32 | 10/04/2024 09:46:51 | |

Blueprint's archive upload success! OK

Figura 405 – Menu for Tenant switch

After clicking on “Switch Tenant”, a modal appears where you can select a Tenant to switch to. After selecting the desired Tenant, click on the “Confirm” button.

The system automatically verifies the tenant's enablement and existence before performing the switch.

After doing so, the page updates with the desired Tenant, where you can view all data belonging to it across all platform functionalities.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

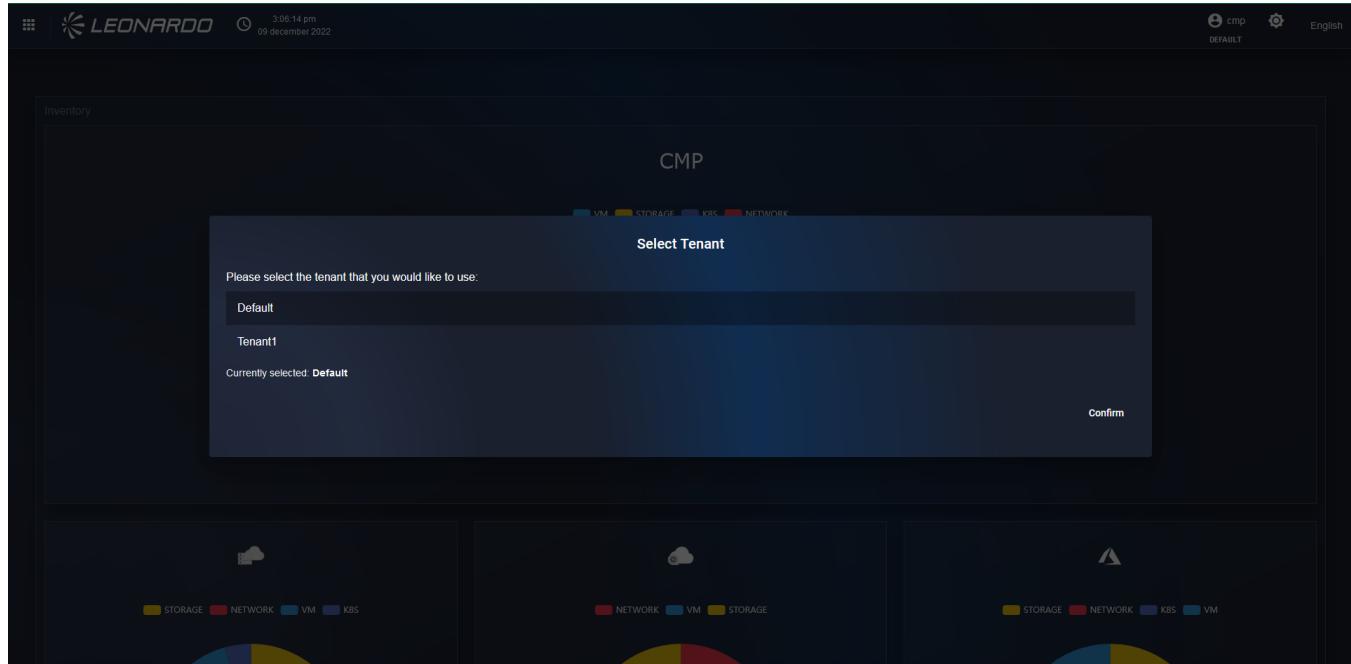


Figura 406 – Tenant Switch

Managing Columns in Available Tables

For the tables available in SCMP, the user has the ability to customize the column display in two ways:

- Modify the order of the displayed columns.
- Change the number of columns shown.

These preferences are saved within the system, using the user identifier and the current page as references.

To customize the display, it is necessary to click on the “filter columns” button, shown with a “funnel” icon, available in the top right section of the respective table.



21 Nov 2025

08.00

Leonardo Cyber & Security Solutions

Secure Cloud Management Platform

| Provider | Name | System | Size | Resource Group | Type | Creation Date | Confidential | Provisioned on | In Catalog |
|-------------------------------|------------|--------|------|-----------------------|------------|---------------|--------------|----------------|------------|
| 0-archive-ast11-tenant-pool-0 | Cluster 02 | - | - | PERSISTENTVOLUMECLAIM | 28/10/2024 | - | - | Cloud | ⋮ |
| 0-archive-pool-0 | Cluster 02 | - | - | PERSISTENTVOLUMECLAIM | 28/10/2024 | - | - | Cloud | ⋮ |
| 0-minio-archive-tenant-pool-0 | Cluster 02 | - | - | PERSISTENTVOLUMECLAIM | 28/10/2024 | - | - | Cloud | ⋮ |
| 0-minio-ast11-tenant-pool-0 | Cluster 02 | - | - | PERSISTENTVOLUMECLAIM | 28/10/2024 | - | - | Cloud | ⋮ |
| 0-minio-customer-tenant-p... | Cluster 02 | - | - | PERSISTENTVOLUMECLAIM | 28/10/2024 | - | - | Cloud | ⋮ |
| 0-minio-pool-0 | Cluster 02 | - | - | PERSISTENTVOLUMECLAIM | 28/10/2024 | - | - | Cloud | ⋮ |

A donut chart is visible on the right side of the interface.

Figura 407 – Column Management

A configuration modal will open, containing the ordered list of all fields currently displayed on the interface.

We can use the “drag n’ drop” technique by clicking on the “Vertical dots” button corresponding to the field we want to move, then we can release the component in the correct position.

| Provider | Name | System | Size | Resource Group | Type |
|-------------------------------|------------|--------|------|-----------------------|------------|
| 0-archive-ast11-tenant-pool-0 | Cluster 02 | - | - | PERSISTENTVOLUMECLAIM | 28/10/2024 |
| 0-archive-pool-0 | Cluster 02 | - | - | PERSISTENTVOLUMECLAIM | 28/10/2024 |
| 0-minio-archive-tenant-pool-0 | Cluster 02 | - | - | PERSISTENTVOLUMECLAIM | 28/10/2024 |
| 0-minio-ast11-tenant-pool-0 | Cluster 02 | - | - | PERSISTENTVOLUMECLAIM | 28/10/2024 |
| 0-minio-customer-tenant-p... | Cluster 02 | - | - | PERSISTENTVOLUMECLAIM | 28/10/2024 |
| 0-minio-pool-0 | Cluster 02 | - | - | PERSISTENTVOLUMECLAIM | 28/10/2024 |

A donut chart is visible on the right side of the interface.

Figura 408 – Column Ordering

Additionally, it is possible to remove a field from the table by clicking on the red "X" corresponding to the field to be deleted; this will be removed from the list and, after saving, will also be removed from the table.

The screenshot shows the Leonardo Secure Cloud Management Platform interface. The top navigation bar includes the Leonardo logo, date (15 November 2024), and time (10:08:15). The main menu has options like Resources, Virtual Machines, Data Stores, Clusters, Networking, Security, Others, What If, and Reports. The 'Resources' tab is selected. Below the menu is a search bar and a 'Search by provider' dropdown. The main area displays a table of resources with columns: Provider, Name, System, Size, Resource Group, and Type. One row is expanded to show details like PersistentVolumeClaim and creation date. A modal window titled 'Columns Options' is overlaid, listing columns: Provider, Name, Creation Date, and Status. Each column has a red 'X' button to its right. A red arrow points to the 'X' button next to 'Provider'. At the bottom of the modal are 'Restore Default' and 'Save' buttons. To the right of the table is a donut chart showing resource distribution across VMs, Storage, Networks, Cluster Kubernetes, Security, and Other categories.

Figura 409 – Deleting Columns

If we want to add a field to the table, it will be necessary to click the "Add column" button; once pressed, it will be replaced by a "select" field which contains the list of all available fields not already present in the table.

The screenshot shows the Leonardo Secure Cloud Management Platform's 'Resources' section. A modal window titled 'Columns Options' is displayed over the main table. The modal lists columns: Provider, Name, Creation Date, and Status, each with a dropdown arrow and a delete icon. At the bottom of the modal is a button labeled '+ Add Column'. The main table below the modal lists resources such as '0-archive-asif11-tenant-pool-0' and '0-minio-pool-0' with their respective details like Cluster, Size, Resource Group, and Type. A pie chart in the background indicates resource distribution across categories like VMs, Storage, Networks, and Others.

Figura 410 – Adding new column

Select the field to add to the table from the displayed list and complete the application by clicking the save button available in the bottom right.

The page will automatically refresh to display the new table; furthermore, the configuration will be saved automatically and automatically retrieved upon login.

The screenshot shows the Leonardo Secure Cloud Management Platform's 'Resources' section. A modal window titled 'Columns Options' is displayed, allowing users to manage the columns shown in the table. The columns listed are: Provider, Name, Creation Date, Status, System, Size, Resource Group, Type, and Provisioned on. The 'Resource Group' column is currently selected or highlighted. At the bottom right of the modal, there is a 'Save' button, which is also highlighted with a red box and an arrow. The background of the page shows a list of resources and a donut chart.


Figura 411 – Saving the view

Service Detail Design

The Service Detail Design service is the solution implemented for managing requests, which must then be processed within our environment by an authorized user.

To access Service Detail Design, log in to SCMP with the Service Manager user.

After logging in, click the "Service Detail Design" module from the bento button.

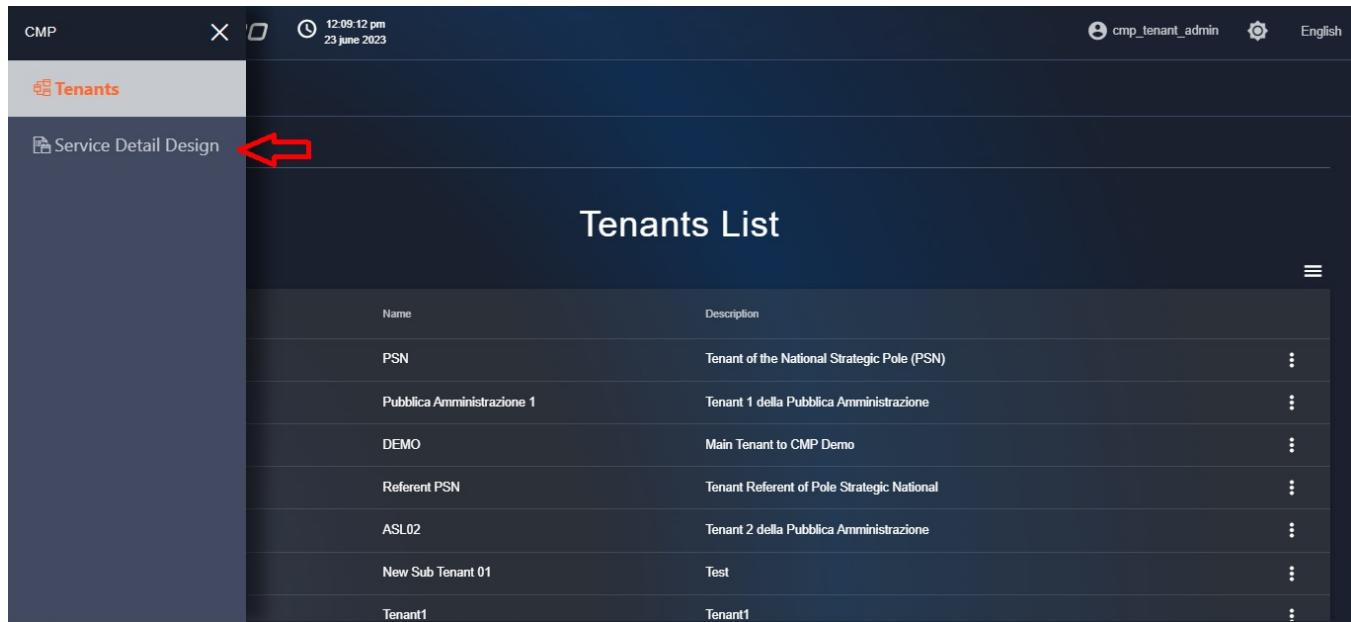

The screenshot shows the SCMP (Secure Cloud Management Platform) interface. The top navigation bar includes the logo, user information (21 Nov 2025, 08.00), and language selection (English). The main menu on the left is titled 'Tenants' and contains a sub-item 'Service Detail Design' (highlighted with a red arrow). The central content area is titled 'Tenants List' and displays a table of tenant information:

| Name | Description | Actions |
|----------------------------|--|---------|
| PSN | Tenant of the National Strategic Pole (PSN) | ⋮ |
| Pubblica Amministrazione 1 | Tenant 1 della Pubblica Amministrazione | ⋮ |
| DEMO | Main Tenant to CMP Demo | ⋮ |
| Referent PSN | Tenant Referent of Pole Strategico Nazionale | ⋮ |
| ASL02 | Tenant 2 della Pubblica Amministrazione | ⋮ |
| New Sub Tenant 01 | Test | ⋮ |
| Tenant1 | Tenant1 | ⋮ |

Figura 412 – Access to Service Detail Design module

The search page will be shown where it is possible to filter already created work orders based on:

- Status
- Customer
- Service Type
- Phase
- Creation Date

The table will show the general information of the Work Order.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Order ID | Customer | Service Type | Creation Date | Last Update | Status | Phase | Actions |
|--------------------------|----------|--------------|---------------------|---------------------|--------|----------------|---------------------------------------|
| 661c71a0bedf107659a55b75 | 840766 | Servizi PSN | 15/04/2024 00:15:28 | 15/04/2024 00:15:28 | New | Deploy Service | ▶ <input checked="" type="checkbox"/> |
| 661cdd0bedf107659a55dae | 840766 | Servizi PSN | 15/04/2024 07:57:36 | 15/04/2024 07:57:36 | New | Deploy Service | ▶ <input checked="" type="checkbox"/> |
| 661dc31dbedf107659a55e77 | 840766 | Servizi PSN | 16/04/2024 00:15:25 | 16/04/2024 00:15:25 | New | Deploy Service | ▶ <input checked="" type="checkbox"/> |
| 661f147cbef107659a560c0 | 840766 | Servizi PSN | 17/04/2024 00:14:52 | 17/04/2024 00:14:52 | New | Deploy Service | ▶ <input checked="" type="checkbox"/> |
| 661fd4ac2941363637a859db | 840766 | Servizi PSN | 17/04/2024 13:54:52 | 17/04/2024 13:54:52 | New | Deploy Service | ▶ <input checked="" type="checkbox"/> |
| 662065cc2941363637a85ab1 | 840766 | Servizi PSN | 18/04/2024 00:14:36 | 18/04/2024 00:14:36 | New | Deploy Service | ▶ <input checked="" type="checkbox"/> |

*Figura 413 – Service Detail Design
functionality filters*

Click the center of a work order row to view its content; a modal will open where we can expand the various sections by clicking on them.

To exit the detail view, click outside the gray window.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a modal window titled "Work Order Details" over a list of work orders. The modal displays the following details:

| Order ID | Order Title | Customer | Operator | Status | Created | Last Updated | Service Type |
|--------------------------|----------------------------|-------------|------------------|-----------|---------------------|---------------------|---------------|
| 6499bb4c58ab7a35a1fb9449 | Gestione servizi cloud New | IC_SPA_2021 | cmp_tenant_admin | Completed | 26/06/2023 16:22:36 | 26/06/2023 16:23:20 | Servizi Cloud |

Below the modal, a list of work orders is shown:

| Order ID | Customer | Service Type | Created | Last Updated | Status | Action Buttons |
|--------------------------|-------------|---------------|---------------------|---------------------|-------------|-----------------------|
| 6499bb4258ab7a35a1fb9446 | IC_SPA_2021 | Servizi Cloud | 26/06/2023 16:22:38 | 26/06/2023 16:22:38 | New | [Play, Edit, Delete] |
| 6499bb4958ab7a35a1fb9448 | IC_SPA_2021 | Servizi Cloud | 26/06/2023 16:31:47 | 26/06/2023 17:52:56 | In progress | [Pause, Edit, Delete] |
| 6499bb4c58ab7a35a1fb9449 | IC_SPA_2021 | Servizi Cloud | 26/06/2023 16:44:33 | 26/06/2023 17:53:05 | Idle | [Edit, Delete] |
| 6499bb4e58ab7a35a1fb944a | IC_SPA_2021 | Servizi Cloud | 26/06/2023 16:22:38 | 26/06/2023 16:22:38 | New | [Play, Edit, Delete] |
| 6499bd73aadc04fa5e3bcb49 | IC_SPA_2021 | Servizi Cloud | 26/06/2023 16:31:47 | 26/06/2023 17:52:56 | In progress | [Pause, Edit, Delete] |
| 6499c071c90c991e9b78ae8 | IC_SPA_2021 | Servizi Cloud | 26/06/2023 16:44:33 | 26/06/2023 17:53:05 | Idle | [Edit, Delete] |

Figura 414 – Work Order Details

Work Order Flow

To take charge of a work order, click the "Play" symbol next to an order in "New" status.

A status change notification will be displayed on the screen, and the current status of the Order becomes "In progress"; the buttons of the corresponding order are modified:

- by clicking the "Pause" button, the order will transition to "Idle" status;
- by clicking the "Mark as completed" button, it is possible to close the Work Order;
- by clicking the "Rejected" button, it is possible to report the cancellation of the Order;



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

| Order ID | Customer | Service Type | Creation Date | Last Update | Status | Actions |
|---------------------------|-------------|---------------|---------------------|---------------------|-------------|--|
| 6499bb4258ab7a35a1fb9446 | IC_SPA_2021 | Servizi Cloud | 26/06/2023 16:22:26 | 26/06/2023 16:44:35 | Completed | ► ✓ ● |
| 6499bb4958ab7a35a1fb9448 | IC_SPA_2021 | Servizi Cloud | 26/06/2023 16:22:33 | 26/06/2023 16:22:33 | Completed | ► ✓ ● |
| 6499bb4c58ab7a35a1fb9449 | IC_SPA_2021 | Servizi Cloud | 26/06/2023 16:22:36 | 26/06/2023 16:23:20 | Completed | ► ✓ ● |
| 6499bb4e58ab7a35a1fb944a | IC_SPA_2021 | Servizi Cloud | 26/06/2023 16:22:38 | 26/06/2023 16:22:38 | New | ► ✓ ● |
| 6499bd73aadc040a6e3bcb49 | IC_SPA_2021 | Servizi Cloud | 26/06/2023 16:31:47 | 26/06/2023 16:31:47 | In progress | ► ✓ ● |
| 6499c071c90c991e9b78aebe8 | IC_SPA_2021 | Servizi Cloud | 26/06/2023 16:44:33 | 26/06/2023 16:44:33 | Idle | ► ✓ ● |

Status updated successfully! OK

*Figura 415 – Work order management
page for Service Detail Design*

When the “Mark as completed” button is clicked, a window is displayed on the screen where information to be attached to the order can be entered, specifically:

- the result of the processing;
- a description of the chosen result;
- a note for the operator.



Leonardo Cyber & Security Solutions

21 Nov 2025

08.00

Secure Cloud Management Platform

The screenshot shows a user interface for managing work orders. On the left, there's a sidebar with filtering options like 'Order ID', 'Search by status' (New, In progress, Idle, Rejected), and 'Search by service type'. The main area displays a table of work orders with columns: Order ID, Status, Start Date, End Date, and Outcome. One row is selected, showing 'Service Cloud' as the status, '26/05/2023 16:22:29' as the start date, '26/05/2023 16:44:33' as the end date, and 'Completed' as the outcome. At the top, a modal window titled 'Close Order' is open, prompting the user to 'Select an outcome for this order' from a dropdown menu ('Select an outcome'). Below this, there's a text input field for 'Explain why you chosen this outcome:' and a note about the reason(s) being typed. A large 'Finish' button is located at the bottom right of the modal.

Figura 416 – Closing a Work order

By scrolling down the page, we can find the parameters section where it is possible to enter different key/value combinations for the parameters used during processing.

After entering the key and value, click the “Plus” button to confirm the entry; new empty fields are added where additional parameters can be entered. To delete a key/value pair, click the “Minus” button; once all parameters have been entered, click the “Finish” button.



Leonardo Cyber & Security Solutions

21 Nov 2025
08.00

Secure Cloud Management Platform

| KEY | IC_SPA_2021 | Servizi Cloud | 20/06/2023 16:34:36 | 20/06/2023 16:34:36 | Completed |
|-------------|-------------|---------------|---------------------|---------------------|-------------|
| errorNumber | IC_SPA_2021 | Servizi Cloud | 400 | 20/06/2023 17:49:38 | Completed |
| New Key | IC_SPA_2021 | Servizi Cloud | New Value | 20/06/2023 16:22:36 | Completed |
| | IC_SPA_2021 | Servizi Cloud | 20/06/2023 16:31:47 | 20/06/2023 17:52:56 | In progress |
| | IC_SPA_2021 | Servizi Cloud | 20/06/2023 16:44:33 | 20/06/2023 16:49:08 | Rejected |

Figura 417 – Parameter entry

After completing the order, it is possible, by opening the respective menus, to view all the information entered during processing within the info section.

Figura 418 – Information added during



Leonardo Cyber & Security Solutions

21 Nov 2025
08.00

Secure Cloud Management Platform

processing

15 Leonardo Services

Leonardo provides several managed services which are represented in the following figure by type (called service families).

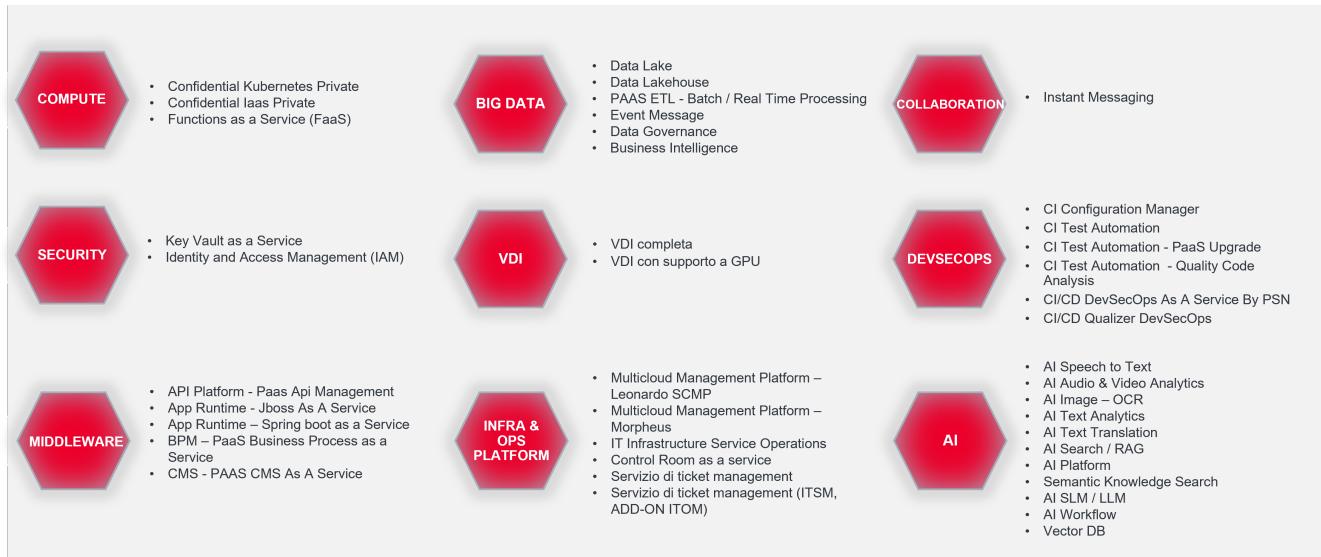


Figura 419 – Overview Leonardo Services

From a logical-functional point of view, the services can be divided into three macro-categories:

- Infrastructure as a Service (IaaS) Services
- Container as a Service (CaaS) Services
- Platform as a Service (PaaS) Services

The IaaS and CaaS categories include some services from the "Compute" family. The PaaS category includes services from all other families.

The aforementioned macro-categories will be described below.

15.1 Infrastructure as a Service (IaaS) Services

In the following table, you can consult the services pertaining to the Infrastructure as a Service (IaaS) category.

| FAMILY | SUB-FAMILY | SERVICE NOMENCLATURE |
|--------|------------|----------------------|
| | | |



| FAMILY | SUB-FAMILY | SERVICE NOMENCLATURE |
|---------|-------------------------------|---|
| Compute | Confidential - IaaS - Private | - Pool Small (Confidential) - Pool Medium (Confidential) - Pool Large (Confidential) - Pool X-Large (Confidential) |

15.1.1 Compute

Below are the sub-families pertaining to the Compute family: - Confidential - IaaS - Private

15.1.1.1 Confidential - IaaS - Private

Below is the list of services pertaining to the Confidential - IaaS - Private sub-family:

- Pool Small (Confidential)
- Pool Medium (Confidential)
- Pool Large (Confidential)
- Pool X-Large (Confidential)

"Service Description"

The services allow for the provision of virtual computational environments (IaaS) of Private type, i.e., on a pool of physical resources, dedicated and isolated for each individual client, based on the use of "bare metal" compute instances. The data of the physical resources are encrypted and kept protected in all phases of their use (At-Rest, In-transit & In-use), leveraging the Confidential Computing paradigm. Depending on the pool of computational resources required for each individual Administration, it is possible to choose the most suitable service from the four available types.

"Service Features and Benefits"

Private Cloud resources are exclusively dedicated to each client. The services use secure Enclaves based on Trusted Execution Environment (TEE) leveraging HW Confidential, which offer an advanced level of security for data in use, protecting them during processing. They support advanced data encryption at Rest, in Transit & in Use. They use advanced Remote Attestation systems to verify the correctness of the TEE environment, isolating the memory of virtual machines from the host operating system and other malicious guests.

The advantages offered by the services are:

- Security and confidentiality of data in dedicated environments;
- Workload isolation through advanced virtualization;
- Dedicated firewalls and network micro-segmentation;



- Automated provisioning and rapid resource management;
- Total control and centralized governance: centralized monitoring and auditing for traceability.

15.2 Container as a Service (CaaS) Services

In the following table, you can consult the services pertaining to the Container as a Service (CaaS) category.

| FAMILY | SUB-FAMILY | SERVICE NOMENCLATURE |
|---------|-------------------------------------|-----------------------------------|
| Compute | Confidential - Kubernetes - Private | Kubernetes Confidential Computing |

15.2.1 Compute

Below are the sub-families pertaining to the Compute family: - Confidential - Kubernetes - Private

15.2.1.1 Confidential - Kubernetes - Private

Below is the list of services pertaining to the Confidential - IaaS - Private sub-family:

- Kubernetes Confidential Computing

"Service Description" Service that allows the provision of a platform for the orchestration of private and secure containers, designed to manage containerized applications in highly regulated environments or with confidentiality requirements. It offers a secure and controlled Kubernetes environment where the security component is one of the main aspects of the solution. The operating system on which the solution is based is hardened, to minimize the attack surface and potential vulnerabilities. Within the architectural components of the solution, mechanisms are used to ensure data security even during communication phases (through encryption mechanisms applied by default to communications between platform components) and for data stored within the platform itself. The platform can be customized to adapt to the specific needs of each Organization, ensuring integration with existing corporate systems and applications.

"Service Features and Benefits" Its implementation requires a combination of hardware certified for Confidential Computing, a security-hardened private Kubernetes infrastructure, and a set of observability and governance tools to maintain total control over the container lifecycle. Included functionalities:

- *Data protection* → the operating system is configured to ensure protection in all its phases: data in memory, through full disk encryption and key rotation; data in transit, using secure and encrypted communication protocols; data in use, adopting Confidential Computing practices and secure execution environments.
- *Secure Enclaves* → apply isolation and encryption, ensuring that only authorized parties can access the data.
- *Trusted Execution Environments (TEE)* → add a secure processing environment, protecting data from external



threats.

Being a managed Kubernetes solution, the client will not have to deal with infrastructure management and its complexity, as the infrastructural layer is managed by Leonardo throughout the service lifecycle.

The advantages offered are:

- Security and confidentiality of containerized applications: end-to-end encryption, confidential computing for workloads, container isolation on dedicated nodes with hardware-based protection, integrated security policies, and advanced RBAC;
- Centralized control and governance of clusters;
- Scalability and flexibility;
- Integration with multicloud and legacy environments.

15.3 Platform as a Service (PaaS) Services

In the following table, you can consult the services pertaining to the Platform as a Service (PaaS) category.

| FAMILY | SUB-FAMILY | SERVICE NOMENCLATURE |
|----------------------|-----------------------|--|
| Compute | FAAS | Functions as a Service |
| Security | IAM | Identity & Access Management Service |
| Security | Key Management | Key Vault as a Service |
| Middleware | API Platform | PaaS API Management |
| Middleware | APP Runtime | Jboss as a Service |
| Middleware | APP Runtime | Spring boot as a Service |
| Middleware | BPM | PaaS Business Process as a Service |
| Middleware | CMS | PaaS CMS as a Service |
| Middleware | ETL | PaaS ETL - Batch / Real Time Processing - 1 worker |
| Infra & Ops Platform | Multicloud Management | Multicloud Management Platform-Leonardo SCMP |
| Infra & Ops Platform | Multicloud Management | Multicloud Management Platform-Morpheus |



| FAMILY | SUB-FAMILY | SERVICE NOMENCLATURE |
|----------------------|----------------------------|---|
| Infra & Ops Platform | Observability-Infra | Control Room as Service |
| Infra & Ops Platform | Observability-Infra | IT infrastructure Service Operations (Logging & Monitoring) |
| Infra & Ops Platform | TTM | PaaS Ticket Management Service |
| Infra & Ops Platform | TTM | PaaS Ticket Management Service (ITSM) |
| Infra & Ops Platform | TTM | PaaS Ticket Management Service (ADD-ON ITOM) |
| DevSecOps | CI | Configuration Manager |
| DevSecOps | CI | Test Automation |
| DevSecOps | CI | Quality Code Analysis |
| DevSecOps | CI/CD | DevSecOps As A Service By PSN |
| DevSecOps | CI/CD | Qualizer DevSecOps |
| Big Data | Data Lake | Data Lake - 1TB |
| Big Data | Data Lakehouse | Data Lakehouse |
| Big Data | Business Intelligence | Business Intelligence |
| Big Data | ETL | Batch/Real time Processing - 1 Worker |
| Big Data | Event Platform | Event Message |
| Big Data | Data Governance | Data Governance |
| AI | AI - Audio & Conversations | Speech to Text |
| AI | AI - Image | OCR |
| AI | AI - Text | AI Search - AI Search - RAG - 10 GB - 1 worker |
| AI | AI - Text | Text Analytics |
| AI | AI - Text | Translation |
| AI | AI - Generative | AI SLM/LLM |



| FAMILY | SUB-FAMILY | SERVICE NOMENCLATURE |
|---------------|-----------------|----------------------|
| AI | AI - Tools | AI workflow |
| AI | AI - Tools | Vector DB |
| AI | AI - Tools | AI Platform |
| VDI | Virtual Desktop | VDI |
| VDI | Virtual Desktop | VDI with GPU Support |
| Collaboration | Communication | Instant Messaging |

15.3.1 Compute

Below are the sub-families pertaining to the Compute family: - FAAS

15.3.1.1 FAAS

Below is the list of services pertaining to the FAAS sub-family:

- Functions as a Service

"Service Description"

FaaS (Function as a Service) is a system design model, event-driven, executed on stateless containers, where developers create, deploy, and run small, independent functions to perform specific tasks without worrying about the underlying infrastructure. The adoption of FaaS allows for the standardization of application development and execution, centralizing cross-functional capabilities such as orchestration, automatic provisioning, monitoring, integrated service management, and event-driven flow control. It offers tools for:

- centrally manage serverless functions;
- automate component lifecycle management;
- enable multi-cloud and hybrid cloud portability;
- support innovation with GPU runtimes and dedicated AI tools. The FaaS platform provides and scales underlying resources based on demand. It is ideal for highly dynamic scenarios, with variable workloads, and integrates seamlessly with microservices and event-driven architectures.

"Service Features and Benefits" The service is not limited to providing an execution engine, but offers a complete ecosystem, composed of:

- *Serverless execution* → stateless functions and event-driven workflows, scalable and available in various



programming languages.

- *Portability and independence* → executable on any Kubernetes cluster, multi-environment, without lock-in constraints.
- *Security and compliance* → data protection and centralized access management.
- The solution allows organizations to adopt a modern and flexible model, reducing operational complexity and benefiting from a standardized and easily accessible service.

The service is delivered via Apache OpenServerless, an open-source, cloud-agnostic serverless platform based on Apache OpenWhisk as a Function-as-a-Service (FaaS) engine.

The advantages offered are:

- *Reduction of operating costs* → you only pay for the actual use of the functions;
- *Flexibility and scalability* → resources adapt to demand;
- *Operational efficiency* → elimination of direct server management, patching, and updates;
- *High availability* → integrated redundancy and fault tolerance, ensuring high availability of functions even in the event of hardware failures or other interruptions;
- *Accelerated time-to-market* → rapid release of new functionalities without worrying about the infrastructure;
- *Development agility* → focus on code and business logic, not on server management;
- *Continuous innovation* → rapid experimentation with new low-cost services;
- *Competitive advantage* in cost and speed compared to traditional hosting models.

16 ☁ REST API