



OpenAI CLIP original attribute embeddings — PCA

DLRSD | OpenAI CLIP ViT-B/16
340 original descriptors, 17 classes

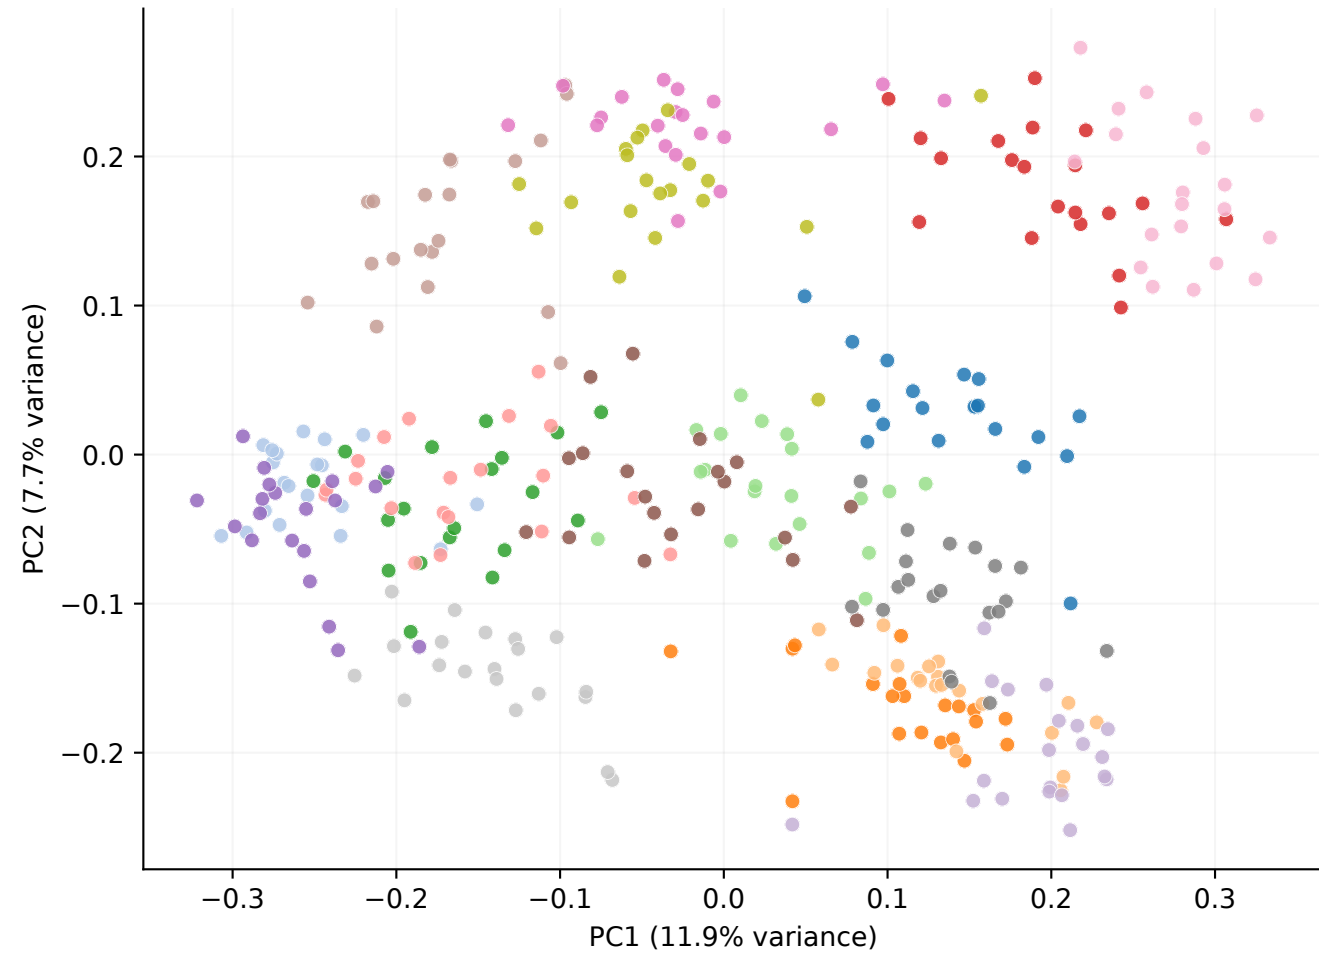


DLRSD | OpenAI CLIP ViT-L/14@336px
340 original descriptors, 17 classes

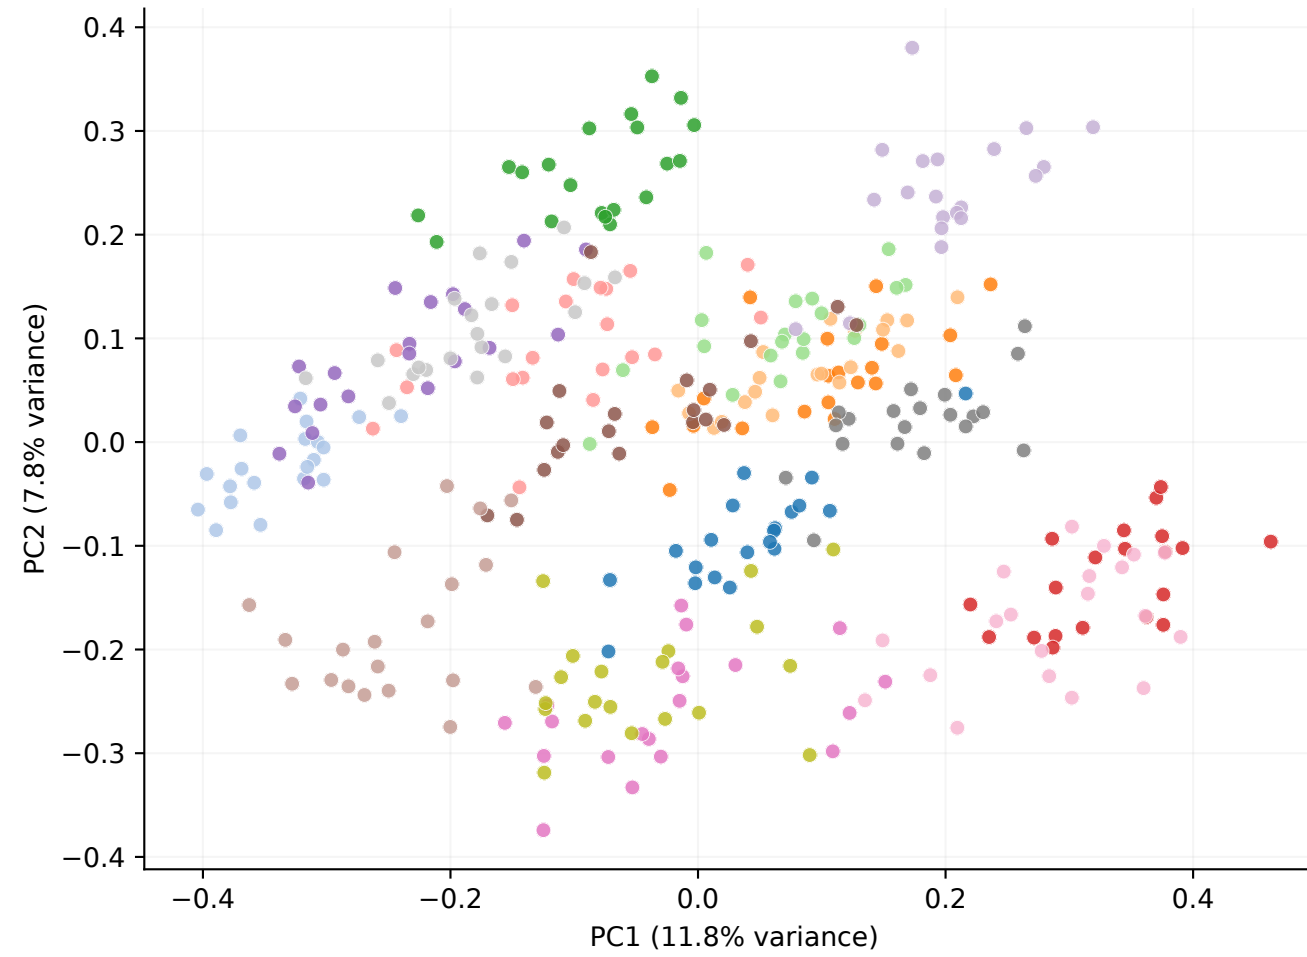


- DLRSD categories
- airplane
 - bare soil
 - buildings
 - cars
 - chaparral
 - court
 - dock
 - field
 - grass
 - mobile home
 - pavement
 - sand
 - sea
 - ship
 - tanks
 - trees
 - water

iSAID | OpenAI CLIP ViT-B/16
300 original descriptors, 15 classes

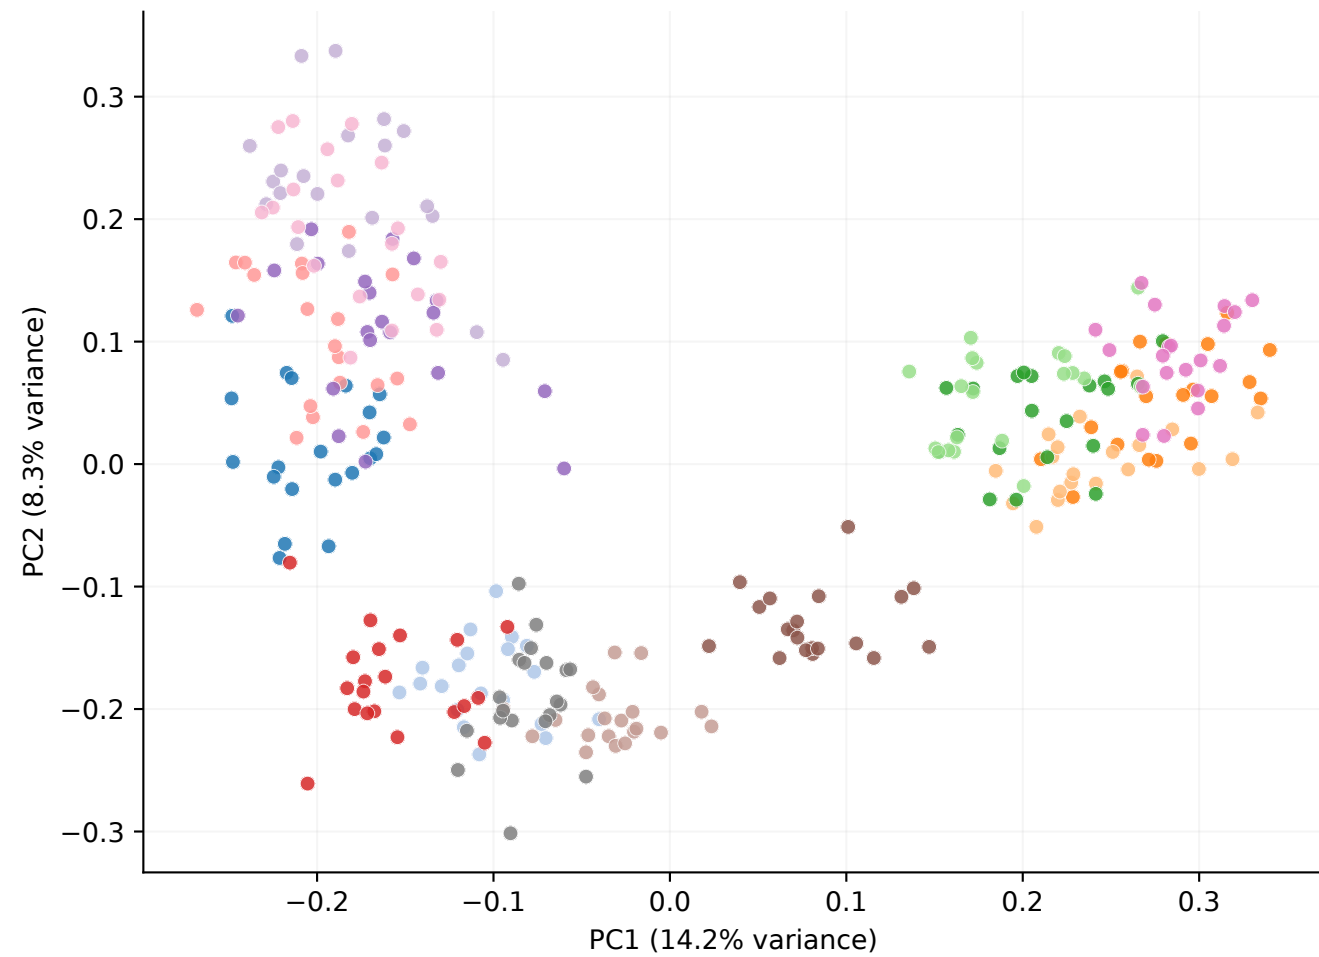

iSAID | OpenAI CLIP ViT-L/14@336px
300 original descriptors, 15 classes

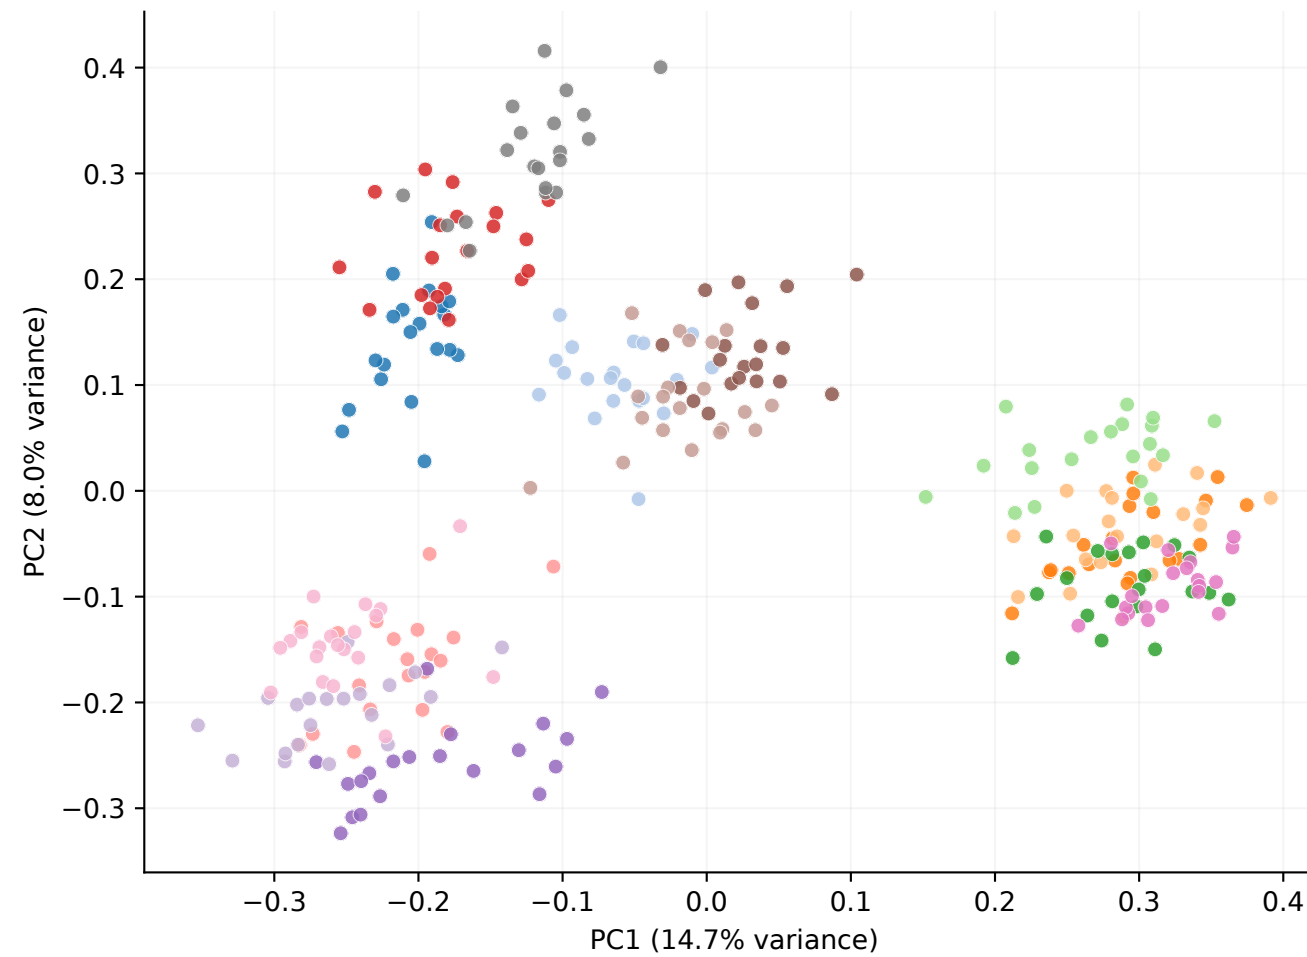

- iSAID categories
- ship
 - storage tank
 - baseball diamond
 - tennis court
 - basketball court
 - ground track field
 - bridge
 - large vehicle
 - small vehicle
 - helicopter
 - swimming pool
 - roundabout
 - soccer ball field
 - plane
 - harbor

Each point = one original attribute sentence; colors = source classes. No clustering or cluster centers.
Independent PCA fits on L2-normalized text embeddings; axis labels report explained variance.