



OpenAI CLIP attribute suffix embeddings — TSNE

DLRSD | OpenAI CLIP ViT-B/16
340 attribute suffixes, 17 classes

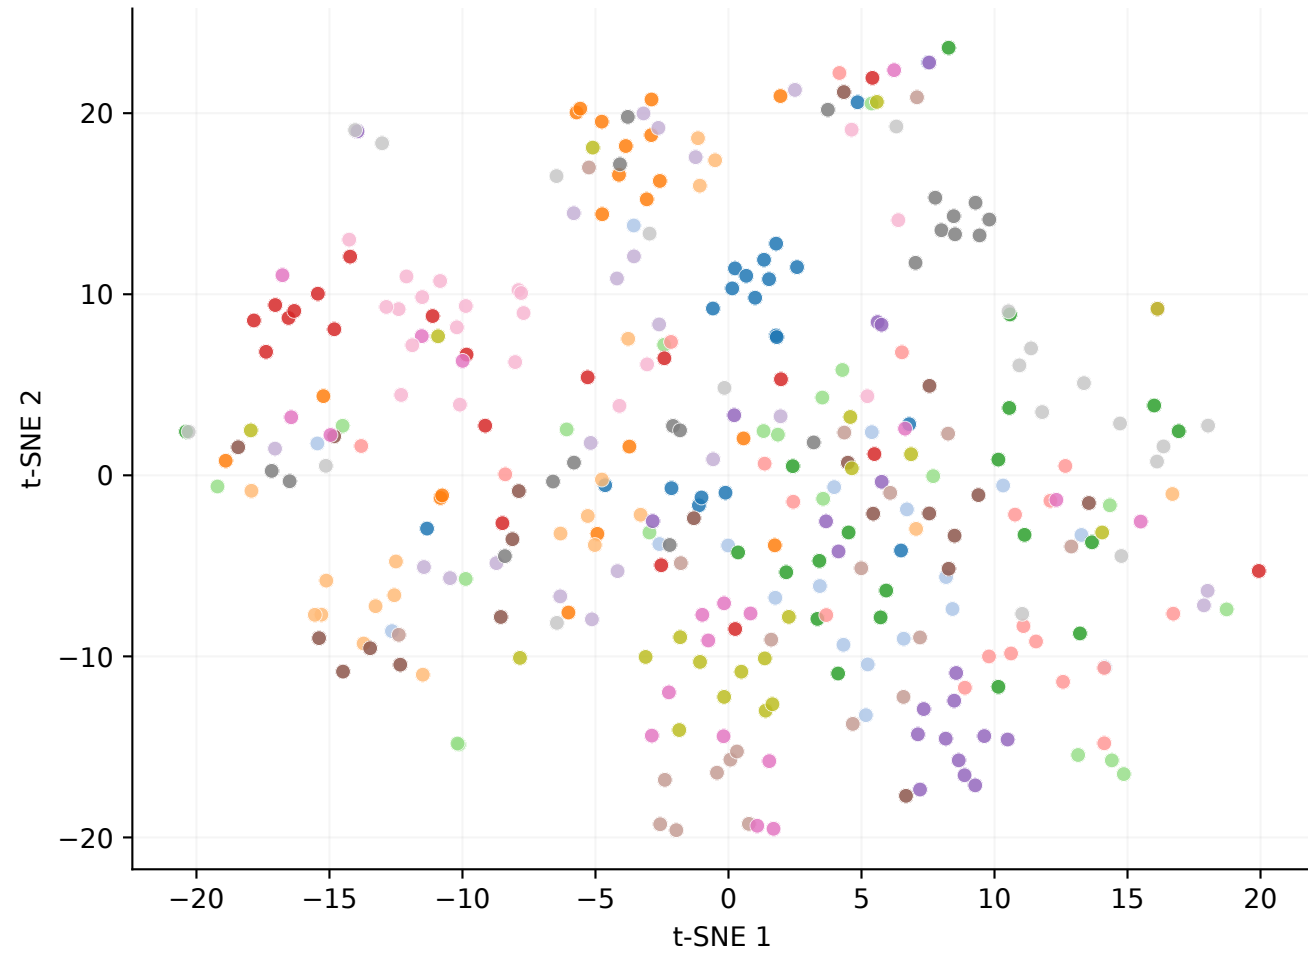


DLRSD | OpenAI CLIP ViT-L/14@336px
340 attribute suffixes, 17 classes

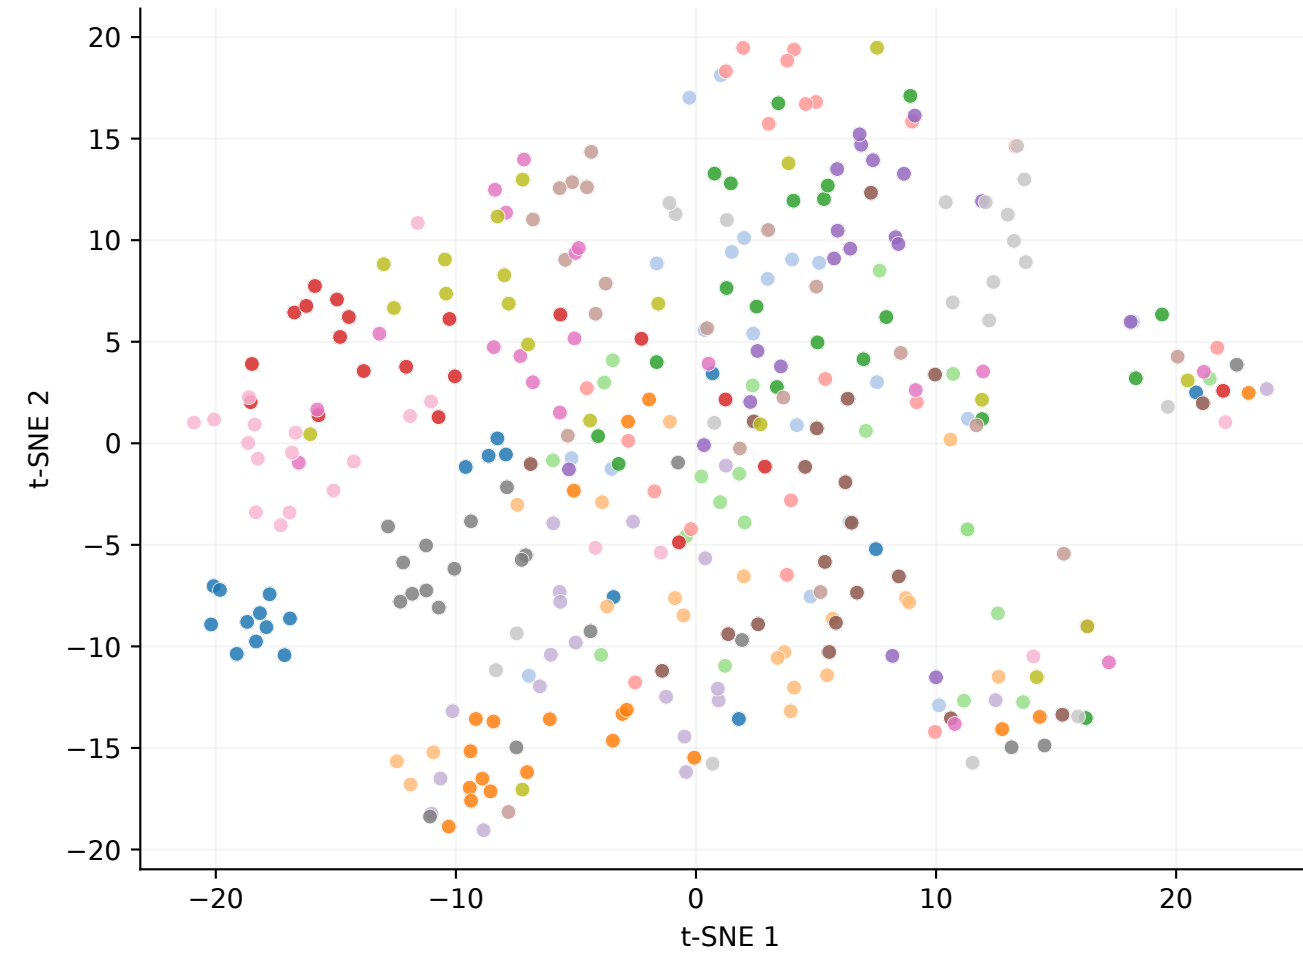


DLRSD categories

- airplane
- bare soil
- buildings
- cars
- chaparral
- court
- dock
- field
- grass
- mobile home
- pavement
- sand
- sea
- ship
- tanks
- trees
- water

iSAID | OpenAI CLIP ViT-B/16
300 attribute suffixes, 15 classes

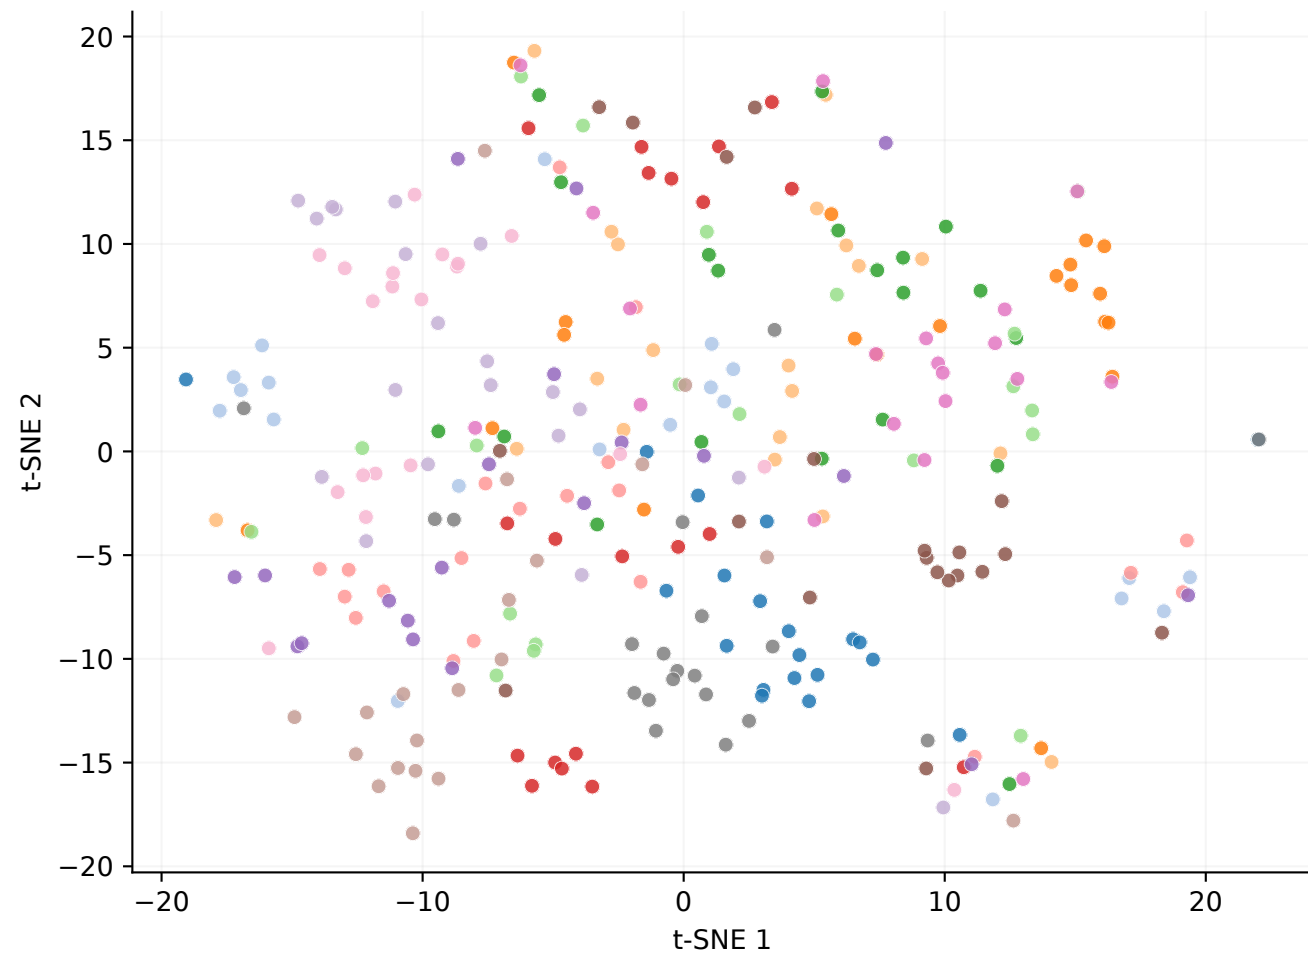

iSAID | OpenAI CLIP ViT-L/14@336px
300 attribute suffixes, 15 classes

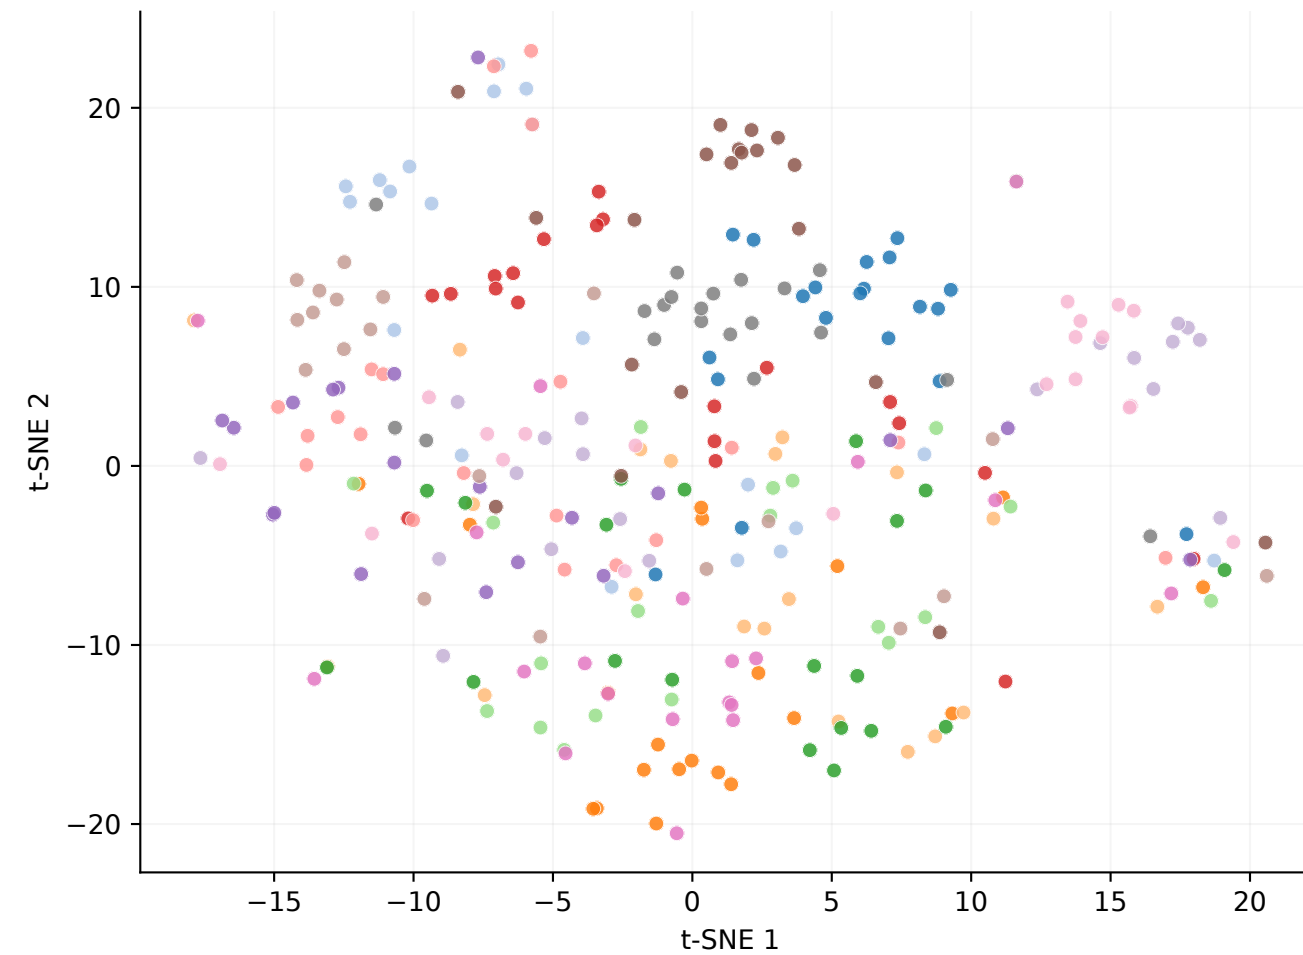

iSAID categories

- ship
- storage tank
- baseball diamond
- tennis court
- basketball court
- ground track field
- bridge
- large vehicle
- small vehicle
- helicopter
- swimming pool
- roundabout
- soccer ball field
- plane
- harbor

Each point = one attribute suffix (class-name prefix removed); colors = source classes. No clustering or cluster centers. Independent t-SNE fits; perplexity=30, seed=42. Axes and distances between panels are not directly comparable.