

**LERUKA**

**LERUKA**

## **Use-Case Specification: View public highscore**

**Version <1.6>**

## Revision History

Date	Version	Description	Author
23/10/2015	1.0	Erstellen des UC-Dokuments	Ruth W.
27/10/2015	1.1	Use Case geändert, zeigt “user”/”server” nicht an	Ruth W.
01/11/2015	1.2	Hinzufügen der Feature-Narration Beschreibung	Leif B.
08/11/2015	1.3	Feature-Narration geändert	Ruth W.
19/12.2015	1.4	Feature-Narration aktualisiert	Ruth W.
15/04/2016	1.5	Hinzufügen der Function Points	Ruth W.
01/06/16	1.6	Anpassungen	Ruth W.

## Table of Contents

- [Use-Case Name](#)
- [Brief Description](#)
- [Mockup](#)
- [Flow of Events](#)
- [Basic Flow](#)
- [Narration](#)
- [Alternative Flows](#)
- [Special Requirements](#)
- [Preconditions](#)
- [Postconditions](#)
- [Extension Points](#)
- [Function Points](#)


## Use-Case Specification: View public highscore

### 1. Use-Case Name

#### 1.1 Brief Description

“Öffentlicher Highscore” should show guests and members the public highscore.


#### 1.2 Mockup

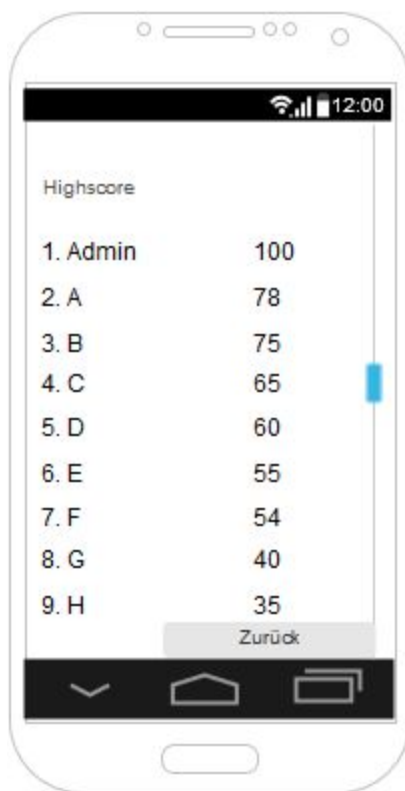

## 2. Flow of Events

### 2.1 Basic Flow

The user and also the guest can view the public highscore.

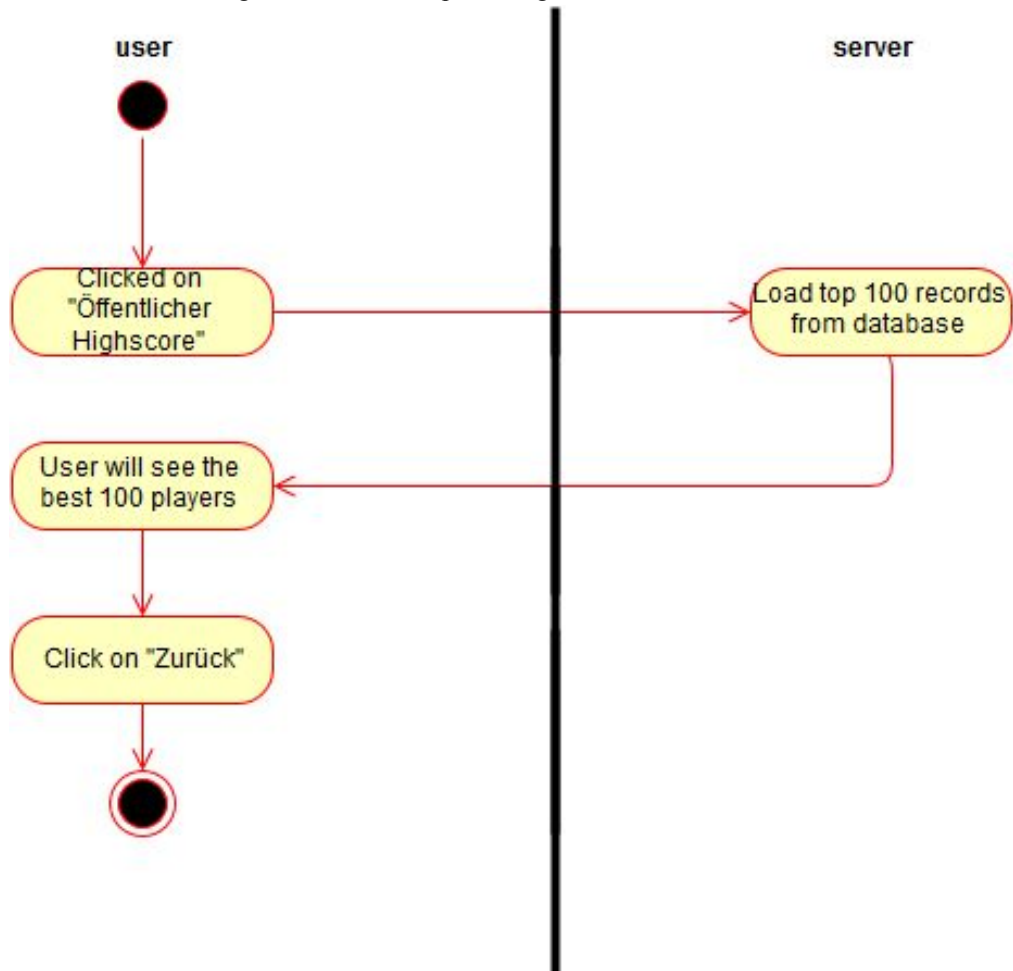

## 2.1.1 Narration

[View public highscore feature file](#)

### Feature: View public highscore

As a app user

I want to view the public highscore

#### Scenario: View public highscore as an user works fine

Given I press "Einloggen"

And I enter "Hugo" into input field number 1

And I enter "lustig" into input field number 2

And I press "Einloggen"

And I see "Hi, hugo"

When I press "Oeffentlicher Highscore"

And I should see "Leruka - Highscore"

#### Scenario: View public highscore as a guest works fine

Given I see "Leruka"

When I press "Oeffentlicher Highscore"

And I should see "Leruka - Highscore"

[Total test result](#)

## 2.2 Alternative Flows

n/a

## 3. Special Requirements

n/a

## 4. Preconditions

There has to be a connection to the server.

## 5. Postconditions

n/a

## 6. Extension Points

n/a

## 7. Function Points

We calculated the function points with the following table from TINY TOOLS. The Use Case “View public highscore” has 39,6 points.

**Domain Characteristic Table**

MEASUREMENT PARAMETER	COUNT (value >= 0)	WEIGHTING FACTOR		
		Simple	Average	Complex
Number of User Input	<input type="text" value="0"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>
Number of User Outputs	<input type="text" value="1"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>
Number of User Inquiries	<input type="text" value="2"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>
Number of Files	<input type="text" value="5"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>
Number of External Interfaces	<input type="text" value="0"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>