

Ajax

Aynchronous JavaScript + XML

Mark Andreessen, Netscape, 1995: "MS Windows will be reduced to a poorly debugged set of device drivers running under Netscape Navigator, with desktop-style applications running inside the browser". This did not happen until 10 years later (true/false?)

This content is protected and may not be shared, uploaded, or distributed.

What are we Talking about today?

- Core Technologies of Ajax
 - JavaScript and DOM Manipulation
 - XMLHttpRequest (XHR) and Fetch
 - JSON as a Data Format
- Asynchronous Communication
 - No Full-Page Refresh
 - Asynchronous Server Requests
 - Client-side Processing
- Ajax Application Characteristics
 - Smooth User Interaction
 - Interactive Elements
 - Web Mashups




Asynchronous JavaScript + XML

- Ajax isn't a technology.
- It's really several technologies. Ajax incorporates:
 - standards-based presentation using **XHTML**;
 - **CSS**, dynamically manipulated using JavaScript;
 - dynamic display and interaction using the Document Object Model (**DOM**). Web page exposed as DOM object;
 - data interchange using **XML** (nowadays **JSON**);
 - asynchronous data retrieval using **XMLHttpRequest**, a JavaScript object, a.k.a "Web remoting";
 - **JavaScript** binding everything together;
 - Server no longer performs display logic, only business logic.
- Acronym originated by **Jesse James Garrett** in 2005:
<https://michaeljordan.nl/ajax.pdf>

Some History and Browsers Supporting Ajax

- The **XMLHttpRequest object (XHR)** is the main element of Ajax programming.
- Microsoft first implemented the **XMLHttpRequest** object in **Internet Explorer 5 (IE5)** for Windows as an ActiveX object in **March 1999**, making it the first Ajax-enabled browser.
- Similar functionality is covered in a recommended W3C standard, Document Object Model **(DOM) Level 3 Load and Save** Specification (April 2004):
<http://www.w3.org/TR/DOM-Level-3-LS>
- Engineers on the Mozilla project implemented a compatible native version for Mozilla 1.0 (included in Netscape 7, Firefox 1.0 and later releases). Apple has done the same starting with Safari 1.2.
- Other browsers supporting XMLHttpRequest include:
 - Opera 7.6+, Apple Safari 1.2+, all mobile browsers
- XMLHttpRequest moved to W3C in 2006 and back to WHATWG in 2012 as **XMLHttpRequest Living Standard**:
 - <https://xhr.spec.whatwg.org/>

An Example Using Ajax - Google Maps

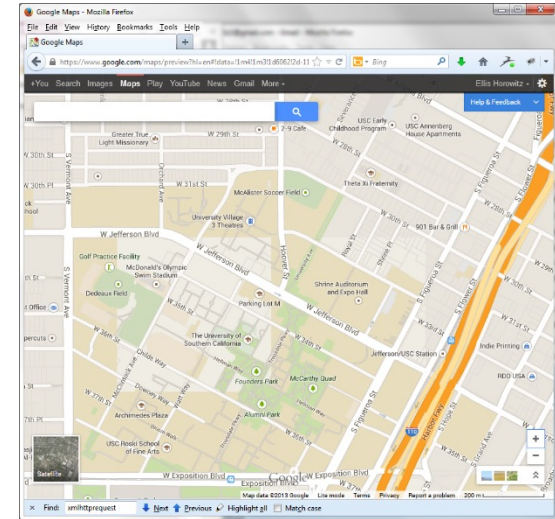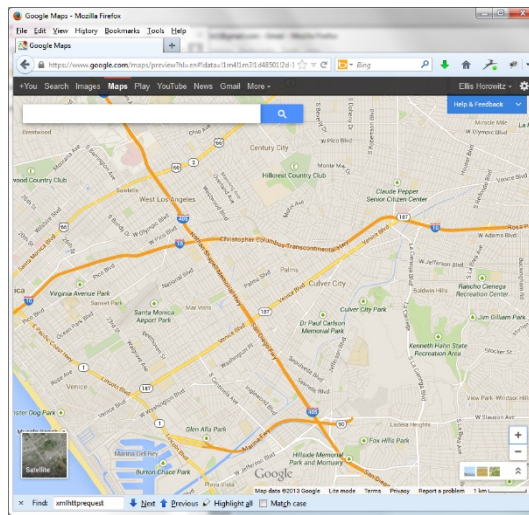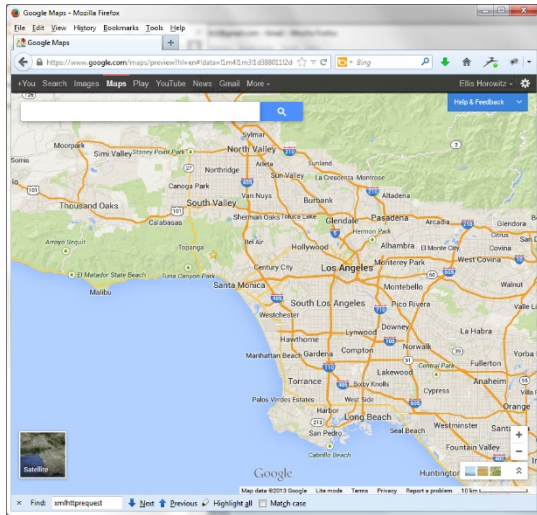

Initial screen

zoom 3 times

drag map and zoom

See: <https://maps.google.com>

Notice that the page is never explicitly refreshed. View source and search for XMLHttpRequest; you will find multiple occurrences. (found 2 times on maps.google.com)


A Mash-Up Combines Multiple Sources of Data

A “mash-up” is a web application that consumes ("remixes") content from different sources and aggregates them to create a new application

Mashup Example -
www.zillow.com

A combination of satellite photos with records of home sale prices placed on top of the appropriate houses

Found 4+ references of XMLHttpRequest

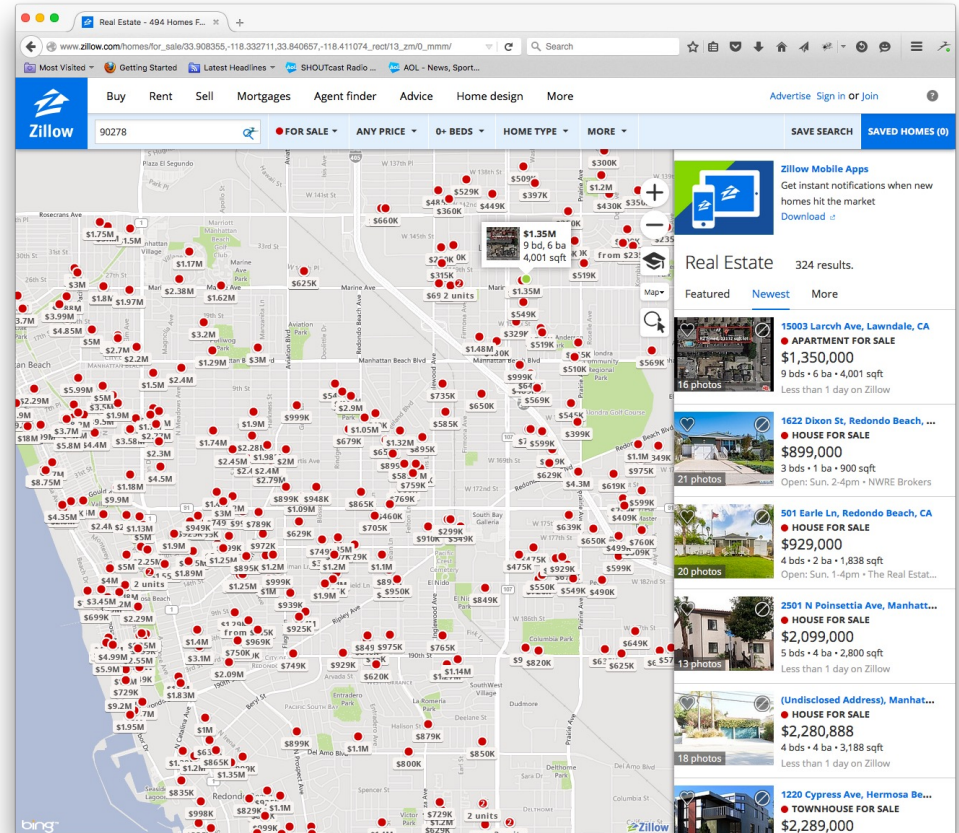

Characteristics of Ajax Applications

- They are applications (or Apps), not just web sites
- They allow for smooth, continuous interaction
- "Live" content
- Visual Effects
- Animations, dynamic icons
- Single keystrokes can lead to server calls
- New Widgets (selectors, buttons, tabs, lists)
- New Styles of Interaction (drag-and-drop, keyboard shortcuts, double-click)

Comparing Traditional vs. AJAX Websites

Traditional

- Interface construction is mainly the responsibility of the server
- User interaction is via form submissions
- An entire page is required for each interaction (bandwidth)
- Application is unavailable while an interaction is processing (application speed)

Ajax

- Interface is manipulated by client-side JavaScript manipulations of the Document Object Model (DOM)
- User interaction via HTTP requests occur 'behind the scenes'
- Communication can be restricted to data only
- Application is always responsive

How to Recognize an Ajax Application Internally

“View Source” in the browser and search for:

- Javascript code that invokes:
 - **XMLHttpRequest** or **fetch**
- JavaScript that “loads” other JavaScript code (files with .js extension)
- XML code passed as text strings to a server, such as ‘<?xml version="1.0"><page>...</page>’
- Javascript <script> sections that embed code between //<![CDATA[and //]]>
- **IFRAMES** / JavaScript code that creates IFRAMES, such as window.document.createElement("iframe")
- Use browser “developer tools” to find the code
- **jQuery Ajax** functions (as jQuery.ajax())
- **fetch()**

The Classic Web Application Model


- Most user actions in the browser interface trigger an HTTP request back to a web server.
- The server does some processing – retrieving data, crunching numbers, talking to various legacy systems.
- The server then returns an HTML page to the client.
- Approach issues:
 - It doesn't make for a great user experience.
 - While the server is doing its thing, the user is waiting.
 - And at every step in a task, the user waits some more.

The Ajax Web Application Model


- Ajax introduces an intermediary – an Ajax engine – between the user and the server.
- Instead of loading a webpage, at the start of the session, the browser loads an Ajax engine – written in JavaScript and usually stored in a hidden frame.
- This engine is responsible for
 - rendering the interface that the user sees
 - communicating with the server on the user's behalf.
- The Ajax engine allows the user's interaction with the application to happen asynchronously – independent of communication with the server.
- Approach Benefits:
 - An Ajax application eliminates the start-stop-start-stop nature of interaction on the Web.
 - The user is never staring at a browser window with hourglass, waiting for the server to do something.
 - The application is more responsive.

AJAX:


- Cuts down on user wait time
- Uses client to offload some work from the server
- Asynchronous operation

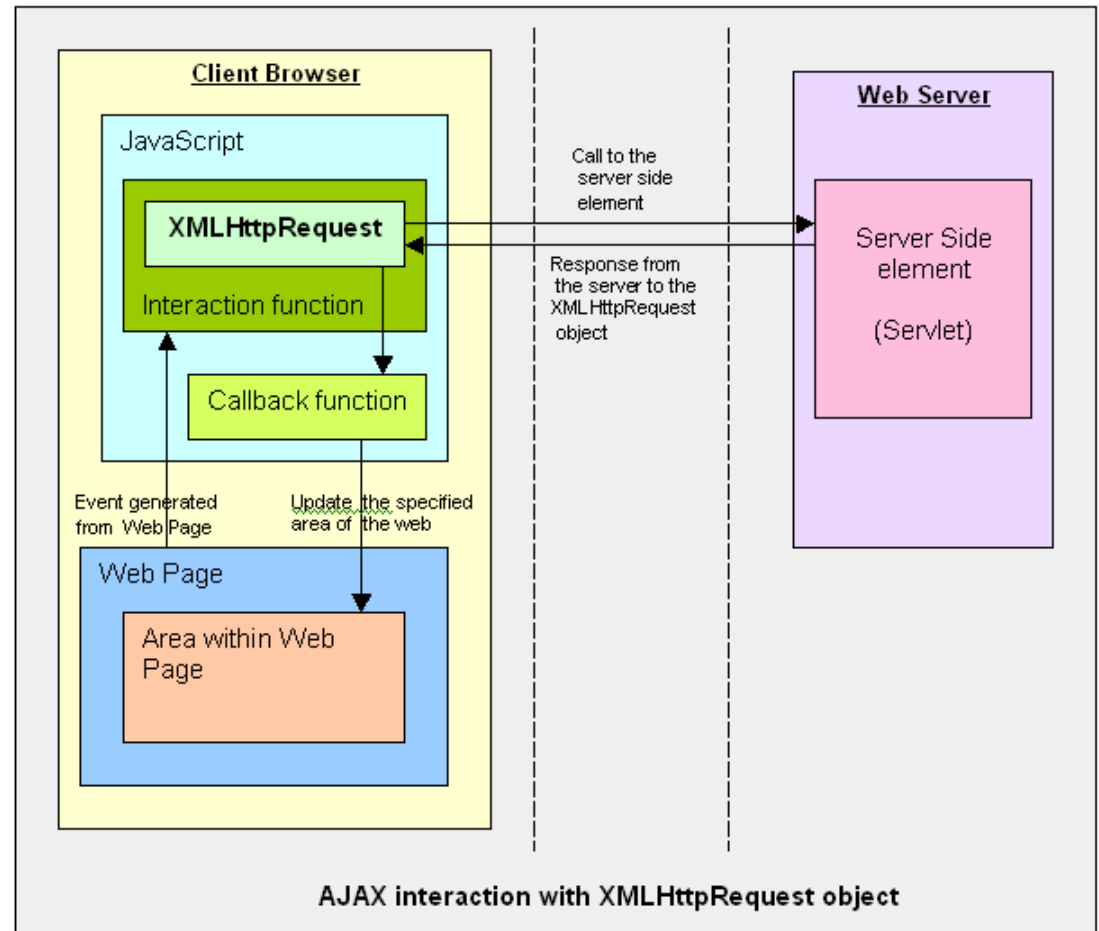

Traditional Web Applications Model compared to the Ajax Model

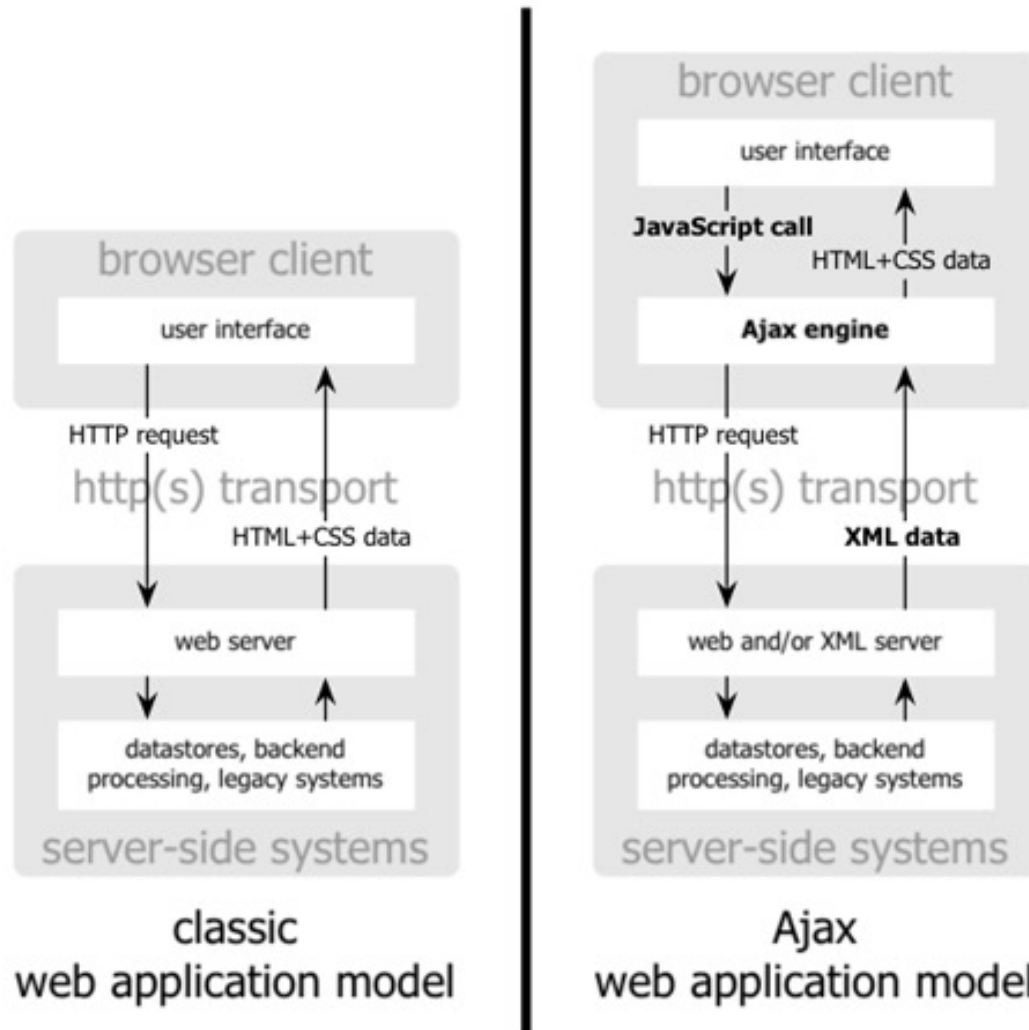

Classic Web Application Model (synchronous)

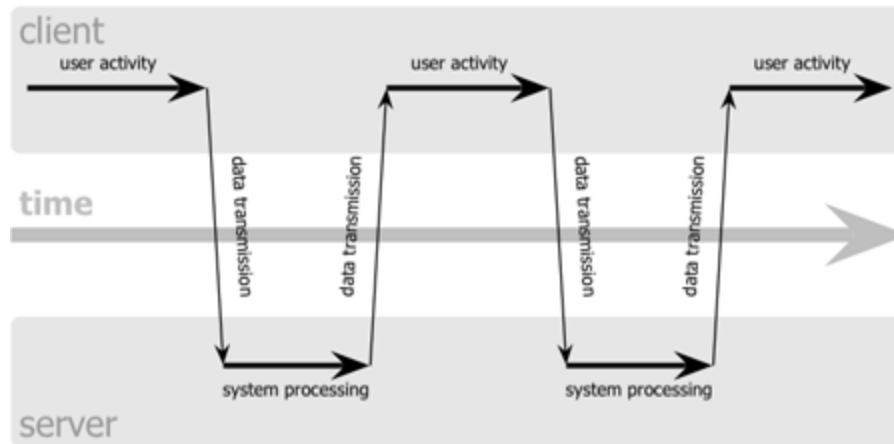


From Jesse James Garrett's "Ajax: a New Approach to Web Applications". See:

<http://adaptivepath.org/ideas/ajax-new-approach-web-applications/> (archived below)

<https://michaeljordan.nl/ajax.pdf>

Ajax Web Application Model (asynchronous)

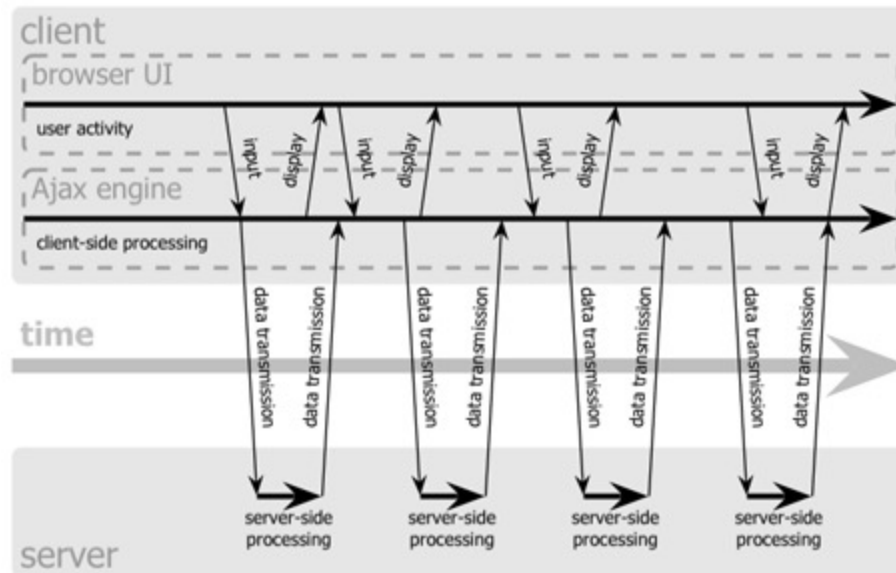

Ajax Engine Role

- Every user action that normally would generate an HTTP request takes the form of a JavaScript call to the Ajax engine instead.
- Any response to a user action that doesn't require a trip back to the server, such as:
 - simple data **validation**
 - **editing** data in memory
 - even some **navigation**

the engine handles on its own.

- If the engine needs something from the server in order to respond, such as:
 - **submitting** data for processing
 - **loading** additional **interface** code
 - **retrieving** new **data**

the engine makes those requests asynchronously, retrieving results in JSON or XML, without stalling a user's interaction with the application.

Initiating the XMLHttpRequest Object

- Creating an instance of the XMLHttpRequest object requires branching syntax to account for browser differences. For all modern browsers a simple call to the object's constructor function does the job:

```
var req = new XMLHttpRequest() ;
```

- The object reference returned by both constructors is to an abstract object that works entirely out of view of the user. Its methods control all operations, while its properties hold, among other things, various data pieces returned from the server.

XMLHttpRequest Object Methods

Method	Description
<code>abort()</code>	Stops the current request
<code>getAllResponseHeaders()</code>	Returns complete set of headers (labels and values) as a string
<code>getResponseHeader("headerLabel")</code>	Returns the string value of a single header label
<code>open("method", "URL"[, <i>asyncFlag</i>[, "userName"[, "password"]]])</code>	Assigns destination URL, method, and other optional attributes of a pending request
<code>send(content)</code>	Transmits the request, optionally with postable string or DOM object data
<code>setRequestHeader("label", "value")</code>	Assigns a label/value pair to the header to be sent with a request

See latest requests and responses at: <https://xhr.spec.whatwg.org/#request>

XMLHttpRequest Object Methods (cont'd)

- Of the methods shown in the Table on the previous slide, the **open()** and **send()** methods are the ones you'll likely use most.
- **open()** sets the scene for an upcoming operation. Two required parameters are the HTTP method you intend for the request and the URL for the connection. For the method parameter, use "GET" on operations that are primarily data retrieval requests; use "POST" on operations that send data to the server, especially if the length of the outgoing data is potentially greater than 512 bytes. The URL may be either a complete or relative URL.
- It is safer to **send** asynchronously and design your code around the `onreadystatechange` event for the request object. **send** initiates the transaction.

XMLHttpRequest Object Properties

Property	Description
<code>onreadystatechange</code>	Event handler for an event that fires at every state change
<code>readyState</code>	Object status integer: 0 = uninitialized 1 = loading 2 = loaded 3 = interactive 4 = complete
<code>responseText</code>	String version of data returned from server process
<code>responseXML</code>	DOM-compatible document object of data returned from server process
<code>status</code>	Numeric code returned by server, such as 404 for "Not Found" or 200 for "OK"
<code>statusText</code>	String message accompanying the status code

See latest at: <https://xhr.spec.whatwg.org/#xmlhttprequest-response>

XMLHttpRequest Object Properties (cont'd)

- Use the **readyState** property inside the event handler function that processes request object state change events. While the object may undergo interim state changes during its creation and processing, the value that signals the completion of the transaction is 4.
- Access data returned from the server via the **responseText** or **responseXML** properties. The former provides a string representation of the data, which is used today for **JSON data**. More powerful, however, is the XML document object in the **responseXML** property. This object is a full-fledged document node object, which can be examined and parsed using W3C DOM node tree methods and properties.
- Note, however, that this is an XML, rather than HTML, document, meaning that you cannot count on the DOM's HTML module methods and properties.
- In today's implementations, everybody is using **responseText**, as this is the way to get **JSON** data.
- The XMLHttpRequest Living Standard includes a **responseType** attribute, that can be set to **arraybuffer**, **blob**, **document**, **json** and **text**, and a **response** property that returns a "parsed json object" when **json** is selected.

XMLHttpRequest Example Code

```
var req;

function loadXMLDoc(url) {
    req = false;
    // branch for native XMLHttpRequest object
    if(window.XMLHttpRequest) {
        try {    req = new XMLHttpRequest();
        } catch(e) {    req = false;
        }
        // branch for IE/Windows ActiveX version (obsolete)
    } else if(window.ActiveXObject) {
        try {
            req = new ActiveXObject("Msxml2.XMLHTTP");
        } catch(e) {
            try {    req = new ActiveXObject("Microsoft.XMLHTTP");
            } catch(e) {    req = false;
            }
        }
    }
    if(req) {
        req.onreadystatechange = processReqChange;
        req.open("GET", url, true);
        req.send("");
    }
}
```

This code instantiates an XMLHttpRequest object depending upon the browser


onreadystatechange Event Handler Function

```
function processReqChange() { // see previous slide
    // only if req shows "loaded"
    if (req.readyState == 4) {
        // only if "OK"
        if (req.status == 200) {
            // processing statements req.responseText
            // for JSON
            // and req.responseXML for XML go here...
        } else {
            alert("There was a problem retrieving the data:\n" +
                req.statusText);
        }
    }
}
```


Security Issues

- When the XMLHttpRequest object operates within a browser, it **adopts the same-domain security policies** of typical JavaScript activity (sharing the same "sandbox," as it were).
- First, on most browsers supporting this functionality, the page that bears scripts accessing the object needs to be retrieved via **http: protocol**, meaning that **you won't be able to test the pages from a local hard disk (file: protocol)** without some extra security issues cropping up, especially in Mozilla and IE on Windows.
- Second, the domain of the URL request destination must be the same as the one that serves up the page containing the script. This means, unfortunately, that client-side scripts cannot fetch web service data from other sources and blend that data into a page. **Everything must come from the same domain.**

AJAX Cross Domain Security

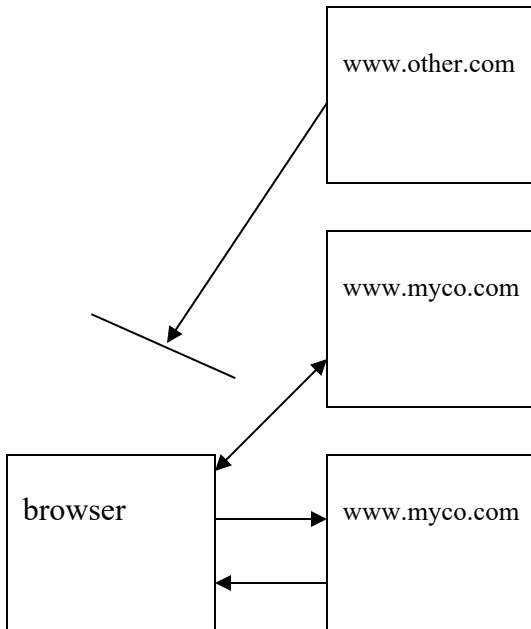

For security reasons, scripts are only allowed to access data which comes from the same domain

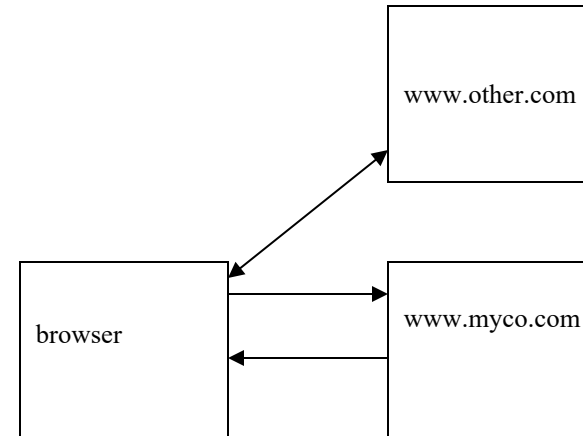

The one exception is for images: images can come from any domain, without any security risk.




This is why all the mash-up applications involve images

They simply would not be possible for other kinds of data

Cross-domain Restrictions and a Solution

- Browser security restrictions prevent your web application from opening network connections to domains other than the one your application came from.
- For example, suppose your web application wants to use data both from your site and from Yahoo!; normally this is not possible as it is a violation of browser cross-domain security policy.
- **One way** to work around this issue is to install a **web proxy** on your server that will pass requests from your application to Yahoo! and the data back again. This is what is used in our assignments.
- If you are using a proxy to relay requests from your web application to Yahoo!, the actual request URL you use from your web application is different, as you must relay your request through your web server proxy.
- **Another way** is **CORS**, which works on all recent browsers. Of course, you will need a server that you trust and that is set up to accept CORS requests. (see slides later in this set)

Why You Need a Proxy

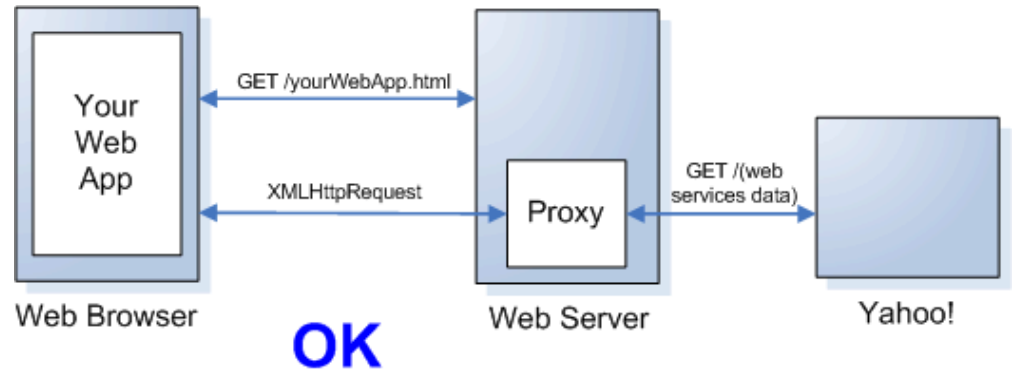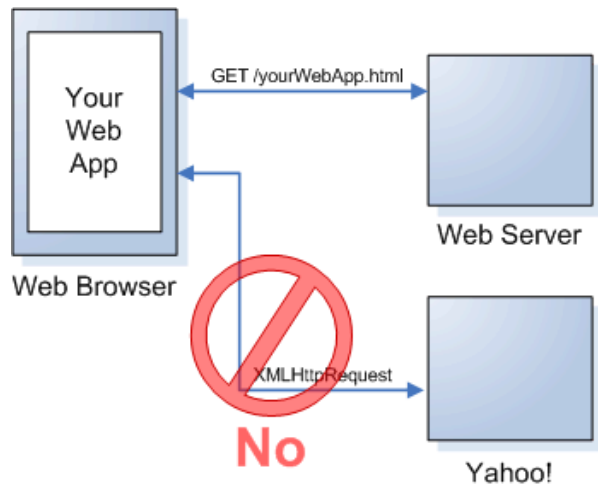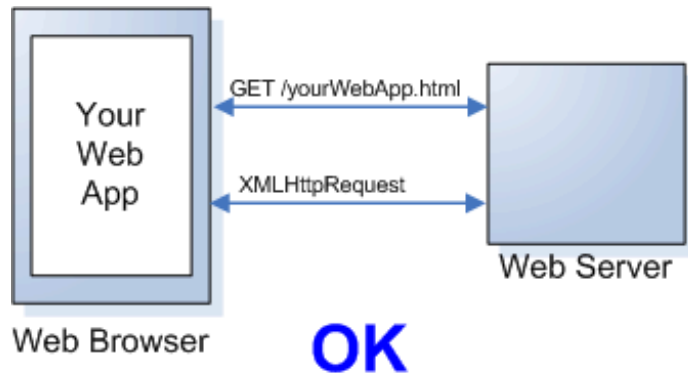

Alternative: Fetch API

- The **Fetch API** provides a JavaScript interface for accessing and manipulating requests and responses. It also provides a global **fetch()** method to fetch resources **asynchronously**.
- Fetch also provides a single logical place to define other HTTP-related concepts such as **CORS** and **HTTP extensions**.
- The fetch specification differs from **jQuery.ajax()** in three main ways:
 - The Promise returned from `fetch()` won't reject on HTTP error status even if the response is an HTTP 404 or 500.
 - `fetch()` won't receive cross-site cookies; you can't establish a cross-site session using fetch. Set-Cookie headers from other sites are silently ignored.
 - `Fetch()` won't send cookies, unless you set the credentials init option. won't receive cross-site cookies;

```
1 fetch('http://example.com/movies.json')
2   .then((response) => {
3     return response.json();
4   })
5   .then((data) => {
6     console.log(data);
7   });
```

Alternative: Fetch API (cont'd)

- see: https://developer.mozilla.org/en-US/docs/Web/API/Fetch_API/Using_Fetch
- The `fetch()` method can optionally accept a second parameter, an `init` object that allows you to control a few settings:

```
1 // Example POST method implementation:
2 async function postData(url = '', data = {}) {
3   // Default options are marked with *
4   const response = await fetch(url, {
5     method: 'POST', // *GET, POST, PUT, DELETE, etc.
6     mode: 'cors', // no-cors, *cors, same-origin
7     cache: 'no-cache', // *default, no-cache, reload, force-cache, only-if-cached
8     credentials: 'same-origin', // include, *same-origin, omit
9     headers: {
10       'Content-Type': 'application/json'
11       // 'Content-Type': 'application/x-www-form-urlencoded',
12     },
13     redirect: 'follow', // manual, *follow, error
14     referrerPolicy: 'no-referrer', // no-referrer, *client
15     body: JSON.stringify(data) // body data type must match "Content-Type" header
16   });
17   return await response.json(); // parses JSON response into native JavaScript objects
18 }
19
20 postData('https://example.com/answer', { answer: 42 })
21   .then((data) => {
22     console.log(data); // JSON data parsed by `response.json()` call
23   });
```

A First Ajax Example - Using Ajax to Download Files

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0  
Transitional//EN">
```

```
<html><head>
```

```
  <title>First Ajax Script</title>
```

```
  <script src="script01.js"></script>
```

The javascript file does all of the work

```
</head><body>
```

```
  <p>
```

```
    <a id="makeTextRequest" href="gAddress.txt">
```

```
      Request a text file</a><br />
```

```
    <a id="makeXMLRequest" href="us-states.xml">
```


```
      Request an XML file</a>
```

```
  </p>
```

```
  <div id="updateArea">&nbsp;</div>
```

```
</body>
```

```
</html>
```

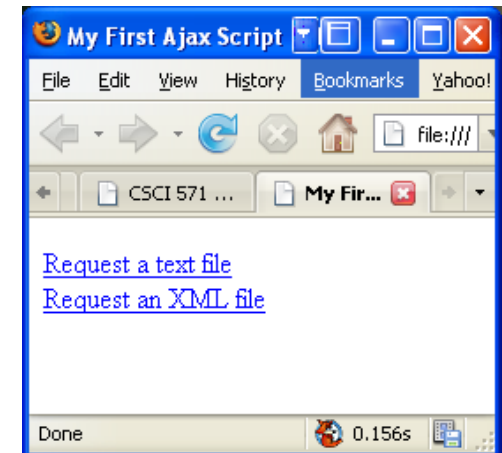


Imported JavaScript-script01.js

```
window.onload = initAll;
var xhr = false;
function initAll() {
    document.getElementById("makeTextRequest").onclick = getNewFile;
    document.getElementById("makeXMLRequest").onclick = getNewFile;}
function getNewFile() {
    makeRequest(this.href); return false;}
function makeRequest(url) {
    if (window.XMLHttpRequest) { xhr = new XMLHttpRequest(); }
    else { if (window.ActiveXObject) {
        try { xhr = new ActiveXObject("Microsoft.XMLHTTP"); }
        catch (e) { }
    } }
    if (xhr) { xhr.onreadystatechange = showContents;
        xhr.open("GET", url, true); xhr.send(null); }
    else { document.getElementById("updateArea").innerHTML = "Sorry, but I couldn't
    create an XMLHttpRequest"; } }
function showContents() {
    if (xhr.readyState == 4) {
        if (xhr.status == 200) {
            var outMsg = (xhr.responseXML &&
            xhr.responseXML.contentType=="text/xml") ?
            xhr.responseXML.getElementsByTagName("choices")[0].textContent : xhr.responseText;
        } else { var outMsg = "There was a problem with the request " + xhr.status; }
        document.getElementById("updateArea").innerHTML = outMsg; } }
```


On page load the onclick event is set to call the function
When the click is made, getNewFile and makerequest are executed.

showContents waits for a successful return of an
file; it then prints the result in the browser

Browser Output

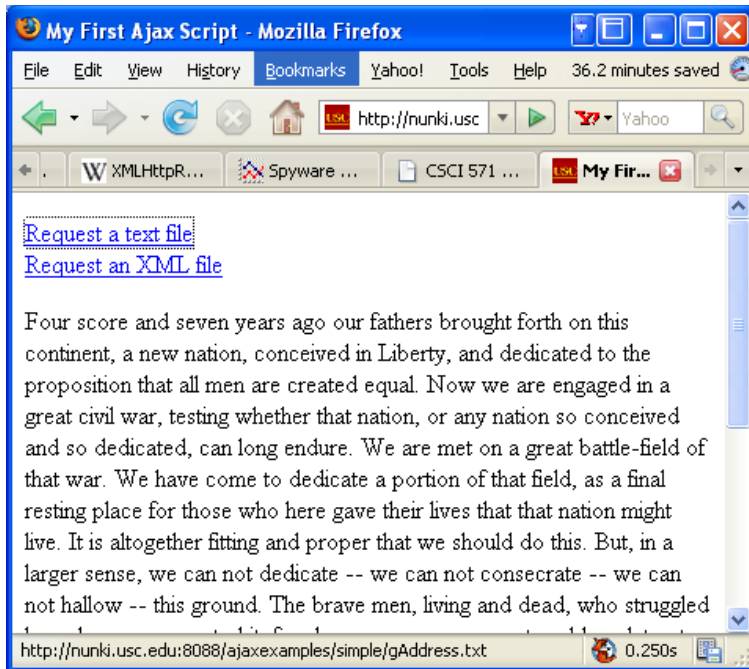

Result of clicking on the first link

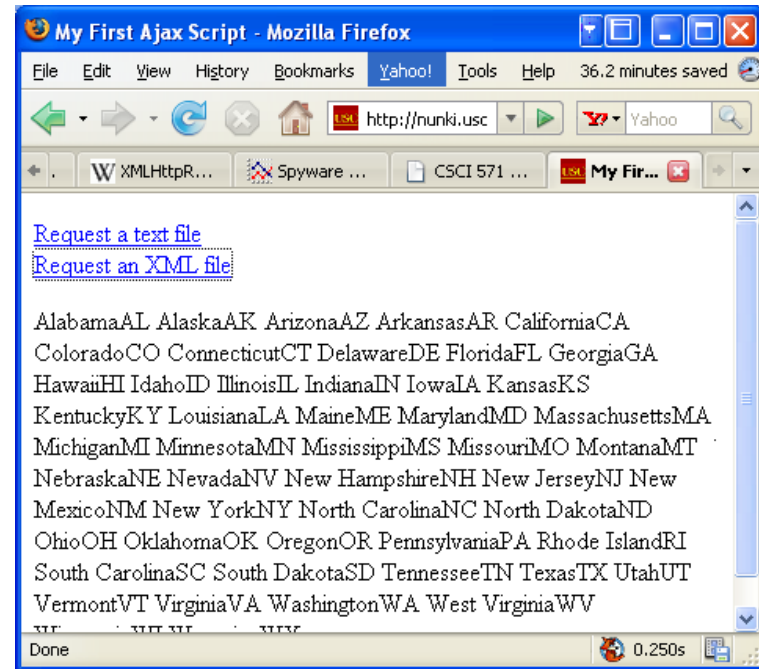

Result of clicking on the second link

<http://csci571.com/ajaxexamples/simple/script01.html>

Second Ajax Example - Using Ajax to Download Files from Flickr

- Here is the html file, which basically loads script02.js


```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN">
<html><head><title>Second Ajax Script</title>
<script src="script02.js" type="text/javascript" language="Javascript"></script>
</head><body><div id="pictureBar"> </div></body></html>
```

- Here is script02.js

```
window.onload = initAll;
var xhr = false;
function initAll() {
    if (window.XMLHttpRequest) { xhr = new XMLHttpRequest(); } else {
    if (window.ActiveXObject) { try { xhr = new ActiveXObject("Microsoft.XMLHTTP"); }
        catch (e) {} } }
    if (xhr) {
        xhr.onreadystatechange = showPictures; xhr.open("GET", "flickrfeed.xml", true);
        xhr.send(null);
    } else { alert("Sorry, but I couldn't create an XMLHttpRequest"); }}
```

```
function showPictures() {
    var tempDiv = document.createElement("div");
    var pageDiv = document.getElementById("pictureBar");
    if (xhr.readyState == 4 && xhr.status == 200) {
        tempDiv.innerHTML = xhr.responseText;
        var allLinks = tempDiv.getElementsByTagName("a");
        for (var i = 1; i < allLinks.length; i += 2)
            pageDiv.appendChild(allLinks[i].cloneNode(true));
    } else { alert("There was a problem with the request " + xhr.status); }
};
```

ShowPictures retrieves an file from flickr;
The result is extracted from responseText and
assigned to innerHTML property




Portion of Flickr XML file

```
<?xml version="1.0" encoding="utf-8" standalone="yes"?>
<feed xmlns=http://www.w3.org/2005/Atom
xmlns=http://purl.org/dc/elements/1.1>
<title>Dori Simth's Photos</title>
<link rel="self"
      href=http://www.flickr.com/services/feeds/photos_public.gne?id=23922109@N00 />
<link rel="alternate" type="text/html" href=http://www.flickr.com/photos/dorismith/
/>
<id>tag:flickr.com,2005:/photos/public/116078</id>
<icon>http://static.flickr.com/5/buddyicons/23922109@N00.jpg?1113973282</icon>
<subtitle>A feed of Dori Smith's Photos</subtitle>
<updated>2006-03-22T20:12:44Z</updated>
<generator uri=http://www.flickr.com/>Flickr</generator>
<entry>
<title>Mash note</title>
<link rel="alternate" type="text/html"
      href=http://www.flickr.com/photos/dorismith/116463569/ />
```


OTHER STUFF

```
<p> <a href=http://www.flickr.com/photos/dorismith/116463569/ title="Mash
note"><img src=http://static.flickr.com/44/116463569_483fd4ee7c_s.jpg
width="75" height="75" alt="Mash note" style="border: 5px solid #ddd;" /></a>
</p>
```

Each <entry> node has two links;
This application uses the second link so
the showPictures loop starts with 1 rather
than 0 and increments by 2; each link contains
the thumbnail image inside it; every
thumbnail is a link back to the original photo



Browser Output

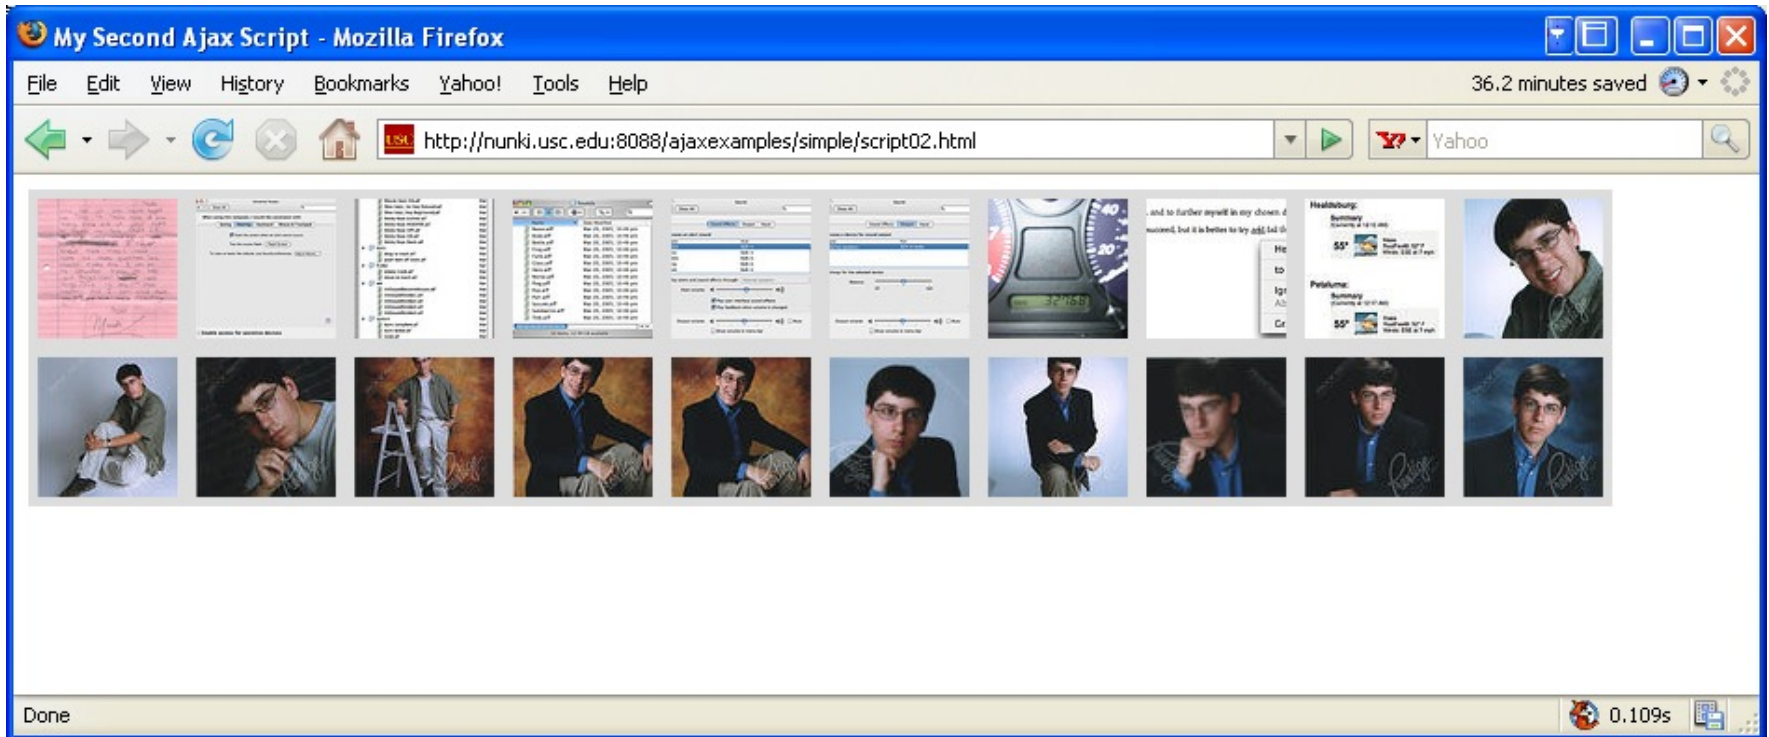

<http://csci571.com/ajaxexamples/simple/script02.html>

Third Ajax Example - Refreshing Server Data

- This extension retrieves a new version of the data from the server, refreshing the page; **here is the html accessing javascript**

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN">
```

```
<html><head><title>My Third Ajax Script</title>
```

```
<script src="script03.js"></script></head>
```

```
<body><div id="pictureBar"> </div></body></html>
```

- And here is the source for script03.js

```
window.onload = initAll;
```

```
var xhr = false;
```

```
function initAll() { same as previously except it calls getPix }
```

```
function getPix() { xhr.open("GET", "flickrfeed.xml", true);
```

```
xhr.onreadystatechange = showPictures; xhr.send(null); setTimeout("getPix()", 5 * 1000);}
```

```
function showPictures() {
```

```
    var tempDiv = document.createElement("div");
```

```
    var tempDiv2 = document.createElement("div");
```

```
    if (xhr.readyState == 4 && xhr.status == 200) {
```

```
        tempDiv.innerHTML = xhr.responseText;
```

```
        var allLinks = tempDiv.getElementsByTagName("a");
```

```
        for (var i=1; i<allLinks.length; i+=2)
```

```
            tempDiv2.appendChild(allLinks[i].cloneNode(true));
```

```
        allLinks = tempDiv2.getElementsByTagName("a");
```

```
        var randomImg = Math.floor(Math.random() * allLinks.length);
```

```
        document.getElementById("pictureBar").innerHTML = allLinks[randomImg].innerHTML;
```




```
    } else { alert("There was a problem with the request " + xhr.status); }
```

```
}
```

The call to getPix is placed in setTimeout which causes repeated execution, every 5 seconds;

An array of links of photographs is created, a random number computed, and use it as an index into the array

Browser Output

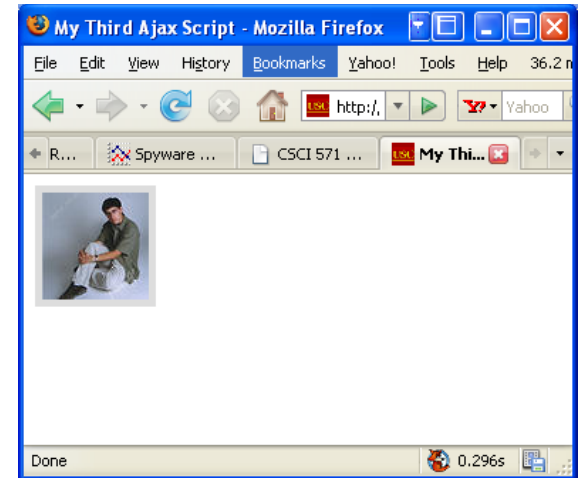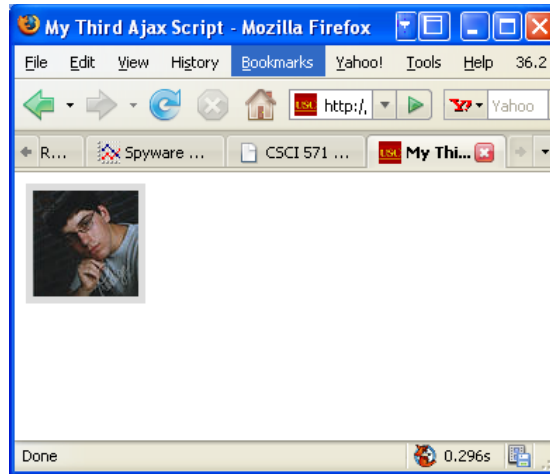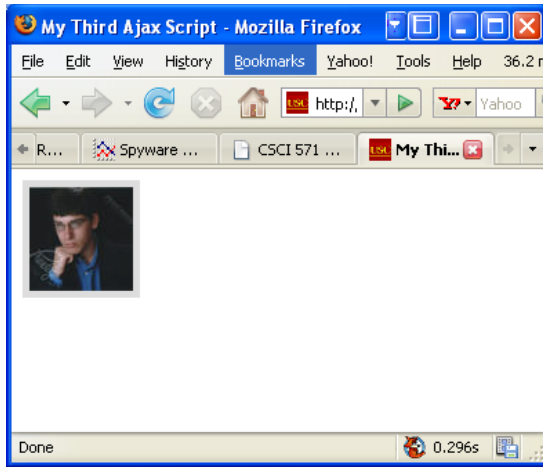


Three consecutive outputs

<http://csci571.com/ajaxexamples/simple/script03.html>

Fourth Ajax Example - Previewing Links

```
<!DOCTYPE html PUBLIC
    "-//W3C//DTD XHTML 1.0 Transitional//EN">

<html>
<head>
  <title>My Fourth Ajax Script</title>
  <link rel="stylesheet" href="script04.css" />
  <script src="script04.js"></script>
</head>
<body>
  <h2>A Gentle Introduction to JavaScript</h2>
  <ul>
    <li><a href="jsintro/2000-08.html">August column</a></li>
    <li><a href="jsintro/2000-09.html">September column</a></li>
    <li><a href="jsintro/2000-10.html">October column</a></li>
    <li><a href="jsintro/2000-11.html">November column</a></li>
  </ul>
  <div id="previewWin"> </div>
</body>
</html>
```

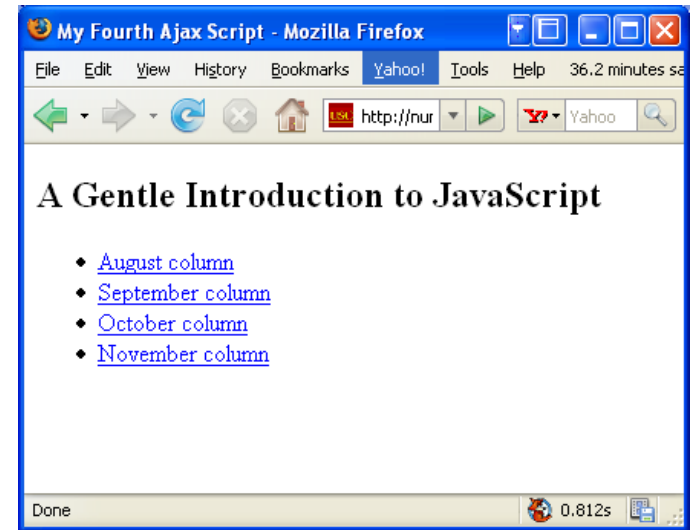

<http://csci571.com/ajaxexamples/simple/script04.html>

The stylesheet

```
#previewWin {  
  background-color: #ff9;  
  width: 400px;  
  height: 100px;  
  font: 0.8em Arial, Helvetica, sans-serif;  
  padding: 5px;  
  position: absolute;  
  visibility: hidden;  
  top: 10px;  
  left: 10px;  
  border: 1px #cc0 solid;  
  clip: auto;  
  overflow: hidden;  
}  
  
#previewWin h1,  
#previewWin h2 {  
  font-size: 1em;  
}
```

The javascript source

```
window.onload = initAll;
var xhr = false;
var xPos, yPos;
function initAll() {
    for (const link of document.getElementsByTagName("a"))
        link.onmouseover = showPreview;
}
function showPreview(evt) { getPreview(evt); return false; }
function hidePreview() {
    document.getElementById("previewWin").style.visibility = "hidden"; }
function getPreview(evt) {
    if (evt) { var url = evt.target; }
    else { evt = window.event; var url = evt.srcElement; }
    xPos = evt.clientX; yPos = evt.clientY;

    if (window.XMLHttpRequest) { xhr = new XMLHttpRequest(); }
    else { if (window.ActiveXObject) {
        try { xhr = new ActiveXObject("Microsoft.XMLHTTP"); } catch (e) { } }
    }
    if (xhr) {
        xhr.onreadystatechange = showContents;
        xhr.open("GET", url, true); xhr.send(null);
    } else {
        alert("Sorry, but I couldn't create an XMLHttpRequest"); }
    }
}
```

The javascript source cont'd

```
function showContents() {  
    var prevWin = document.getElementById("previewWin");  
    if (xhr.readyState == 4) {  
        prevWin.innerHTML = xhr.status == 200 ? xhr.responseText : "There was a problem with the  
                                                                    request " + xhr.status;  
  
        prevWin.style.top = parseInt(yPos) + 2 + "px";  
        prevWin.style.left = parseInt(xPos) + 2 + "px";  
        prevWin.style.visibility = "visible";  
        prevWin.onmouseout = hidePreview;  
    }  
}
```

Notes: initall goes through all of the links and adds an onmouseover event;

showPreview() and hidePreview() are both needed; the latter sets the preview window back to hidden;

In getPreview(), depending upon the browser, the URL is in either evt.target or in window.event.srcElement; the (x,y) position is extracted;

In showContents() the data is placed in prevWin.innerHTML from.responseText;

The preview window is placed just below and to the right of the cursor position that triggered the call

Fifth Ajax Example, Auto Completion

```
<!DOCTYPE html>
<html>
<head>
  <title>My Fifth Ajax Script</title>
  <link rel="stylesheet" href="script05.css" />
  <script src="script05.js"></script>
</head>
<body>
  <form action="#">
    Please enter your state:<br />
    <input type="text" id="searchField" autocomplete="off" /><br />
    <div id="popups"> </div>
  </form>
</body>
</html>
```

Autocomplete attribute is set to off to prevent browsers from trying to autocomplete the field

Initial screen



The stylesheet

```
body,  
#searchfield {  
  font: 1.2em Arial, Helvetica, sans-serif;  
}  
.suggestions {  
  background-color: #fff;  
  padding: 2px 6px;  
  border: 1px solid #000;  
}  
.suggestions:hover {  
  background-color: #69f;  
}  
#popups {  
  position: absolute;  
}  
#searchField.error {  
  background-color: #ffc;  
}
```

The JavaScript Source

```
window.onload = initAll;  
var xhr = false;  
var statesArray = [];
```

Onkeyup captures single keystrokes

```
function initAll() {  
    document.getElementById("searchField").onkeyup = searchSuggest;  
    if (window.XMLHttpRequest) { xhr = new XMLHttpRequest(); }  
    else if (window.ActiveXObject) {  
        try { xhr = new ActiveXObject("Microsoft.XMLHTTP"); } catch (e) {}  
    }  
    if (!xhr) { alert("Sorry, but I couldn't create an XMLHttpRequest"); return; }  
    xhr.onreadystatechange = setStatesArray;  
    xhr.open("GET", "us-states.xml", true);  
    xhr.send(null);  
}
```

The example uses the xml file listing the states

```
function setStatesArray() {  
    if (xhr.readyState == 4 && xhr.status == 200 && xhr.responseXML) {  
        statesArray = xhr.responseXML.getElementsByTagName("item")  
            .map((state) => state.getElementsByTagName("label")[0].firstChild);  
    } else {  
        alert("There was a problem with the request " + xhr.status);  
    }  
}
```

Here we form an array from the list of states

The JavaScript Source cont'd

```
function searchSuggest() {  
    var str = document.getElementById("searchField").value;  
    document.getElementById("searchField").className = "";  
    if (!str) return;  
    document.getElementById("popups").innerHTML = "";  
    for (const state of statesArray) {  
        if (state.nodeValue.toLowerCase().startsWith(str.toLowerCase())) {  
            var tempDiv = document.createElement("div");  
            tempDiv.innerHTML = state.nodeValue;  
            tempDiv.onclick = makeChoice;  
            tempDiv.className = "suggestions";  
            document.getElementById("popups").appendChild(tempDiv);  
        }  
    }  
    var foundCt = document.getElementById("popups").childNodes.length;  
    if (foundCt == 0) {  
        document.getElementById("searchField").className = "error";  
    } else if (foundCt == 1) {  
        document.getElementById("searchField").value =  
            document.getElementById("popups").firstChild.innerHTML;  
        document.getElementById("popups").innerHTML = "";  
    }  
}  
  
function makeChoice(evt) {  
    var thisDiv = evt ? evt.target : window.event.srcElement;  
    document.getElementById("searchField").value = thisDiv.innerHTML;  
    document.getElementById("popups").innerHTML = "";  
}
```

This routine is called on a key up;
The value in the search field is first
extracted; if nothing is entered, do
nothing;

If starts with query, then we have a hit;

Add a state to the list of
possibilities

Foundct is the number
of matches

Unique hit, place it in proper place

Modern version

```
document.addEventListener("DOMContentLoaded", initAll);
const parser = new DOMParser();
let statesArray = [];


async function initAll() {
  document.getElementById("searchField").onkeyup = searchSuggest;

  const statesXml = await fetch("us-states.xml")
    .then((response) => response.text())
    .then((xmlText) => parser.parseFromString(xmlText, "application/xml"))
    .catch((error) => {
      alert("Sorry, but I couldn't fetch the data: " + error.message);
    });

  if (statesXml) setStatesArray(statesXml);
}

function setStatesArray(xmlDoc) {
  const items = Array.from(xmlDoc.getElementsByTagName("item"));
  statesArray = items.map((item) => item.getElementsByTagName("label")[0].textContent);
}
```

Browser Output

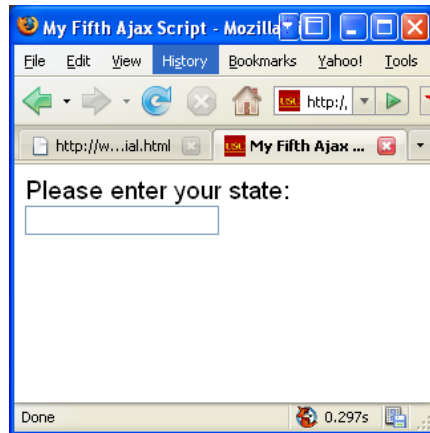

Initial screen



3 examples

<http://csci571.com/ajaxexamples/simple/script05.html>

Some References

- Ajax (programming) – Wikipedia:
<http://en.wikipedia.org/wiki/AJAX>
- Using the XML HTTP Request object:
<http://jibbering.com/2002/4/httprequest.html>
- XMLHttpRequest & Ajax Working Examples:
<http://www.fiftyfoureleven.com/resources/programming/xmlhttprequest/examples>
- Very Dynamic Web Interfaces:
<http://www.xml.com/pub/a/2005/02/09/xml-http-request.html>
- Fetch:
https://developer.mozilla.org/en-US/docs/Web/API/Fetch_API

Ajax Enabled Technologies (Toolkits)

- **Axios:**

<https://github.com/axios/axios>

- Microsoft **ASP.NET** Ajax:

<https://docs.microsoft.com/en-us/aspnet/ajax/>

- DevExpress **AJAX Control Toolkit** for ASP.NET Forms:

<https://github.com/DevExpress/AjaxControlToolkit>

- **jQuery:**

<http://jquery.com>

- Google -- **Angular:**

<http://angular.io>

See “**Understanding communicating with backend services using HTTP**”:

<https://angular.io/guide/understanding-communicating-with-http>

Cross-origin resource sharing (CORS)

Cross-origin resource sharing (CORS) allows many resources (e.g, fonts, JavaScript, etc.) on a web page to be requested across domains. In particular, AJAX calls can use XMLHttpRequest across domains.

The CORS standard adds new HTTP headers. If the browser recognizes a cross-domain request, it sends an "Origin" HTTP header. Suppose a page from <http://www.social-network.com> attempts to access user data from online-personal-calendar.com. If the browser supports CORS, this header is sent:

Origin: <http://www.social-network.com>

If the server at online-personal-calendar.com allows the request, it sends an Access-Control-Allow-Origin (ACAO) header in the response. The value of the header indicates what origin sites are allowed. For example:

Access-Control-Allow-Origin: <http://www.social-network.com>

Access-Control-Allow-Origin: *


If the server does not allow the CORS request, the browser will deliver an error instead of the online-personal-calendar.com response. **Firefox 3.5+, Safari 4+, Chrome3+, IE 10+, Opera 12+, and Edge support CORS**. See:

https://developer.mozilla.org/en-US/docs/Web/HTTP/Access_control_CORS

http://enable-cors.org/server_apache.html

https://enable-cors.org/server_nginx.html

CORS Example

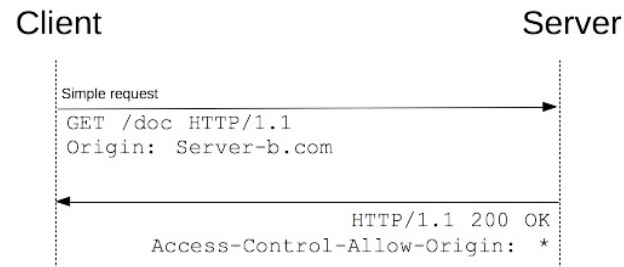

```
1 GET /resources/public-data/ HTTP/1.1
2 Host: bar.other
3 User-Agent: Mozilla/5.0 (Macintosh; U; Intel Mac OS X 10.5; en-US; rv:1.9.1b3pre) Gecko/
4 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
5 Accept-Language: en-us,en;q=0.5
6 Accept-Encoding: gzip,deflate
7 Accept-Charset: ISO-8859-1,utf-8;q=0.7,*;q=0.7
8 Connection: keep-alive
9 Referer: http://foo.example/examples/access-control/simpleXSIInvocation.html
10 Origin: http://foo.example
11
12
13 HTTP/1.1 200 OK
14 Date: Mon, 01 Dec 2008 00:23:53 GMT
15 Server: Apache/2.0.61
16 Access-Control-Allow-Origin: *
17 Keep-Alive: timeout=2, max=100
18 Connection: Keep-Alive
19 Transfer-Encoding: chunked
20 Content-Type: application/xml
21
22 [XML Data]
```