

JavaScript Frameworks

This content is protected and may not be shared, uploaded, or distributed.

What are we Talking about today?

- Node.js
 - Event-Driven, Non-Blocking I/O
 - Core Modules: Supports HTTP, file systems, and streams.
 - Package Management: npm
- JS Frameworks
- Authentication on web
- Angular
 - Data Binding
 - Directives
 - Page Application (SPA) Support

Outline

- Node.js
- Authentication
- Angular


Node.js

1. Node.js is a JavaScript runtime built on **Chrome's V8 JavaScript engine**.
<https://v8.dev/>
2. Node.js uses an **event-driven, non-blocking I/O model** that makes it **lightweight and efficient**.
3. Node.js allows the creation of **Web servers** and **networking tools** using **JavaScript** and a collection of "**modules**" that handle various core functionality.
4. Modules handle **file system I/O**, **networking** (DNS, HTTP, TCP, TLS/SSL, or UDP), **binary data (buffers)**, **cryptography functions**, **data streams** and other core functions.



Node.js Releases

1. Latest LTS is Node.js 22
2. Oldest supported version is Node.js 18
3. Even versions are considered stable and becoming LTS releases every year
4. Odd versions are unstable and are released for testing and feature validation purposes for the next even release.

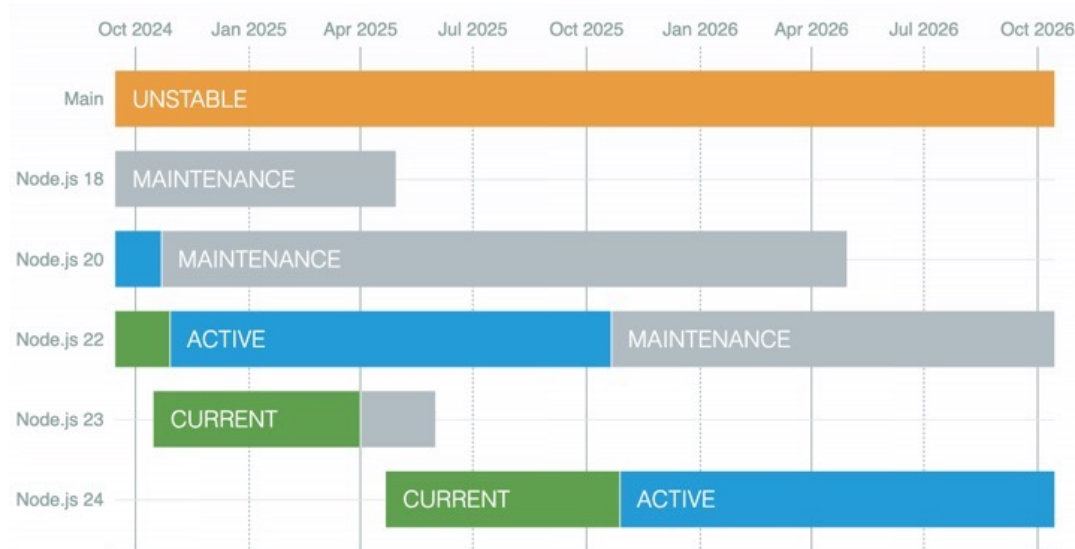

<https://nodejs.org/en/about/previous-releases>

ESM, also known as ES Modules (which itself is an acronym of ECMAScript Modules), is a modern module format built to replace older alternatives like CommonJS, AMD, and UMD.

Node.js CJS vs ESM

1. Originally JS ecosystem had no standard of imports from external file – since JS was mainly implemented in web browsers, which provided global pollution model – when specifying multiple scripts on the page, their symbols are merged into global namespace.
2. Historically, NodeJS introduced CommonJS format that used:
 1. To import: `var value = require("fs")`
 2. To export: `module.exports = ...`
3. In 2015 ES2015 brings static import/exports – commonly referred to as ESM. Now it is a modern preferred syntax variant
 1. To import: `import defaultSymbol, {symbols} from 'library or path'`
`const dynamicValue = await import('library or path')`
 2. To export: `export default defaultSymbol`
`export const mySymbol = 123`

Basic functionality

HTTP

- To use the HTTP server and client one must **require('http')**.
- The HTTP interfaces in Node.js are designed to support many features of the protocol which have been traditionally difficult to use. In particular, large, possibly chunk-encoded, messages. The interface is careful to never buffer entire requests or responses--the user is able to stream data.

`http.createServer([requestListener])`

- Returns a new instance of `http.Server`.
- The requestListener is a function which is automatically added to the 'request' event.

`http.request(options[, callback])`

- Node.js maintains several connections per server to make HTTP requests. This function allows one to transparently issue requests.
- options can be an object or a string. If options is a string, it is automatically parsed with `url.parse()`.

`http.get(options[, callback])`

- Since most requests are GET requests without bodies, Node.js provides this convenience method. The only difference between this method and `http.request()` is that it sets the method to GET and calls `req.end()` automatically.
- For HTTPS – use **require('https')** package

Basic functionality

File System

- File I/O is provided by simple wrappers around standard POSIX functions. To use this module do **require('fs')**. All the methods have asynchronous and synchronous forms..

`fs.readFile(file[, options], callback)`

- **Asynchronously** reads the entire contents of a file.
- The callback is passed two arguments (err, data), where data is the contents of the file.
- If no encoding is specified, then the raw buffer is returned.

`fs.readFileSync(file[, options])`

- **Synchronous** version of fs.readFile. Returns the contents of the file.
- If the encoding option is specified, then this function returns a string. Otherwise, it returns a buffer.
-

Basic functionality

Buffer

- Prior to the introduction of TypedArray in ECMAScript 2015 (ES6), the JavaScript language had no mechanism for reading or manipulating streams of binary data. The Buffer class was introduced as part of the Node.js API to make it possible to interact with octet streams in the context of things like TCP streams and file system operations.
- The Buffer class is a **global** within Node.js.

Buffers and Character Encodings

- Buffers are commonly used to represent sequences of encoded characters such as UTF8, UCS2, Base64 or even Hex-encoded data. It is possible to convert back and forth between Buffers and ordinary JavaScript string objects by using an explicit encoding method.

Example usage – Buffer Class

buffer.js:

```
const buf = Buffer.from('hello world', 'utf8');
console.log(buf.toString('hex'));
// Prints: 68656c6c6f20776f726c64
console.log(buf.toString('base64'));
// Prints: aGVsbG8gd29ybGQ=
console.log(Buffer.from('fhqwhgads', 'utf8'));
// Prints: <Buffer 66 68 71 77 68 67 61 64 73>
console.log(Buffer.from('fhqwhgads', 'utf16le'));
// Prints: <Buffer 66 00 68 00 71 00 77 00 68 00 67 00 61 00 64 00 73 00>
```

Example usage – ‘fs’Read File

fs-readFile.js:

```
var fs = require("fs");
fs.readFile("./intro.txt", "utf-8", function (err, data) {
  if (err) throw err;
  console.log(data);
});
```

intro.txt:

CSCI571 focuses on the phenomenon known as the World Wide Web (WWW or Web)
It's focus is to present many of the core technologies that the web is based upon.

Run command (may have to add ‘sudo’):

```
$ node fs-readFile.mjs
```

```
ubuntu@ip-172-31-12-48:~/nodejs$ nodejs fs-readFile.js
CSCI571 focuses on the phenomenon known as the World Wide Web (WWW or Web).
It's focus is to present many of the core technologies that the Web is based upon.
```

‘fs’Read File - Modern version

fs-readFile.mjs:


```
import fs from 'fs/promises'  
const data = await fs.readFile("./intro.txt", "utf-8");  
console.log(data);
```

intro.txt:

JsApp.US is a hosting platform for node.js applications.
It is setup to be a platform to coddle to quick, weekend hack like projects.

Run command (may have to add ‘sudo’):

```
$ node fs-readFile.mjs
```



```
▶ ~ / temp / node node fs-readFile.mjs  
JsApp.US is a hosting platform for node.js applications.  
It is setup to be a platform to coddle to quick, weekend hack like projects.
```

Test of Assertions

```
// tests.mjs
import assert from 'node:assert';
import test from 'node:test';

test('that 1 is equal 1', () => {
  assert.strictEqual(1, 1);
});
test('that throws as 1 is not equal 2', () => {
  // throws an exception because 1 != 2
  assert.strictEqual(1, 2);
});
// run with `node tests.mjs`
```

<https://nodejs.org/docs/latest/api/assert.html#assert>

Streaming Data

? ?

```
// streams.mjs
import { pipeline } from 'node:stream/promises';
import { createReadStream, createWriteStream } from 'node:fs';
import { createGzip } from 'node:zlib';
// ensure you have a `package.json` file for this test!
await pipeline
(
  createReadStream('package.json'),
  createGzip(),
  createWriteStream('package.json.gz')
);
// run with `node streams.mjs`
```

<https://nodejs.org/docs/latest/api/stream.html>

‘http’ Run Web Server


server.mjs:

```
import { createServer } from 'node:http';
const server = createServer((req, res) => {
  res.writeHead(200, { 'Content-Type': 'text/plain' });
  res.end("Hello World CSCI571!\n");
});
server.listen(9090, "127.0.0.1", () => {
  console.log("Listening on 127.0.0.1:9090");
});
```

Run command:

```
$ node server.js
```

```
[Marco-Papas-Mac-mini:Desktop marcopapa$ sudo node server.js
Server running at http://127.0.0.1:9090/
```

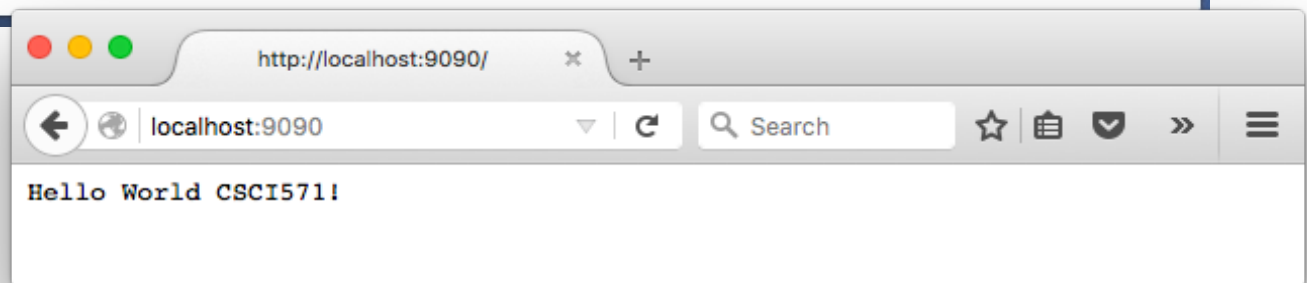

JS Linters

- Static analysis tools to detect errors and potential problems in JavaScript code and to enforce your team's coding conventions and standards.
- **ESLint**
 - ESLint uses an **AST (Abstract Syntax Tree)** to evaluate patterns in code.
 - ESLint is completely pluggable, every single rule is a plugin, and you can add more at runtime.
 - See: eslint.org
- **JSHint**
 - See: [Jshint.com](https://jshint.com)
- **StandardJs**
 - See; standardjs.com

eslint vs jshint vs standardjs



Stats

	Stars	Issues	Version	Updated [?]	Created [?]	Size
eslint	25,025	102	9.13.0	9 days ago	11 years ago	install size 6.85 MB
jshint	8,981	456	2.13.6	2 years ago	14 years ago	install size 5.21 MB
standardjs	-	-	1.0.0-alpha	7 years ago	7 years ago	install size 3.49 kB

JS Package Managers

- **npm:** the default package manager. Bundled with Node.js. If you have it installed, then you already have **npm** too. (see <https://www.npmjs.com>)
- **pnpm:** A performance-focused package manager that uses hard links and symlinks to save disk space and speed up installations. Supports monorepo projects. (see <https://pnpm.io/>)
- **yarn:** A fast, secure, and deterministic package manager developed by Facebook, improving dependency resolution and caching. (see <https://yarnpkg.com/>)

Useful commands

- `npm install` - Installs dependencies defined in `package.json`
- `npm add mypackage` - Adds “*mypackage*”,
updates `package.json` and the lockfile
- `npm remove mypackage` - removes package
- `npm run name` - Runs a script called *name* (def. in `package.json`)
- `node ./main.js` - Runs `./main.js`

Usefull node flags:

- `--watch` - watches file (and its dependencies) and reruns on change
- `--env-file .env` - populates `.env` values from file to `process.env`

JS Web Frameworks

- **express:** (<https://expressjs.com>) old, but still very popular. Does not receive major updates (1 major release over 5 years that almost does not contain any changes). Lacks proper TypeScript support, uses outdated concepts, lacks hooks and proper async-await support
- **fastify:** (<https://fastify.dev>) the de-facto default modern framework, focuses on performance, type-safe, flexible. Comes with many production-oriented design decisions.
- **hono:** (<https://hono.dev>) is a small, simple, and ultrafast web framework relying on web standards. Hence works on any JS runtime – Node, Bun, Deno, cloud runtimes (functions, edge computing, cdn middlewares, etc...)
- **ElysiaJS:** (<https://elysiajs.com>) “next-generation” ergonomic web framework for Bun. Contains lots of built-in features

Express Usage Example

```
const express = require("express");
const app     = express();
const path    = require("path");
const port    = 3000;
// Middleware
app.use(express.json()); // JSON Body Parsing
app.use(express.static(path.join(__dirname, "public"))); // Serve static Files
app.use((req, res, next) => {
  console.log(`Request received: ${req.method} ${req.url}`);
  next();
});
app.get("/user/:id", (req, res) => {
  res.json({ userId: req.params.id });
});

// Validation Middleware
const validateInput = (req, res, next) => {
  if (!req.body.name) return res.status(400).json({ error: "Name is required" });
  next();
};

// JSON Response & Request Body Parsing
app.post("/data", validateInput, (req, res) => {
  res.json({ message: `Hello, ${req.body.name}` });
});

// Start Server
app.listen(port, () => console.log(`Express running on http://localhost:${port}`));
```

Fastify Usage Example

```
import Fastify from "fastify";
import fastifyStatic from "@fastify/static";

const app = Fastify({ logger: true });

await app
  .register(MyPlugin, { /* ...plugins params... */ }) // Using plugins
  .register(fastifyStatic, { root: new URL("./public", import.meta.url) }) // Static Files
  .setNotFoundHandler((req, reply) => reply.sendFile("index.html")) // Send index.html for non-api
  .addHook("preHandler", async (request, reply) => { /* ... */ }); // Hooks/Middleware

app.get("/user/:id", async (request, reply) => {
  return { userId: request.params.id }; // Get route params
});

// Validation Schema
const schema = { body: {
  type: "object",
  properties: { name: { type: "string" } },
  required: ["name"],
}};

// JSON Response & Request Body Parsing
app.post("/data", { schema }, async (request, reply) => {
  return { message: `Hello, ${request.body.name}` };
});

// Start Server
app.listen({ port: 3000 }).then(() => console.log("Fastify running on http://localhost:3000"));
```

Hono Usage Example

```
import { Hono } from "hono";
import { serve } from "@hono/node-server";
import { serveStatic } from "@hono/node-server/serve-static";
import fs from "node:fs";

const app = new Hono();

// Middleware
app.use("*", async (c, next) => {
  console.log(`Request received: ${c.req.method} ${c.req.path}`);
  await next();
  console.log(`Request processed: ${c.res.status}`);
});

app.get("/user/:id", (c) => {
  return c.json({ userId: c.req.param("id") }); // Read URL Param
});

// JSON Body Parsing
app.post("/data", async (c) => {
  const body = await c.req.json(); // Parse Request JSON body
  return c.json({ message: `Hello, ${body.name}` });
});

app.get("*", serveStatic({ root: "./static" })); // Static Files
app.notFound(
  (c) => c.body(fs.createReadStream("./static/index.html"), 200, { "Content-Type": "text/html" })
);

serve({ port: 3000, fetch: app.fetch }); // Start Server
```

Elysia Usage Example

```
import { Elysia, t } from "elysia";
import { node } from "@elysiajs/node"; // To use with node.js

import { staticPlugin } from "@elysiajs/static";
import { swagger } from "@elysiajs/swagger";

const app = new Elysia({ adapter: node() })
  .use(swagger()) // Use plugin to generate Swagger documentation
  .use(staticPlugin({ assets: "./static", indexHTML: true })) // Static Files
                                                                & index.html on 404
                                                                // Route with Params
  .get("/user/:id", (ctx) => ({ userId: ctx.params.id }));

const validationSchema = {
  body: t.Object({
    name: t.String({ minLength: 4 })
  })
};


const loginHandler = async (ctx) => {
  return { message: `Hello, ${ctx.body.name}` };
};

app.post("/login", loginHandler, validationSchema);

app.listen(3000);
```

hono > fastify > express > ElysiaJS

Node.js Web Frameworks Popularity

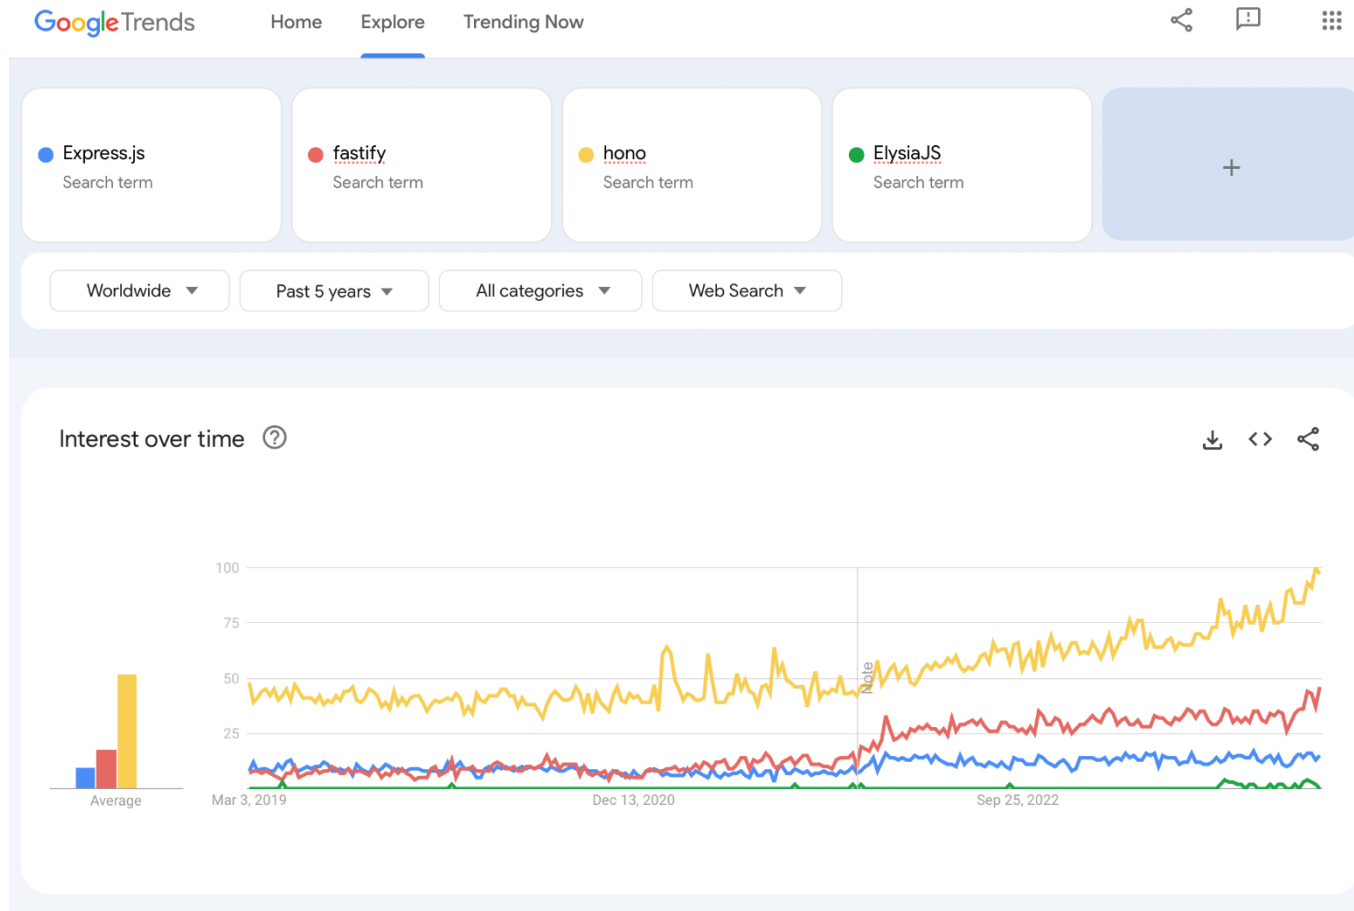

Node.js Modules (cont'd) – Express ecosystem

- **cors:** a Node.js package for providing a Connect/Express middleware that can be used to enable CORS with various options. (see <https://github.com/expressjs/cors>)
- **body-parser:** body-parser extracts the entire body portion of an incoming request stream and exposes it on req.body as something easier to interface with. (see <https://github.com/expressjs/body-parser>)
- And many more!
- Other mentioned frameworks can work seamlessly with these libraries!

Node.js Modules (cont'd)

- **xml2js**: a simple XML to JavaScript object converter. (see <https://www.npmjs.com/package/xml2js>)
- **async**: a utility module which provides straight-forward, powerful functions for working with asynchronous JavaScript. (see <https://caolan.github.io/async/>)
- **q**: a library for promises. A promise is an object that represents the return value or the thrown exception that the function may eventually provide. (see <https://github.com/krisKowal/q>)
- **underscore**: a JavaScript library that provides a whole set of useful functional programming helpers without extending any built-in objects. (see <http://underscorejs.org>)
- **socket.io**: a Node.js real-time framework server. It enables real-time bidirectional event-based communication. (see <https://socket.io/docs/>)
- **minimist**: a module used to parse command line arguments. (see <https://www.npmjs.com/package/minimistx>)

Node.js Modules (cont'd)

- **jest**: a simple, flexible, fun JavaScript **test** framework for Node.js and the browser. (see <https://jestjs.io/>)
- **mongodb**: the official MongoDB **driver** for Node.js. It provides a high-level API on top of mongodb-core that is meant for end users. (see <https://www.mongodb.com/docs/drivers/node/current/>)
- **mongoose**: a MongoDB **object modeling** tool designed to work in an asynchronous environment. (see <http://mongoosejs.com>)

Node.js Modules (cont'd)

- **fetch:** available natively! (no need to use node-fetch)
- **axios:** a promise-based HTTP client for the browser and node.js. Make [XMLHttpRequests](#) from the browser. Make [http](#) requests from node.js. Supports the [Promise](#) API. (see <https://www.npmjs.com/package/axios>)
- **Hapi:** a powerful and robust framework that is used for developing APIs. It was first introduced by Eran Hammer 2011 at Walmart while trying to handle the traffic on black Friday.. (see <https://hapi.dev/>)
- **passport:** a unique authentication module for Node.js devs. Hundreds of authentication methods to choose from, starting from internal ones, all the way up to external ones like Google, Facebook, and others. (see <https://github.com/jaredhanson/passport>)


xml2js Module Example

```
var parseString = require('xml2js').parseString;
var xml = "<root>Hello xml2js!</root>";

// "result" is the result of parsing xml
parseString(xml, function (err, result) {
    console.dir(result);
});
```

Node.js on AWS

- Create Ubuntu Micro EC2 instance
- ssh to the AWS ubuntu server
- Download node.js using 'wget'
- Execute the binaries, make, and install:
./configure && make && sudo make install

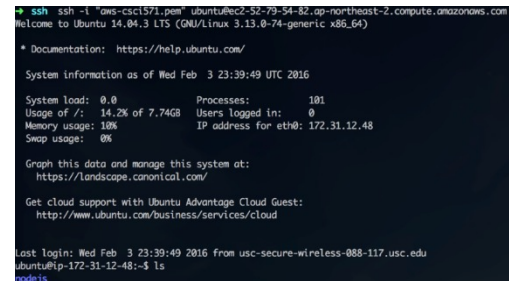

```
ssh -i "aws-cscl571.pem" ubuntu@ec2-52-79-54-82.ap-northeast-2.compute.amazonaws.com
Welcome to Ubuntu 14.04.3 LTS (GNU/Linux 3.13.0-74-generic x86_64)

 * Documentation:  https://help.ubuntu.com/

System information as of Wed Feb  3 23:39:49 UTC 2016

System load:  0.0               Processes:    101
Usage of /:   14.2% of 7.74GB    Users logged in:  0
Memory usage: 10%              IP address for eth0: 172.31.12.48
Swap usage:   0%

Graph this data and manage this system at:
https://landscape.canonical.com/


Get cloud support with Ubuntu Advantage Cloud Guest:
http://www.ubuntu.com/business/services/cloud

Last login: Wed Feb  3 23:39:49 2016 from usc-secure-wireless-088-117.usc.edu
ubuntu@ip-172-31-12-48:~$ ls
nodejs
```

- Alternatively, use **AWS Elastic Beanstalk** and select the Node.js Preconfigured Platform when creating Environment
- See supported platforms, Node.js 18 & 20:
<https://docs.aws.amazon.com/elasticbeanstalk/latest/platforms/platforms-supported.html#platforms-supported.nodejs>
- **nginx** Proxy server
- Supports static file mappings and **gzip** compression
- See slides on D2L Brightspace. Also see:
<https://docs.aws.amazon.com/elasticbeanstalk/latest/dg/nodejs-dynamodb-tutorial.html>
https://docs.aws.amazon.com/elasticbeanstalk/latest/dg/create_deploy_nodejs.container.html


Node.js on AWS (cont'd)

- AWS SDK for JavaScript in Node.js
- Provides JavaScript objects for AWS services including Amazon S3, Amazon EC2, DynamoDB, Amazon Elastic Beanstalk and many more.
- Single, downloadable package includes the AWS JavaScript Library and documentation
- See: <https://aws.amazon.com/sdk-for-javascript/>

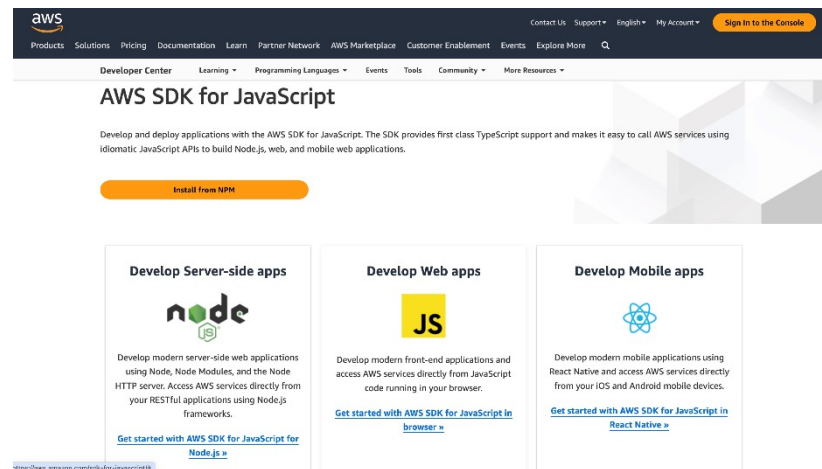



Node.js on Google Cloud

- Node.js app deployed using Google App Engine Managed VMs
- Scales to serve millions of requests
- Supports structures and binary data, authentication, logging, events
- See: <https://cloud.google.com/nodejs>
- See slides on D2L Brightspace.
- Node.js supported versions:
<https://cloud.google.com/appengine/docs/standard/lifecycle/support-schedule#nodejs>

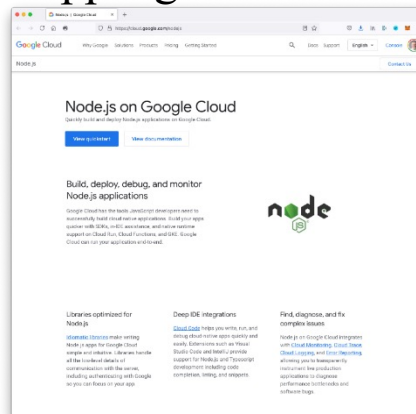

Node.js on macOS and Windows

- Download macOS (64bit) and Windows package at <https://nodejs.org/en/>
 - Alternatively use Homebrew
- To be able to switch between versions, use mise/nvm/etc
- Learn Node.js on you local MacBook or Windows PC

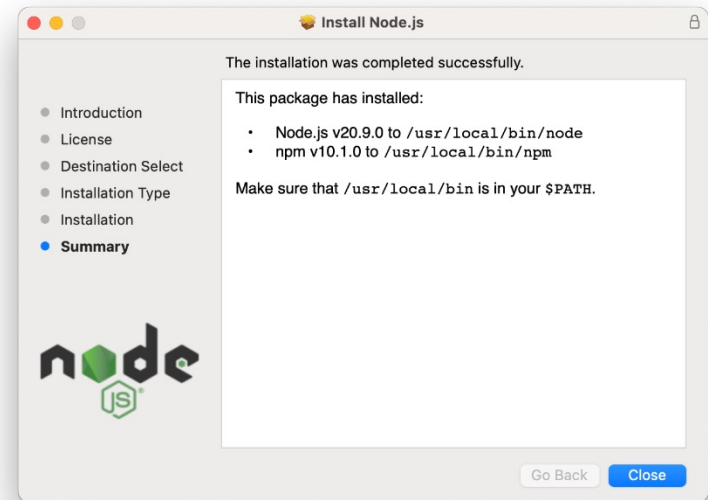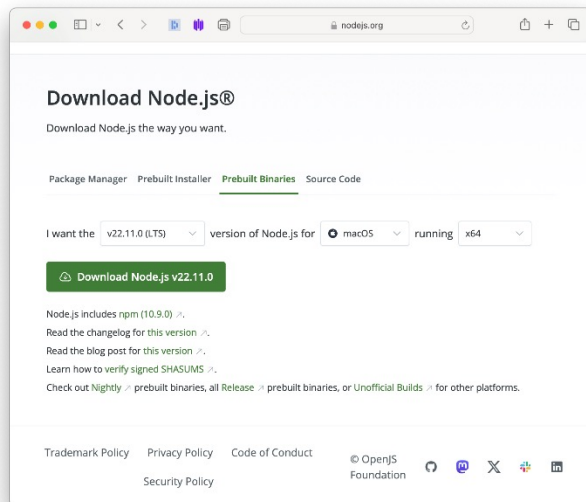

Related URLs

- **Node.js website:** <https://nodejs.org/>
- **Node.js on Github:** <https://github.com/nodejs/node>
- **NPM:** <https://www.npmjs.com/>
- **Learn Node.js in terminal:** <https://github.com/workshopper/learnyounode>
- **Tools:** <http://gruntjs.com/>

Web Authentication Techniques

Different ways to initially prove your identity to “log in”

- something you **KNOW**
(Login, password, phone number, street address, credit card number, cvc, etc)
Most common on web – login + password auth
- something you **HAVE**
 - Account in other service usually - OAuth2, LDAP, SAML, etc
 - A SIM card, an email SMS codes, one-time links
 - Authenticated phone app push notification actions
 - Code generation secret One-Time Password (OTP)
- Something you **ARE**
 - Fingerprint scanner
 - Iris scanner
 - Face scanner

Multiple factors provide better security!

Web Authentication Techniques (cont'd)

- Browsers support the following techniques **natively**:
 - **HTTP Basic Authentication** (login-password dialog)
 - **Web Authentication API (WebAuthN)**
integrated with physical tokens, passkeys, secure chips, TouchId, FaceId, etc
 - **Federated Credential Management API** (more details in the HTML5 lecture)
- Widely used non-native techniques involve some backend-generated secret that is stored in
 - **Cookies** (for additional security httpOnly is used)
 - **Memory** (in a JS variable)
 - **localStorage** (may be less secure, depends on the implementation)and sent with every request to the backend

Web Authentication Techniques (cont'd)

What can be the secret?

- In **Stateful approach** - a random string/identifier (long enough) that is stored in the database or cache and is retrieved on every request to authenticate user. When the session is over, it is deleted from the database. Usually this is referred to as a **Session Id**.
- In **Stateless approach** – a token that carries *user id* along with metadata. It is **signed**, so backend can validate it and trust it if the signature matches the data. It usually contains `expiryDate`, so it can be used over a controlled period. The most popular is **JWT - JSON Web Token**.
- See: <https://jwt.io/introduction>
<https://datatracker.ietf.org/doc/html/rfc7519>

JWT (JSON Web Token)

- Has three sections (typically)
- Each section is base64 encoded
- Each section stores information in JSON format
- Can use symmetric and asymmetric cryptography
 - **Header**
contains information about type (JWT), signature algorithm and its params
Example (decoded): `{"alg": "HS256", "typ": "JWT"}`
 - **Payload**
carries data, has predefined keys (claims), but developers may use any keys and JSON structure
Example (decoded): `{"sub": "<userid>", "name": "John"}`
 - **Signature**
binary signature, produced with algorithm and params in the header

JWT (JSON Web Token) (cont'd)

```
= HMACSHA256(  
    base64UrlEncode(header) + "." +  
    base64UrlEncode(payload),  
    "supersecret"  
)
```

Example:

```
eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJzbnVzZXQiOiJkaWUyIiwiaWF0IjoxNTE2MzkwMjI.VF3xEprks1_Bm...SJ8jmWf2NAq9Vz0
```

↓

```
{  
  "alg": "HS256",  
  "typ": "JWT"  
}
```

↓

```
{  
  "sub": "john@doe.com",  
  "name": "John Doe",  
  "iat": 1516239022,  
  "exp": 1516260022  
}
```

issuedAt (unix timestamp)

subject - email, id, etc
- custom field

expiresAt (unix timestamp)

Interactive debugger & playground: (see <https://jwt.io/>)

Angular - Introduction

- AngularJS is a complete JavaScript-based open-source front-end web application framework.
- It is mainly maintained by Google and some community of individuals.
- It provides a framework for client-side [model-view-controller](#) (MVC) and [model-view-viewmodel](#) (MVVM) architectures.
- AngularJS is the frontend part of the **MEAN stack**, consisting of MongoDB database, Express.js web application server framework, Angular.js itself, and Node.js runtime environment.



Angular.js

Why AngularJS?

- HTML is great for declaring static documents, but it falters when we try to use it for declaring **dynamic views** in web-applications. AngularJS lets you extend HTML vocabulary for your application. The resulting environment is extraordinarily expressive, readable, and quick to develop.

Alternatives

- Other frameworks deal with HTML's shortcomings by either abstracting away HTML, CSS, and/or JavaScript or by providing an imperative way for manipulating the DOM. Neither of these address the root problem that HTML was not designed for **dynamic views**.

Extensibility

- AngularJS is a toolset for building the framework most suited to your application development. It is fully extensible and works well with other libraries. Every feature can be modified or replaced to suit your unique development workflow and feature needs. Read on to find out how.

Basic functionality

Control of the app

Data Binding

- Data-binding is an automatic way of updating the view whenever the model changes, as well as updating the model whenever the view changes. This is awesome because it eliminates DOM manipulation from the list of things you have to worry about.

Controller

- Controllers are the **behavior behind the DOM elements**. AngularJS lets you **express the behavior in a clean readable form** without the usual boilerplate of updating the DOM, registering callbacks or watching model changes.

Plain JavaScript

- Unlike other frameworks, there is no need to inherit from proprietary types in order to wrap the model in accessors methods. Angular models are plain old JavaScript objects. This makes your code easy to test, maintain, reuse, and again free from boilerplate.

Basic functionality (cont'd)

Wire up a Backend

Deep Linking

- A deep link reflects **where the user is in the app**, this is useful so users can bookmark and email links to locations within apps. Round trip apps get this automatically, but **AJAX apps** by their nature do not. AngularJS **combines the benefits of deep link with desktop app-like behavior**.

Form Validation

- **Client-side form validation** is an important part of great user experience. AngularJS lets you declare the validation rules of the form without having to write JavaScript code. Write less code, go have beer sooner.

Server Communication

- AngularJS provides built-in services **on top of XHR (XMLHttpRequest)** as well as various other backends using **third party libraries**. Promises further simplify your code by handling **asynchronous** return of data. (Alternative to jQuery's .ajax(), fetch(), etc.)

Basic functionality (cont'd)

Create Components

Directives

- Directives is a unique and powerful feature available only in Angular. Directives let you invent new HTML syntax, specific to your application.

Reusable Components

- We use directives to create reusable components. A component allows you to hide complex DOM structure, CSS, and behavior. This lets you focus either on what the application does or how the application looks separately.

Localization

- An important part of serious apps is localization. Angular's **locale aware filters** and **stemming directives** give you building blocks to make your application available in all locales.

Companies that Use Angular JS




There are approximately 12,000 other sites out of 1 million tested in May 2017 that use Angular JS

React and Angular on Google Trends:

<https://trends.google.com/trends/explore?date=all&q=React,Angular&hl=en-US>

(2004-present)

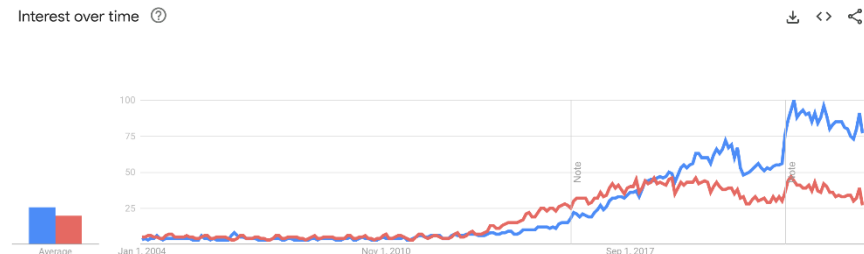

Goals

AngularJS de-emphasizes explicit DOM manipulation with the goal of improving testability and performance.


- Design goals are
 - It decouples DOM manipulation from application logic
 - It decouple the client side of an application from the server side.
 - It provides structure for building an application
 - Designing the UI
 - Writing the business logic
 - Testing

Goals (cont'd)

- Angular JS framework adapts and extends traditional HTML.
- It supports **dynamic content** through two-way data-binding.
- Two-way data-binding allows for the **automatic synchronization of models and views**.
- The tasks in angular bootstrapper occur in 3 phases
 - Creation of **a new Injector**
 - **Compilation** of the **directives** that decorate the DOM
 - Linking of all directives to scope


Data Binding

Classical

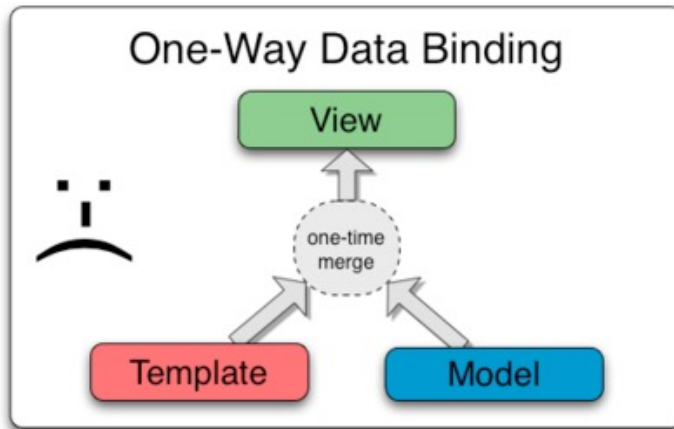

Any changes that the user makes to the view are not reflected in the model

Angular

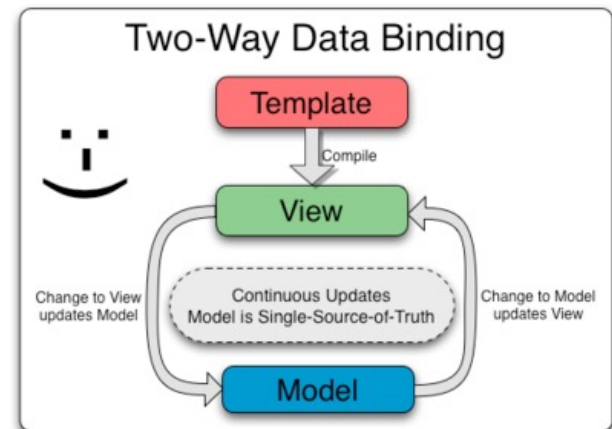

The view is just a projection of the model. So there is automatic refresh of the data between view and model

AngularJS Directives

- AngularJS directives allows to specify custom reusable HTML-like elements and attributes.
- Some of the Angular Directives are
 - ng-app
 - ng-controller
 - ng-bind
 - ng-model
 - ng-class
 - ng-repeat

AngularJS Directives (Cont'd)

- **ng-app**
 - Declares the root element of an AngularJS application.
- **ng-controller**
 - Specifies a JavaScript controller class that evaluates HTML expressions.
- **ng-bind**
 - Sets the text of a DOM element to the value of an expression.
- **ng-model**
 - Similar to ng-bind, but establishes a two-way data binding between the view and the scope.
- **ng-repeat**
 - Instantiate an element once per item from a collection.

Code Snippet – AngularJS Instantiation

```
<script>
var app = angular.module("myApp", []);
app.controller("myController", function($scope,$http) {
    // $scope holds your model (metadata) for your application
    $scope.topic = "CSCI 571";
});
</script>

<body ng-app="myApp" ng-controller="myController">
</body>
```

- An AngularJS module defines an application.
- The module is a container for controllers
- Controllers always belong to a module.

AngularJS Data Binding - Example

```
<div ng-app="formExample" ng-controller="ExampleController">
  <form class="form container simple-form">
    <div class="form-group">
      <label>Name :</label> <input class="form-control" type="text" ng-model="user.name" />
    </div>
    <div class="form-group">
      <label>E-mail:</label> <input class="form-control" type="email" ng-model="user.email" /><br />
    </div>
    <div class="form-group">
      <label>School:</label> <input class="form-control" type="text" ng-model="user.school" /><br />
    </div>
    <div class="form-group">
      <label>Level:</label>
      <select class="form-control" ng-model="user.level">
        <option value=""></option>
        <option value="G">Graduate</option>
        <option value="UG">Under Graduate</option>
        <option value="PhD">Doctoral</option>
      </select><br />
    </div>
    <input class="btn btn-default" type="button" ng-click="reset()" value="Reset" />
    <input class="btn btn-primary" type="submit" ng-click="update(user)" value="Save" />
  </form>
  <br/>
  <div class="container">
    <pre>user = {{user | json}}</pre>
    <pre>master = {{master | json}}</pre>
  </div>
</div>
```

```
angular.module('formExample', [])
  .controller('ExampleController', ['$scope', function($scope) {
    $scope.master = {};

    $scope.update = function(user) {
      $scope.master = angular.copy(user);
    };

    $scope.reset = function() {
      $scope.user = angular.copy($scope.master);
    };

    $scope.reset();
  }])
```

A simple example which shows how AngularJS process two-way data binding using **ng-model**.

<http://csci571.com/examples/Angular/binding/index.html>

AngularJS Repeat with data from static array

```
<div class="row">
  <div class="col-md-6 col-sm-12">
    <h3>Loading Data from Array</h3>
    <h4>Web Tech Producer</h4>
    <table class="table table-striped">
      <tr>
        <th>#</th>
        <th>Name</th>
        <th>Office Hours</th>
        <th>Location</th>
      </tr>
      <tr ng-repeat="x in producers track by $index">
        <td>{{ $index + 1 }}</td>
        <td>{{ x.Name }}</td>
        <td>{{ x.Office }}</td>
        <td>{{ x.Location }}</td>
      </tr>
    </table>
  </div>
</div>
```

ng-repeat works like a for loop and replicates the template to the number of rows in the model

```
var app = angular.module("data", []);
app.controller("data", function ($scope, $http) {
  $scope.producers = [
    {
      Name: "Producer 1",
      Office: "10-11 AM",
      Location: "Leavey Library (LVL) 201"
    },
    {
      Name: "Producer 2",
      Office: "9-10 AM",
      Location: "Leavey Library (LVL) 202"
    },
    {
      Name: "Producer 3",
      Office: "4-5 PM",
      Location: "Leavey Library (LVL) 203"
    },
    {
      Name: "Producer 4",
      Office: "2-3 PM",
      Location: "Leavey Library (LVL) 204"
    },
    {
      Name: "Producer 5",
      Office: "5-6 PM",
      Location: "Leavey Library (LVL) 201"
    },
    {
      Name: "Producer 6",
      Office: "10-11 AM",
      Location: "Leavey Library (LVL) 209"
    },
    {
      Name: "Producer 7",
      Office: "10-11 AM",
      Location: "Leavey Library (LVL) 202"
    }
  ];
});
```

http://csci571.com/examples/Angular/populating_data/index.html

AngularJS Repeat from http request

```
<table class="table table-responsive table-striped" ng-app="myapp" ng-controller="myapp">
  <tr>
    <th>Name</th>
    <th>City</th>
    <th>Country</th>
  </tr>
  <tr ng-repeat="x in rows">
    <td>{{x.Name}}</td>
    <td>{{x.City}}</td>
    <td>{{x.Country}}</td>
  </tr>
</table>
```

```
angular.module('myapp', [])
  .controller('myapp', function($scope, $http) {
    $scope.rows = {};

    $http.get("http://www.w3schools.com/angular/customers.php").then(function(response){
      $scope.rows = response.data.records;
    });
  });
```

\$http holds the xml http request handler in Angular.

Name	City	Country
Alfreds Futterkiste	Berlin	Germany
Ana Trujillo Emparedados y helados	México D.F.	Mexico
Antonio Moreno Taquería	México D.F.	Mexico
Around the Horn	London	UK
B's Beverages	London	UK
Berglunds snabbköp	Luleå	Sweden
Blauer See Delikatessen	Mannheim	Germany

http://csci571.com/examples/Angular/populating_data/index.html

AngularJS Sort and Search

```
<table class="table table-responsive table-striped" ng-app="myapp" ng-controller="myapp">
  <tr>
    <th>Name</th>
    <th>City</th>
    <th>Country</th>
    <input type="text" class="form-control pull-right" style="width:40%;" placeholder="Search" ng-model="search" />
  </tr>
  <tr>
    <td colspan="4"><input type="text" class="form-control pull-right" style="width:40%;" placeholder="Search" ng-model="search" />
  </tr>
  <tr ng-repeat="x in rows | orderBy:Name | filter: search">
    <td>{{x.Name}}</td>
    <td>{{x.City}}</td>
    <td>{{x.Country}}</td>
  </tr>
</table>
```

```
angular.module('myapp', [])
.controller('myapp', function($scope, $http) {
  $scope.rows = {};

  $http.get("http://www.w3schools.com/angular/customers.php").then(function(response){
    $scope.rows = response.data.records;
  });
});
```

orderBy: sort the Column ascending

orderBy: <column>: <reverse>

<column> - the column you want to sort

<reverse> - true-descending, false-ascending

Filter: search the rows in the model

Filter: <searchstring> e.x. filter: search

Or

Filter: <column_based_search> e.x.

filter: {<column>: search}

Name	City	Country
Alfreds Futterkiste	Berlin	Germany
Ana Trujillo Emparedados y helados	México D.F.	Mexico
Antonio Moreno Taquería	México D.F.	Mexico
Around the Horn	London	UK
B's Beverages	London	UK
Berglunds snabbköp	Luleå	Sweden
Blauer See Delikatessen	Mannheim	Germany

http://csci571.com/examples/Angular/sort_and_search/index.html

AngularJS External UI Components

```
<table class="table table-responsive table-striped" ng-app="myapp" ng-controller="myapp">
  <tr>
    <th>Name</th>
    <th>City</th>
    <th>Country
      <input type="text" class="form-control pull-right" style="width:40%;" placeholder="Search" ng-
model="search" />
    </th>
  </tr>
  <tr dir-paginate="x in rows | orderBy:Name:false | filter: search | itemsperpage: 10" pagination-
id="example">
    <td>{{x.Name}}</td>
    <td>{{x.City}}</td>
    <td>{{x.Country}}</td>
  </tr>
</table>
<dir-pagination-controls max-size="10" boundary-links="true" direction-links="true" max-size="10"
pagination-id="example"></dir-pagination-controls>
```

External components need to be added to the angular application.

```
angular.module('myapp',
[<external_components>])
```

```
angular.module('myapp', ['angularUtils.directives.dirPagination'])
.controller('myapp', function($scope, $http) {
  $scope.rows = {};

  $http.get("http://www.w3schools.com/angular/customers.php").then(function(response){
    $scope.rows = response.data.records;
  });
});
```

http://csci571.com/examples/Angular/external_plugins/index.html

AngularJS Remove and Insert DOM Element

```
<div ng-app="myApp">
  <div ng-controller="AppCtrl">
    <input type="checkbox" ng-click="toggleShowDiv()"/>
    <label for="showDiv">Toggle DIV</label>
    <div id="my-div" ng-if="showDiv">New Div</div>
  </div>
</div>
```

Using *ng-if* to insert/remove the dom.

```
angular.module('myApp', ['ngAnimate'])
  .controller('AppCtrl', function ($scope) {
    $scope.showDiv = false;

    $scope.toggleShowDiv = function(){
      console.log('fired');
      $scope.showDiv = !$scope.showDiv;
    }
  });
```

http://csci571.com/examples/Angular/manipulate_dom/index.html

About Angular 2+

- AngularJS is the name for all AngularJS version 1.x.
- Angular 2+ stands for the Angular 2 and later, including Angular 2,4,5,6,7 and 8.
- Angular 2+ is a ground-up rewrite.
- AngularJS 1.7 was released on July 1, 2018, and it enters a 3 years long-term support. It is “retired” now.
- There are few upgrade possibilities of AngularJS to Angular 2+ and in most cases the only suitable possible option is to rewrite the application in Angular 2+.
- Starting with Angular 2, a major release is **published every 6 months**. There are some improvements between each version.
- The “active” (6 months) Angular version is **Angular 19.1.7** and was released on Feb 19, 2025. <https://angular.io/guide/releases>
- The “LTS” (Long Term Support, 12 months) release is **Angular version 18.0.0**.

Differences between versions

	AngularJS	Angular 2+
Architecture	Based on MVC	Based on service/component
Javascript vs TypeScript	Uses JavaScript	Uses TypeScript (a superset of JavaScript) and RxJS (A reactive programming library for JavaScript).
Component-based UI		Can split application features into various components and call required UI, which increases reusability and flexibility
Mobile Support		Native Script or Ionic
SEO (Search Engine Optimization) Friendly	Difficult to develop search engine friendly Single Page Applications	Possible to build Single Page Applications SEO friendly by rendering plain HTML at the server side. It released Angular Universal.

Features of Angular 4

- **Smaller and Faster**
- **View engine with less code**
 - The view engine is introduced in Angular 4 where the produced code of components can be reduced up to 60%. The bundles are reduced to thousands of KBs.
- **Improved *ngIf directive** wfy 划掉了这一整页
 - A new “else” statement is added
- **Animation**
 - Animations are pulled from the Angular core and set in their own package
- **TypeScript 2.1 and 2.2 Compatibility**
- **Source Maps for Templates**
 - Now whenever there's an error caused by something in one of the templates, source maps are created which provide a meaningful context concerning the original template.

Features of Angular 6

- **ng update**
 - Using **ng update** to update your Angular app from Angular 2, 4 or 5.
- **ng add**
 - Using **ng add** to add new dependencies and invoke an installation script.
- **Angular Material + CDK Components**
- **CLI Workspaces**
 - CLI projects will now use angular.json for build and project configuration.
- **Animations Performance Improvements**
- **RxJS v6**

wfy 划掉了这一整页

Features of Angular 7

- **Application Performance**
 - Optimize polyfills.ts
- **Angular Material & the CDK**
 - Virtual Scrolling
 - Drag and Drop
- **Partner Launches**
 - NativeScript: A single project that builds for both web and installed mobile with NativeScript
 - StackBlitz 2.0 supports multipane editing and the Angular Language Service
- **Dependency Updates**
 - Typescript 3.1
 - RxJS 6.3
 - Node 10

wfy 划掉了这一整页

Features of Angular 8

- **Requires TypeScript 3.4**
 - Required. You will need to upgrade.
- **Ivy support**
 - New compiler / runtime for Angular
- **Bazel support**
 - Build tool developed and built by Google.
 - Build back-end and front-end with same tool
- **Router**
 - Lazy-loading with import() syntax
- **Location**
 - Location services to help migrating from AngularJS

wfy 划掉了这一整页

Features of Angular 9

- **Requires TypeScript 3.7**
 - You will need to upgrade.
- **Ivy support**
 - Angular compiles by Ivy by default
- **APIs**
 - Lots on new removed and deprecated APIs
- **Migration**
 - CLI handles many migrations automatically

wfy 划掉了这一整页

Features of Angular 10

- **Requires TypeScript 3.9**
 - You will need to upgrade.
- **Deprecations**
 - @angular/core (may be removed in v12)
 - IE 9, 10 and IE Mobile (removed in v11).
- **Ivy**
 - Heavily promoted as default rendering engine
 - See: <https://angular.io/guide/ivy>
- **Migration**
 - Automated migration from version 9

wfy 划掉了这一整页

Features of Angular 12

- **Requires TypeScript 4.2.3 to 4.2.x**
 - You will need to upgrade.
- **Angular CDK and Angular Material**
 - Use the new SASS module system
- **Angular Tooling**
 - Uses Webpack 5 to build applications
- **See**
 - <https://angular.io/guide/updating-to-version-12>

wfy 划掉了这一整页

Features of Angular 14

- **Requires newer TypeScript**
 - You will need to upgrade.
 - <https://update.angular.io/>
- **Strictly Typed Reactive Forms**
- **ComponentFactory and NgModuleFactory cleanup**
- **Lots of deprecations**
 - <https://angular.io/guide/deprecations>
- **Upgrade from AngularJS**
 - <https://angular.io/guide/upgrade>

wfy 划掉了这一整页

Features of Angular 16

- **Requires newer TypeScript**
 - You will need to upgrade.
 - <https://update.angular.io/> (15 to 16)
- **Angular Signals developer preview**
- **Faster builds with the esbuild developer preview**
- **Standalone component migration and scaffolding**
- **Angular v16 requires node.js version v16 or v18**
- **Angular v16 requires TypeScript version 4.9 or later**
- **Lots of deprecations**
 - <https://angular.io/guide/deprecations>
- **Upgrade from AngularJS**
 - <https://angular.io/guide/upgrade>

wfy 划掉了这一整页

RxJS

- Reactive programming is an asynchronous programming paradigm concerned with data streams and the propagation of change (Wikipedia)
- RxJS is a library for reactive programming. ([RxJS Docs](#))
- Angular2+ use RxJS for asynchronous operation. ([Angular RxJS](#))
- RxJS uses [Observables](#) for asynchronous or callback-based code.
 - Converting existing code for async operations into observables
 - Iterating through the values in a stream
 - Mapping values to different types
 - Filtering streams
 - Composing multiple streams
- See example “Repeat from http request”

Angular 2+ Data Binding Component Example

```
<div>
  <form class="form container simple-form">
    <div class="form-group">
      <label>Name:</label> <input class="form-control" type="text" [(ngModel)]="user.name" name="name" />
    </div>
    <div class="form-group">
      <label>E-mail:</label> <input class="form-control" type="email" [(ngModel)]="user.email" name="email" /><br />
    </div>
    <div class="form-group">
      <label>School:</label> <input class="form-control" type="text" [(ngModel)]="user.school" name="school" /><br />
    </div>
    <div class="form-group">
      <label>Level:</label>
      <select class="form-control" [(ngModel)]="user.level" name="level">
        <option value=""></option>
        <option value="G">Graduate</option>
        <option value="UG">Under Graduate</option>
        <option value="PhD">Doctoral</option>
      </select><br />
    </div>
    <input class="btn btn-default" type="button" (click)="reset()" value="Reset" />
    <input class="btn btn-primary" type="submit" (click)="update()" value="Save" />
  </form>
  <br />
  <div class="container">
    <pre>user = {{user | json}}</pre>
    <pre>master = {{master | json}}</pre>
  </div>
</div>
```

form.component.html

```
import { Component, OnInit } from '@angular/core';

@Component({
  selector: 'app-form',
  templateUrl: './form.component.html',
  styleUrls: ['./form.component.css']
})
export class FormComponent implements OnInit {
  user = {};
  master = {};

  constructor() { }

  ngOnInit() {
  }

  update() {
    this.master = Object.assign({}, this.user);
  }

  reset() {
    this.user = Object.assign({}, this.master);
  }
}
```

form.component.ts

http://csci571.com/examples/Angular/binding_angular2_and_4/index.html

Angular 2+ Repeat with data from static array

```
<div class="row">
  <div class="col-md-6 col-sm-12">
    <h3>Loading Data from Array</h3>
    <h4>Web Tech Producer</h4>
    <table class="table table-striped">
      <tr>
        <th>#</th>
        <th>Name</th>
        <th>Office Hours</th>
        <th>Locaton</th>
      </tr>
      <tr *ngFor="let x of producers; index as i; trackBy: trackByFn">
        <td>{{i + 1}}</td>
        <td>{{x.Name}}</td>
        <td>{{x.Office}}</td>
        <td>{{x.Location}}</td>
      </tr>
    </table>
  </div>
</div>
```

staff.component.html

```
import { Component, OnInit } from '@angular/core';

@Component({
  selector: 'app-staff',
  templateUrl: './staff.component.html',
  styleUrls: ['./staff.component.css']
})
export class StaffComponent implements OnInit {

  producers = [
    {
      Name: 'Producer 1',
      Office: '10-11 AM',
      Location: 'Leavey Library (LVL) 201'
    },
    {
      Name: 'Producer 2',
      Office: '9-10 AM',
      Location: 'Leavey Library (LVL) 202'
    },
    {
      Name: 'Producer 3',
      Office: '4-5 PM',
      Location: 'Leavey Library (LVL) 203'
    },
    {
      Name: 'Producer 4',
      Office: '2-3 PM',
      Location: 'Leavey Library (LVL) 204'
    },
    {
      Name: 'Producer 5',
      Office: '5-6 PM',
      Location: 'Leavey Library (LVL) 201'
    },
    {
      Name: 'Producer 6',
      Office: '10-11 AM',
      Location: 'Leavey Library (LVL) 209'
    },
    {
      Name: 'Producer 7',
      Office: '10-11 AM',
      Location: 'Leavey Library (LVL) 202'
    }
  ];

  constructor() { }

  ngOnInit() {
  }

  trackByFn(index, item) {
    return index;
  }
}
```

staff.component.ts

http://csci571.com/examples/Angular/populating_data_static_angular_2_and_4/index.html

Angular 2+ Repeat from http request

```
<table class="table table-responsive table-striped">
  <tr>
    <th>Name</th>
    <th>Email</th>
    <th>Phone</th>
    <th>Website</th>
  </tr>
  <tr *ngFor="let x of rows">
    <td>{{x.name}}</td>
    <td>{{x.email}}</td>
    <td>{{x.phone}}</td>
    <td>{{x.website}}</td>
  </tr>
</table>
```

```
import { Injectable } from '@angular/core';
import { Http } from '@angular/http';

@Injectable()
export class DataService {

  constructor(private http: Http) { }

  getCustomer() {
    return this.http.get('http://jsonplaceholder.typicode.com/users');
  }
}
```

```
import { DataService } from './../../services/data.service';
import { Component, OnInit } from '@angular/core';

@Component({
  selector: 'app-customer',
  templateUrl: './customer.component.html',
  styleUrls: ['./customer.component.css']
})
export class CustomerComponent implements OnInit {

  rows = [];

  constructor(private dataService: DataService) {
    dataService.getCustomer().subscribe(response => {
      this.rows = response.json();
    });
  }

  ngOnInit() {
  }
}
```

Using **observable** subscription to handle
asynchronized http request

http://csci571.com/examples/Angular/populating_data_external_angular_2_and_4/index.html

Angular 2+ External UI Components

```
<table class="table table-responsive table-striped">
  <tr>
    <th>Name</th>
    <th>Email</th>
    <th>Phone</th>
    <th>Website</th>
  </tr>
  <tr *ngFor="let x of rows | paginate: { itemsPerPage: 5, currentPage: p }">
    <td>{{x.name}}</td>
    <td>{{x.email}}</td>
    <td>{{x.phone}}</td>
    <td>{{x.website}}</td>
  </tr>
</table>

<pagination-controls (pageChange)="p = $event"></pagination-controls>
```

```
import { DataService } from './services/data.service';
import { BrowserModule } from '@angular/platform-browser';
import { NgModule } from '@angular/core';
import { HttpModule } from '@angular/http';
import { NgxPaginationModule } from 'ngx-pagination';

import { AppComponent } from './app.component';
import { PaginationComponent } from './components/pagination/pagination.component';

@NgModule({
  declarations: [
    AppComponent,
    PaginationComponent
  ],
  imports: [
    BrowserModule,
    HttpModule,
    NgxPaginationModule
  ],
  providers: [DataService],
  bootstrap: [AppComponent]
})
export class AppModule { }
```

```
import { DataService } from './../../services/data.service';
import { Component, OnInit } from '@angular/core';

@Component({
  selector: 'app-pagination',
  templateUrl: './pagination.component.html',
  styleUrls: ['./pagination.component.css']
})
export class PaginationComponent implements OnInit {

  p: number = 1;
  rows = [];

  constructor(private dataService: DataService) {
    dataService.getCustomer().subscribe(response => {
      this.rows = response.json();
    });
  }

  ngOnInit() {
  }
}
```

http://csci571.com/examples/Angular/external_plugins_angular_2_and_4/index.html

Angular 2+ Remove and Insert DOM Element

```
<div>
  <div>
    <input type="checkbox" (click)="toggleShowDiv()"/>
    <label for="showDiv">Toggle DIV</label>
    <div id="my-div" *ngIf="showDiv">New Div</div>
  </div>
</div>
```

```
import { Component, OnInit } from '@angular/core';

@Component({
  selector: 'app-manipulation',
  templateUrl: './manipulation.component.html',
  styleUrls: ['./manipulation.component.css']
})
export class ManipulationComponent implements OnInit {

  showDiv = false;

  constructor() { }

  ngOnInit() {
  }

  toggleShowDiv() {
    console.log('fired');
    this.showDiv = !this.showDiv;
  }
}
```

http://csci571.com/examples/Angular/manipulate_dom_angular_2_and_4/index.html

Angular 2+ Sort and Search

- Angular 2+ doesn't support *FilterPipe* or *OrderByPipe* mainly because they are expensive operations, and they have often been abused in AngularJS apps.
- To learn more about why FilterPipe and OrderByPipe are not supported and what the alternatives are, see this page:

<https://angular.io/guide/pipes#appendix-no-filterpipe-or-orderbypipe>.

Angular HttpClient

- HttpClient is Angular's mechanism for communicating with a remote server over HTTP.
- See: <https://angular.io/guide/understanding-communicating-with-http>
- Make HttpClient available everywhere in the application in two steps.
STEP – 1: Add it to the root AppModule by importing it:

```
src/app/app.module.ts (HttpClientModule import)
```

```
import { HttpClientModule } from '@angular/common/http';
```

Next, still in the `AppModule`, add `HttpClientModule` to the `imports` array:

```
src/app/app.module.ts (imports array excerpt)
```

```
@NgModule({
  imports: [
    HttpClientModule,
  ],
})
```

Angular HttpClient (cont'd)

- **STEP - 2:** HttpClient Inject
- HttpClient methods are get(),delete(), patch(), post(), put() etc.
 - Inject HttpClient using constructor into our component or service. HttpClient is imported from @angular/common/http library as following.
 - Find constructor to inject HttpClient
 - Ready to call HttpClient methods using http instance.

```
import { HttpClient } from '@angular/common/http';
```

```
constructor(private http: HttpClient) {  
}
```

```
getWriterWithFavBooks(): Observable<any> {  
    return this.http.get(this.writerUrl);  
}
```

TypeScript

- Open-source programming language developed and maintained by Microsoft
- Syntactical superset of JavaScript
- Developed by **Anders Hejlsberg**, C# Architect and creator of Turbo Pascal
- First made public in October **2012** (version 0.8)
- Built-in support for TypeScript in Visual Studio 2013+
- Latest version is **TypeScript 5.7**
- TypeScript program can seamlessly consume JavaScript
- TypeScript compiler written in TypeScript
- See: <http://www.typescriptlang.org/>

TypeScript Features

- Extensions to ECMAScript 5th Ed.
 - Type annotations and compile-time type checking
 - Type inference
 - Type erasure
 - Interfaces
 - Enumerated type
 - Mixin
 - Generic
 - Namespaces
 - Tuple
 - Await
- Backported features from ECMAScript 2015
 - Classes
 - Modules
 - Arrow syntax for anonymous functions
 - Optional and default parameters

Example usage & Related URLs

Examples

- **Hello World:** <https://angularjs.org/#the-basics>
- **Todo List:** <https://angularjs.org/#add-some-control>
- **Advanced Single Page App:** <https://angularjs.org/#wire-up-a-backend>

Related URLs

- **Angular.js website:** <https://angularjs.org>
- **Angular.js on Github:** <https://github.com/angular/angular.js>
- **Tutorial:** <https://docs.angularjs.org/tutorial>
- **Angular.js Course**
<http://campus.codeschool.com/courses/shaping-up-with-angular-js/level/1/section/1/creating-a-store-module>
- **Angular 2+:** <https://angular.io/>
- **Angular 2+ docs:** <https://angular.io/docs>
- **Angular 2+ IDEs, Tools, Libraries, UI Components:** <https://angular.io/resources>

Angular Examples URLs

- **Best Examples of Websites and Applications built with Angular:** <https://clockwise.software/blog/best-angular-applications/>
- **Tour of Heroes App :** <https://stackblitz.com/edit/angular-tour-of-heroes-example>
- **Ng For Example :** <https://stackblitz.com/edit/angular-10-ngfor-example>
- **Angular Forms and Property Binding :** <https://stackblitz.com/edit/angular-disable-form-field-on-select-value>
- **Angular Pipes :** <https://stackblitz.com/edit/angular-simple-examples>