


cacheScope: "public"

no user-specific data

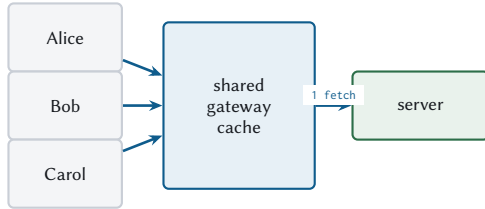


*one fetch serves everybody
this is where caching pays*

*reference curves, sector spreads,
public filings, tool catalogues*

cacheScope: "private"

varies by who is asking

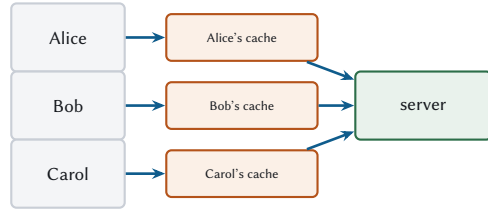

*one fetch per authorization context
never shared across them*

*account summaries, transactions,
anything scoped to a user*

The failure mode. Marking a personalised response public does not merely leak it, it invites a shared gateway to serve one user's data to another and call it a cache hit. The specification is explicit: a public result may be shared *even when it came from an authenticated endpoint*. Access control is never cacheScope's job.