



Supervisor tree

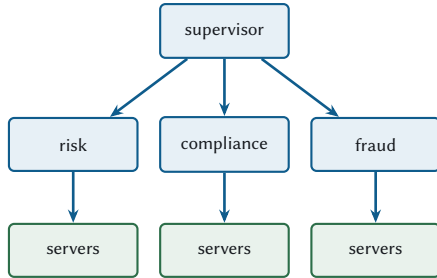

*one place to enforce budgets
one place to look when it breaks*

*the supervisor is a
single point of failure*


Peer mesh

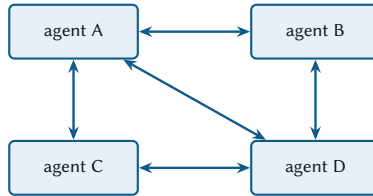

*no single point of failure
peers route around damage*

*a cycle without a depth limit
is a fork bomb with a nicer API*

Hierarchy

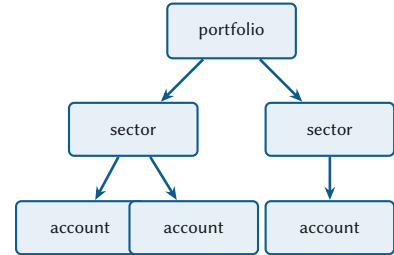

*each level summarises,
so context does not accumulate*

*depth multiplies latency:
3 levels, 3x the model turns*

Whatever the shape, four counters travel with the request. depth (refuse past a limit) • token budget (spent, not allocated) • dollar budget • a request id, so one trace covers the whole tree. All four ride in `_meta`. An agent that receives no budget should assume the smallest one, never an unlimited one.