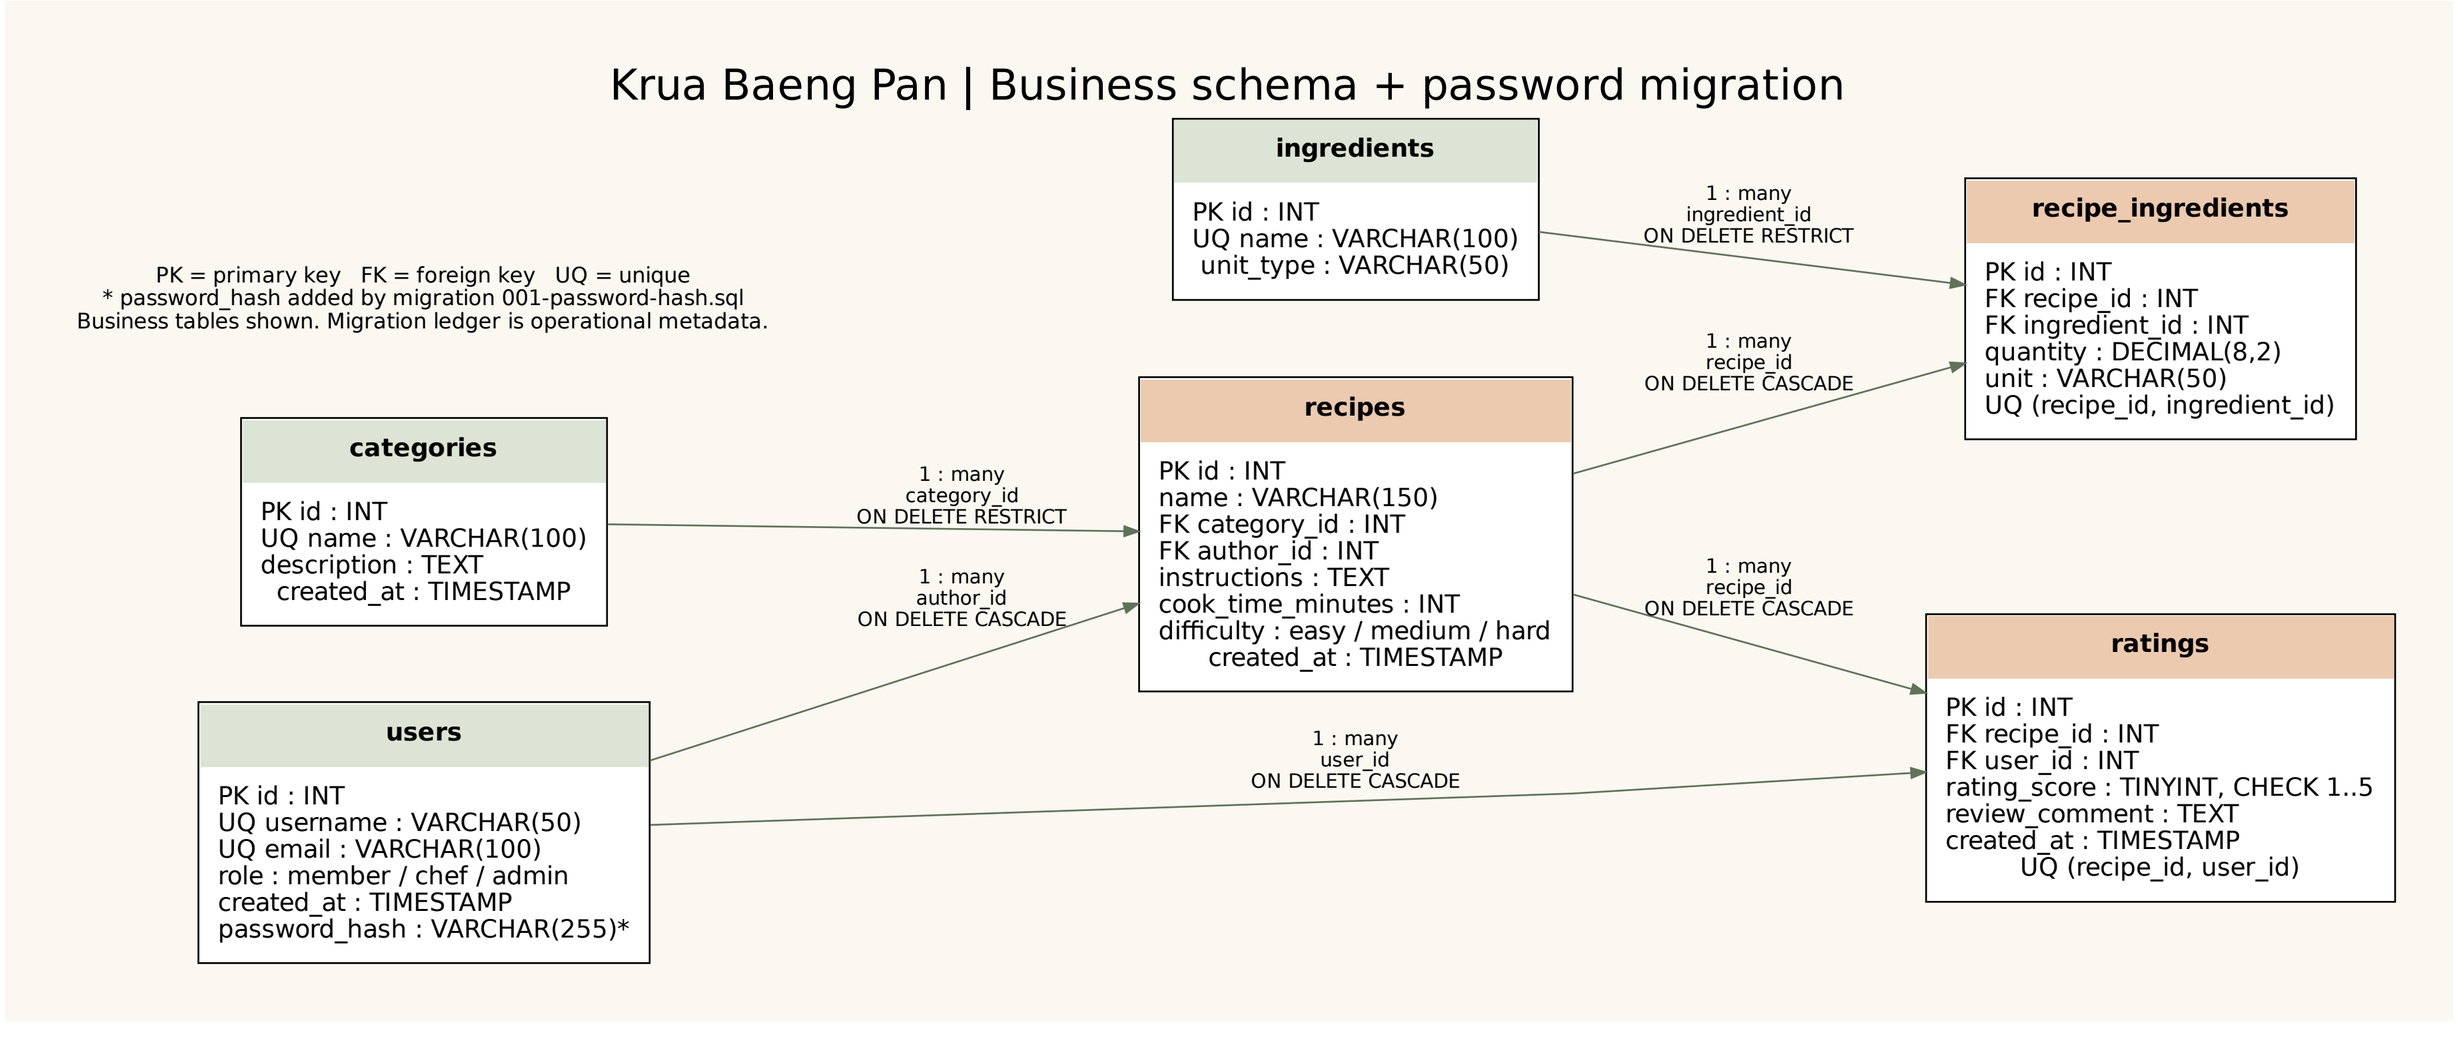
Krua Baeng Pan | Business schema + password migration
PK = primary key FK = foreign key UQ = unique
* password_hash added by migration 001-password-hash.sql
Business tables shown. Migration ledger is operational metadata.
ingredients
PK id : INT
UQ name : VARCHAR(100)
unit_type : VARCHAR(50)
1 : many
ingredient_id
ON DELETE RESTRICT
recipe_ingredients
PK id : INT
FK recipe_id : INT
FK ingredient_id : INT
quantity : DECIMAL(8,2)
unit : VARCHAR(50)
UQ (recipe_id, ingredient_id)
1 : many
recipe_id
ON DELETE CASCADE
categories
PK id : INT
UQ name : VARCHAR(100)
description : TEXT
created_at : TIMESTAMP
1 : many
category_id
ON DELETE RESTRICT
recipes
PK id : INT
name : VARCHAR(150)
FK category_id : INT
FK author_id : INT
instructions : TEXT
cook_time_minutes : INT
difficulty : easy / medium / hard
created_at : TIMESTAMP
1 : many
author_id
ON DELETE CASCADE
1 : many
recipe_id
ON DELETE CASCADE
ratings
PK id : INT
FK recipe_id : INT
FK user_id : INT
rating_score : TINYINT, CHECK 1..5
review_comment : TEXT
created_at : TIMESTAMP
UQ (recipe_id, user_id)
users
PK id : INT
UQ username : VARCHAR(50)
UQ email : VARCHAR(100)
role : member / chef / admin
created_at : TIMESTAMP
password_hash : VARCHAR(255)*
1 : many
user_id
ON DELETE CASCADE