

# CSS Default Values Reference

[< Previous](#)[Next >](#)

## Default CSS Values for HTML Elements

The table below shows the default CSS browser values for all HTML elements.

Element	Default CSS Value	Try it
a:link	color: (internal value); text-decoration: underline; cursor: auto;	<a href="#">Try it »</a>
a:visited	color: (internal value); text-decoration: underline; cursor: auto;	<a href="#">Try it »</a>
a:link:active	color: (internal value);	<a href="#">Try it »</a>
a:visited:active	color: (internal value);	<a href="#">Try it »</a>
abbr	None.	
address	display: block; font-style: italic;	<a href="#">Try it »</a>
area	display: none;	
article	display: block;	
aside	display: block;	

☐ Dark mode



HTML

CSS



b	font-weight: bold;	Try it »
base	None.	
bdi	None.	
bdo	unicode-bidi: bidi-override;	
blockquote	display: block; margin-top: 1em; margin-bottom: 1em; margin-left: 40px; margin-right: 40px;	Try it »
body	display: block; margin: 8px;	Try it »
body:focus	outline: none;	Try it »
br	None.	
button	None	
canvas	None.	
caption	display: table-caption; text-align: center;	Try it »
cite	font-style: italic;	Try it »
code	font-family: monospace;	Try it »
col	display: table-column;	Try it »
colgroup	display: table-column-group	Try it »
datalist	display: none;	
dd	display: block; margin-left: 40px;	Try it »
del	text-decoration: line-through;	Try it »
details	display: block;	
dfn	font-style: italic;	Try it »

☐ Dark mode



HTML

CSS



div	display: block;	Try it »
dl	display: block; margin-top: 1em; margin-bottom: 1em; margin-left: 0; margin-right: 0;	Try it »
dt	display: block;	Try it »
em	font-style: italic;	Try it »
embed:focus	outline: none;	
fieldset	display: block; margin-left: 2px; margin-right: 2px; padding-top: 0.35em; padding-bottom: 0.625em; padding-left: 0.75em; padding-right: 0.75em; border: 2px groove (internal value);	Try it »
figcaption	display: block;	
figure	display: block; margin-top: 1em; margin-bottom: 1em; margin-left: 40px; margin-right: 40px;	Try it »
footer	display: block;	
form	display: block; margin-top: 0em;	Try it »
h1	display: block; font-size: 2em; margin-top: 0.67em; margin-bottom: 0.67em; margin-left: 0; margin-right: 0; font-weight: bold;	Try it »
h2	display: block; font-size: 1.5em;	Try it »

☐ Dark mode



	<pre>margin-left: 0; margin-right: 0; font-weight: bold;</pre>	
h3	<pre>display: block; font-size: 1.17em; margin-top: 1em; margin-bottom: 1em; margin-left: 0; margin-right: 0; font-weight: bold;</pre>	<a href="#">Try it »</a>
h4	<pre>display: block; margin-top: 1.33em; margin-bottom: 1.33em; margin-left: 0; margin-right: 0; font-weight: bold;</pre>	<a href="#">Try it »</a>
h5	<pre>display: block; font-size: .83em; margin-top: 1.67em; margin-bottom: 1.67em; margin-left: 0; margin-right: 0; font-weight: bold;</pre>	<a href="#">Try it »</a>
h6	<pre>display: block; font-size: .67em; margin-top: 2.33em; margin-bottom: 2.33em; margin-left: 0; margin-right: 0; font-weight: bold;</pre>	<a href="#">Try it »</a>
head	<pre>display: none;</pre>	
header	<pre>display: block;</pre>	
hr	<pre>display: block; margin-top: 0.5em; margin-bottom: 0.5em; margin-left: auto; margin-right: auto; border-style: inset; border-width: 1px;</pre>	<a href="#">Try it »</a>



HTML

CSS



html:focus	outline: none;	
i	font-style: italic;	Try it »
iframe:focus	outline: none;	
iframe[seamless]	display: block;	
img	display: inline-block;	Try it »
input	None.	
ins	text-decoration: underline;	Try it »
kbd	font-family: monospace;	Try it »
label	cursor: default;	Try it »
legend	display: block; padding-left: 2px; padding-right: 2px; border: none;	Try it »
li	display: list-item;	
link	display: none;	
main	None.	
map	display: inline;	
mark	background-color: yellow; color: black;	Try it »
menu	display: block; list-style-type: disc; margin-top: 1em; margin-bottom: 1em; margin-left: 0; margin-right: 0; padding-left: 40px;	
menuitem	None.	
meta	None.	
meter	None.	

☐ Dark mode



HTML

CSS



noscript	None.	
object:focus	outline: none;	
ol	display: block; list-style-type: decimal; margin-top: 1em; margin-bottom: 1em; margin-left: 0; margin-right: 0; padding-left: 40px;	Try it »
optgroup	None.	
option	None.	
output	display: inline;	
p	display: block; margin-top: 1em; margin-bottom: 1em; margin-left: 0; margin-right: 0;	Try it »
param	display: none;	
picture	None.	
pre	display: block; font-family: monospace; white-space: pre; margin: 1em 0;	Try it »
progress	None.	
q	display: inline;	Try it »
q::before	content: open-quote;	Try it »
q::after	content: close-quote;	Try it »
rp	None.	
rt	line-height: normal;	
ruby	None.	

☐ Dark mode



HTML

CSS



samp	font-family: monospace;	Try it »
script	display: none;	
section	display: block;	Try it »
select	None.	
small	font-size: smaller;	Try it »
source	None.	
span	None.	
strike	text-decoration: line-through;	Try it »
strong	font-weight: bold;	Try it »
style	display: none;	
sub	vertical-align: sub; font-size: smaller;	Try it »
summary	display: block;	
sup	vertical-align: super; font-size: smaller;	Try it »
table	display: table; border-collapse: separate; border-spacing: 2px; border-color: gray;	Try it »
tbody	display: table-row-group; vertical-align: middle; border-color: inherit;	
td	display: table-cell; vertical-align: inherit;	
template	None.	
textarea	None.	
tfoot	display: table-footer-group; vertical-align: middle; border-color: inherit;	

☐ Dark mode



HTML

CSS



	<code>font-weight: bold;</code> <code>text-align: center;</code>	
thead	<code>display: table-header-group;</code> <code>vertical-align: middle;</code> <code>border-color: inherit;</code>	
time	None.	
title	<code>display: none;</code>	
tr	<code>display: table-row;</code> <code>vertical-align: inherit;</code> <code>border-color: inherit;</code>	
track	None.	
u	<code>text-decoration: underline;</code>	<a href="#">Try it »</a>
ul	<code>display: block;</code> <code>list-style-type: disc;</code> <code>margin-top: 1em;</code> <code>margin-bottom: 1 em;</code> <code>margin-left: 0;</code> <code>margin-right: 0;</code> <code>padding-left: 40px;</code>	<a href="#">Try it »</a>
var	<code>font-style: italic;</code>	<a href="#">Try it »</a>
video	None.	
wbr	None.	

[< Previous](#)[Next >](#)


ADVERTISEMENT

☐ Dark mode



NEW

We just launched  
W3Schools videos

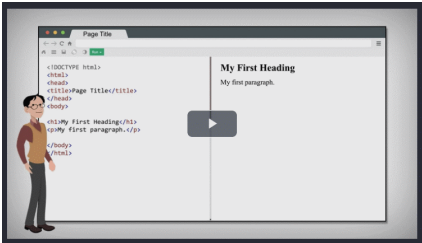

Explore now

COLOR PICKER

☐ Dark mode



Get certified  
by completing  
a course today!



Get started

CODE GAME



Play Game

ADVERTISEMENT

ADVERTISEMENT

ADVERTISEMENT

[HTML](#)[CSS](#)[About](#)[Shop](#)

## Top Tutorials

- [HTML Tutorial](#)
- [CSS Tutorial](#)
- [JavaScript Tutorial](#)
- [How To Tutorial](#)
- [SQL Tutorial](#)
- [Python Tutorial](#)
- [W3.CSS Tutorial](#)
- [Bootstrap Tutorial](#)
- [PHP Tutorial](#)
- [Java Tutorial](#)
- [C++ Tutorial](#)
- [jQuery Tutorial](#)

## Top References

- [HTML Reference](#)
- [CSS Reference](#)
- [JavaScript Reference](#)
- [SQL Reference](#)
- [Python Reference](#)
- [W3.CSS Reference](#)
- [Bootstrap Reference](#)
- [PHP Reference](#)
- [HTML Colors](#)
- [Java Reference](#)
- [Angular Reference](#)
- [jQuery Reference](#)

## Top Examples

- [HTML Examples](#)
- [CSS Examples](#)
- [JavaScript Examples](#)
- [How To Examples](#)
- [SQL Examples](#)
- [Python Examples](#)
- [W3.CSS Examples](#)
- [Bootstrap Examples](#)
- [PHP Examples](#)
- [Java Examples](#)
- [XML Examples](#)
- [jQuery Examples](#)

## Web Courses

- [HTML Course](#)
- [CSS Course](#)

☐ **Dark mode**

[HTML](#)[CSS](#)

- [SQL Course](#)
- [Python Course](#)
- [PHP Course](#)
- [jQuery Course](#)
- [Java Course](#)
- [C++ Course](#)
- [C# Course](#)
- [XML Course](#)

[Get Certified »](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie and privacy policy](#).

Copyright 1999-2022 by Refsnes Data. All Rights Reserved.  
W3Schools is Powered by W3.CSS.

