Branch benefit and useful condition content are different claims

Same fixed16 per intervention; seed42; gamma5. Positive values favor the normal condition.

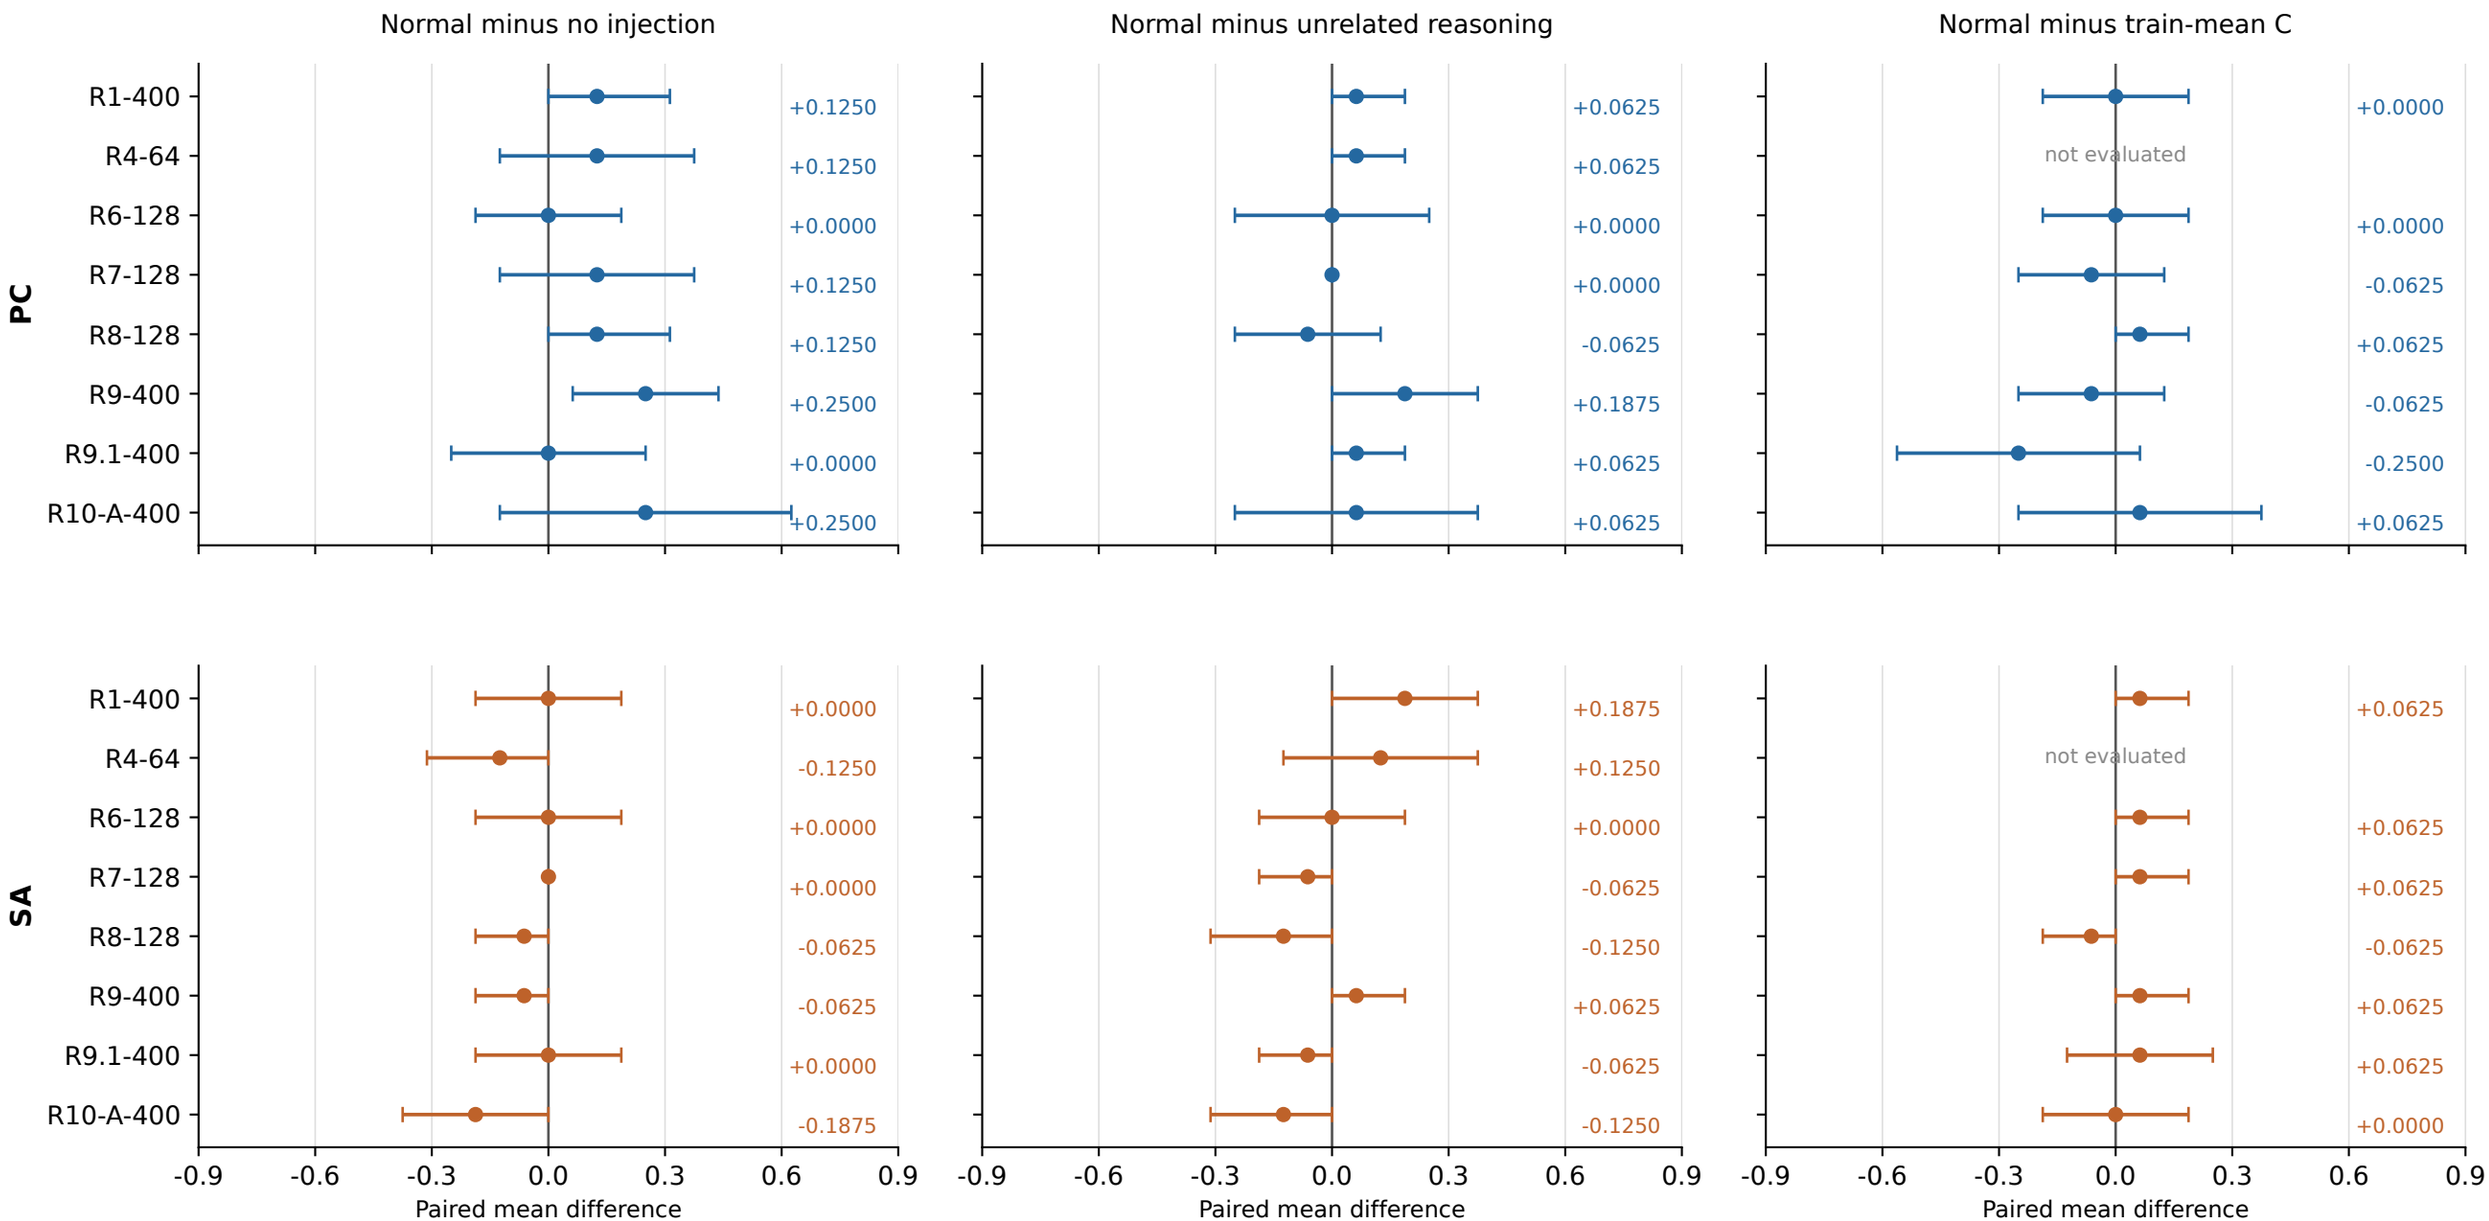

Lines: existing paired bootstrap95% intervals, not across-seed uncertainty. Each row intervenes within one checkpoint.
Rows have different training budgets and recipes; differences between rows are not controlled architecture effects.
Train-mean C fixes both CFG conditions and changes amplitude. Unrelated reasoning changes the positive reasoning only.
All available controls, including empty reasoning and anchor-only, are retained in the companion CSV; missing cells are not zero effects.