R1-400 condition interventions: fixed 16 cases

Seed 42; native text guidance 5; active physical guidance 5.

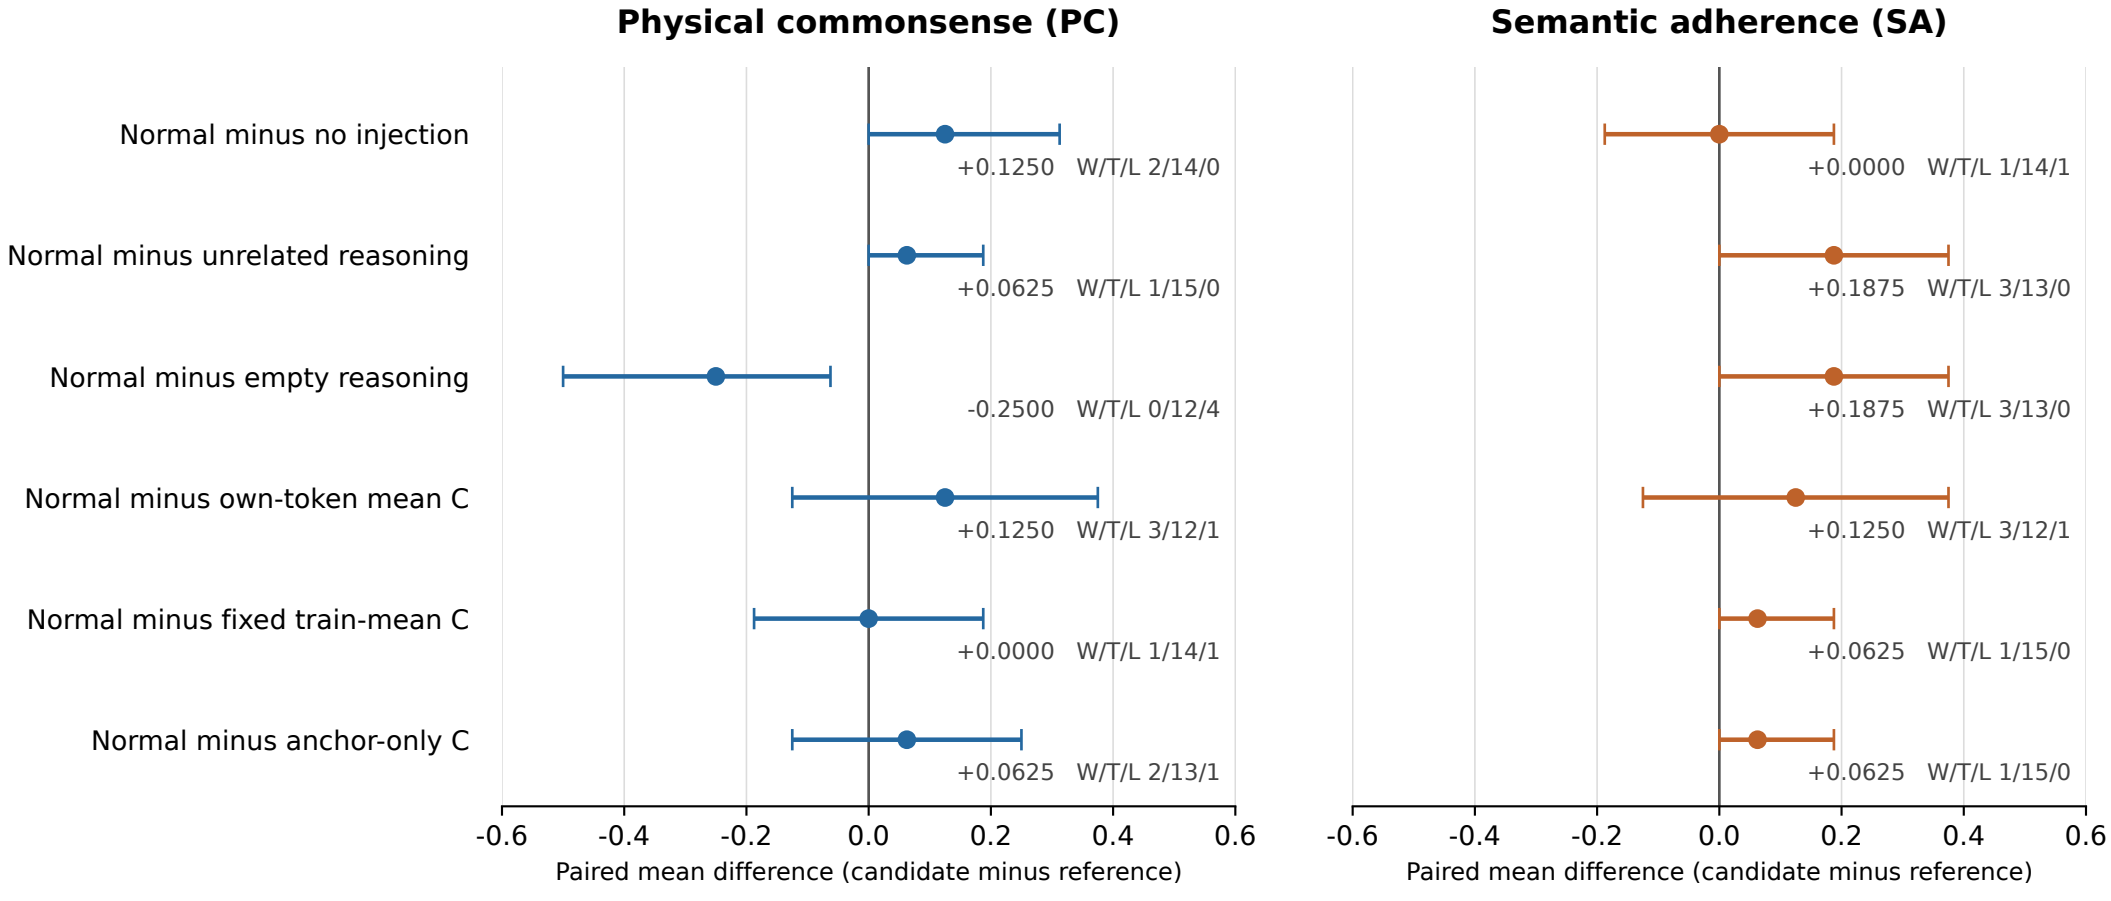

Same checkpoint, first image, native T5 request and initial noise. Units: points on the 1–5 scale; existing paired bootstrap 95% intervals.
Empty reasoning retains the own image/request. Own-token mean retains sample identity; fixed train-mean C removes Qwen sample information.
Mean interventions also change amplitude. This fixed16 subset must not be presented as the full40 main comparison.