R6-128 condition interventions: fixed 16 cases

Seed 42; native text guidance 5; active physical guidance 5.

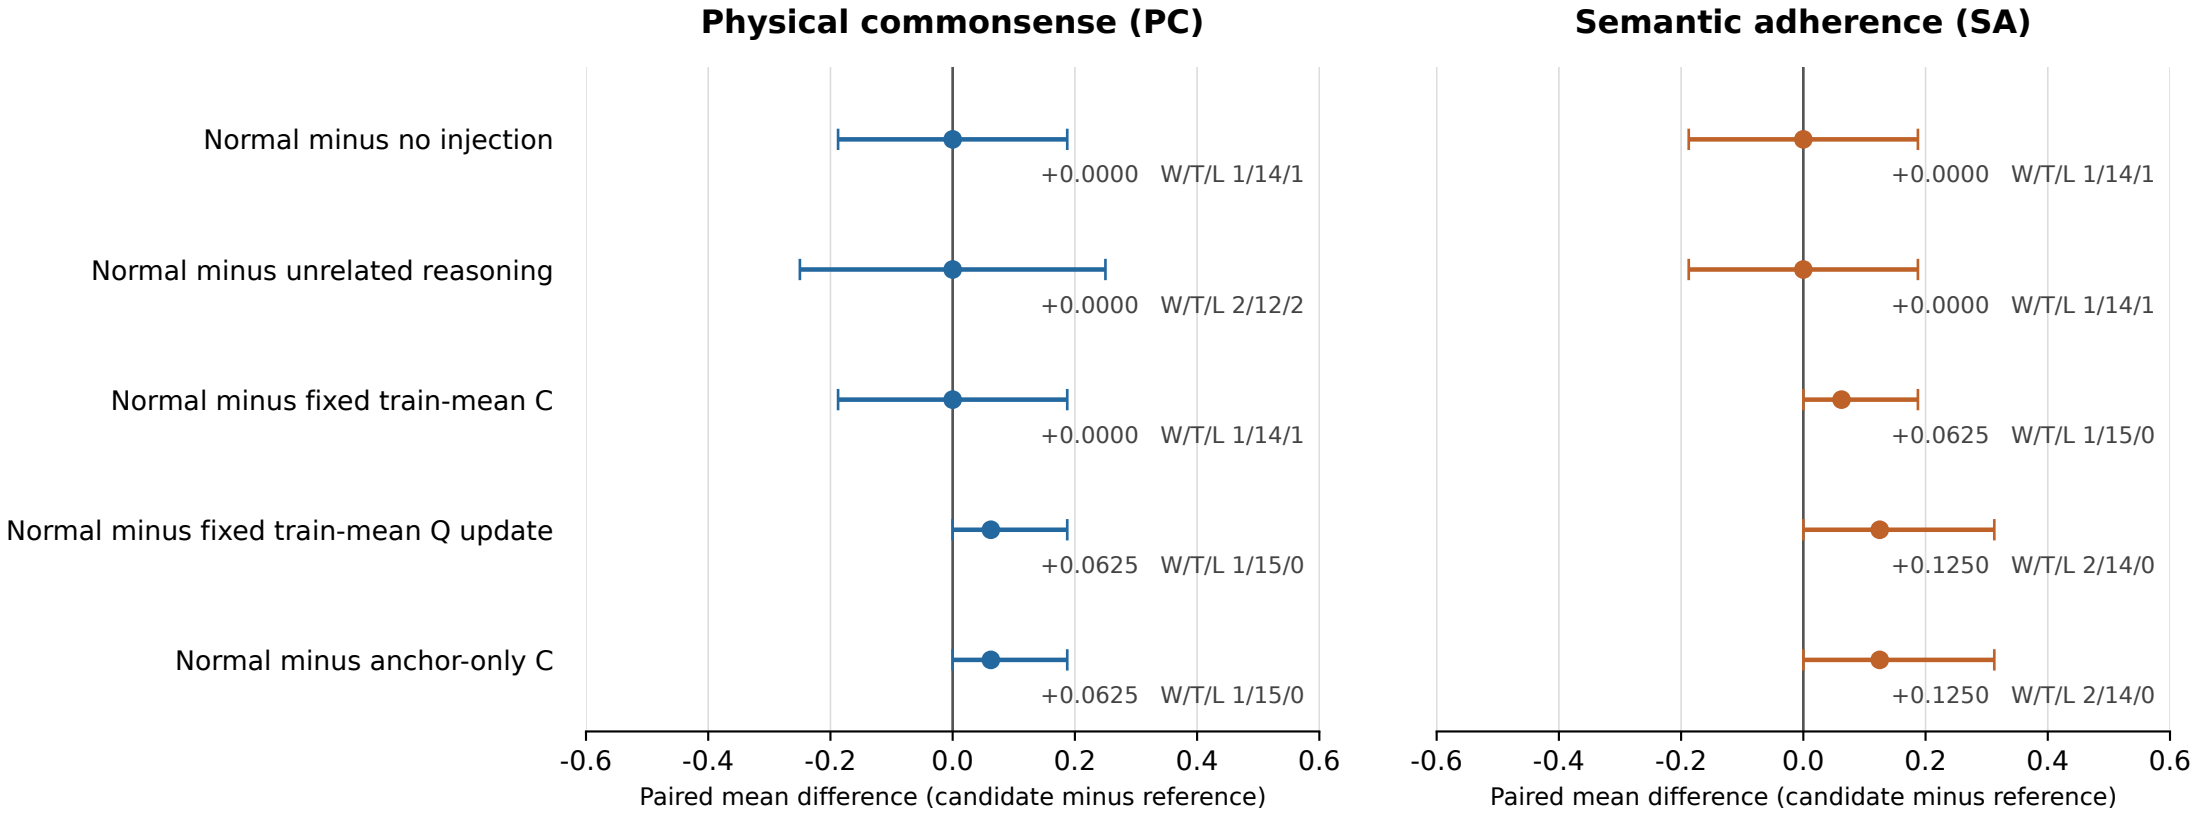

Same checkpoint, first image, native T5 request and initial noise. Existing case-paired bootstrap 95% intervals; one seed only.
Mean Q update retains each sample anchor. Fixed mean C removes Qwen sample information; mean controls also change amplitude.
Small gains over anchor or mean Q do not establish net gain over no injection or unrelated reasoning. Main full40 PC equals native128.