Integration Test Report: Superadmin

Date: 2025-09-10

Author: Weiran Xu

Version: 2.0

1. Introduction

This document details software defects identified in the Course Management System. The purpose of this report is to provide a clear and concise description of each issue, the steps required to reproduce it, and the expected versus actual results to facilitate resolution by the development team.

2. Defect Summary

Defect ID	Title	Severity	Priority	Status
CMS-001	"Edit Course Administrator" Pop-up Always Displays "Active" Status	Medium	Medium	Open
CMS-002	Incorrect Email Format Hint in "Invite Admin"	Low	Low	Open
CMS-003	Lack of Debounce on Course Search Functionality	Medium	High	Open

3. Defect Details

3.1 Defect ID: CMS-001

Title: "Edit Course Administrator" Pop-up Always Displays "Active" Status

Severity: Medium

Priority: Medium

Status: Open

Environment:

- **Application:** Course Management System
- **Browser:** [140.0.7339.81 (Official Build) (arm64)
- **Operating System:** macOS 15.6.1

Description: The "Status" parameter within the "Edit Course Administrator" pop-up window consistently shows as "Active", regardless of whether the selected administrator's actual status is "Active" or "Inactive". This can lead to confusion and misrepresentation of user statuses.


Steps to Reproduce:

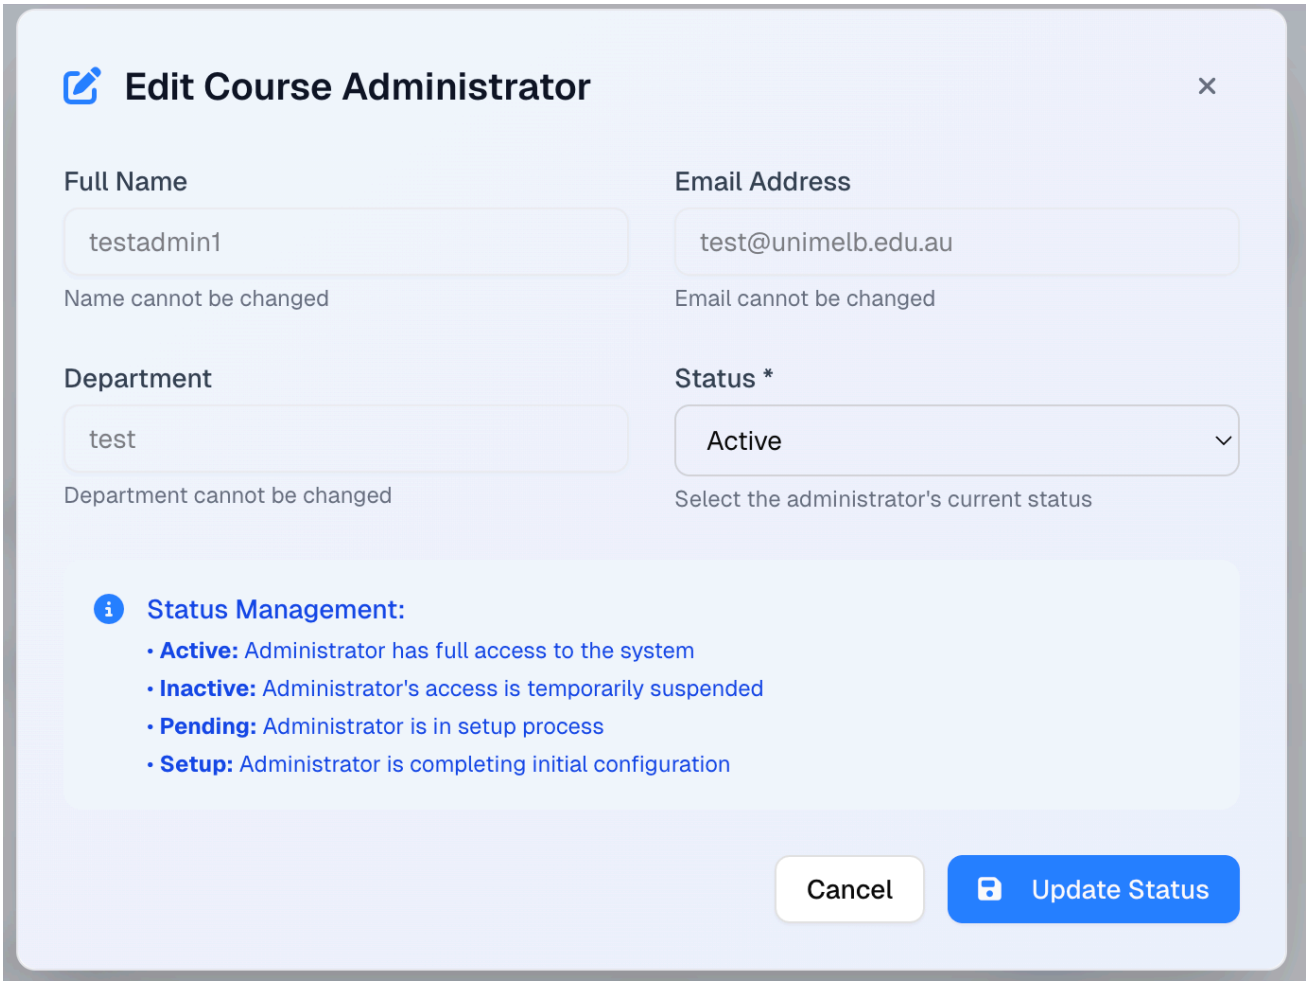
1. Navigate to the "Course Administrators" section.
2. Identify a Course Administrator with a status of "Inactive".
3. Click on the "Edit" button or icon corresponding to the "Inactive" administrator.
4. Observe the "Edit Course Administrator" pop-up window.

Expected Result: The "Status" field within the "Edit Course Administrator" pop-up should accurately reflect the current status of the selected administrator. For an administrator who is "Inactive", the status should be pre-selected as "Inactive".

Actual Result: The "Status" field in the "Edit Course Administrator" pop-up is always defaulted to "Active", irrespective of the administrator's actual current status.

Attachments:

- 

- 

3.2 Defect ID: CMS-002

Title: Incorrect Email Format Hint in "Invite Admin"

Severity: Low

Priority: Low

Status: Open

Environment:

- **Application:** Course Management System
- **Browser:** [140.0.7339.81 (Official Build) (arm64)
- **Operating System:** macOS 15.6.1

Description: The instructional text or placeholder for the email input field in the "Invite Admin" feature provides an incorrect or misleading example of a valid email format. This could potentially confuse users and lead to incorrect data entry.

Steps to Reproduce:

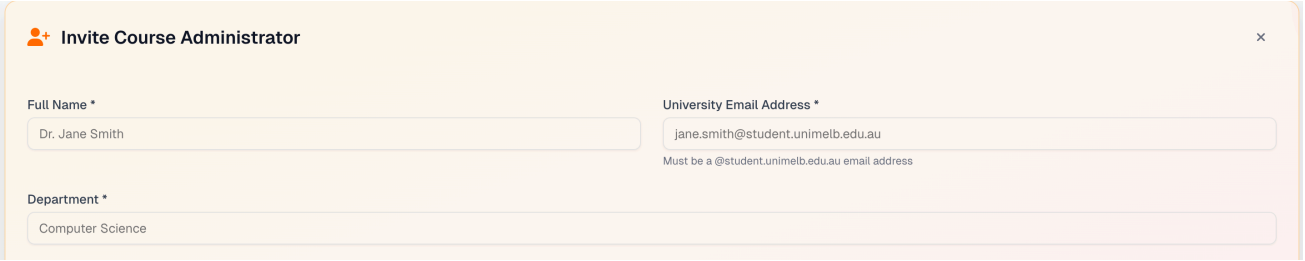
1. Navigate to the "Course Administrators" section.
2. Click on the "Invite Admin" or "Add New Administrator" button.
3. Observe the hint text or placeholder within the email address input field.

Expected Result: The hint text for the email format should provide a correct and universally recognised example, such as "e.g., name@unimelb.edu.au".

Actual Result: The hint text for the email format is incorrect [State what the incorrect hint is, for example, "e.g., name@student.unimelb.edu.au"].

Attachments:

-



3.3 Defect ID: CMS-003

Title: Lack of Debounce on Course Search Functionality

Severity: Medium

Priority: High

Status: Open

Environment:

- **Application:** Course Management System
- **Browser:** [140.0.7339.81 (Official Build) (arm64)
- **Operating System:** macOS 15.6.1

Description: The course search functionality executes a query for each character typed into the search bar. Given that the search query is slow to execute, this results in a poor user experience, with the interface becoming sluggish and unresponsive as the user types. Implementing a debounce mechanism or a dedicated search button would significantly improve performance.

Steps to Reproduce:

1. Navigate to the "Courses" section.
2. Locate the search bar for finding courses.
3. Begin typing a search query into the search bar at a normal pace.
4. Observe the system's responsiveness and network requests.

Expected Result: The system should wait for a brief pause in typing (e.g., 300-500ms) before sending a search query to the server. Alternatively, a search button should be provided to initiate the search explicitly. This would prevent multiple, unnecessary queries from being sent while the user is still typing.

Actual Result: A new search query is sent for every keystroke in the search bar, leading to a high volume of requests and a noticeable lag in the user interface.

Recommendations:

- Implement a debounce function on the search input field to only trigger the search after the user has stopped typing for a specified duration.
- Alternatively, add a "Search" button next to the input field, so the search is only initiated on a button click.