Machine-Level Programming IV: Data

15-213/18-213/14-513/15-513/18-613: Introduction to Computer Systems
8th Lecture, February 6, 2020

Today

- **Switch Statements**
- **Arrays**
  - One-dimensional
  - Multi-dimensional (nested)
  - Multi-level
- **Structures**
  - Allocation
  - Access
  - Alignment
- **Floating Point**

Switch Statement Example

```
long my_switch
   (long x, long y, long z)
{
    long w = 1;
    switch(x) {
    case 1:
        w = y*z;
        break;
    case 2:
        w = y/z;
        /* Fall Through */
    case 3:
        w += z;
        break;
    case 5:
    case 6:
        w -= z;
        break;
    default:
        w = 2;
    }
    return w;
}
```

- **Multiple case labels**
  - Here: 5 & 6
- **Fall through cases**
  - Here: 2
- **Missing cases**
  - Here: 4

Jump Table Structure

Switch Form

```
switch(x) {
  case val_0:
    Block 0
  case val_1:
    Block 1
    • • •
  case val_n-1:
    Block n–1
}
```

Jump Table

jtab:

Targ0
Targ1
Targ2
• • •
Targn-1

Jump Targets

Targ0: Code Block 0

Targ1: Code Block 1

Targ2: Code Block 2

• • •

Targn-1: Code Block *n*–1

Translation (Extended C)

```
goto *JTab[x];
```

Switch Statement Example

```
long my_switch(long x, long y, long z)
{
    long w = 1;
    switch(x) {
      . . .
    }
    return w;
}
```

Setup

```
my_switch:
    movq    %rdx, %rcx
    cmpq    $6, %rdi    # x:6
    ja      .L8
    jmp     *.L4(,%rdi,8)
```

What range of values takes default?

Register	Use(s)
%rdi	Argument **x**
%rsi	Argument **y**
%rdx	Argument **z**
%rax	Return value

Note that w not initialized here

Switch Statement Example

```
long my_switch(long x, long y, long z)
{
    long w = 1;
    switch(x) {
      . . .
    }
    return w;
}
```

Setup

```
my_switch:
    movq    %rdx, %rcx
    cmpq    $6, %rdi      # x:6
    ja      .L8           # use default
    jmp     *.L4(,%rdi,8)  # goto *Jtab[x]
```

Indirect jump

Jump table

```
.section    .rodata
  .align 8
.L4:
  .quad     .L8   # x = 0
  .quad     .L3   # x = 1
  .quad     .L5   # x = 2
  .quad     .L9   # x = 3
  .quad     .L8   # x = 4
  .quad     .L7   # x = 5
  .quad     .L7   # x = 6
```

Assembly Setup Explanation

- **Table Structure**
  - Each target requires 8 bytes
  - Base address at **`.L4`**

- **Jumping**
  - **Direct:** **`jmp .L8`**
  - Jump target is denoted by label **`.L8`**

  - **Indirect:** **`jmp *.L4(,%rdi,8)`**
  - Start of jump table: **`.L4`**
  - Must scale by factor of 8 (addresses are 8 bytes)
  - Fetch target from effective Address **`.L4 + x*8`**
    - Only for $0 \le$ **x** ≤ 6

Jump table

```
.section    .rodata
  .align 8
.L4:
  .quad     .L8   # x = 0
  .quad     .L3   # x = 1
  .quad     .L5   # x = 2
  .quad     .L9   # x = 3
  .quad     .L8   # x = 4
  .quad     .L7   # x = 5
  .quad     .L7   # x = 6
```

Jump Table

Jump table

```
.section    .rodata
  .align 8
.L4:
  .quad     .L8   # x = 0
  .quad     .L3   # x = 1
  .quad     .L5   # x = 2
  .quad     .L9   # x = 3
  .quad     .L8   # x = 4
  .quad     .L7   # x = 5
  .quad     .L7   # x = 6
```

```
switch(x) {
case 1:        // .L3
    w = y*z;
    break;
case 2:        // .L5
    w = y/z;
    /* Fall Through */
case 3:        // .L9
    w += z;
    break;
case 5:
case 6:        // .L7
    w -= z;
    break;
default:       // .L8
    w = 2;
}
```

Code Blocks (x == 1)

```
  switch(x) {
  case 1:       // .L3
        w = y*z;
        break;
   . . .
}
```

```
.L3:
   movq    %rsi, %rax   # y
   imulq   %rdx, %rax   # y*z
   ret
```

Register	Use(s)
`%rdi`	Argument **x**
`%rsi`	Argument **y**
`%rdx`	Argument **z**
`%rax`	Return value

Handling Fall-Through

```
long w = 1;
   . . .
switch(x) {
   . . .
case 2:
    w = y/z;
    /* Fall Through */
case 3:
    w += z;
    break;
   . . .
}
```

```
case 2:
    w = y/z;
    goto merge;
```

```
case 3:
        w = 1;
```

```
merge:
        w += z;
```

Code Blocks (x == 2, x == 3)

```
long w = 1;
   . . .
switch(x) {
   . . .
case 2:
    w = y/z;
    /* Fall Through */
case 3:
    w += z;
    break;
   . . .
}
```

```
.L5:                    # Case 2
   movq    %rsi, %rax
   cqto                 # sign extend
                        # rax to rdx:rax
   idivq   %rcx         #   y/z
   jmp     .L6          #   goto merge
.L9:                    # Case 3
   movl    $1, %eax     #   w = 1
.L6:                    # merge:
   addq    %rcx, %rax #   w += z
   ret
```

Register	Use(s)
`%rdi`	Argument **`x`**
`%rsi`	Argument **`y`**
`%rcx`	**`z`**
`%rax`	Return value

Code Blocks (x == 5, x == 6, default)

```
  switch(x) {
    . . .
    case 5:  // .L7
    case 6:  // .L7
        w -= z;
        break;
    default: // .L8
        w = 2;
}
```

```
.L7:                       # Case 5,6
  movl   $1, %eax    #  w = 1
  subq   %rdx, %rax  #  w -= z
  ret
.L8:                       # Default:
  movl   $2, %eax    #  2
  ret
```

Register	Use(s)
`%rdi`	Argument **`x`**
`%rsi`	Argument **`y`**
`%rdx`	Argument **`z`**
`%rax`	Return value

Today

- Switch Statements
- Arrays
  - One-dimensional
  - Multi-dimensional (nested)
  - Multi-level
- Structures
  - Allocation
  - Access
  - Alignment
- Floating Point

Array Allocation

- **Basic Principle**

  T **`A`**`[`*L*`];`

  - Array of data type *T* and length *L*
  - Contiguously allocated region of *L* * **`sizeof`**`(`*T*`)` bytes in memory

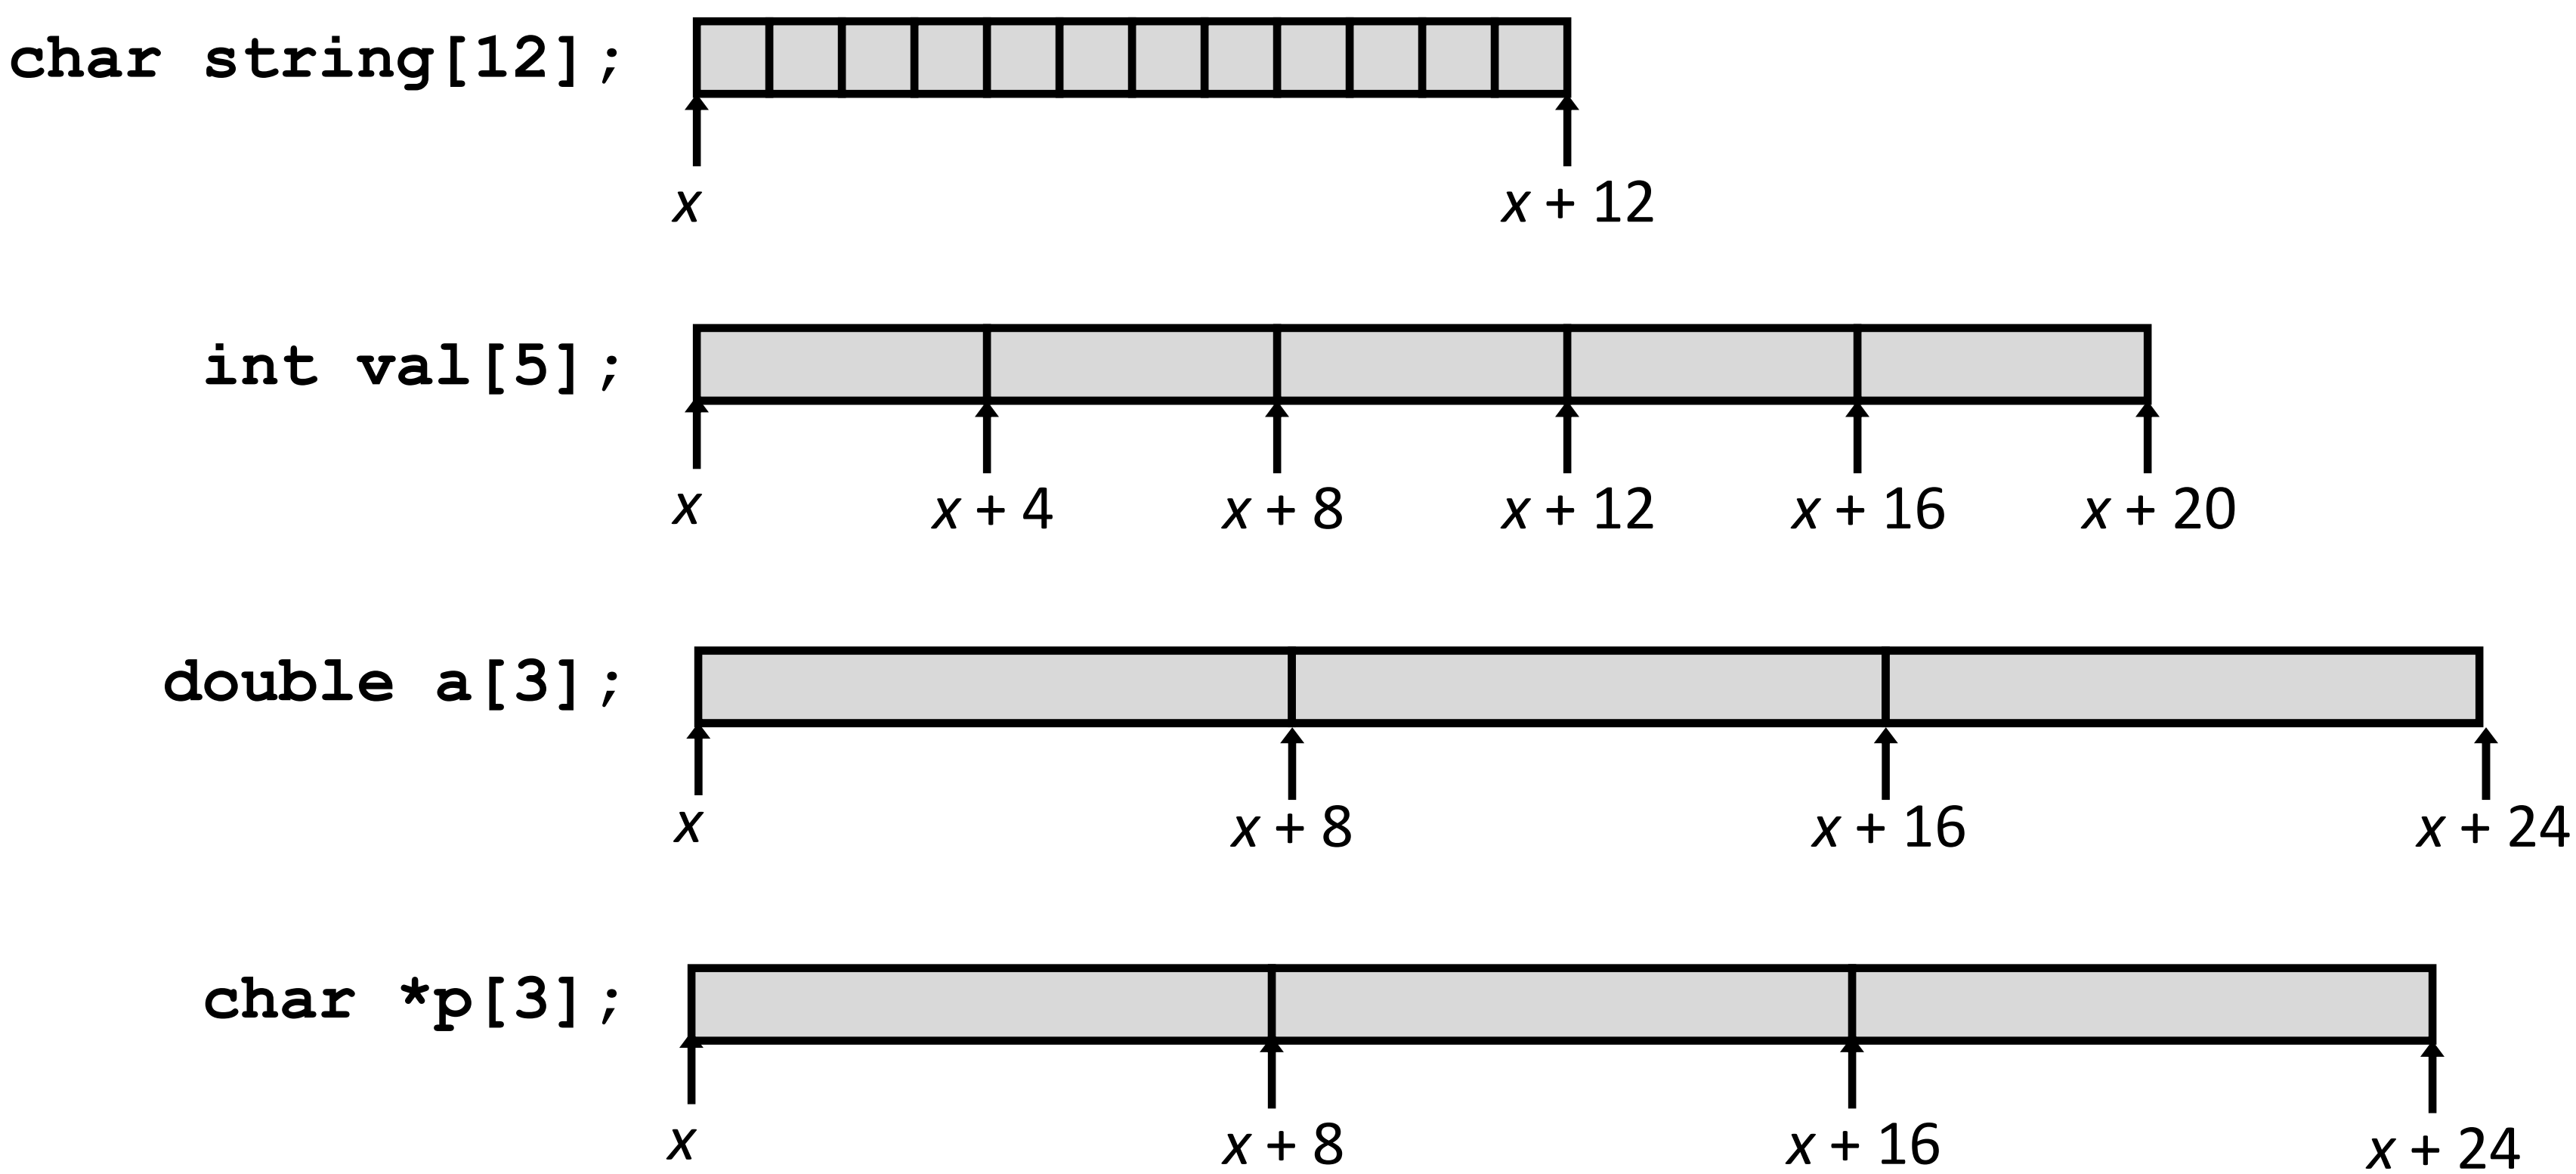

Array Access

- **Basic Principle**

  T **A[*L*];**
  - Array of data type *T* and length *L*
  - Identifier **A** can be used as a pointer to array element 0: Type *T**

`int val[5];`

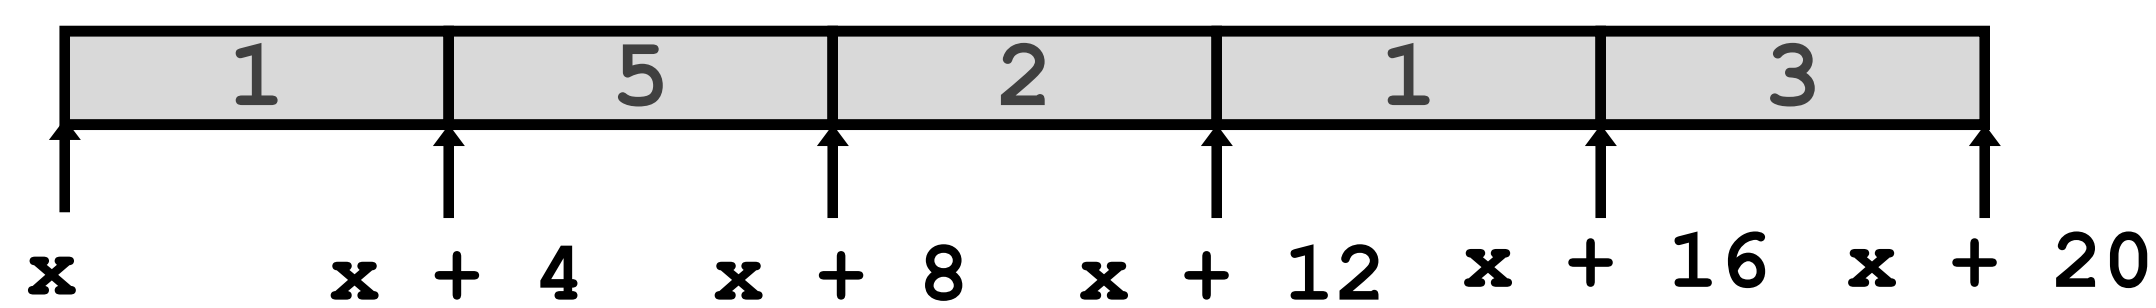

Reference	Type	Value
`val[4]`	`int`	
`val`	`int *`	
`val+1`	`int *`	
`&val[2]`	`int *`	
`val[5]`	`int`	
`*(val+1)`	`int`	
`val + i`	`int *`	

Array Access

■ Basic Principle

T **A[*L*];**

- Array of data type *T* and length *L*
- Identifier **A** can be used as a pointer to array element 0: Type *T**

int val[5];

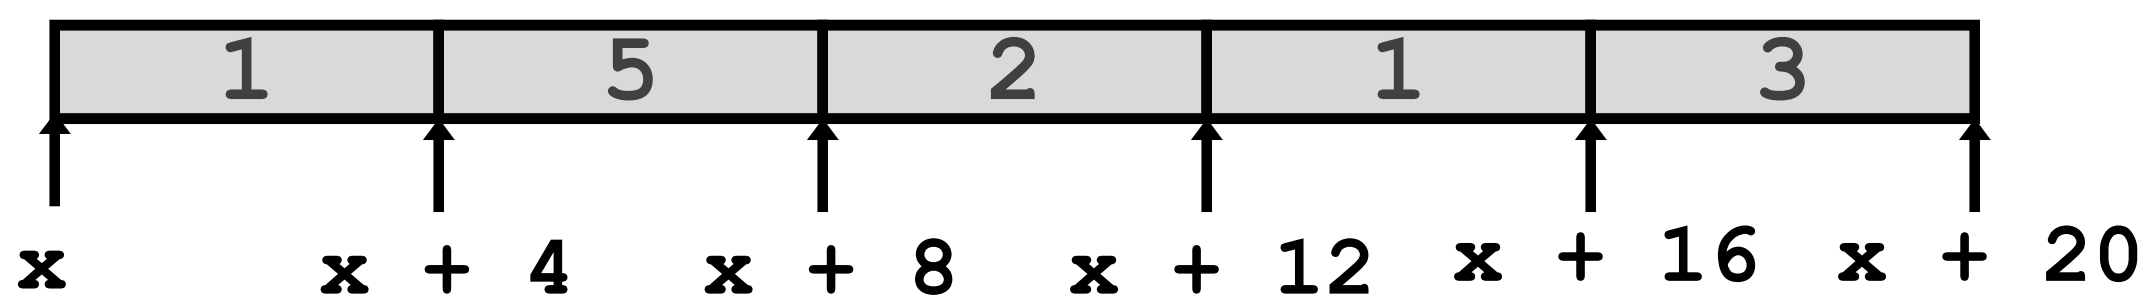

■ Reference

Reference	Type	Value
`val[4]`	`int`	3
`val`	`int *`	
`val+1`	`int *`	
`&val[2]`	`int *`	
`val[5]`	`int`	
`*(val+1)`	`int`	
`val + i`	`int *`	

Array Access

- **Basic Principle**

  T **A[*L*];**

  - Array of data type *T* and length *L*
  - Identifier **A** can be used as a pointer to array element 0: Type *T**

`int val[5];`

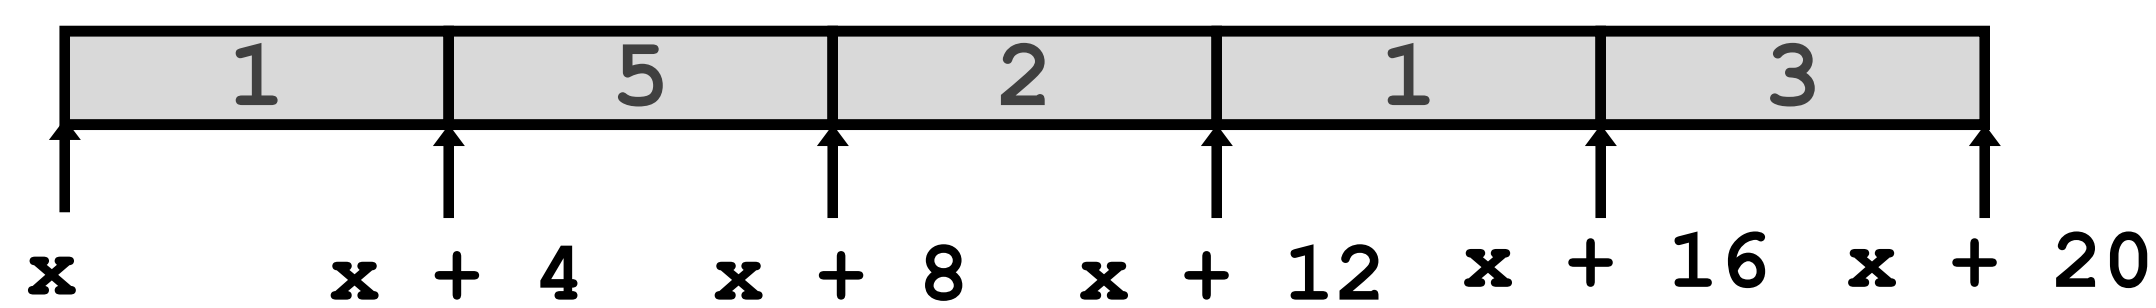

Reference	Type	Value
`val[4]`	`int`	`3`
`val`	`int *`	`x`
`val+1`	`int *`	`x + 4`
`&val[2]`	`int *`	`x + 8`
`val[5]`	`int`	`??`
`*(val+1)`	`int`	`5 //val[1]`
`val + i`	`int *`	`x + 4 * i //&val[i]`

Array Example

```
#define ZLEN 5
typedef int zip_dig[ZLEN];

zip_dig cmu = { 1, 5, 2, 1, 3 };
zip_dig mit = { 0, 2, 1, 3, 9 };
zip_dig ucb = { 9, 4, 7, 2, 0 };
```

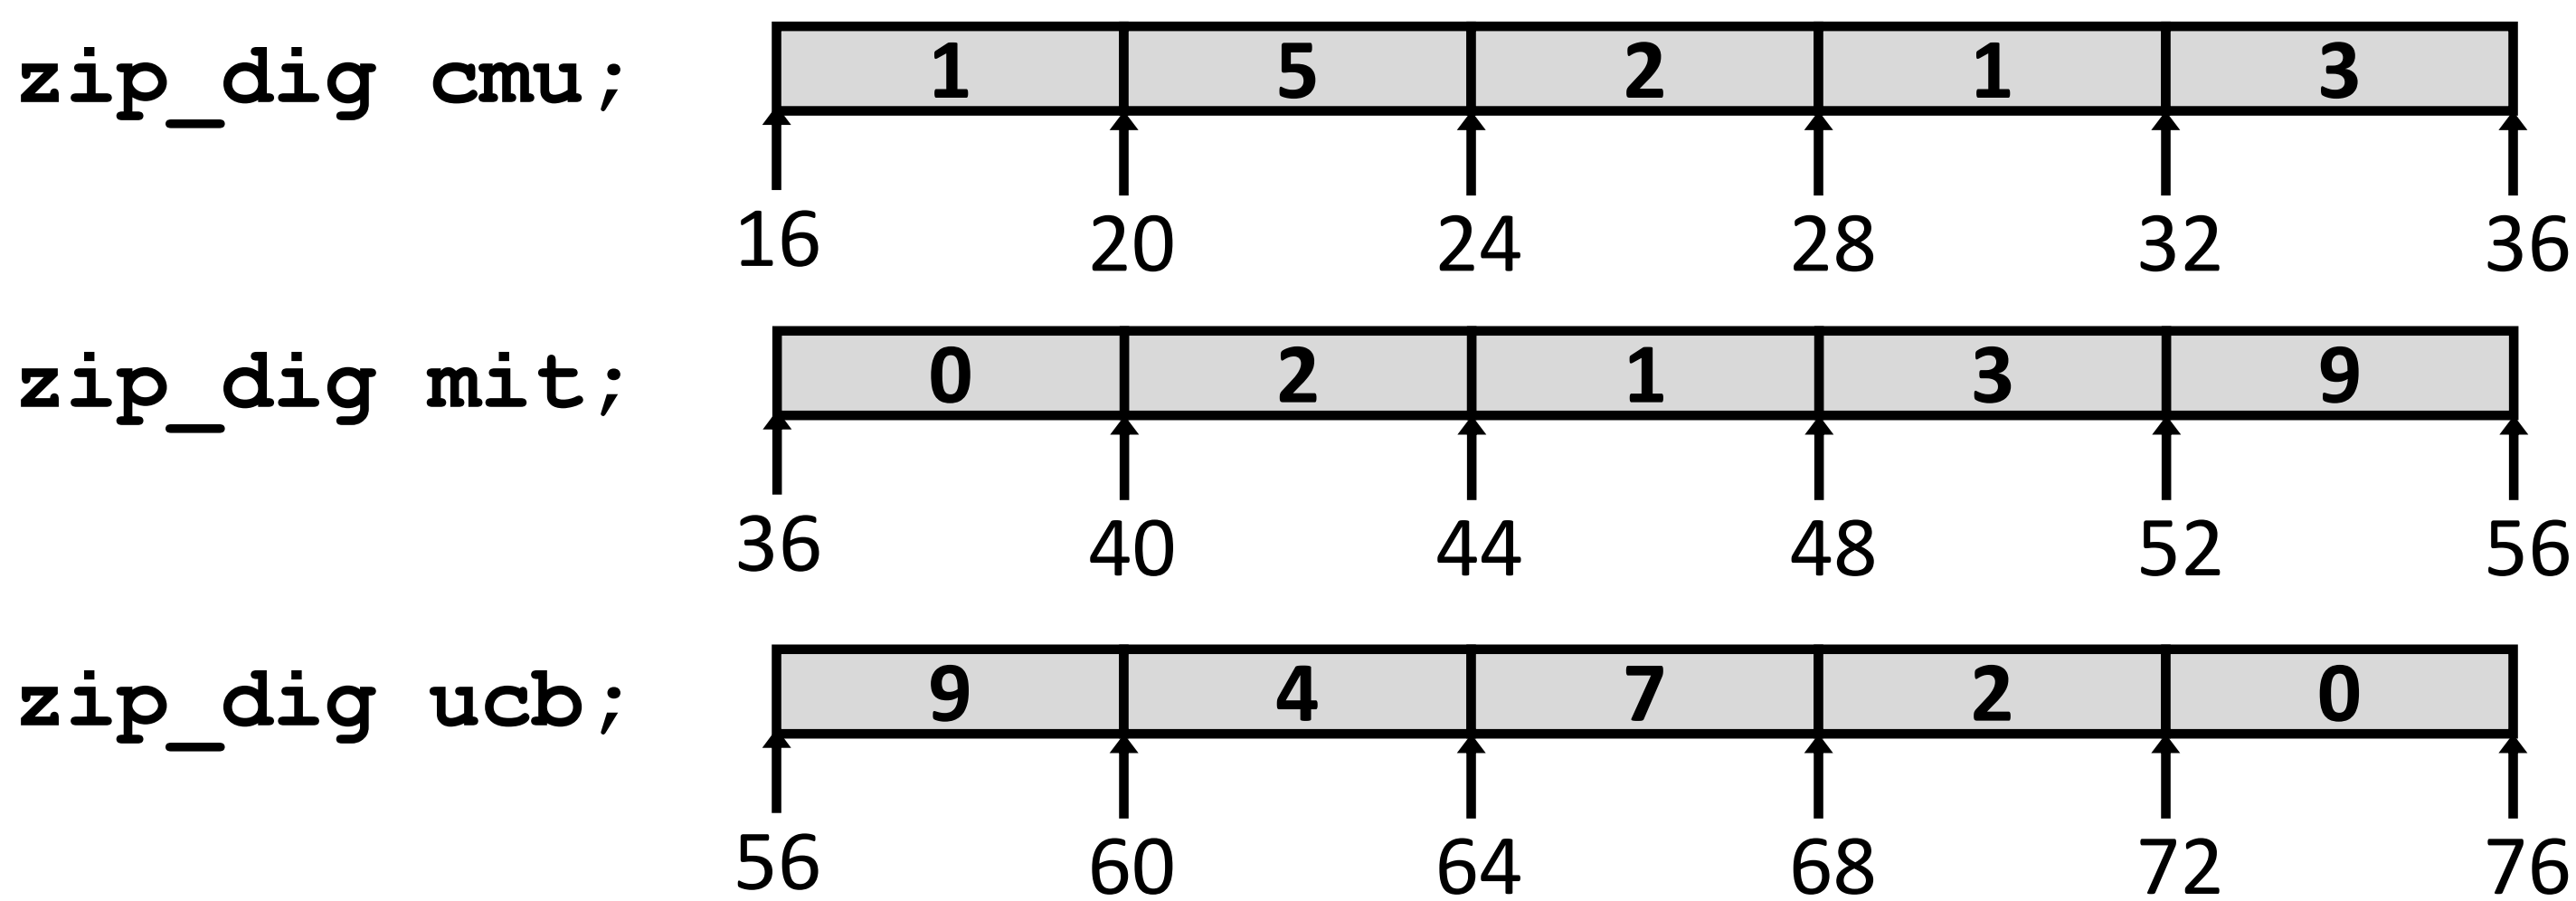

- **Declaration "`zip_dig cmu`" equivalent to "`int cmu[5]`"**
- **Example arrays were allocated in successive 20 byte blocks**
  - Not guaranteed to happen in general

Array Accessing Example

```
zip_dig cmu;
```

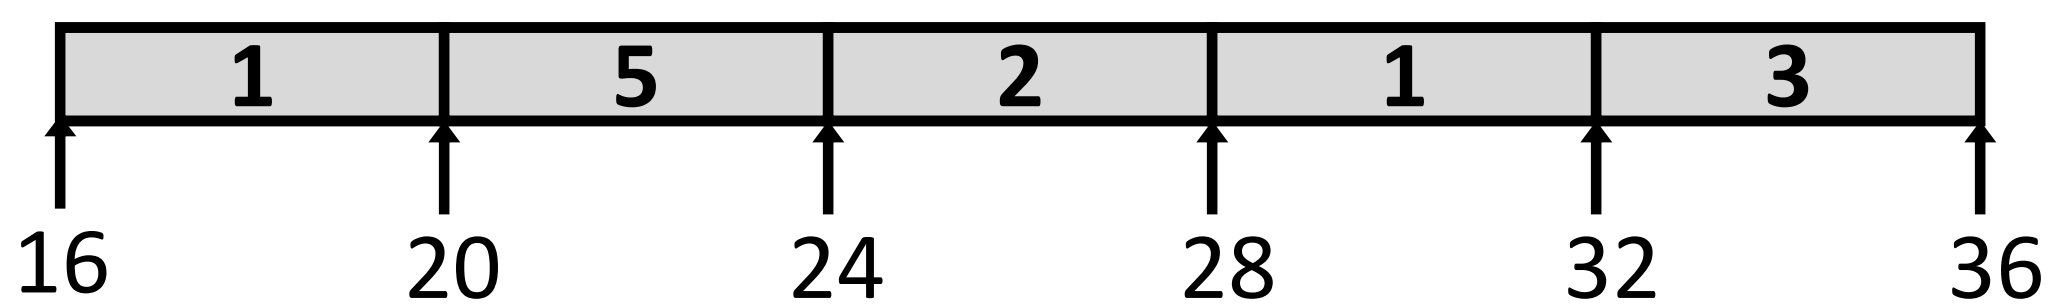


```
int get_digit
  (zip_dig z, int digit)
{
  return z[digit];
}
```

x86-64

```
  # %rdi = z
  # %rsi = digit
movl (%rdi,%rsi,4), %eax  # z[digit]
```

- Register `%rdi` contains starting address of array
- Register `%rsi` contains array index
- Desired digit at `%rdi + 4*%rsi`
- Use memory reference `(%rdi,%rsi,4)`

Array Loop Example

```
void zincr(zip_dig z) {
  size_t i;
  for (i = 0; i < ZLEN; i++)
    z[i]++;
}
```

```
  # %rdi = z
  movl    $0, %eax
  jmp     .L3
.L4:
  addl    $1, (%rdi,%rax,4)
  addq    $1, %rax
.L3:
  cmpq    $4, %rax
  jbe     .L4
  rep; ret
```

Array Loop Example

```
void zincr(zip_dig z) {
  size_t i;
  for (i = 0; i < ZLEN; i++)
    z[i]++;
}
```

```
  # %rdi = z
  movl    $0, %eax             #   i = 0
  jmp     .L3                  #   goto middle
.L4:                           # loop:
  addl    $1, (%rdi,%rax,4)    #   z[i]++
  addq    $1, %rax             #   i++
.L3:                           # middle
  cmpq    $4, %rax             #   i:4
  jbe     .L4                  #   if <=, goto loop
  rep; ret
```

Understanding Pointers & Arrays #1

Decl	A1 , A2			*A1 , *A2		
	Comp	Bad	Size	Comp	Bad	Size
`int A1[3]`						
`int *A2`						

- **Comp: Compiles (Y/N)**
- **Bad: Possible bad pointer reference (Y/N)**
- **Size: Value returned by `sizeof`**

Understanding Pointers & Arrays #1

Decl	A1 , A2			*A1 , *A2		
	Comp	Bad	Size	Comp	Bad	Size
`int A1[3]`						
`int *A2`						

- **Comp: Compiles (Y/N)**
- **Bad: Possible bad pointer reference (Y/N)**
- **Size: Value returned by `sizeof`**

Understanding Pointers & Arrays #1

Decl	`A1` , `A2`			`*A1` , `*A2`		
	Comp	Bad	Size	Comp	Bad	Size
`int A1[3]`	Y	N	12	Y	N	4
`int *A2`	Y	N	8	Y	Y	4

- **Comp: Compiles (Y/N)**
- **Bad: Possible bad pointer reference (Y/N)**
- **Size: Value returned by `sizeof`**

Understanding Pointers & Arrays #2

Decl	`An`			`*An`			`**An`		
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size
`int A1[3]`									
`int *A2[3]`									
`int (*A3)[3]`									

Allocated pointer

Unallocated pointer

Allocated int

Unallocated int

Understanding Pointers & Arrays #2

Decl	An			*An			**An		
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size
`int A1[3]`									
`int *A2[3]`									
`int (*A3)[3]`									

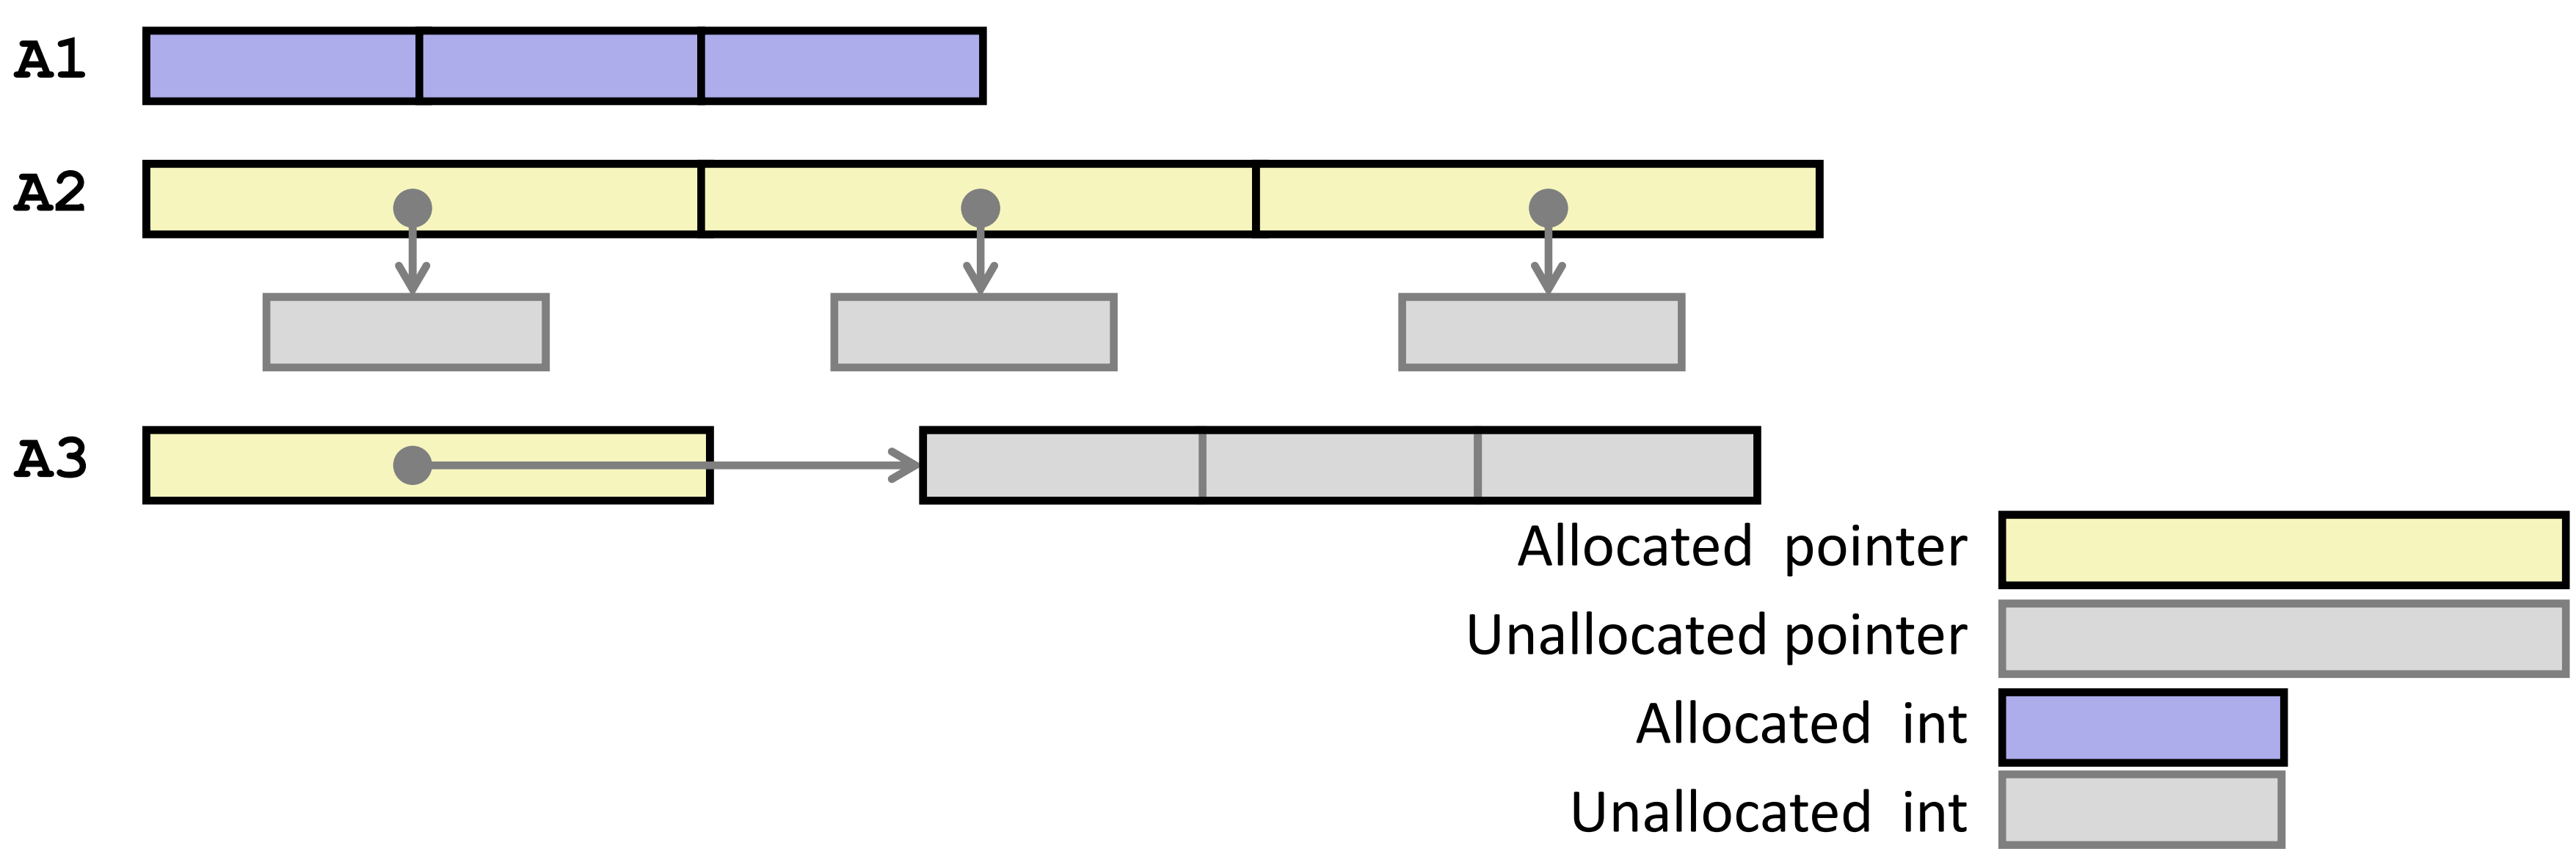

Understanding Pointers & Arrays #2

Decl	An			*An			**An		
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size
`int A1[3]`	Y	N	12	Y	N	4	N	-	-
`int *A2[3]`	Y	N	24	Y	N	8	Y	Y	4
`int (*A3)[3]`	Y	N	8	Y	Y	12	Y	Y	4

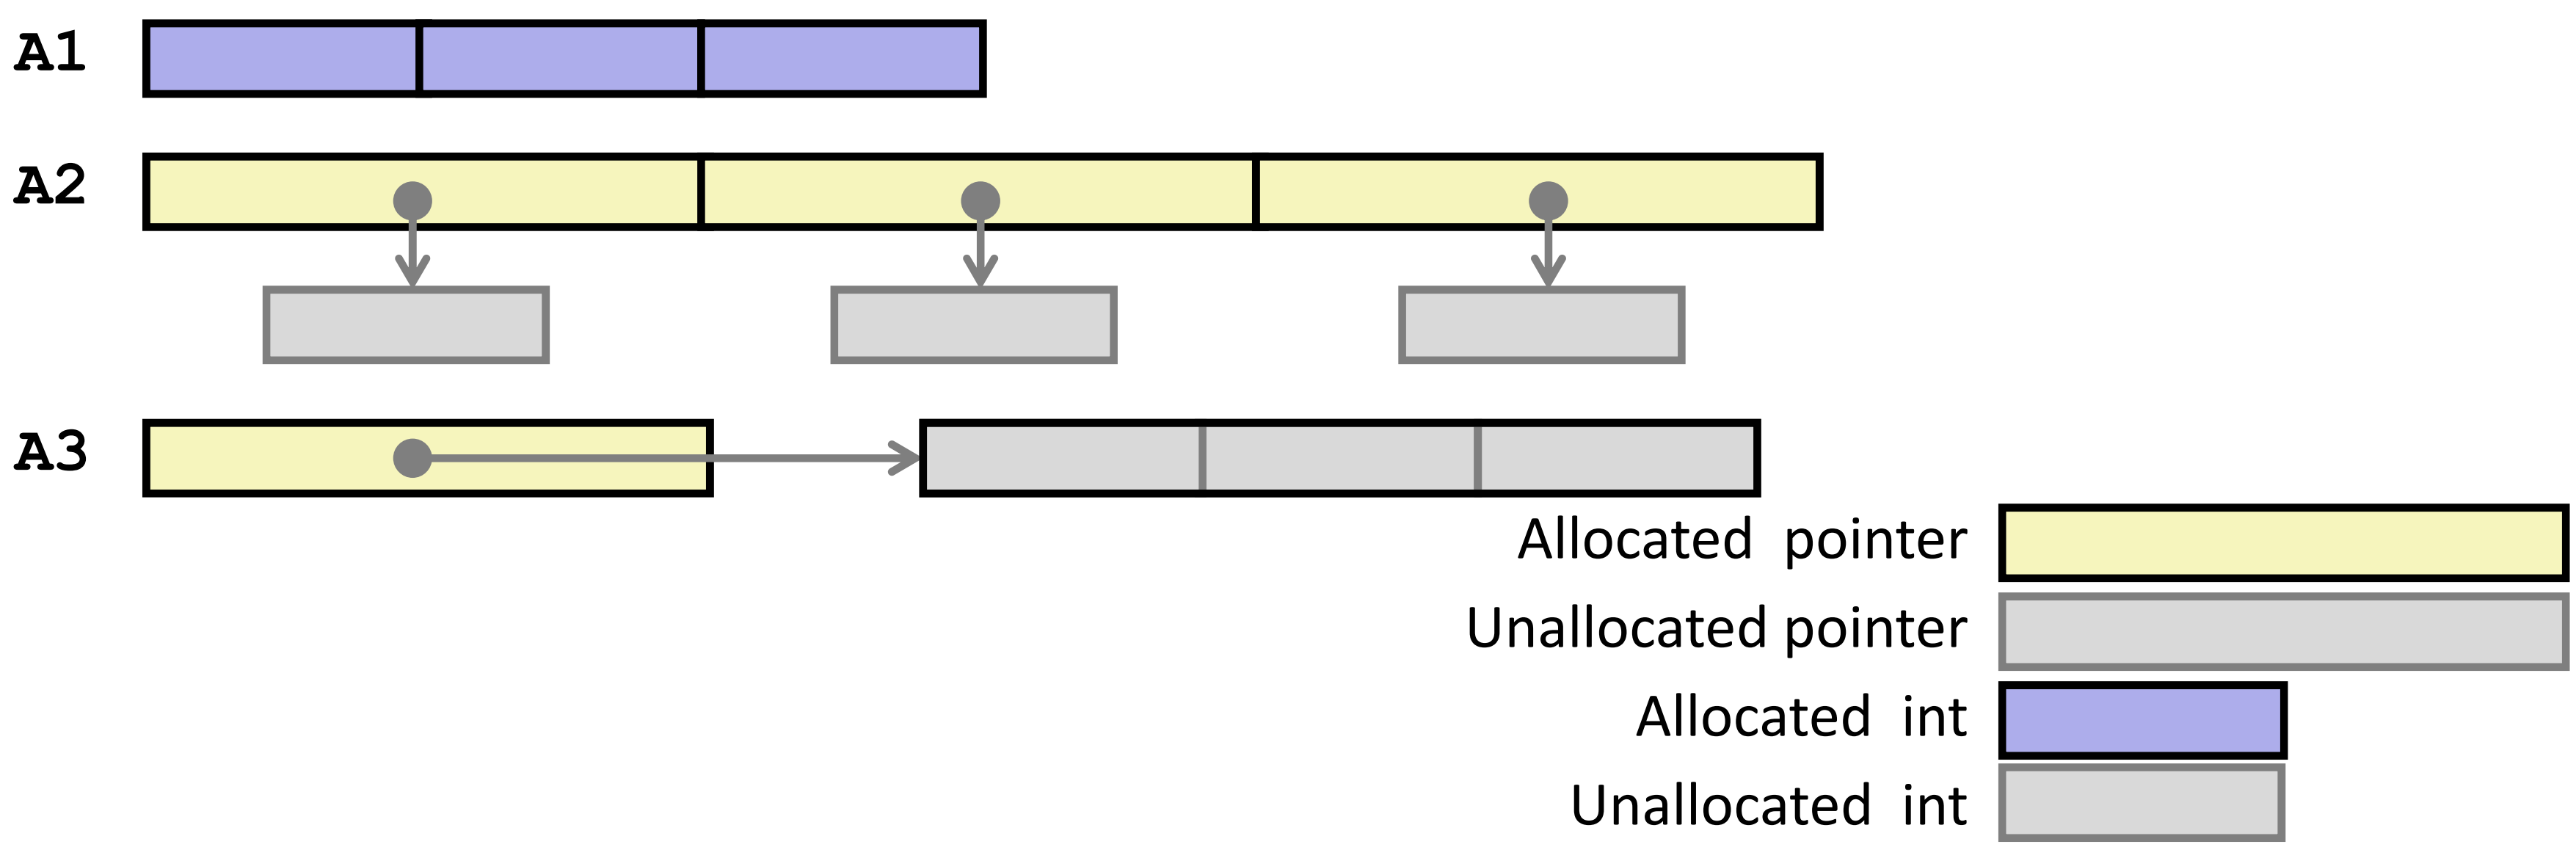

Multidimensional (Nested) Arrays

- **Declaration**
  - *T* **A**[*R*][*C*];
  - 2D array of data type *T*
  - *R* rows, *C* columns
- **Array Size**
  - *R* * *C* * **sizeof**(*T*) bytes
- **Arrangement**
  - Row-Major Ordering

$$\begin{bmatrix} \texttt{A[0][0]} & \cdots & \texttt{A[0][C-1]} \\ \vdots & & \vdots \\ \texttt{A[R-1][0]} & \cdots & \texttt{A[R-1][C-1]} \end{bmatrix}$$

```
int A[R][C];
```

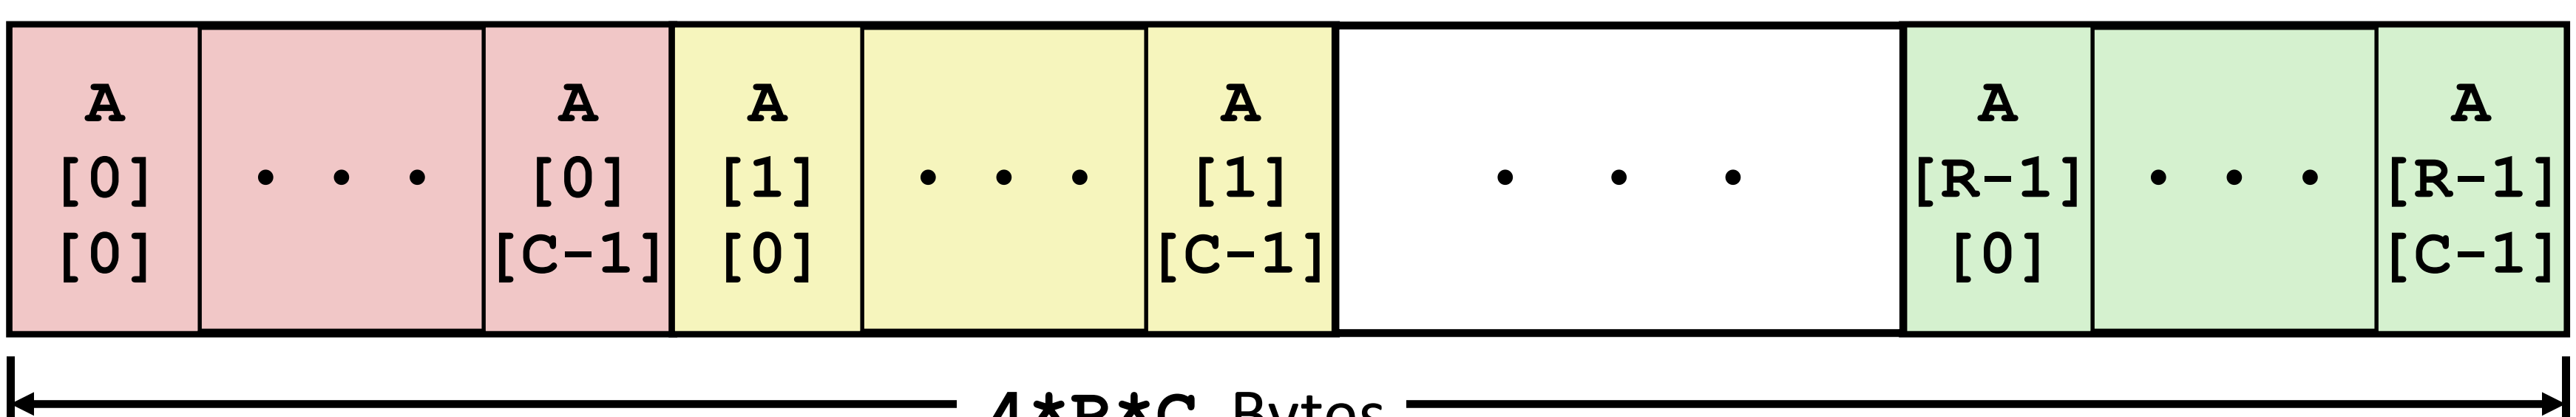

Nested Array Example

```
#define PCOUNT 4
typedef int zip_dig[5];

zip_dig pgh[PCOUNT] =
  {{1, 5, 2, 0, 6},
   {1, 5, 2, 1, 3 },
   {1, 5, 2, 1, 7 },
   {1, 5, 2, 2, 1 }};
```

```
zip_dig
pgh[4];
```

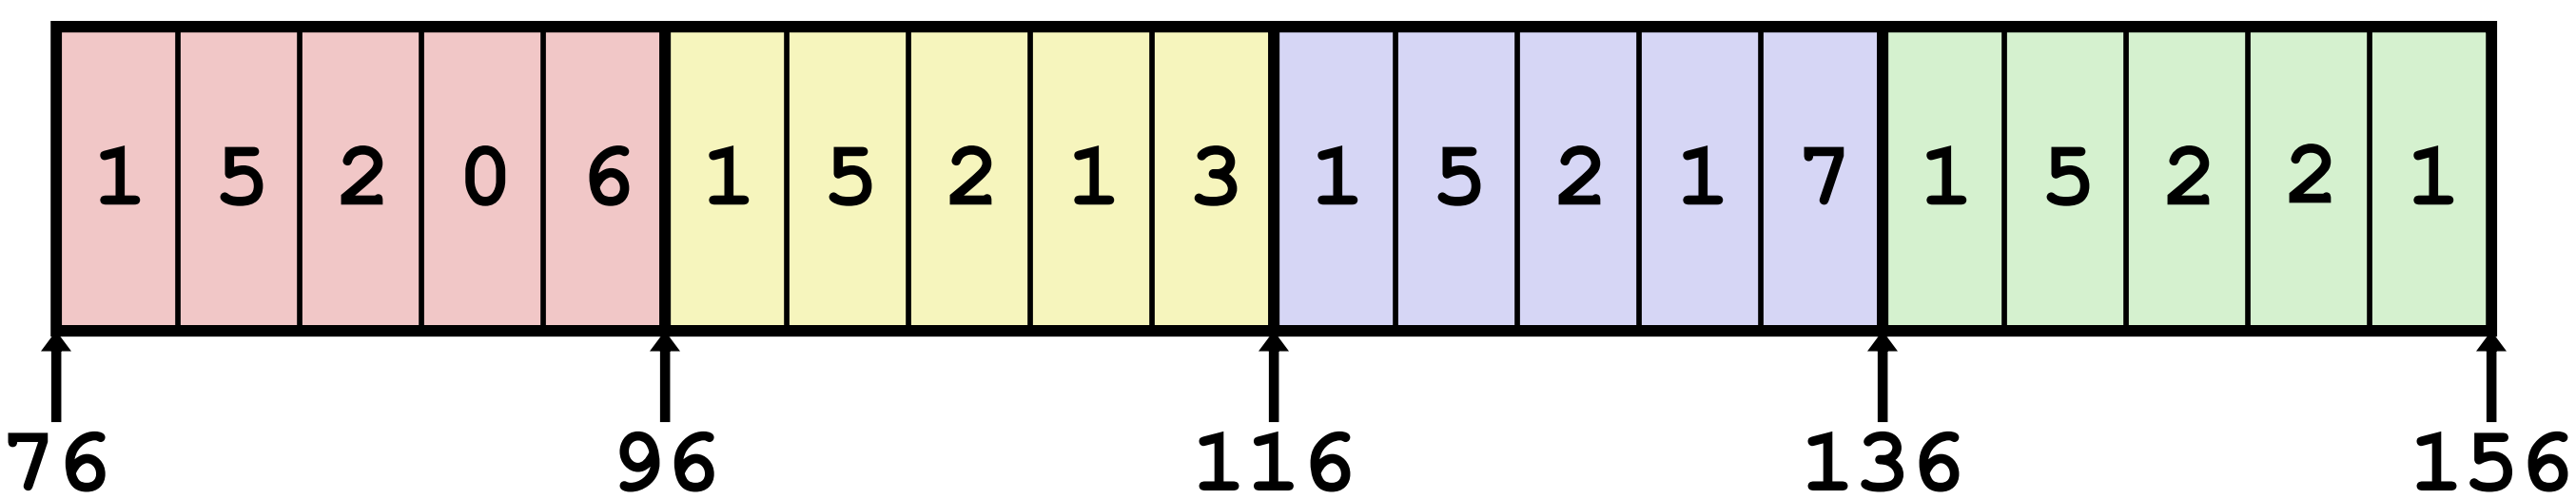

- "`zip_dig pgh[4]`" equivalent to "`int pgh[4][5]`"
  - Variable **`pgh`**: array of 4 elements, allocated contiguously
  - Each element is an array of 5 **`int`**'s, allocated contiguously
- "Row-Major" ordering of all elements in memory

Nested Array Row Access

- **Row Vectors**
  - `A[i]` is array of *C* elements of type *T*
  - Starting address `A + i * (C * sizeof(`*T*`))`

```
int A[R][C];
```

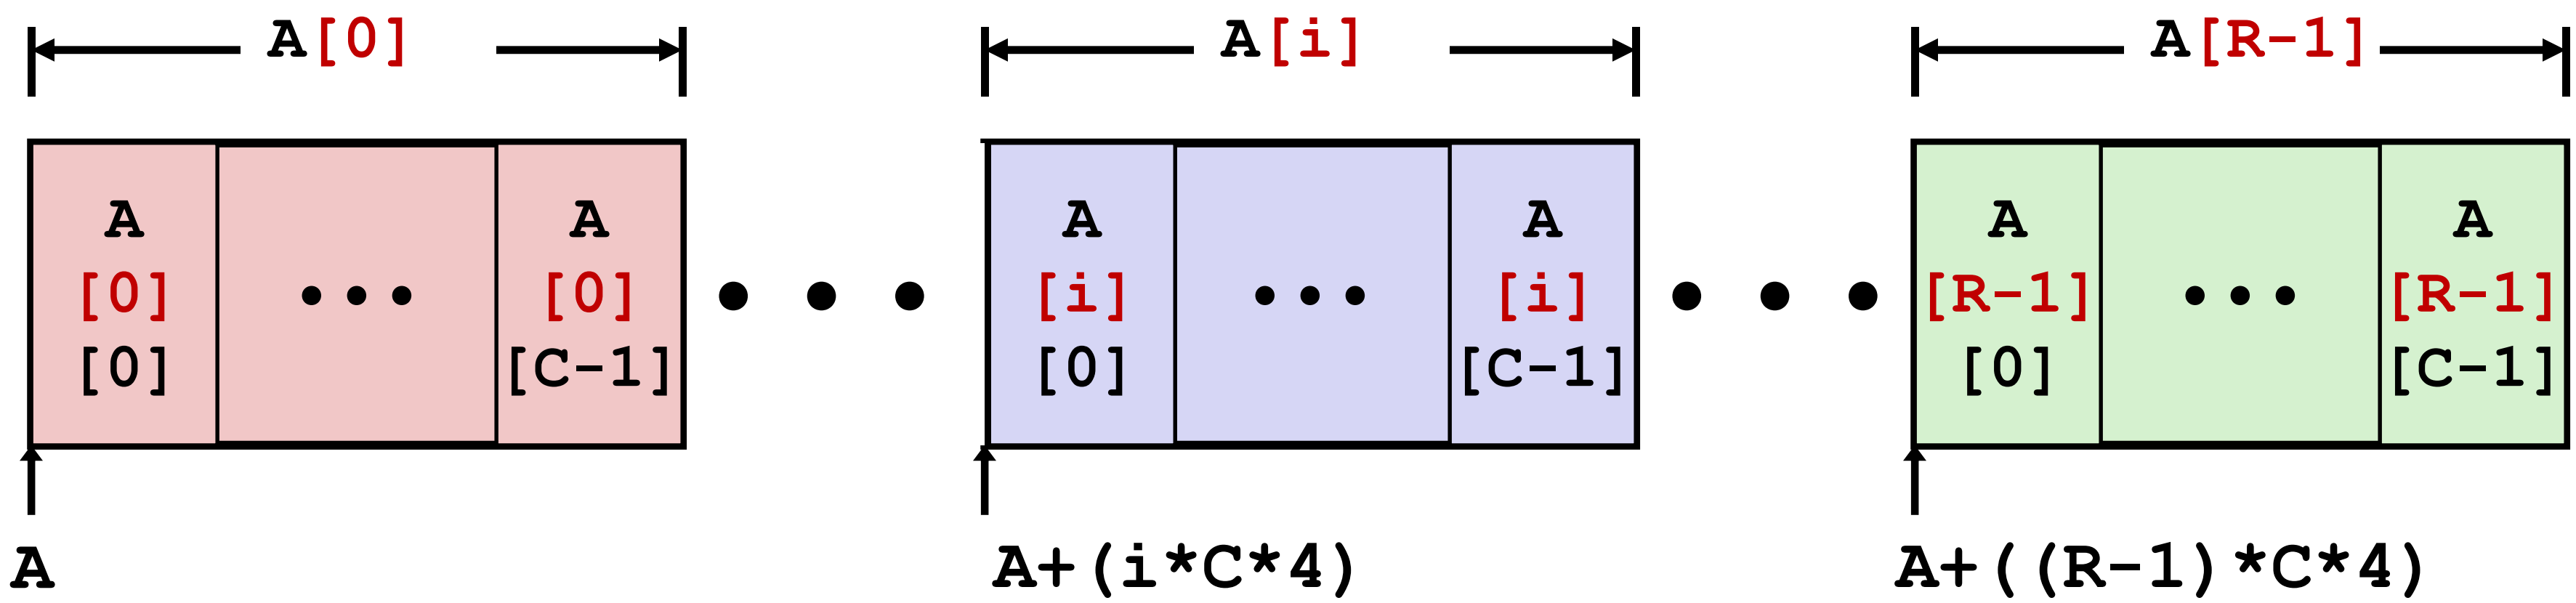

Nested Array Row Access Code

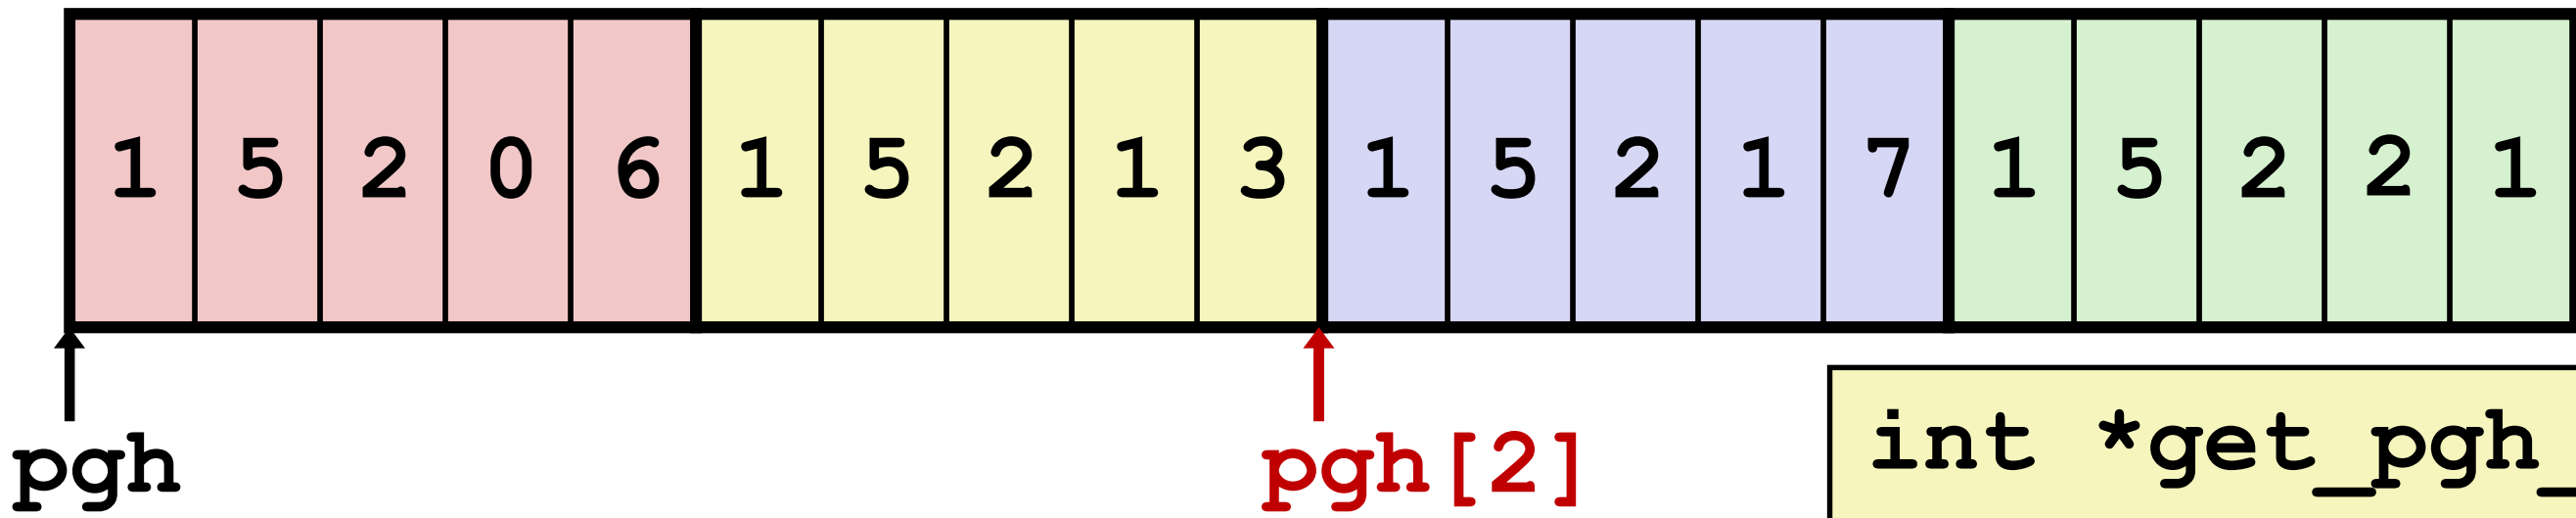


```
int *get_pgh_zip(int index)
{
  return pgh[index];
}
```

```
# %rdi = index
leaq (%rdi,%rdi,4),%rax # 5 * index
leaq pgh(,%rax,4),%rax  # pgh + (20 * index)
```

- **Row Vector**
  - `pgh[index]` is array of 5 `int`'s
  - Starting address `pgh+20*index`
- **Machine Code**
  - Computes and returns address
  - Compute as `pgh + 4*(index+4*index)`

Nested Array Element Access

- **Array Elements**
  - `A[i][j]` is element of type *T*, which requires *K* bytes
  - Address `A + i * (C * K) + j * K`
    `= A + (i * C + j) * K`

```
int A[R][C];
```

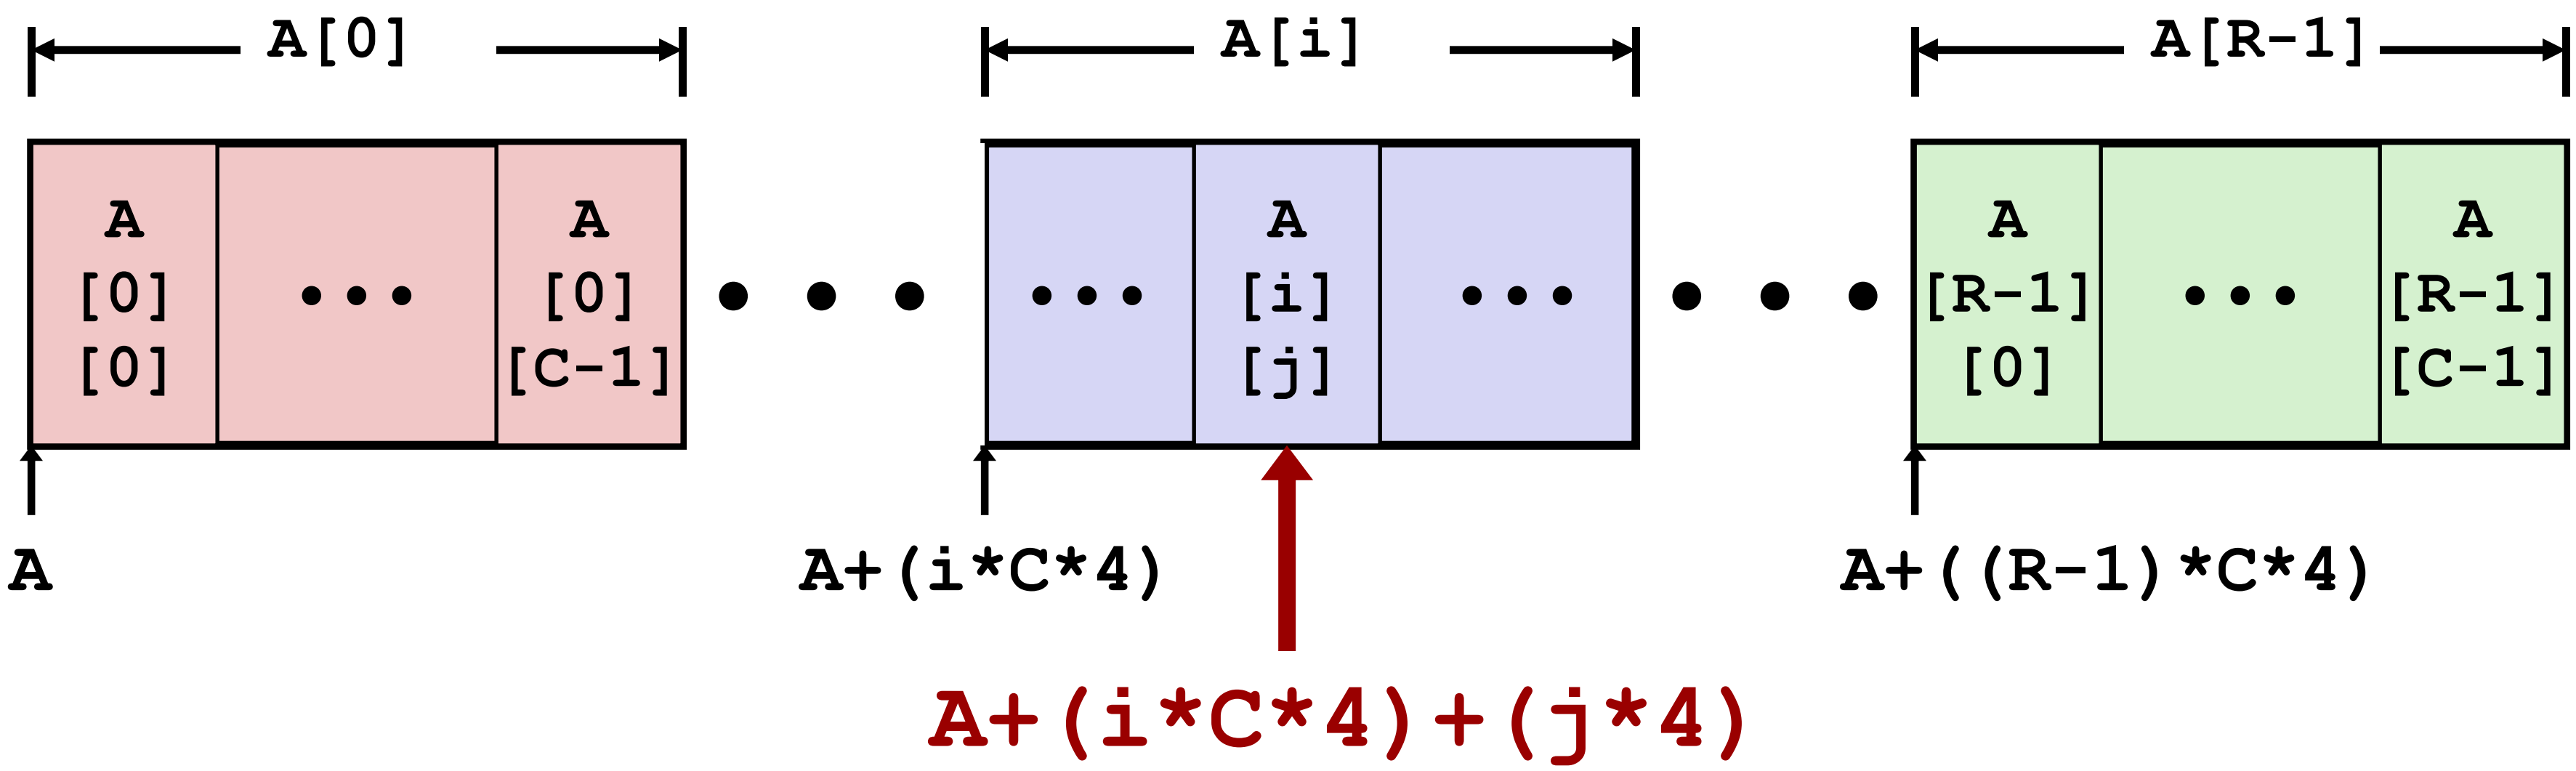

Nested Array Element Access Code

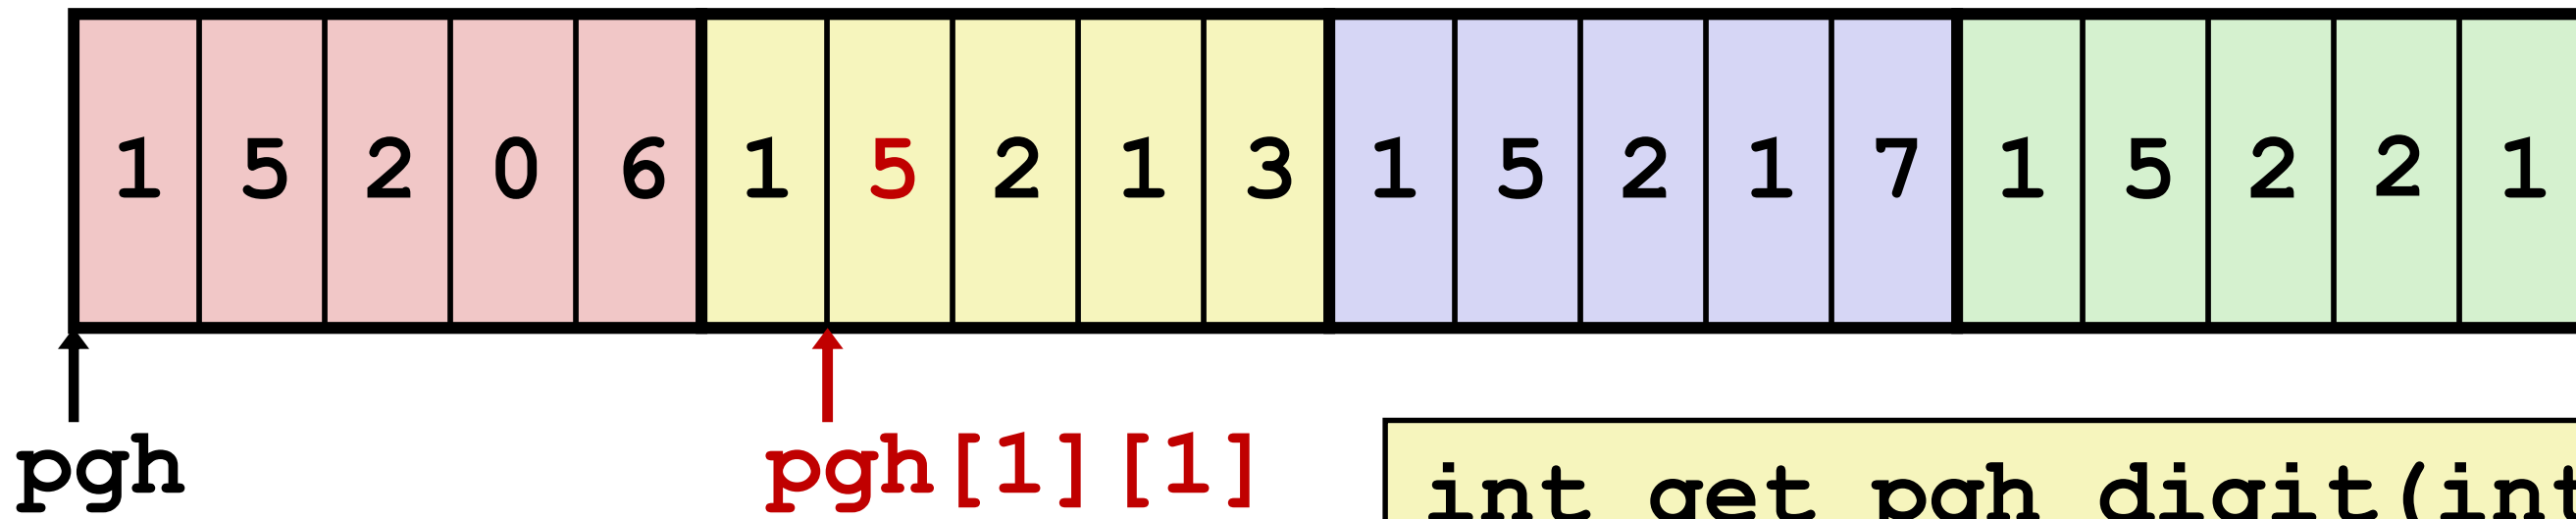


```
int get_pgh_digit(int index, int dig)
{
  return pgh[index][dig];
}
```

```
leaq   (%rdi,%rdi,4), %rax    # 5*index
addl   %rax, %rsi             # 5*index+dig
movl   pgh(,%rsi,4), %eax     # M[pgh + 4*(5*index+dig)]
```

- **Array Elements**
  - `pgh[index][dig]` is `int`
  - Address: `pgh + 20*index + 4*dig`

    = `pgh + 4*(5*index + dig)`

Multi-Level Array Example

```
zip_dig cmu = { 1, 5, 2, 1, 3 };
zip_dig mit = { 0, 2, 1, 3, 9 };
zip_dig ucb = { 9, 4, 7, 2, 0 };
```

```
#define UCOUNT 3
int *univ[UCOUNT] = {mit, cmu, ucb};
```

- **Variable `univ` denotes array of 3 elements**
- **Each element is a pointer**
  - 8 bytes
- **Each pointer points to array of `int`'s**

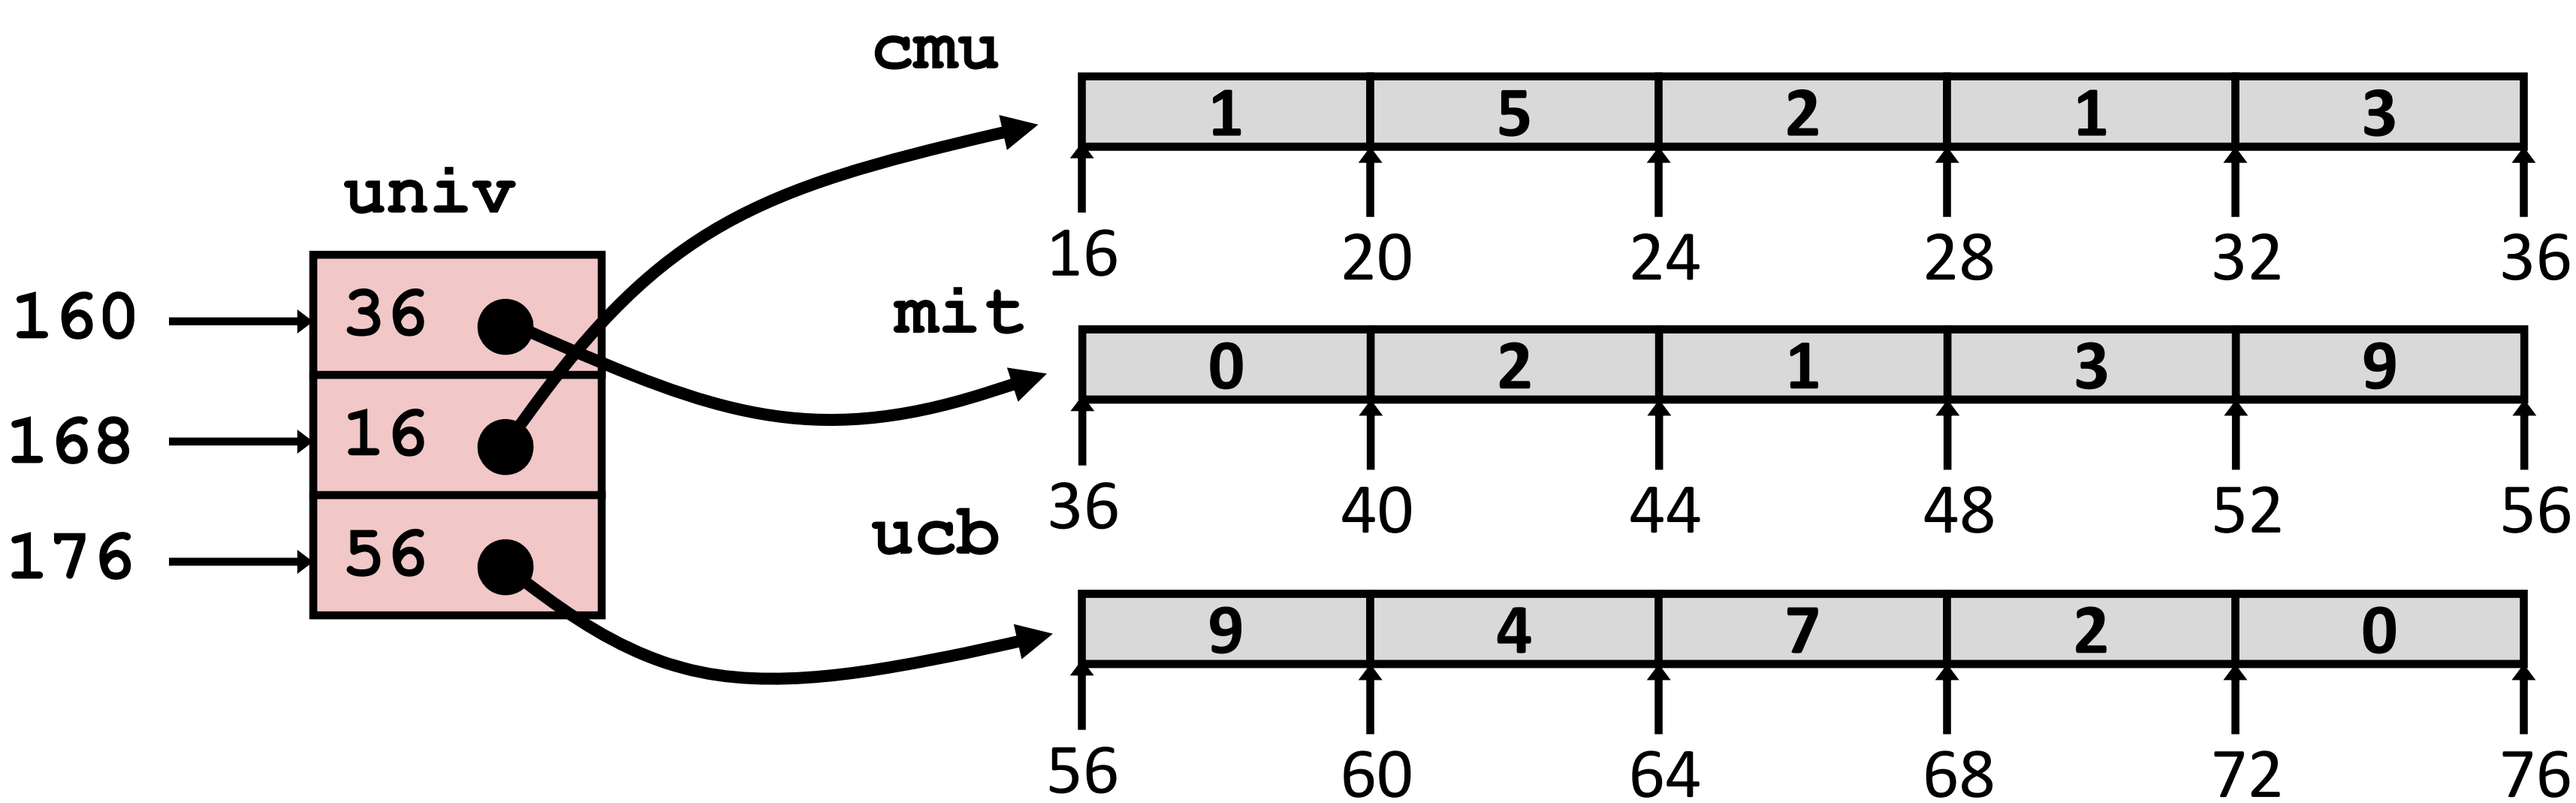

Element Access in Multi-Level Array

```
int get_univ_digit
  (size_t index, size_t digit)
{
  return univ[index][digit];
}
```

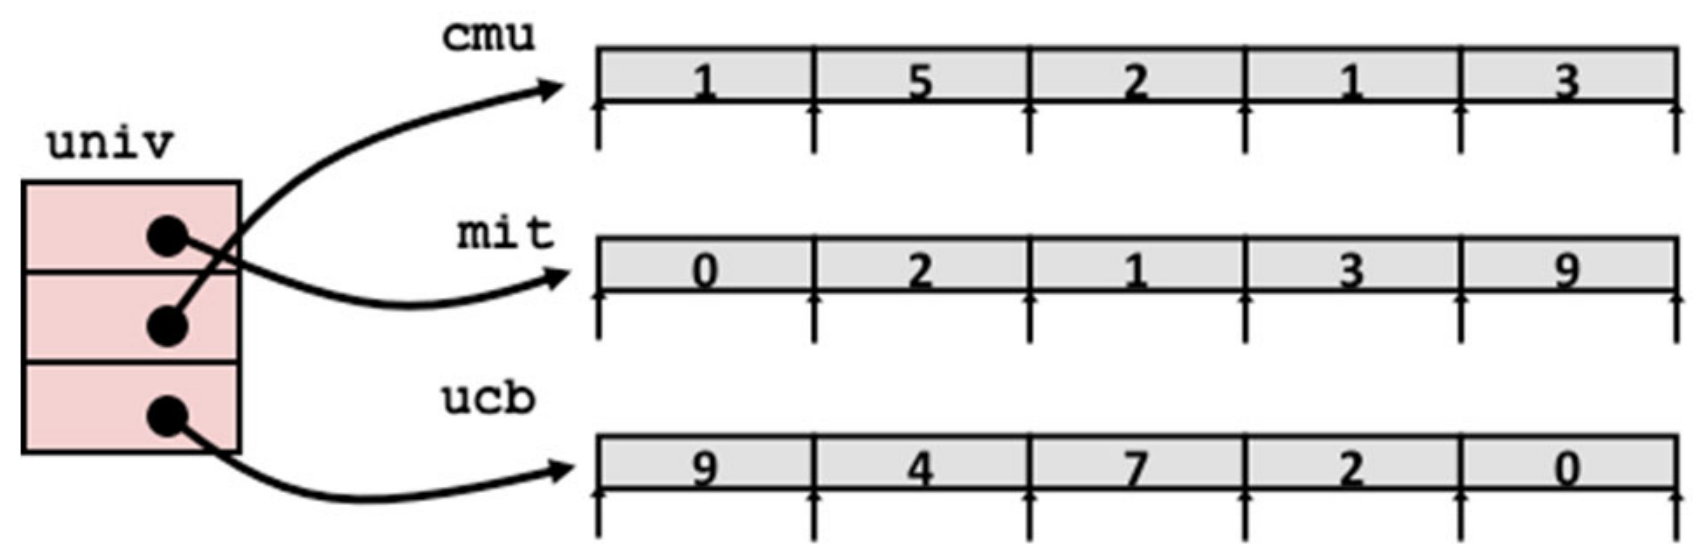


```
  salq    $2, %rsi             # 4*digit
  addq    univ(,%rdi,8), %rsi  # p = univ[index] + 4*digit
  movl    (%rsi), %eax         # return *p
  ret
```

- **Computation**
  - Element access **`Mem[Mem[univ+8*index]+4*digit]`**
  - Must do two memory reads
    - First get pointer to row array
    - Then access element within array

Array Element Accesses

Nested array

```
int get_pgh_digit
  (size_t index, size_t digit)
{
  return pgh[index][digit];
}
```

Multi-level array

```
int get_univ_digit
  (size_t index, size_t digit)
{
  return univ[index][digit];
}
```



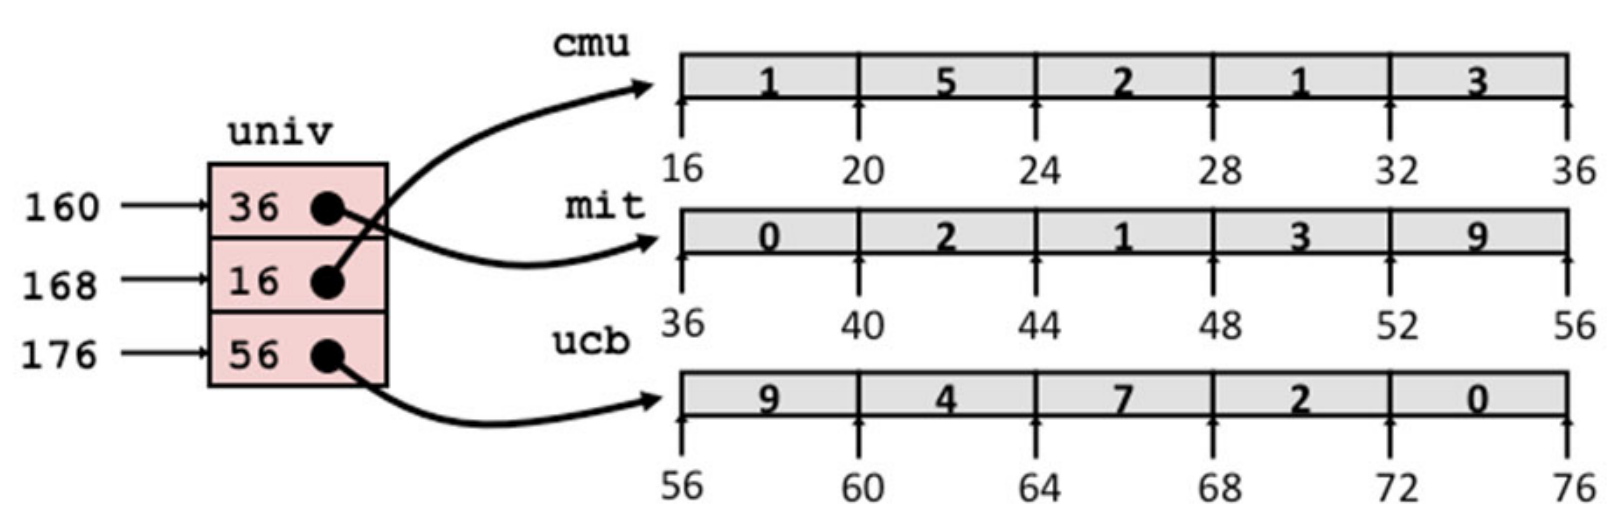

Accesses looks similar in C, but address computations very different:

`Mem[pgh+20*index+4*digit]`   `Mem[Mem[univ+8*index]+4*digit]`

N X *N* Matrix Code

- **Fixed dimensions**
  - Know value of *N* at compile time

```
#define N 16
typedef int fix_matrix[N][N];
/* Get element A[i][j] */
int fix_ele(fix_matrix A,
            size_t i, size_t j)
{
  return A[i][j];
}
```

- **Variable dimensions, explicit indexing**
  - Traditional way to implement dynamic arrays

```
#define IDX(n, i, j) ((i)*(n)+(j))
/* Get element A[i][j] */
int vec_ele(size_t n, int *A,
            size_t i, size_t j)
{
  return A[IDX(n,i,j)];
}
```

- **Variable dimensions, implicit indexing**
  - Now supported by gcc

```
/* Get element A[i][j] */
int var_ele(size_t n, int A[n][n],
            size_t i, size_t j) {
  return A[i][j];
}
```

16 X 16 Matrix Access

- Array Elements
  - `int A[16][16];`
  - Address `A + i * (C * K) +  j * K`
  - C = 16, K = 4

```
/* Get element A[i][j] */
int fix_ele(fix_matrix A, size_t i, size_t j) {
  return A[i][j];
}
```

```
  # A in %rdi, i in %rsi, j in %rdx
  salq    $6, %rsi               # 64*i
  addq    %rsi, %rdi             # A + 64*i
  movl    (%rdi,%rdx,4), %eax    # Mem[A + 64*i + 4*j]
  ret
```

n X *n* Matrix Access

- **Array Elements**
  - `size_t n;`
  - `int A[n][n];`
  - Address `A + i * (C * K) +  j * K`
  - C = n, K = 4
  - Must perform integer multiplication

```
/* Get element A[i][j] */
int var_ele(size_t n, int A[n][n], size_t i, size_t j)
{
  return A[i][j];
}
```

```
  # n in %rdi, A in %rsi, i in %rdx, j in %rcx
  imulq   %rdx, %rdi              # n*i
  leaq    (%rsi,%rdi,4), %rax     # A + 4*n*i
  movl    (%rax,%rcx,4), %eax     # A + 4*n*i + 4*j
  ret
```

Example: Array Access

```
#include <stdio.h>
#define ZLEN 5
#define PCOUNT 4
typedef int zip_dig[ZLEN];

int main(int argc, char** argv) {
zip_dig pgh[PCOUNT] =
    {{1, 5, 2, 0, 6},
     {1, 5, 2, 1, 3 },
     {1, 5, 2, 1, 7 },
     {1, 5, 2, 2, 1 }};
    int *linear_zip = (int *) pgh;
    int *zip2 = (int *) pgh[2];
    int result =
        pgh[0][0] +
        linear_zip[7] +
        *(linear_zip + 8) +
        zip2[1];
    printf("result: %d\n", result);
    return 0;
}
```

```
linux> ./array
```

Example: Array Access

```
#include <stdio.h>
#define ZLEN 5
#define PCOUNT 4
typedef int zip_dig[ZLEN];

int main(int argc, char** argv) {
zip_dig pgh[PCOUNT] =
    {{1, 5, 2, 0, 6},
     {1, 5, 2, 1, 3 },
     {1, 5, 2, 1, 7 },
     {1, 5, 2, 2, 1 }};
    int *linear_zip = (int *) pgh;
    int *zip2 = (int *) pgh[2];
    int result =
        pgh[0][0] +
        linear_zip[7] +
        *(linear_zip + 8) +
        zip2[1];
    printf("result: %d\n", result);
    return 0;
}
```

```
linux> ./array
result: 9
```

Quiz Time!

Check out:

https://canvas.cmu.edu/courses/13182

Understanding Pointers & Arrays #3

Decl	`An`			`*An`			`**An`		
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size
`int A1[3][5]`									
`int *A2[3][5]`									
`int (*A3)[3][5]`									
`int *(A4[3][5])`									
`int (*A5[3])[5]`									

- **Cmp: Compiles (Y/N)**
- **Bad: Possible bad pointer reference (Y/N)**
- **Size: Value returned by `sizeof`**

Decl	`***An`		
	Cmp	Bad	Size
`int A1[3][5]`			
`int *A2[3][5]`			
`int (*A3)[3][5]`			
`int *(A4[3][5])`			
`int (*A5[3])[5]`			

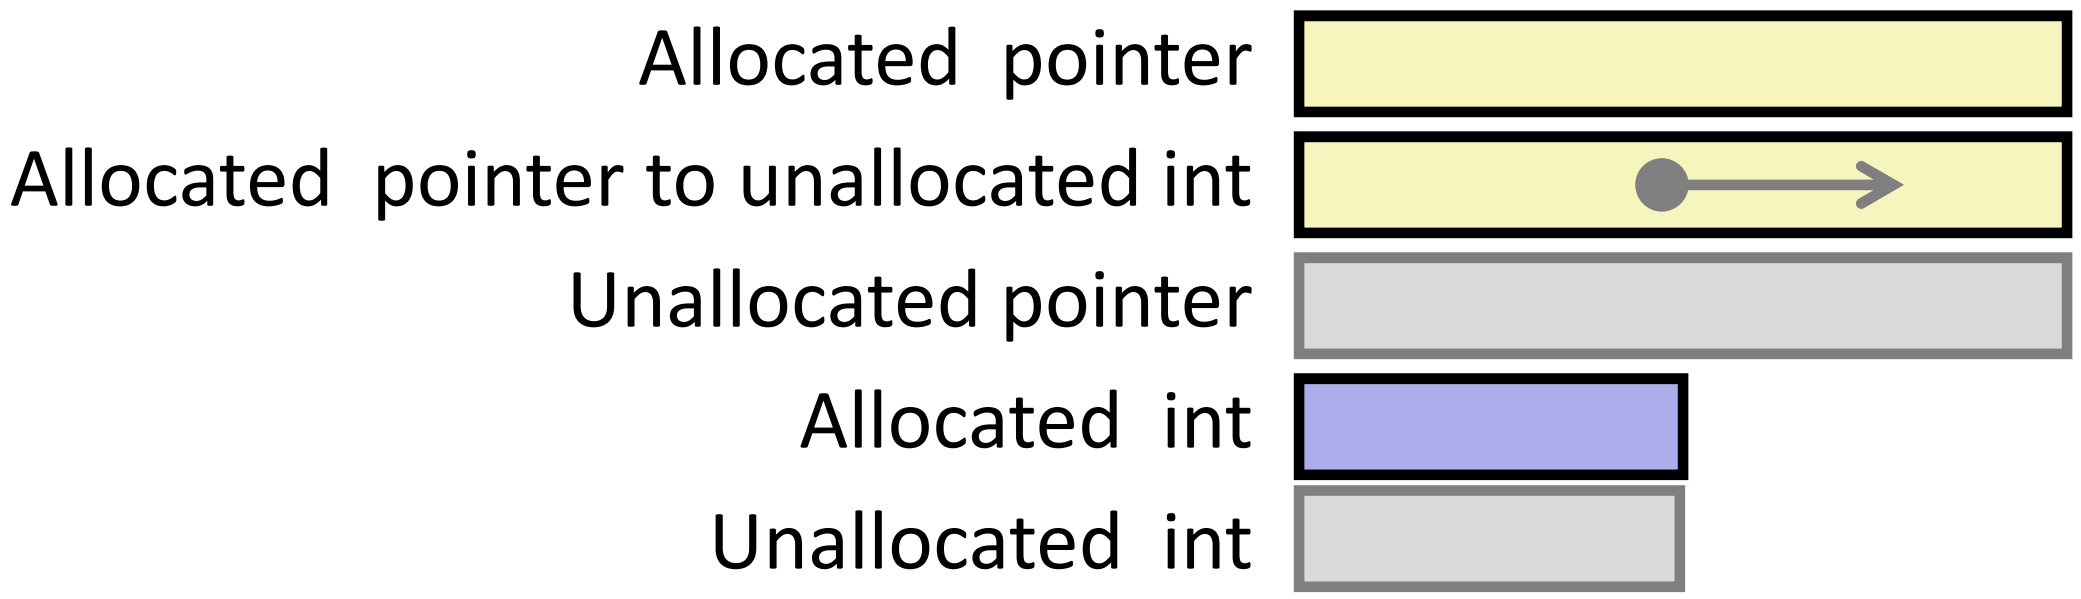

Declaration
`int A1[3][5]`
`int *A2[3][5]`
`int (*A3)[3][5]`
`int *(A4[3][5])`
`int (*A5[3])[5]`

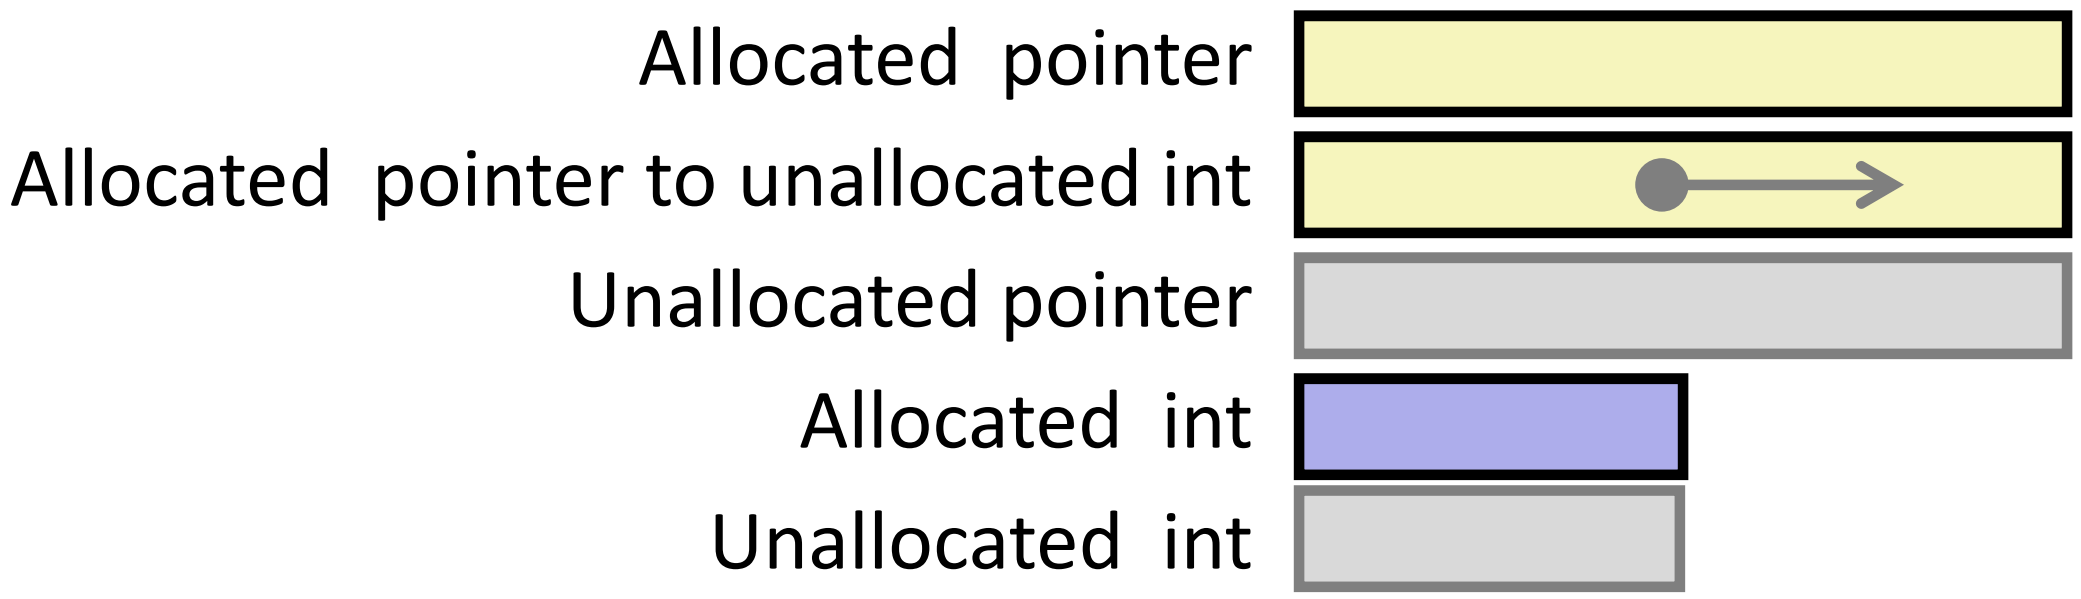

Declaration
`int A1[3][5]`
`int *A2[3][5]`
`int (*A3)[3][5]`
`int *(A4[3][5])`
`int (*A5[3])[5]`

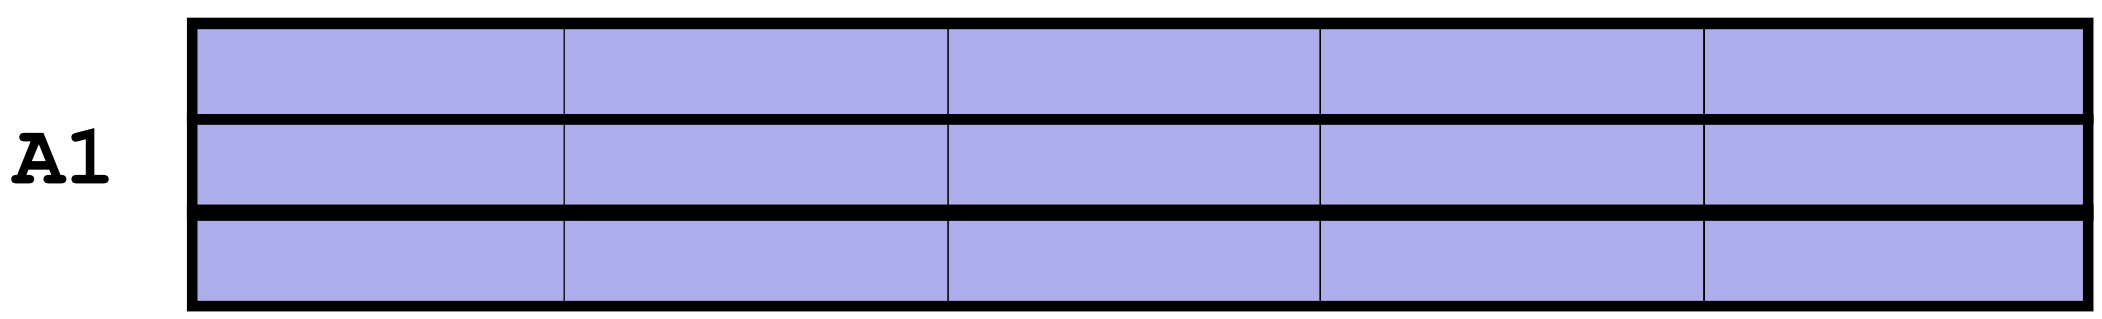

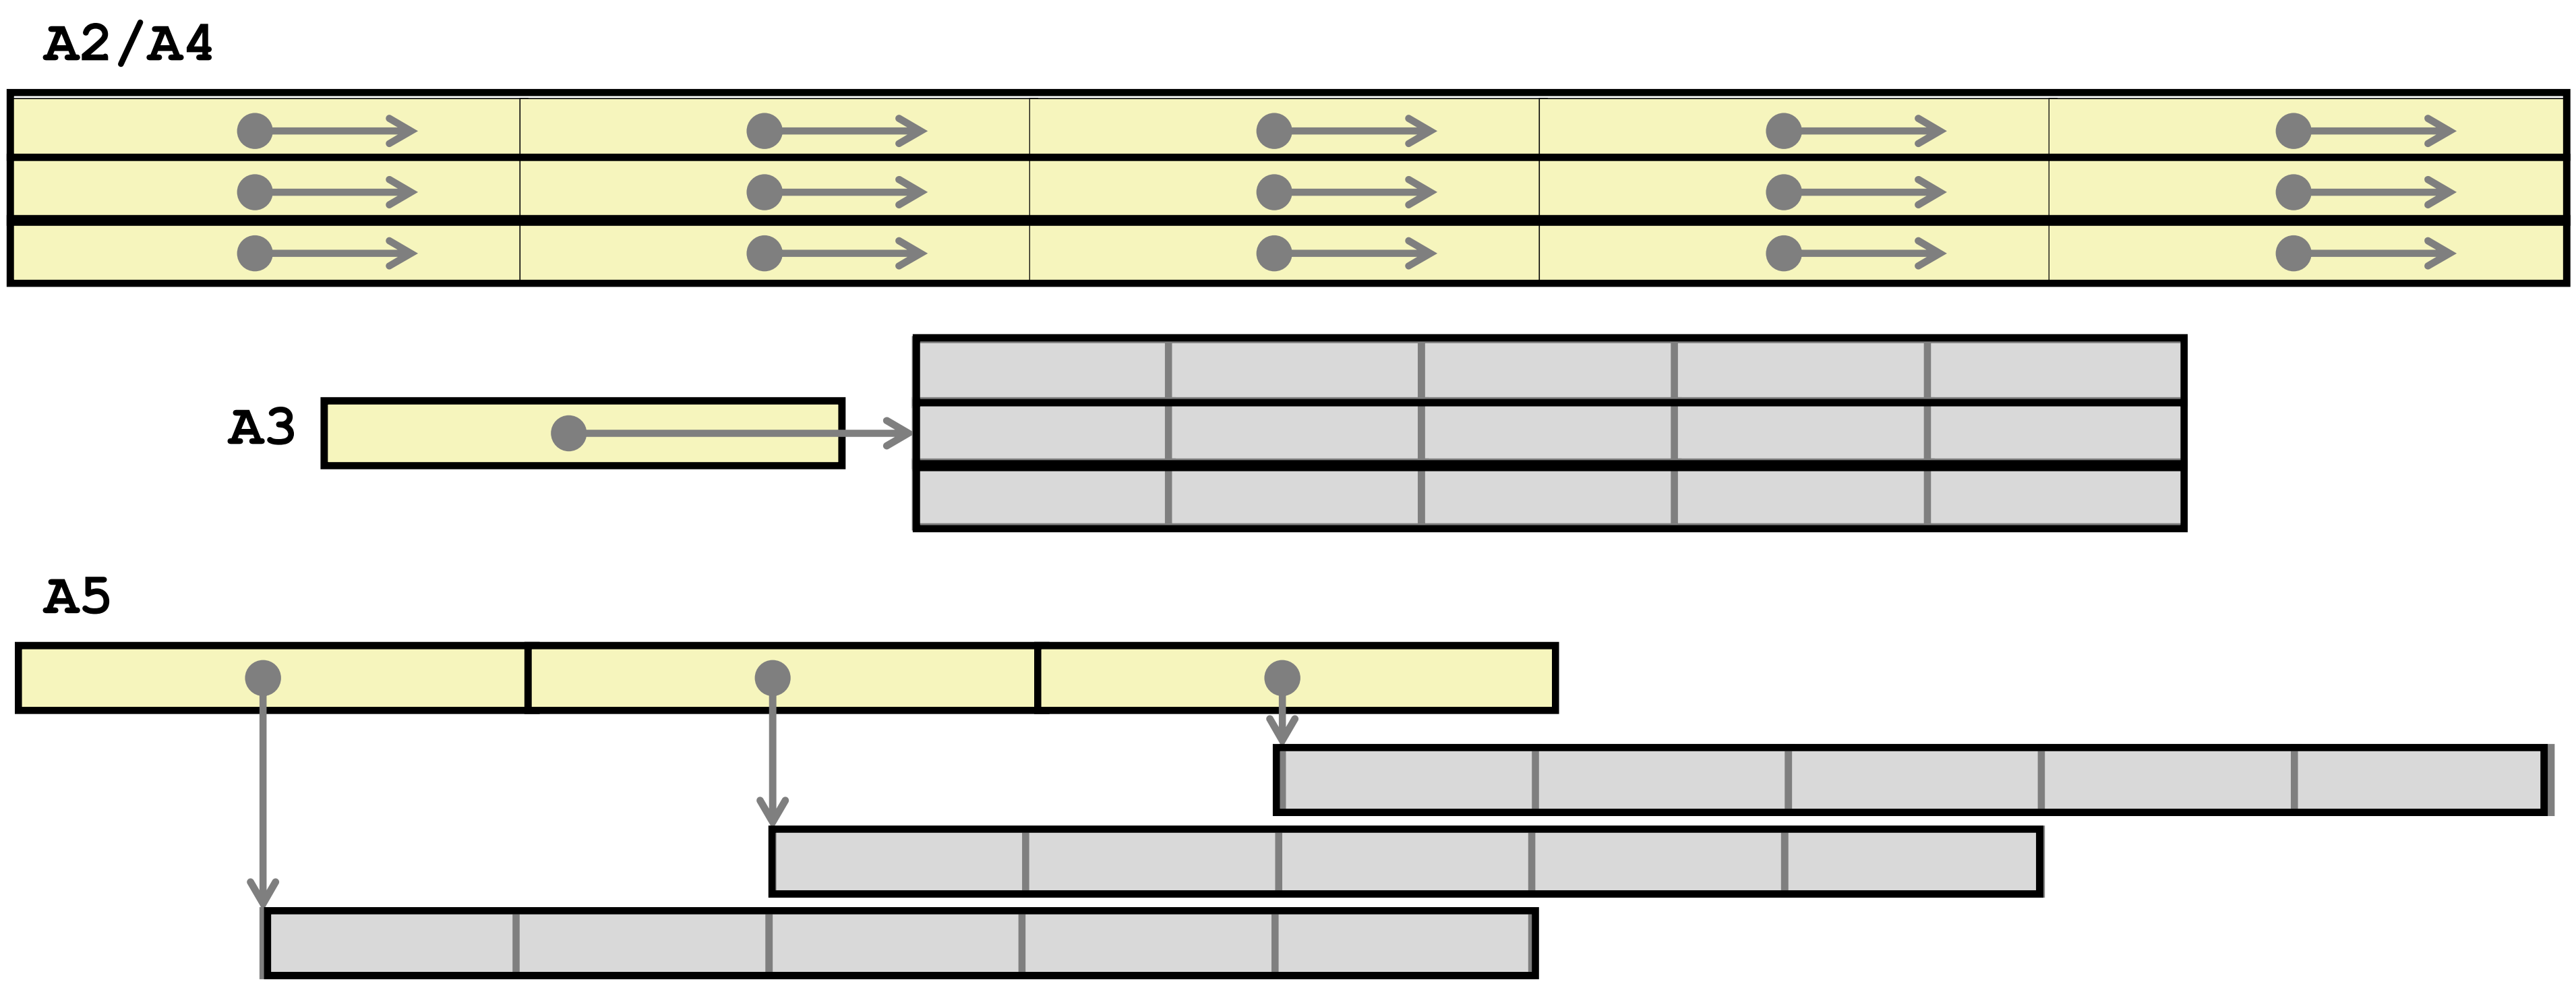

Understanding Pointers & Arrays #3

Decl	An			*An			**An		
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size
`int A1[3][5]`	Y	N	60	Y	N	20	Y	N	4
`int *A2[3][5]`	Y	N	120	Y	N	40	Y	N	8
`int (*A3)[3][5]`	Y	N	8	Y	Y	60	Y	Y	20
`int *(A4[3][5])`	Y	N	120	Y	N	40	Y	N	8
`int (*A5[3])[5]`	Y	N	24	Y	N	8	Y	Y	20

- Cmp: Compiles (Y/N)
- Bad: Possible bad pointer reference (Y/N)
- Size: Value returned by `sizeof`

Decl	***An		
	Cmp	Bad	Size
`int A1[3][5]`	N	-	-
`int *A2[3][5]`	Y	Y	4
`int (*A3)[3][5]`	Y	Y	4
`int *(A4[3][5])`	Y	Y	4
`int (*A5[3])[5]`	Y	Y	4

Today

- **Arrays**
  - One-dimensional
  - Multi-dimensional (nested)
  - Multi-level
- **Structures**
  - Allocation
  - Access
  - Alignment
- **Floating Point**

Structure Representation

```
struct rec {
    int a[4];
    size_t i;
    struct rec *next;
};
```

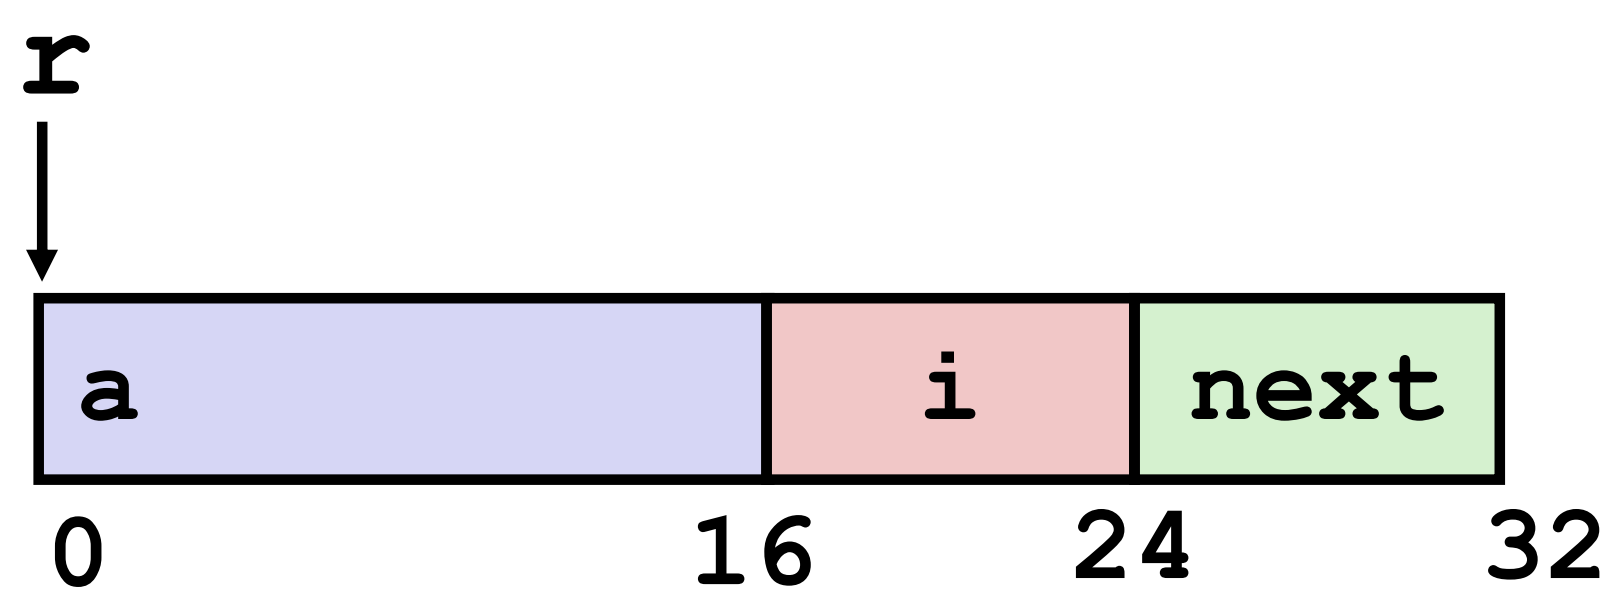

- **Structure represented as block of memory**
  - Big enough to hold all of the fields
- **Fields ordered according to declaration**
  - Even if another ordering could yield a more compact representation
- **Compiler determines overall size + positions of fields**
  - Machine-level program has no understanding of the structures in the source code

Generating Pointer to Structure Member

```
struct rec {
    int a[4];
    size_t i;
    struct rec *next;
};
```

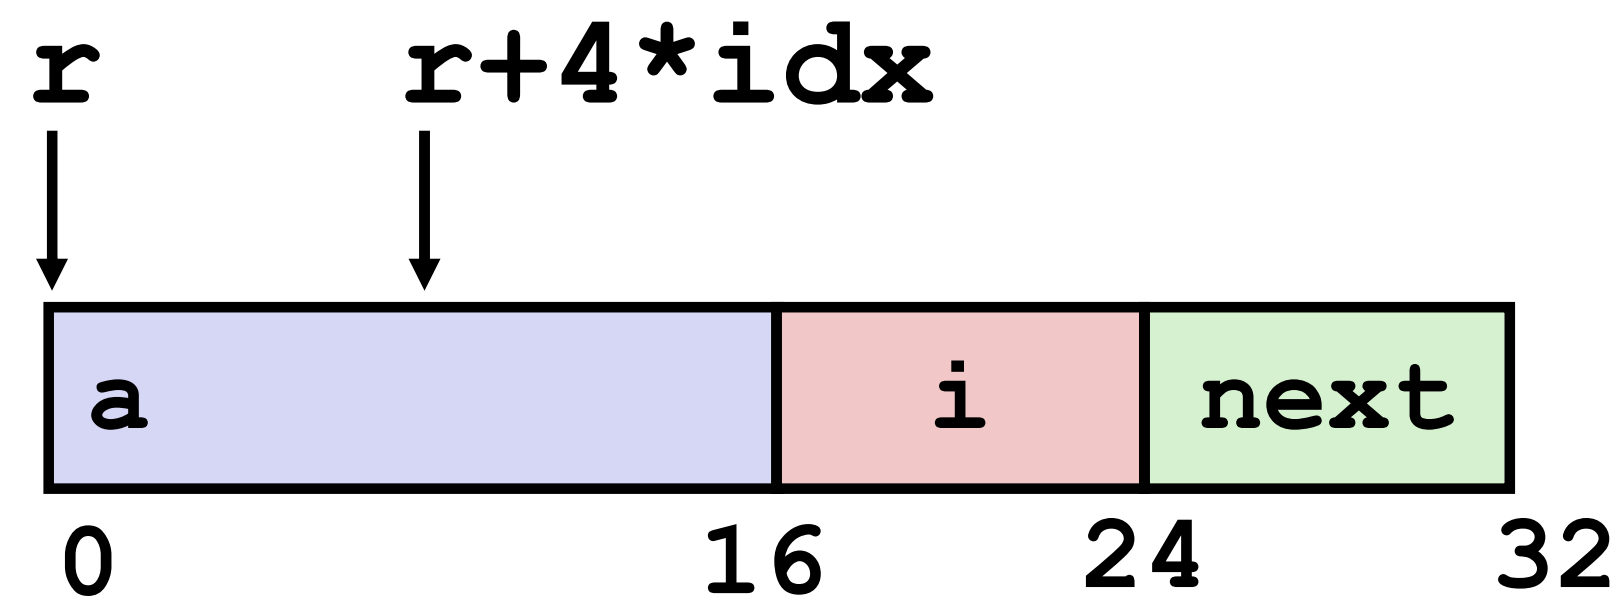

- **Generating Pointer to Array Element**
  - Offset of each structure member determined at compile time
  - Compute as **`r + 4*idx`**

```
int *get_ap
 (struct rec *r, size_t idx)
{
  return &r->a[idx];
}
```

```
  # r in %rdi, idx in %rsi
  leaq  (%rdi,%rsi,4), %rax
  ret
```

Following Linked List #1

```
struct rec {
    int a[4];
    size_t i;
    struct rec *next;
};
```

- C Code

```
long length(struct rec*r) {
    long len = 0L;
    while (r) {
        len ++;
        r = r->next;
    }
    return len;
}
```

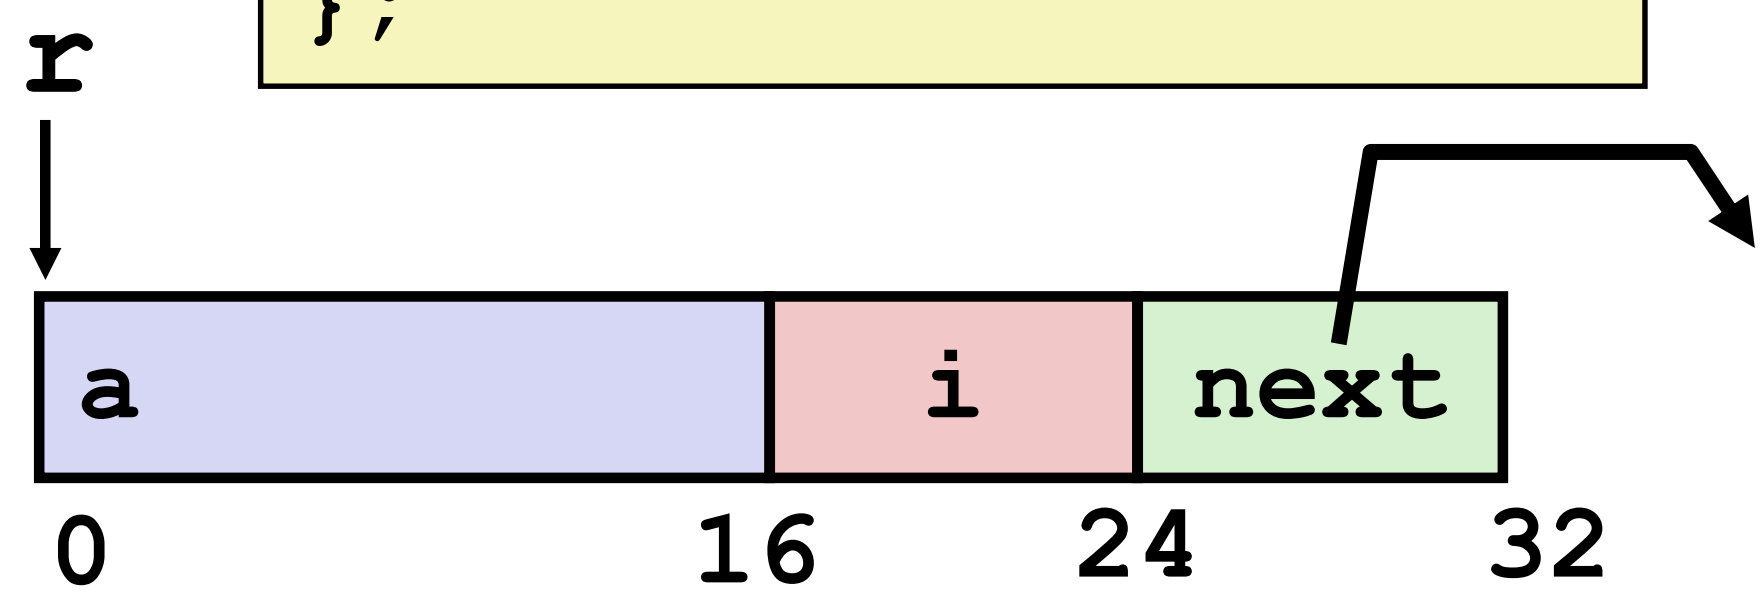

Register	Value
%rdi	r
%rax	len

- Loop assembly code

```
.L11:                           # loop:
  addq    $1, %rax              #   len ++
  movq    24(%rdi), %rdi        #   r = Mem[r+24]
  testq   %rdi, %rdi            #   Test r
  jne     .L11                  #   If != 0, goto loop
```

Following Linked List #2

```
struct rec {
    int a[4];
    size_t i;
    struct rec *next;
};
```

- C Code

```
void set_val
  (struct rec *r, int val)
{
  while (r) {
    size_t i = r->i;
    // No bounds check
    r->a[i] = val;
    r = r->next;
  }
}
```

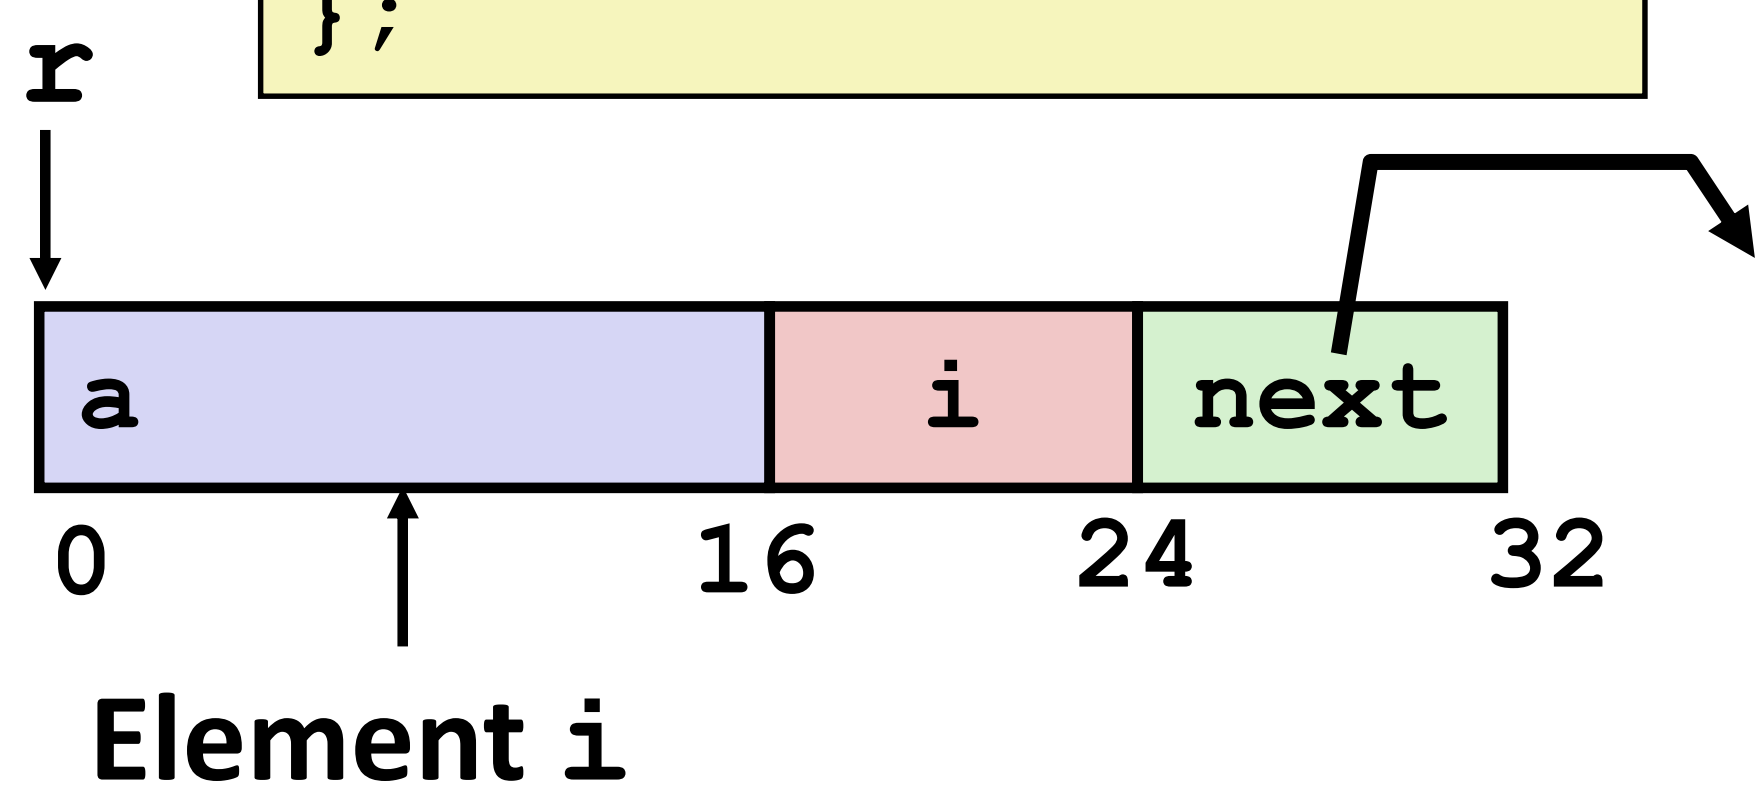

Register	Value
%rdi	r
%rsi	val

```
.L11:                           # loop:
  movq   16(%rdi), %rax         #   i = Mem[r+16]
  movl   %esi, (%rdi,%rax,4)    #   Mem[r+4*i] = val
  movq   24(%rdi), %rdi         #   r = Mem[r+24]
  testq %rdi, %rdi              #   Test r
  jne    .L11                   #   if !=0 goto loop
```

Structures & Alignment

- **Unaligned Data**

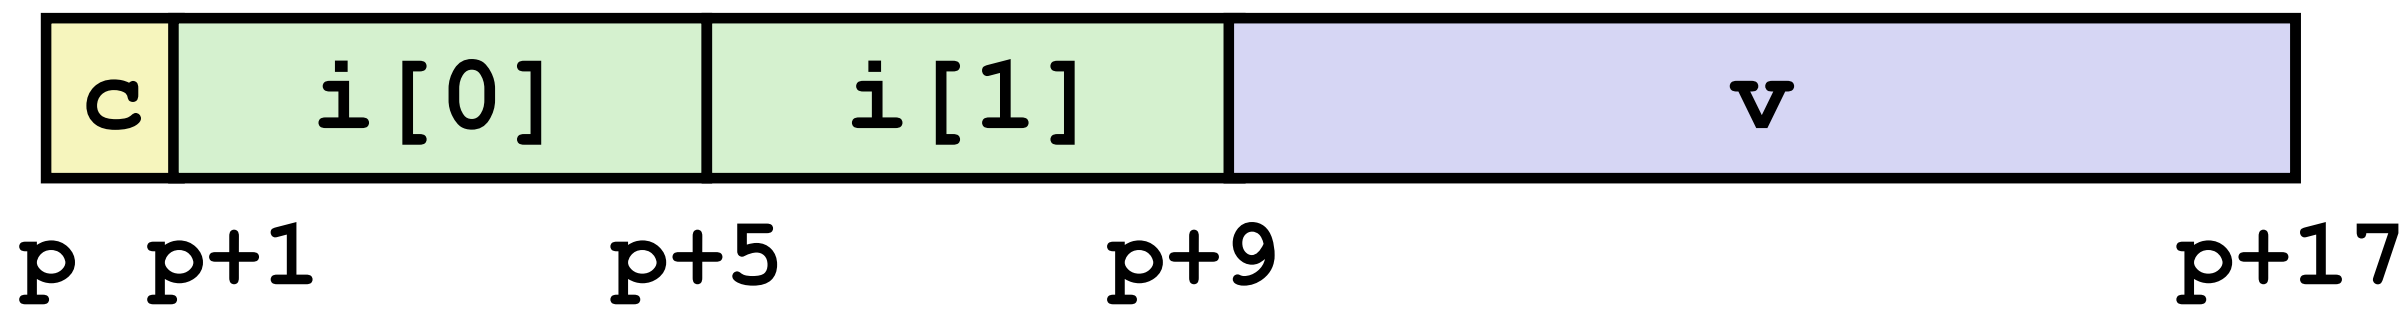


```
struct S1 {
  char c;
  int i[2];
  double v;
} *p;
```

- **Aligned Data**
  - Primitive data type requires ***B*** bytes implies
    Address must be multiple of ***B***

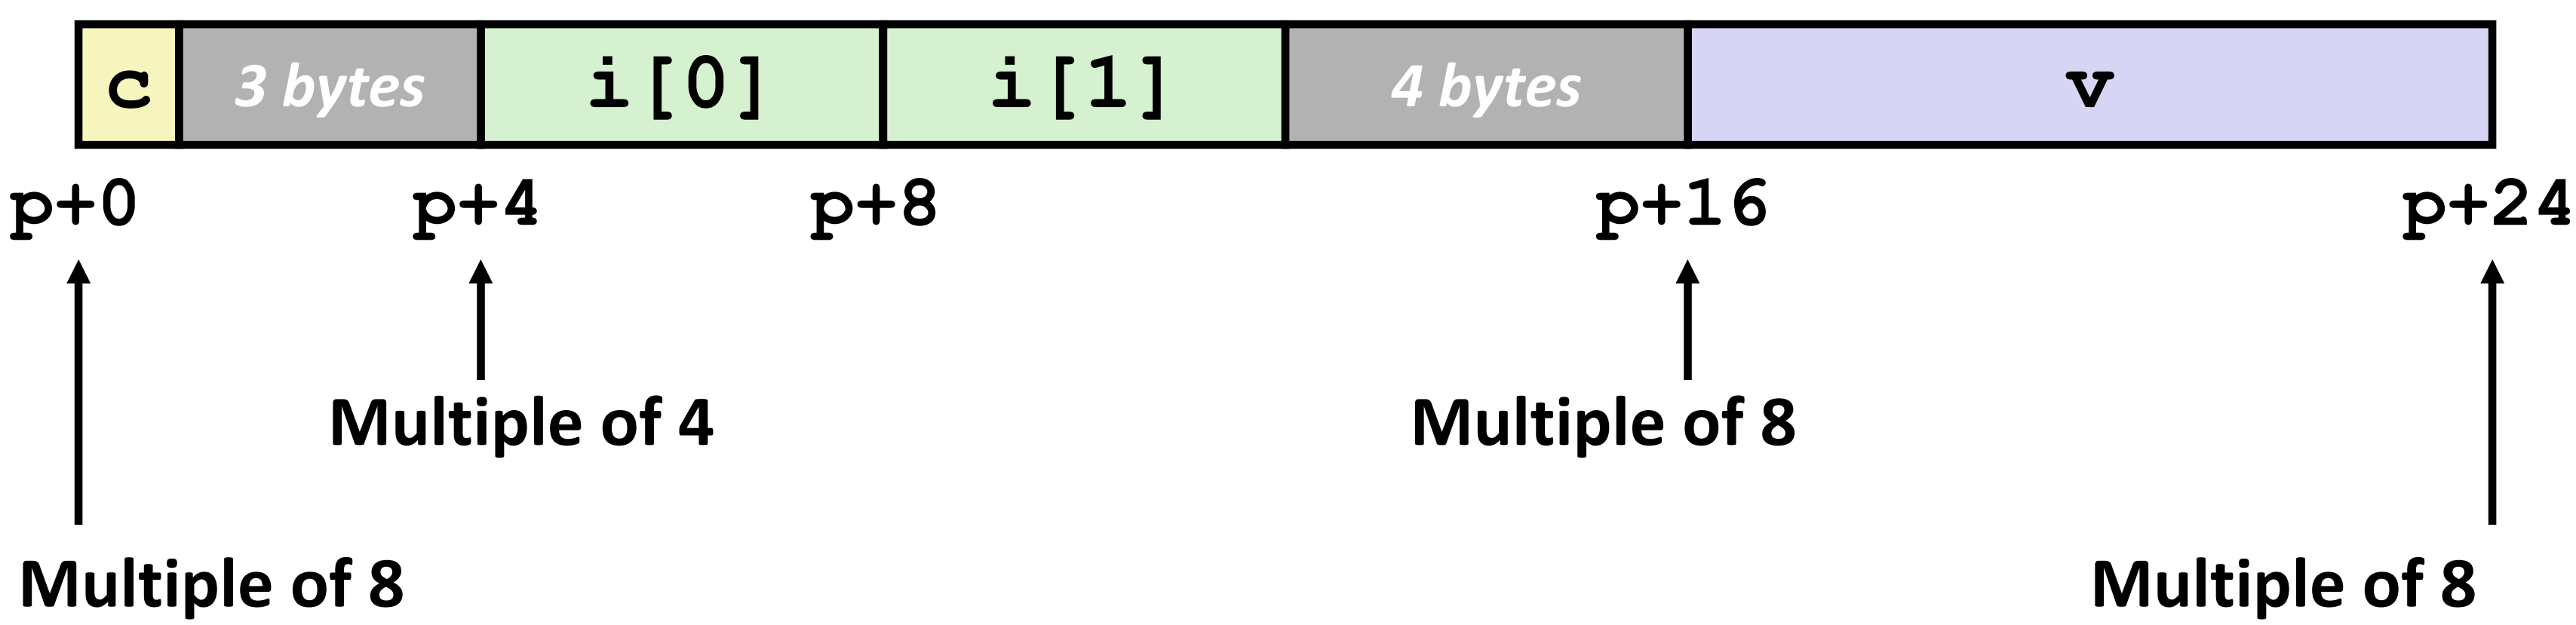

Alignment Principles

- **Aligned Data**
  - Primitive data type requires ***B*** bytes
  - Address must be multiple of ***B***
  - Required on some machines; advised on x86-64
- **Motivation for Aligning Data**
  - Memory accessed by (aligned) chunks of 4 or 8 bytes (system dependent)
    - Inefficient to load or store datum that spans cache lines (64 bytes). Intel states should avoid crossing 16 byte boundaries.

      [Cache lines will be discussed in Lecture 11.]
    - Virtual memory trickier when datum spans 2 pages (4 KB pages)

      [Virtual memory pages will be discussed in Lecture 17.]
- **Compiler**
  - Inserts gaps in structure to ensure correct alignment of fields

Specific Cases of Alignment (x86-64)

- **1 byte: `char`, …**
  - no restrictions on address
- **2 bytes: `short`, …**
  - lowest 1 bit of address must be 0_2
- **4 bytes: `int`, `float`, …**
  - lowest 2 bits of address must be 00_2
- **8 bytes: `double`, `long`, `char *`, …**
  - lowest 3 bits of address must be 000_2

Satisfying Alignment with Structures

- **Within structure:**
  - Must satisfy each element's alignment requirement
- **Overall structure placement**
  - Each structure has alignment requirement **K**
    - **K** = Largest alignment of any element
  - Initial address & structure length must be multiples of **K**
- **Example:**
  - **K** = 8, due to `double` element

```
struct S1 {
  char c;
  int i[2];
  double v;
} *p;
```

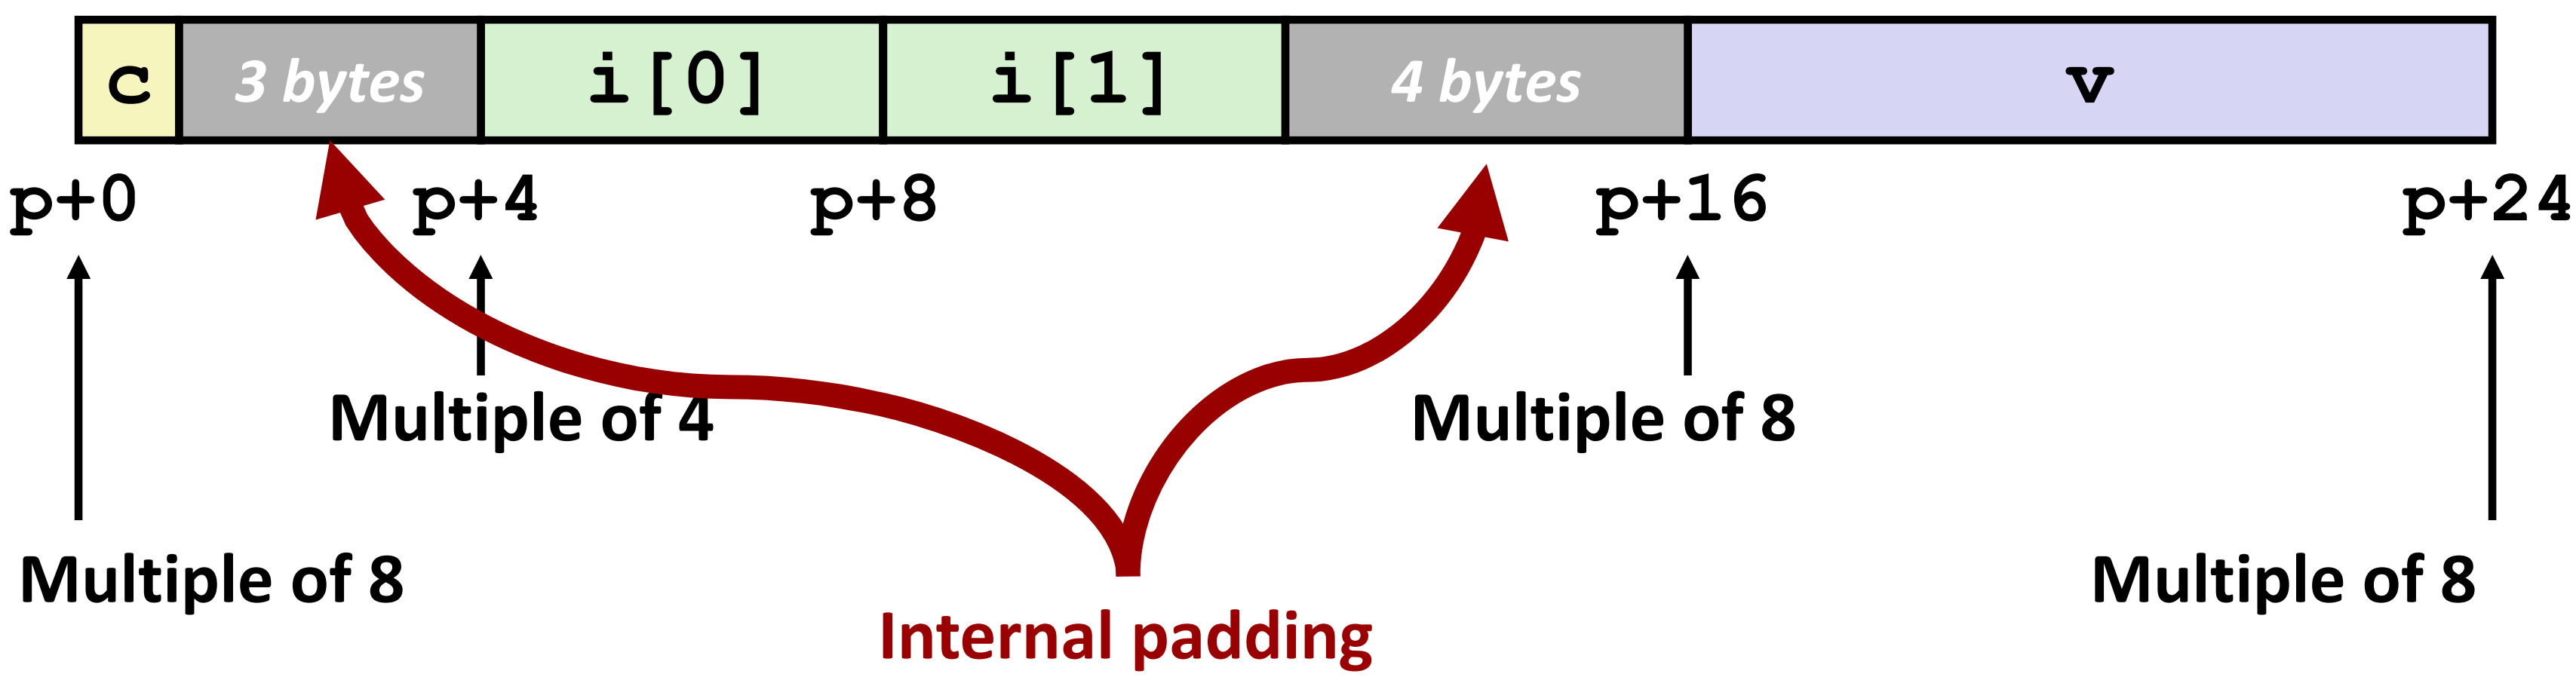

Meeting Overall Alignment Requirement

- For largest alignment requirement K
- Overall structure must be multiple of K

```
struct S2 {
  double v;
  int i[2];
  char c;
} *p;
```

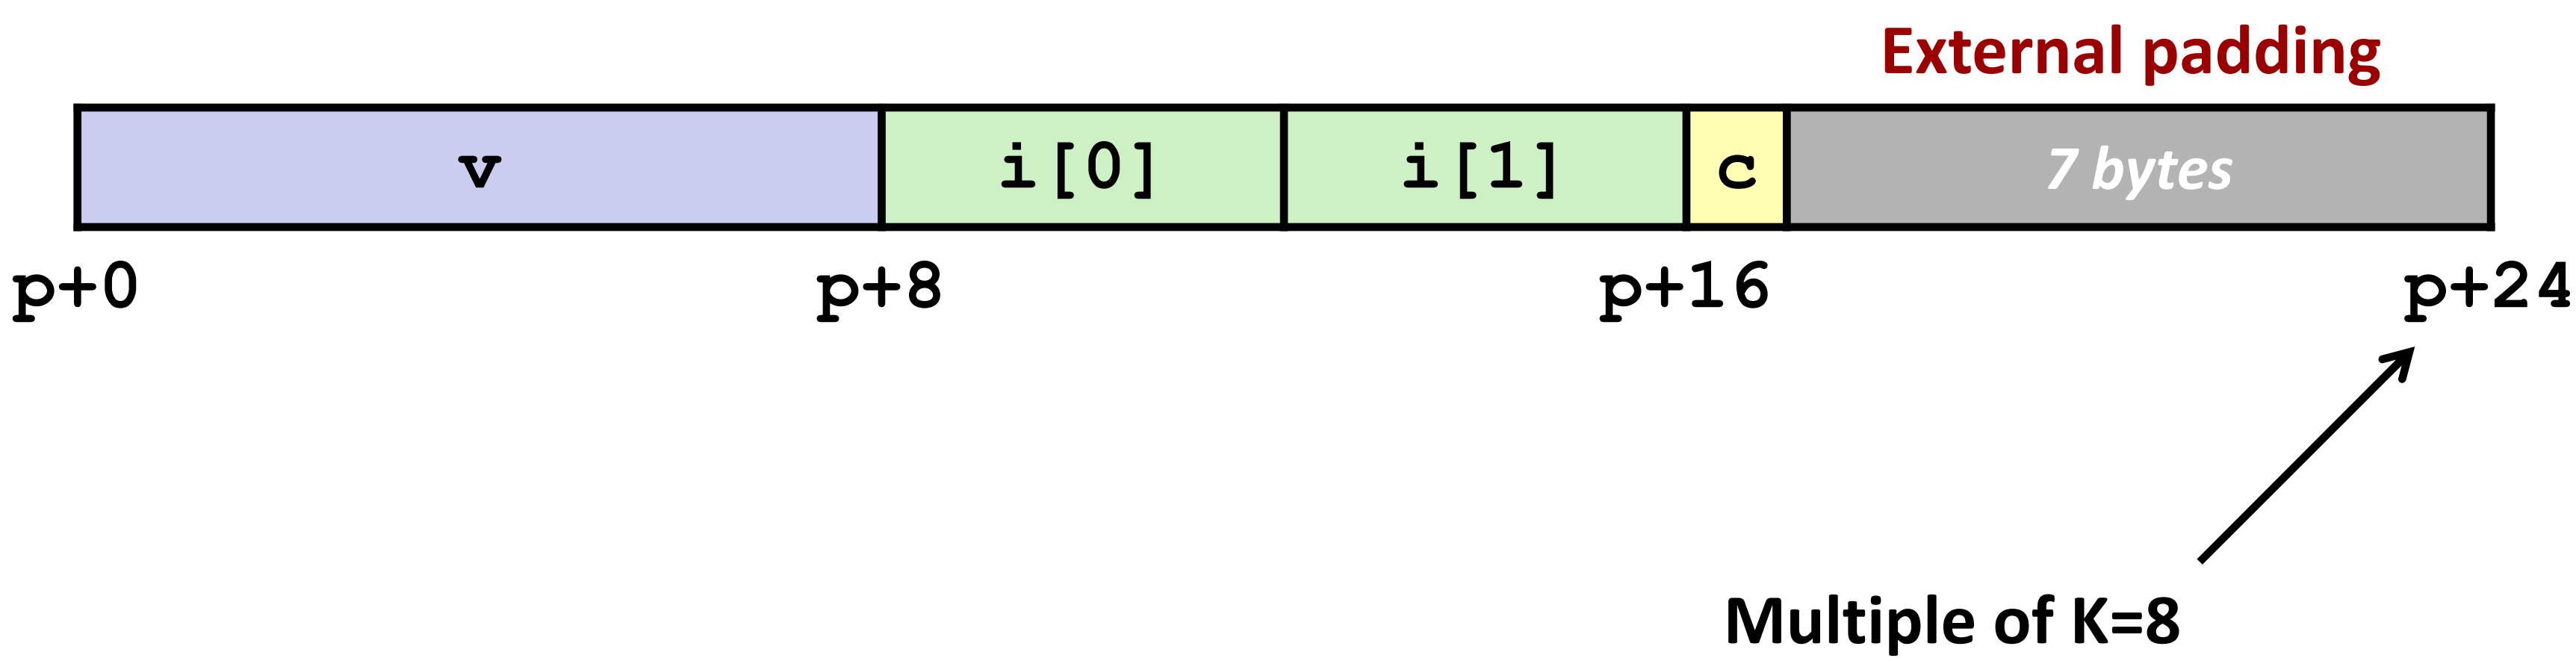

Arrays of Structures

- Overall structure length multiple of K
- Satisfy alignment requirement for every element

```
struct S2 {
  double v;
  int i[2];
  char c;
} a[10];
```

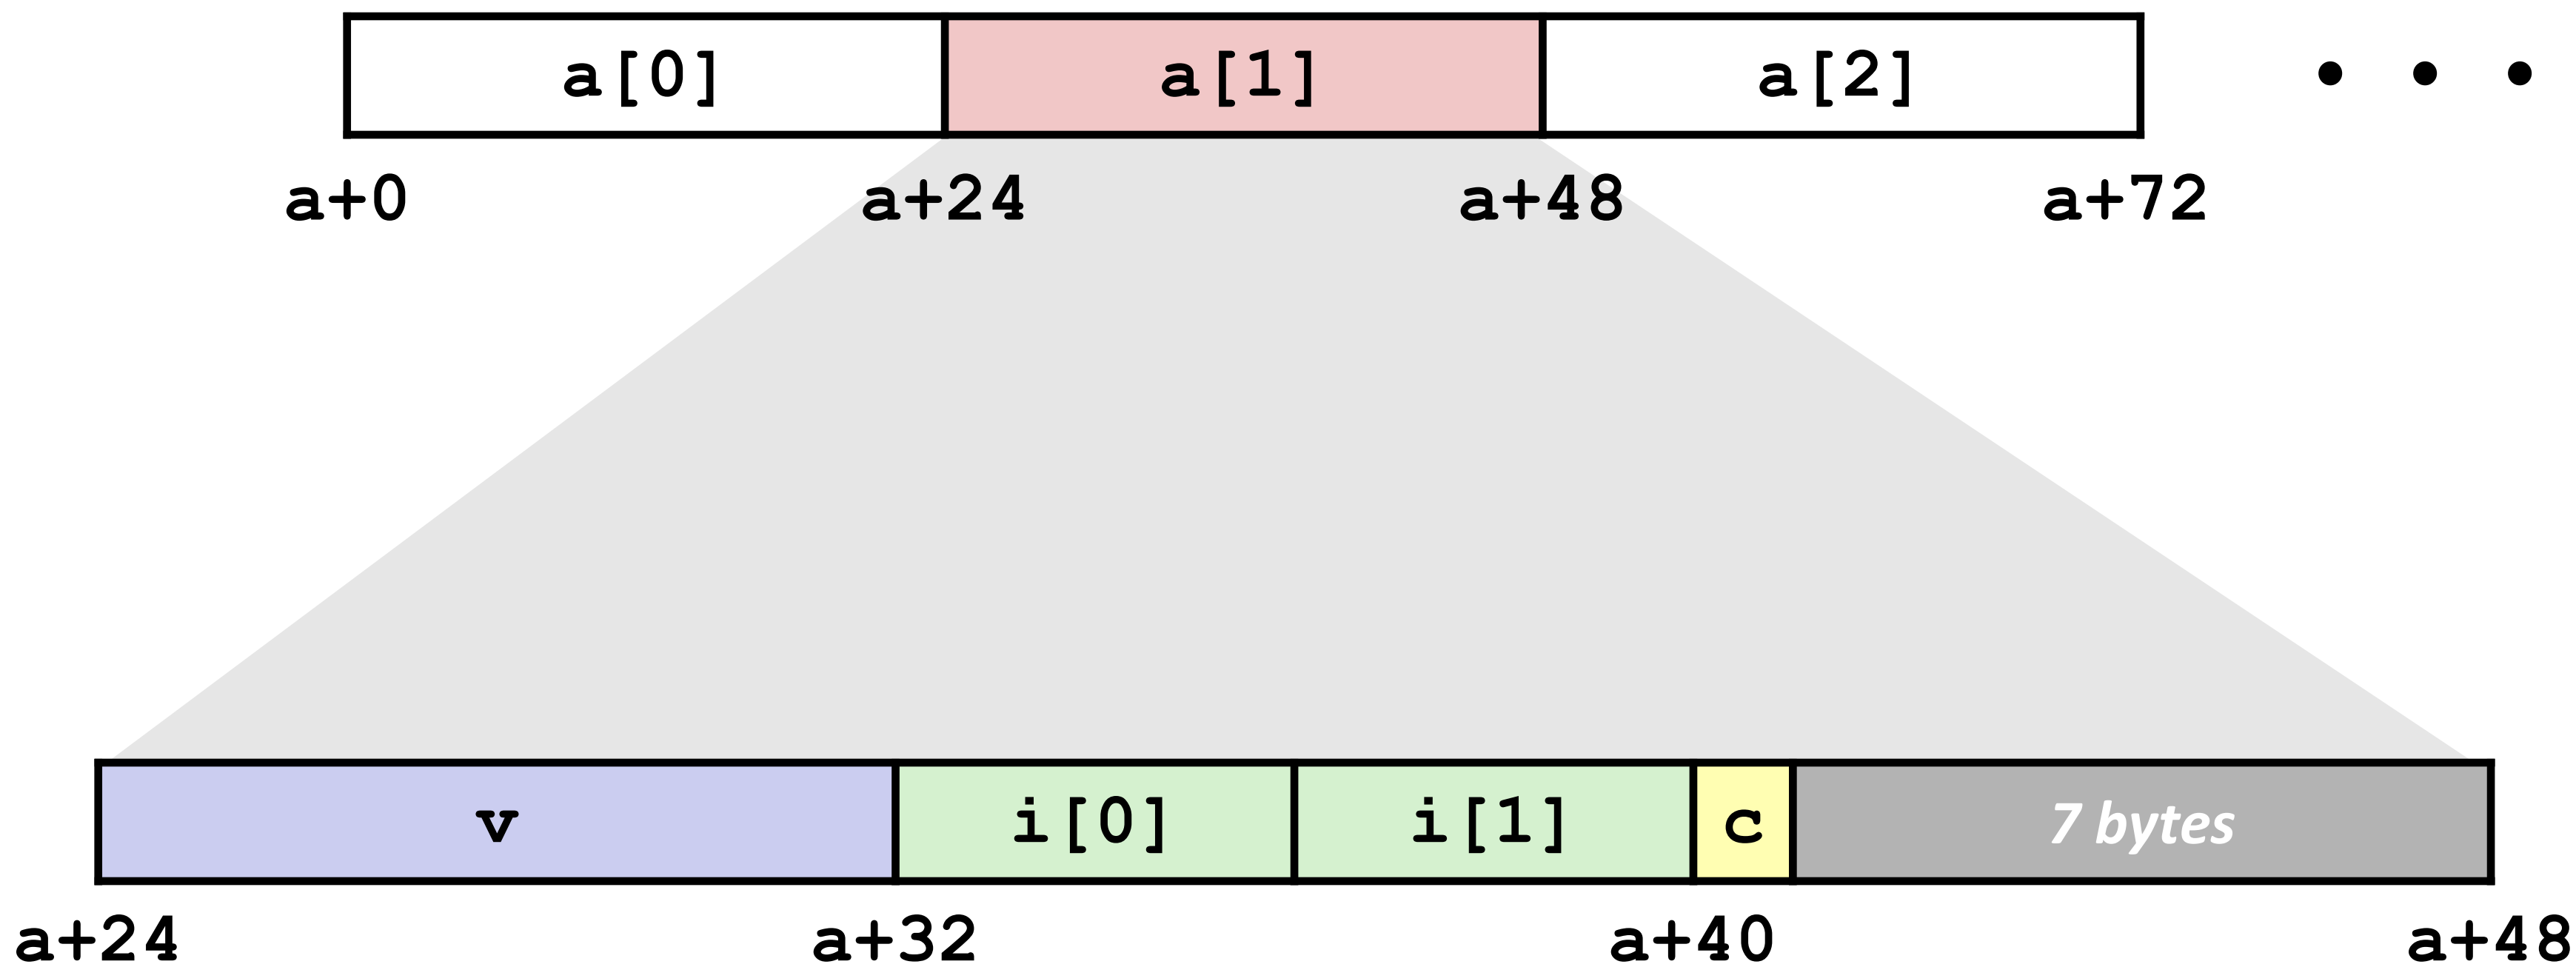

Accessing Array Elements

```
struct S3 {
  short i;
  float v;
  short j;
} a[10];
```

- Compute array offset 12*idx
  - `sizeof(S3)`, including alignment spacers
- Element `j` is at offset 8 within structure
- Assembler gives offset `a+8`
  - Resolved during linking

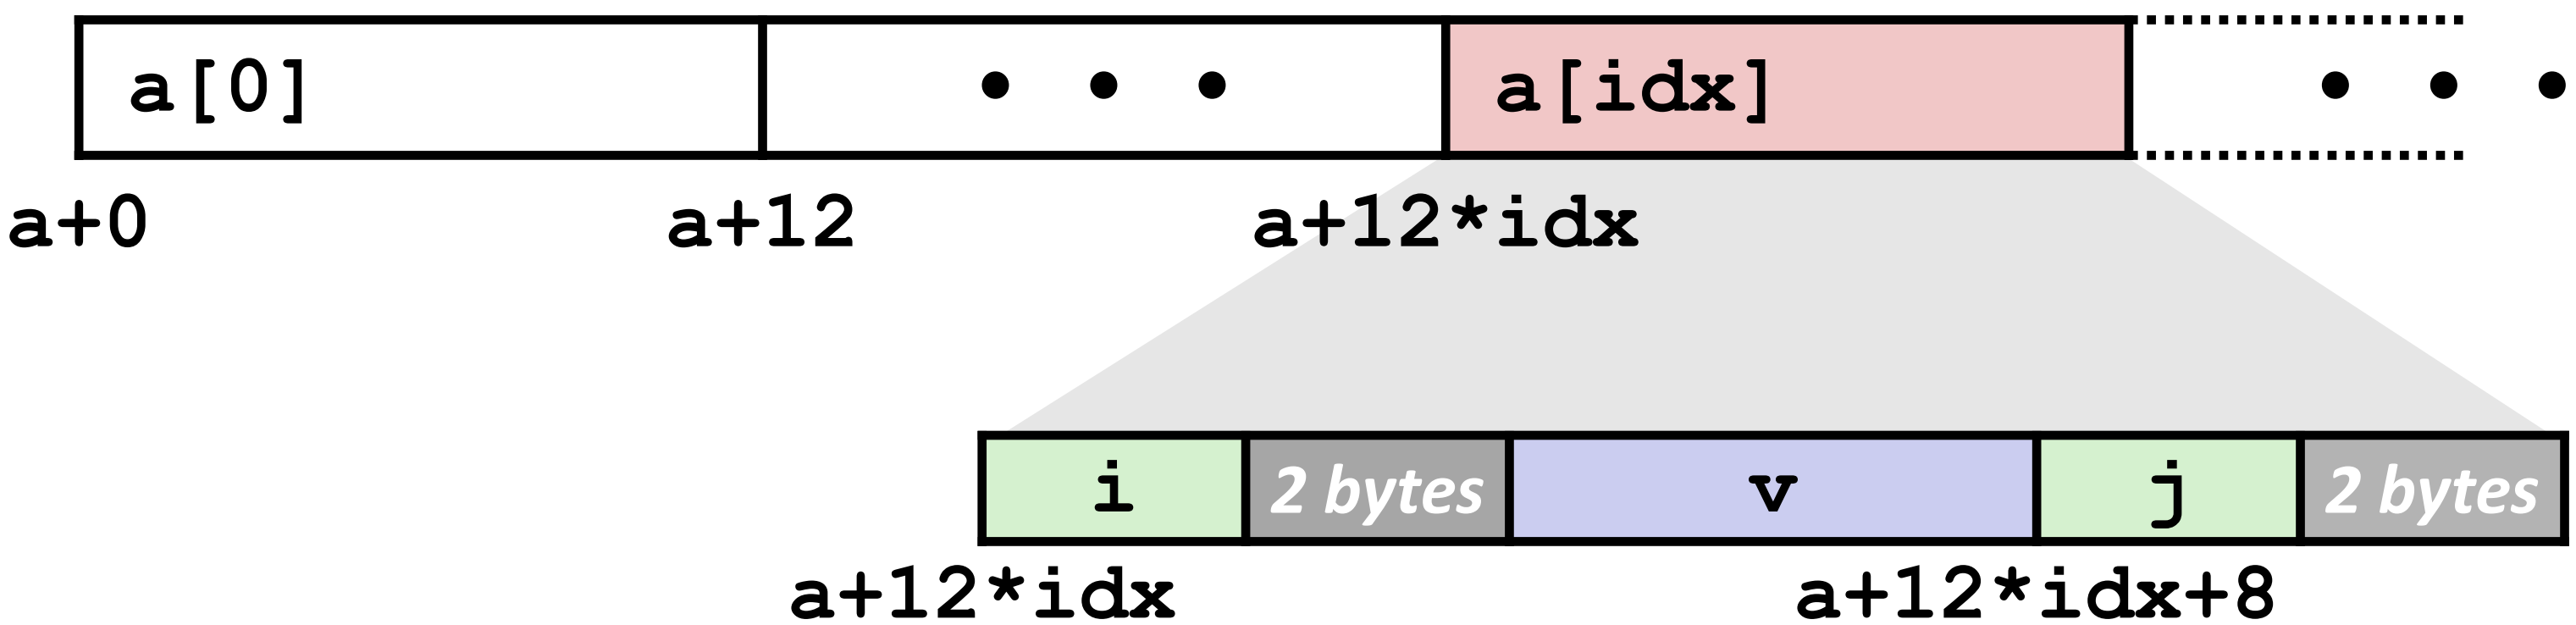


```
short get_j(int idx)
{
  return a[idx].j;
}
```

```
# %rdi = idx
leaq (%rdi,%rdi,2),%rax # 3*idx
movzwl a+8(,%rax,4),%eax
```

Saving Space

- **Put large data types first**

```
struct S4 {
  char c;
  int i;
  char d;
} *p;
```

```
struct S5 {
  int i;
  char c;
  char d;
} *p;
```

c	*3 bytes*	i	d	*3 bytes*

12 bytes

- **Effect (largest alignment requirement K=4)**

i	c	d	*2 bytes*

8 bytes

Example Struct Exam Question

Problem 5. (8 points):

Struct alignment. Consider the following C struct declaration:

```
typedef struct {
  char a;
  long b;
  float c;
  char d[3];
  int *e;
  short *f;
} foo;
```

1. Show how `foo` would be allocated in memory on an x86-64 Linux system. Label the bytes with the names of the various fields and **clearly mark the end of the struct**. Use an X to denote space that is allocated in the struct as padding.

```
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
```

http://www.cs.cmu.edu/~213/oldexams/exam1-f12.pdf

Example Struct Exam Question

Problem 5. (8 points):

Struct alignment. Consider the following C struct declaration:

```
typedef struct {
  char a;
  long b;
  float c;
  char d[3];
  int *e;
  short *f;
} foo;
```

1. Show how `foo` would be allocated in memory on an x86-64 Linux system. Label the bytes with the names of the various fields and **clearly mark the end of the struct**. Use an X to denote space that is allocated in the struct as padding.

```
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|a |X |X |X |X |X |X |X |b |b |b |b |b |b |b |b |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|c |c |c |c |d |d |d |X |e |e |e |e |e |e |e |e |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|f |f |f |f |f |f |f |f |  |  |  |  |  |  |  |  |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
```

http://www.cs.cmu.edu/~213/oldexams/exam1-f12.pdf

Example Struct Exam Question (Cont'd)

Problem 5. (8 points):

Struct alignment. Consider the following C struct declaration:

```
typedef struct {
  char a;
  long b;
  float c;
  char d[3];
  int *e;
  short *f;
} foo;
```

2. Rearrange the elements of `foo` to conserve the most space in memory. Label the bytes with the names of the various fields and **clearly mark the end of the struct**. Use an X to denote space that is allocated in the struct as padding.

```
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
```

http://www.cs.cmu.edu/~213/oldexams/exam1-f12.pdf

Example Struct Exam Question (Cont'd)

Problem 5. (8 points):

Struct alignment. Consider the following C struct declaration:

```
typedef struct {
  char a;
  long b;
  float c;
  char d[3];
  int *e;
  short *f;
} foo;
```

2. Rearrange the elements of `foo` to conserve the most space in memory. Label the bytes with the names of the various fields and **clearly mark the end of the struct**. Use an X to denote space that is allocated in the struct as padding.

```
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|a |d |d |d |c |c |c |c |b |b |b |b |b |b |b |b |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|e |e |e |e |e |e |e |e |f |f |f |f |f |f |f |f |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
```

http://www.cs.cmu.edu/~213/oldexams/exam1-f12.pdf

Today

- **Arrays**
  - One-dimensional
  - Multi-dimensional (nested)
  - Multi-level
- **Structures**
  - Allocation
  - Access
  - Alignment
- **Floating Point**

Background

- **History**
  - x87 FP
    - Legacy, very ugly
  - SSE FP
    - Supported by Shark machines
    - Special case use of vector instructions
  - AVX FP
    - Newest version
    - Similar to SSE (but registers are 32 bytes instead of 16)
    - Documented in book

Programming with SSE4

XMM Registers

- 16 total, each 16 bytes
- 16 single-byte integers



- 8 16-bit integers



- 4 32-bit integers



- 4 single-precision floats



- 2 double-precision floats



- 1 single-precision float



- 1 double-precision float



Scalar & SIMD Operations

- Scalar Operations: Single Precision `addss %xmm0,%xmm1`

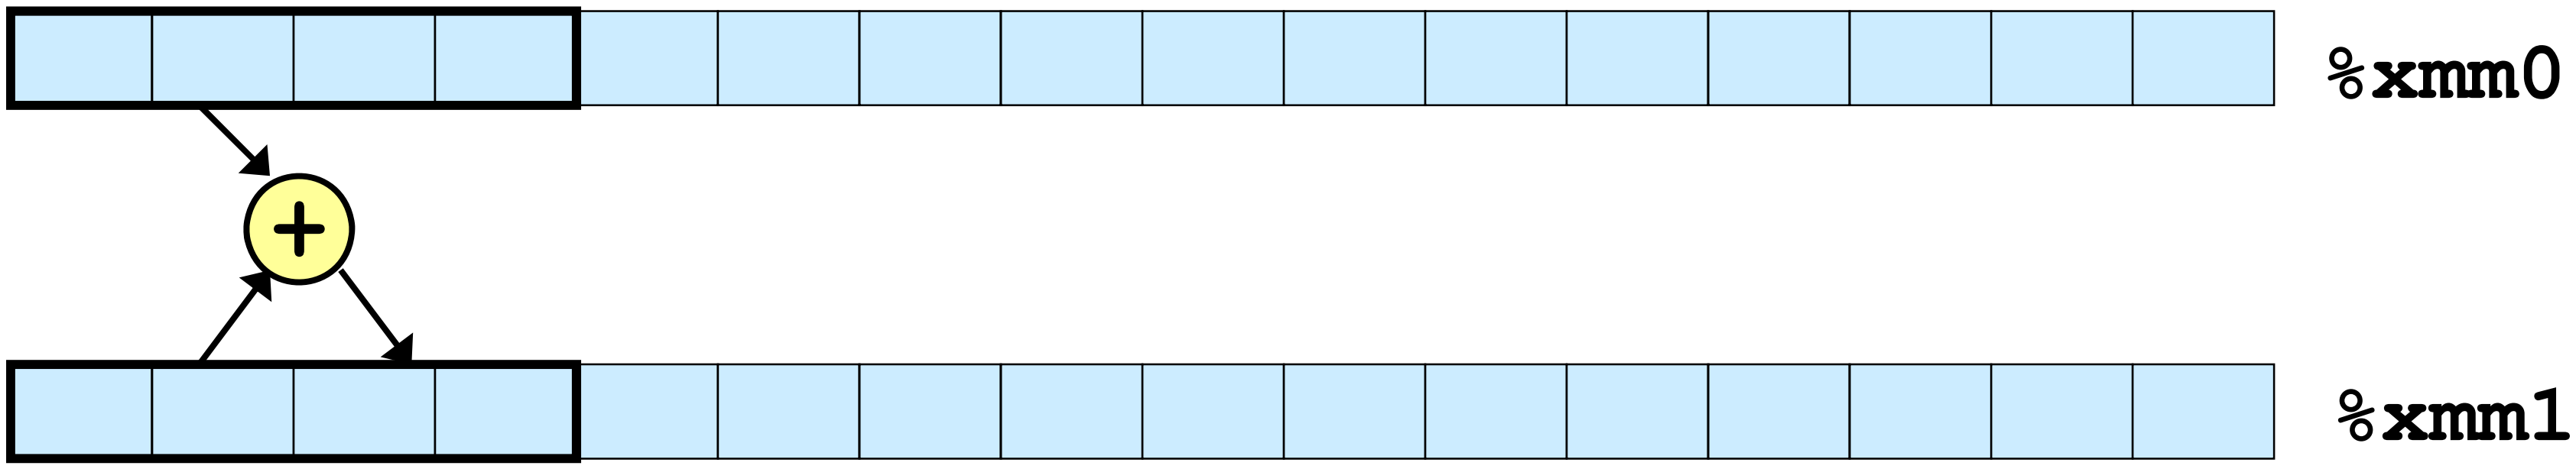

- SIMD Operations: Single Precision `addps %xmm0,%xmm1`

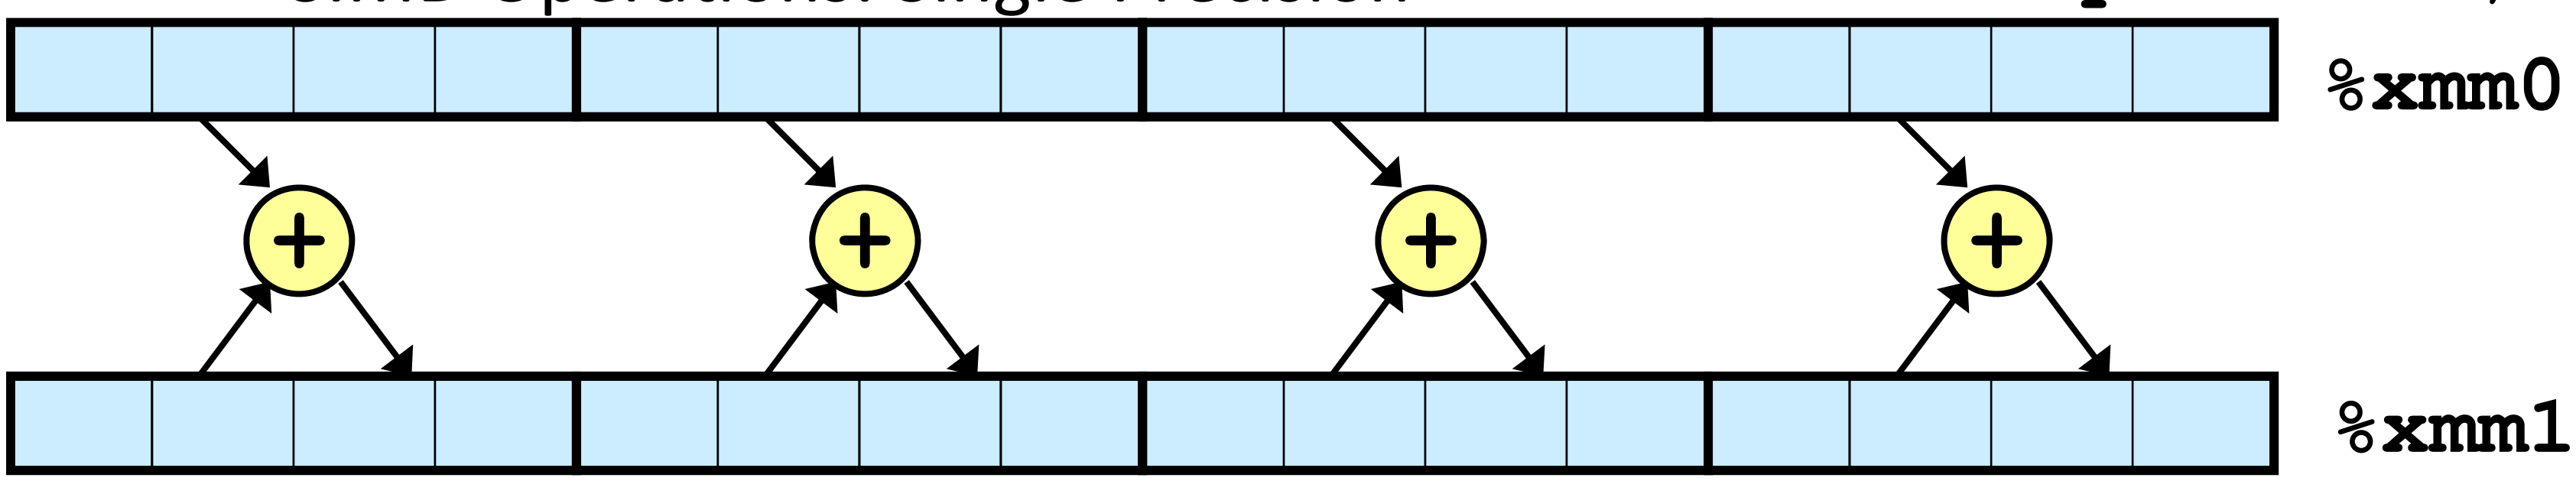

- Scalar Operations: Double Precision `addsd %xmm0,%xmm1`

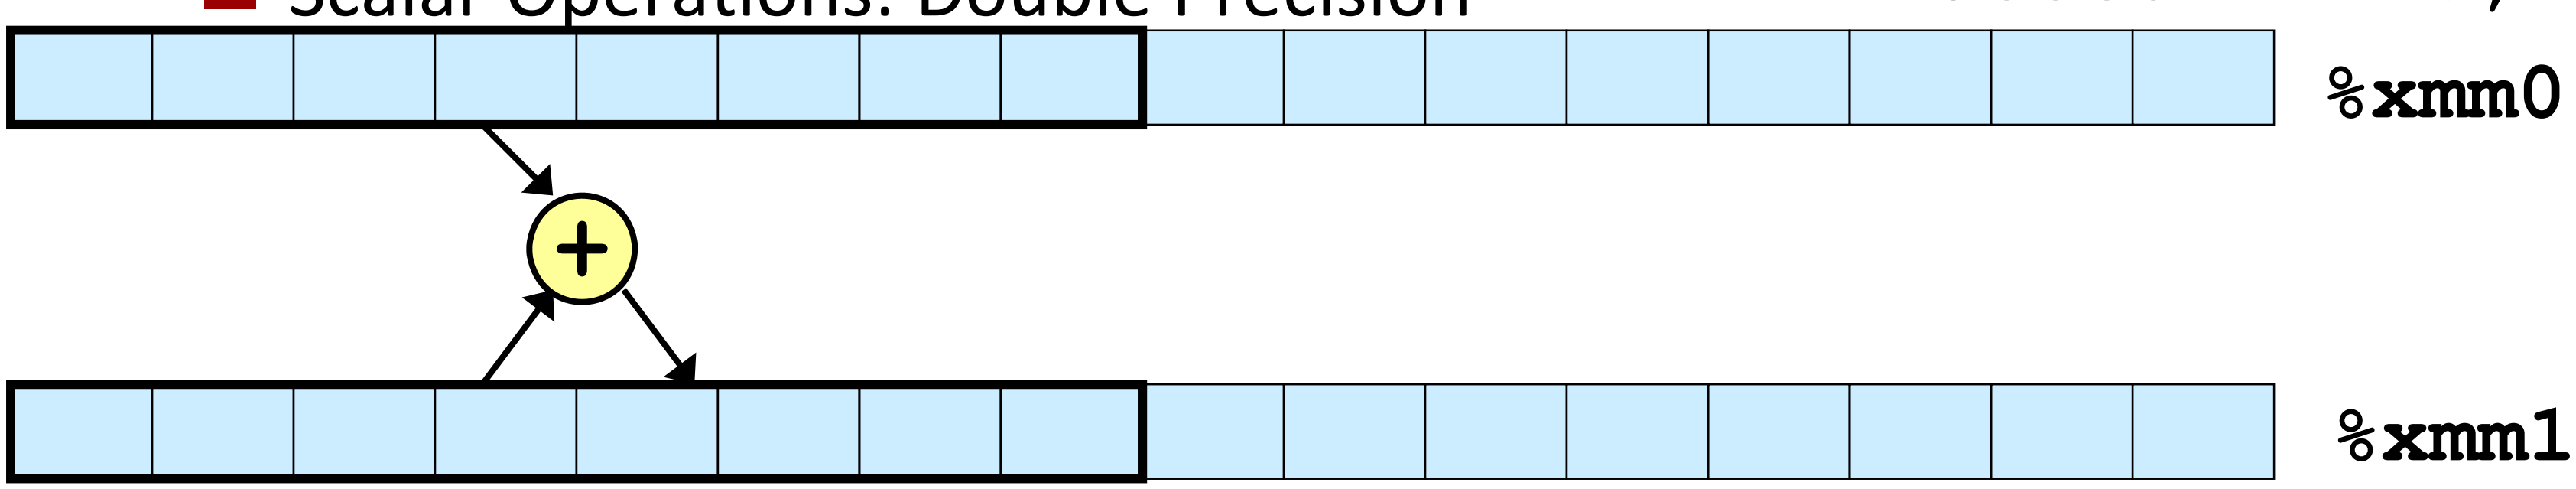

FP Basics

- Arguments passed in `%xmm0`, `%xmm1`, ...
- Result returned in `%xmm0`
- All XMM registers caller-saved

```
float fadd(float x, float y)
{
    return x + y;
}
```

```
double dadd(double x, double y)
{
    return x + y;
}
```

```
  # x in %xmm0, y in %xmm1
  addss    %xmm1, %xmm0
  ret
```

```
  # x in %xmm0, y in %xmm1
  addsd    %xmm1, %xmm0
  ret
```

FP Memory Referencing

- Integer (and pointer) arguments passed in regular registers
- FP values passed in XMM registers
- Different mov instructions to move between XMM registers, and between memory and XMM registers

```
double dincr(double *p, double v)
{
    double x = *p;
    *p = x + v;
    return x;
}
```

```
  # p in %rdi, v in %xmm0
  movapd  %xmm0, %xmm1    # Copy v
  movsd   (%rdi), %xmm0   # x = *p
  addsd   %xmm0, %xmm1    # t = x + v
  movsd   %xmm1, (%rdi)   # *p = t
  ret
```

Other Aspects of FP Code

- ***Lots* of instructions**
  - Different operations, different formats, ...
- **Floating-point comparisons**
  - Instructions **`ucomiss`** and **`ucomisd`**
  - Set condition codes ZF, PF and CF
  - Zeros OF and SF

Parity Flag

UNORDERED: ZF,PF,CF←111
GREATER_THAN: ZF,PF,CF←000
LESS_THAN: ZF,PF,CF←001
EQUAL: ZF,PF,CF←100

- **Using constant values**
  - Set XMM0 register to 0 with instruction **`xorpd %xmm0, %xmm0`**
  - Others loaded from memory

Summary

- **Arrays**
  - Elements packed into contiguous region of memory
  - Use index arithmetic to locate individual elements
- **Structures**
  - Elements packed into single region of memory
  - Access using offsets determined by compiler
  - Possible require internal and external padding to ensure alignment
- **Combinations**
  - Can nest structure and array code arbitrarily
- **Floating Point**
  - Data held and operated on in XMM registers

Understanding Pointers & Arrays #3

Decl	An			*An			**An		
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size
`int A1[3][5]`									
`int *A2[3][5]`									
`int (*A3)[3][5]`									
`int *(A4[3][5])`									
`int (*A5[3])[5]`									

- **Cmp: Compiles (Y/N)**
- **Bad: Possible bad pointer reference (Y/N)**
- **Size: Value returned by `sizeof`**

Decl	***An		
	Cmp	Bad	Size
`int A1[3][5]`			
`int *A2[3][5]`			
`int (*A3)[3][5]`			
`int *(A4[3][5])`			
`int (*A5[3])[5]`			

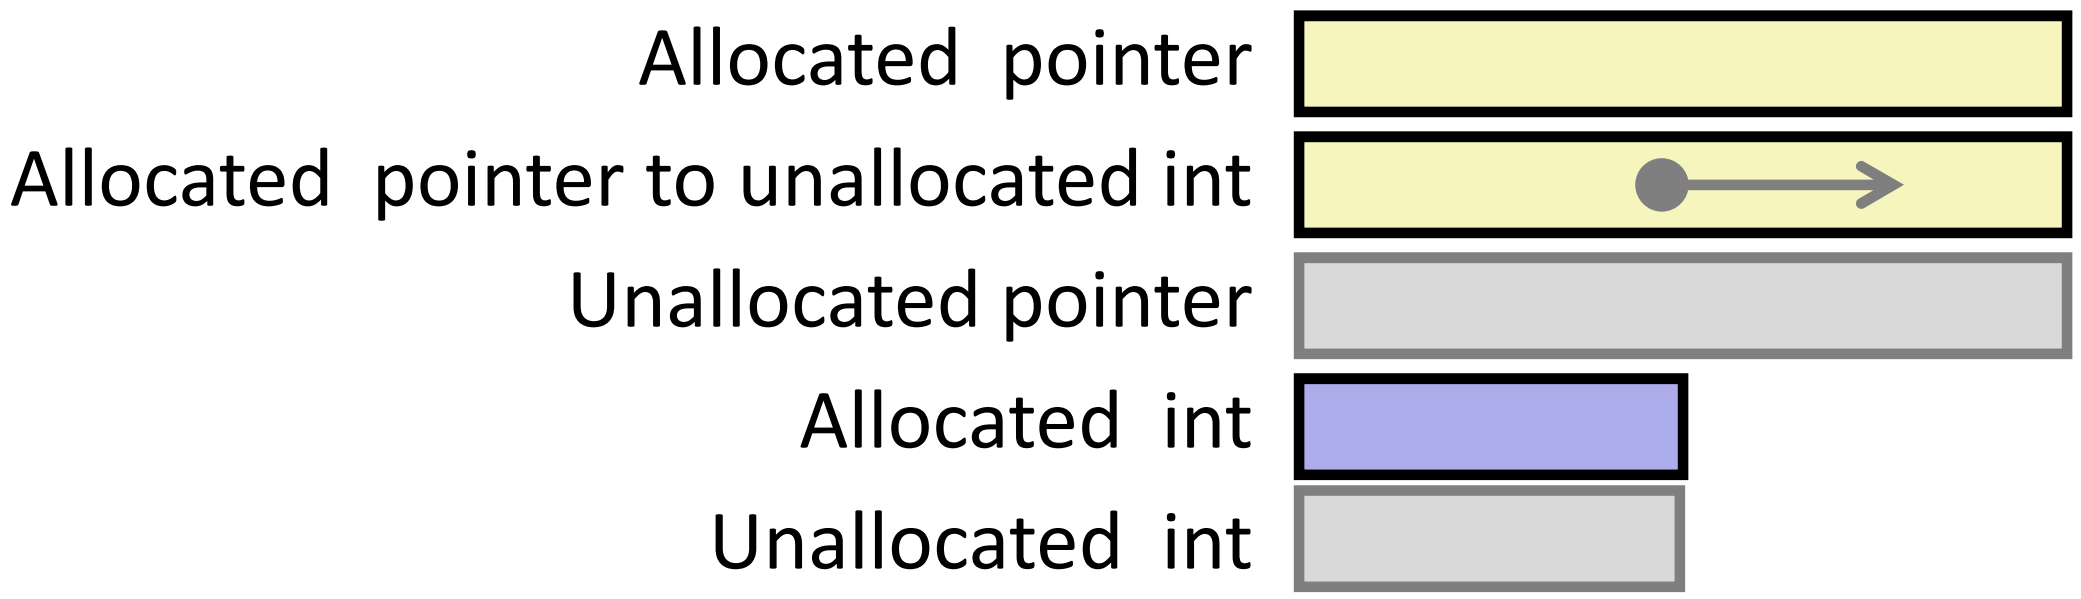

Declaration
`int A1[3][5]`
`int *A2[3][5]`
`int (*A3)[3][5]`
`int *(A4[3][5])`
`int (*A5[3])[5]`

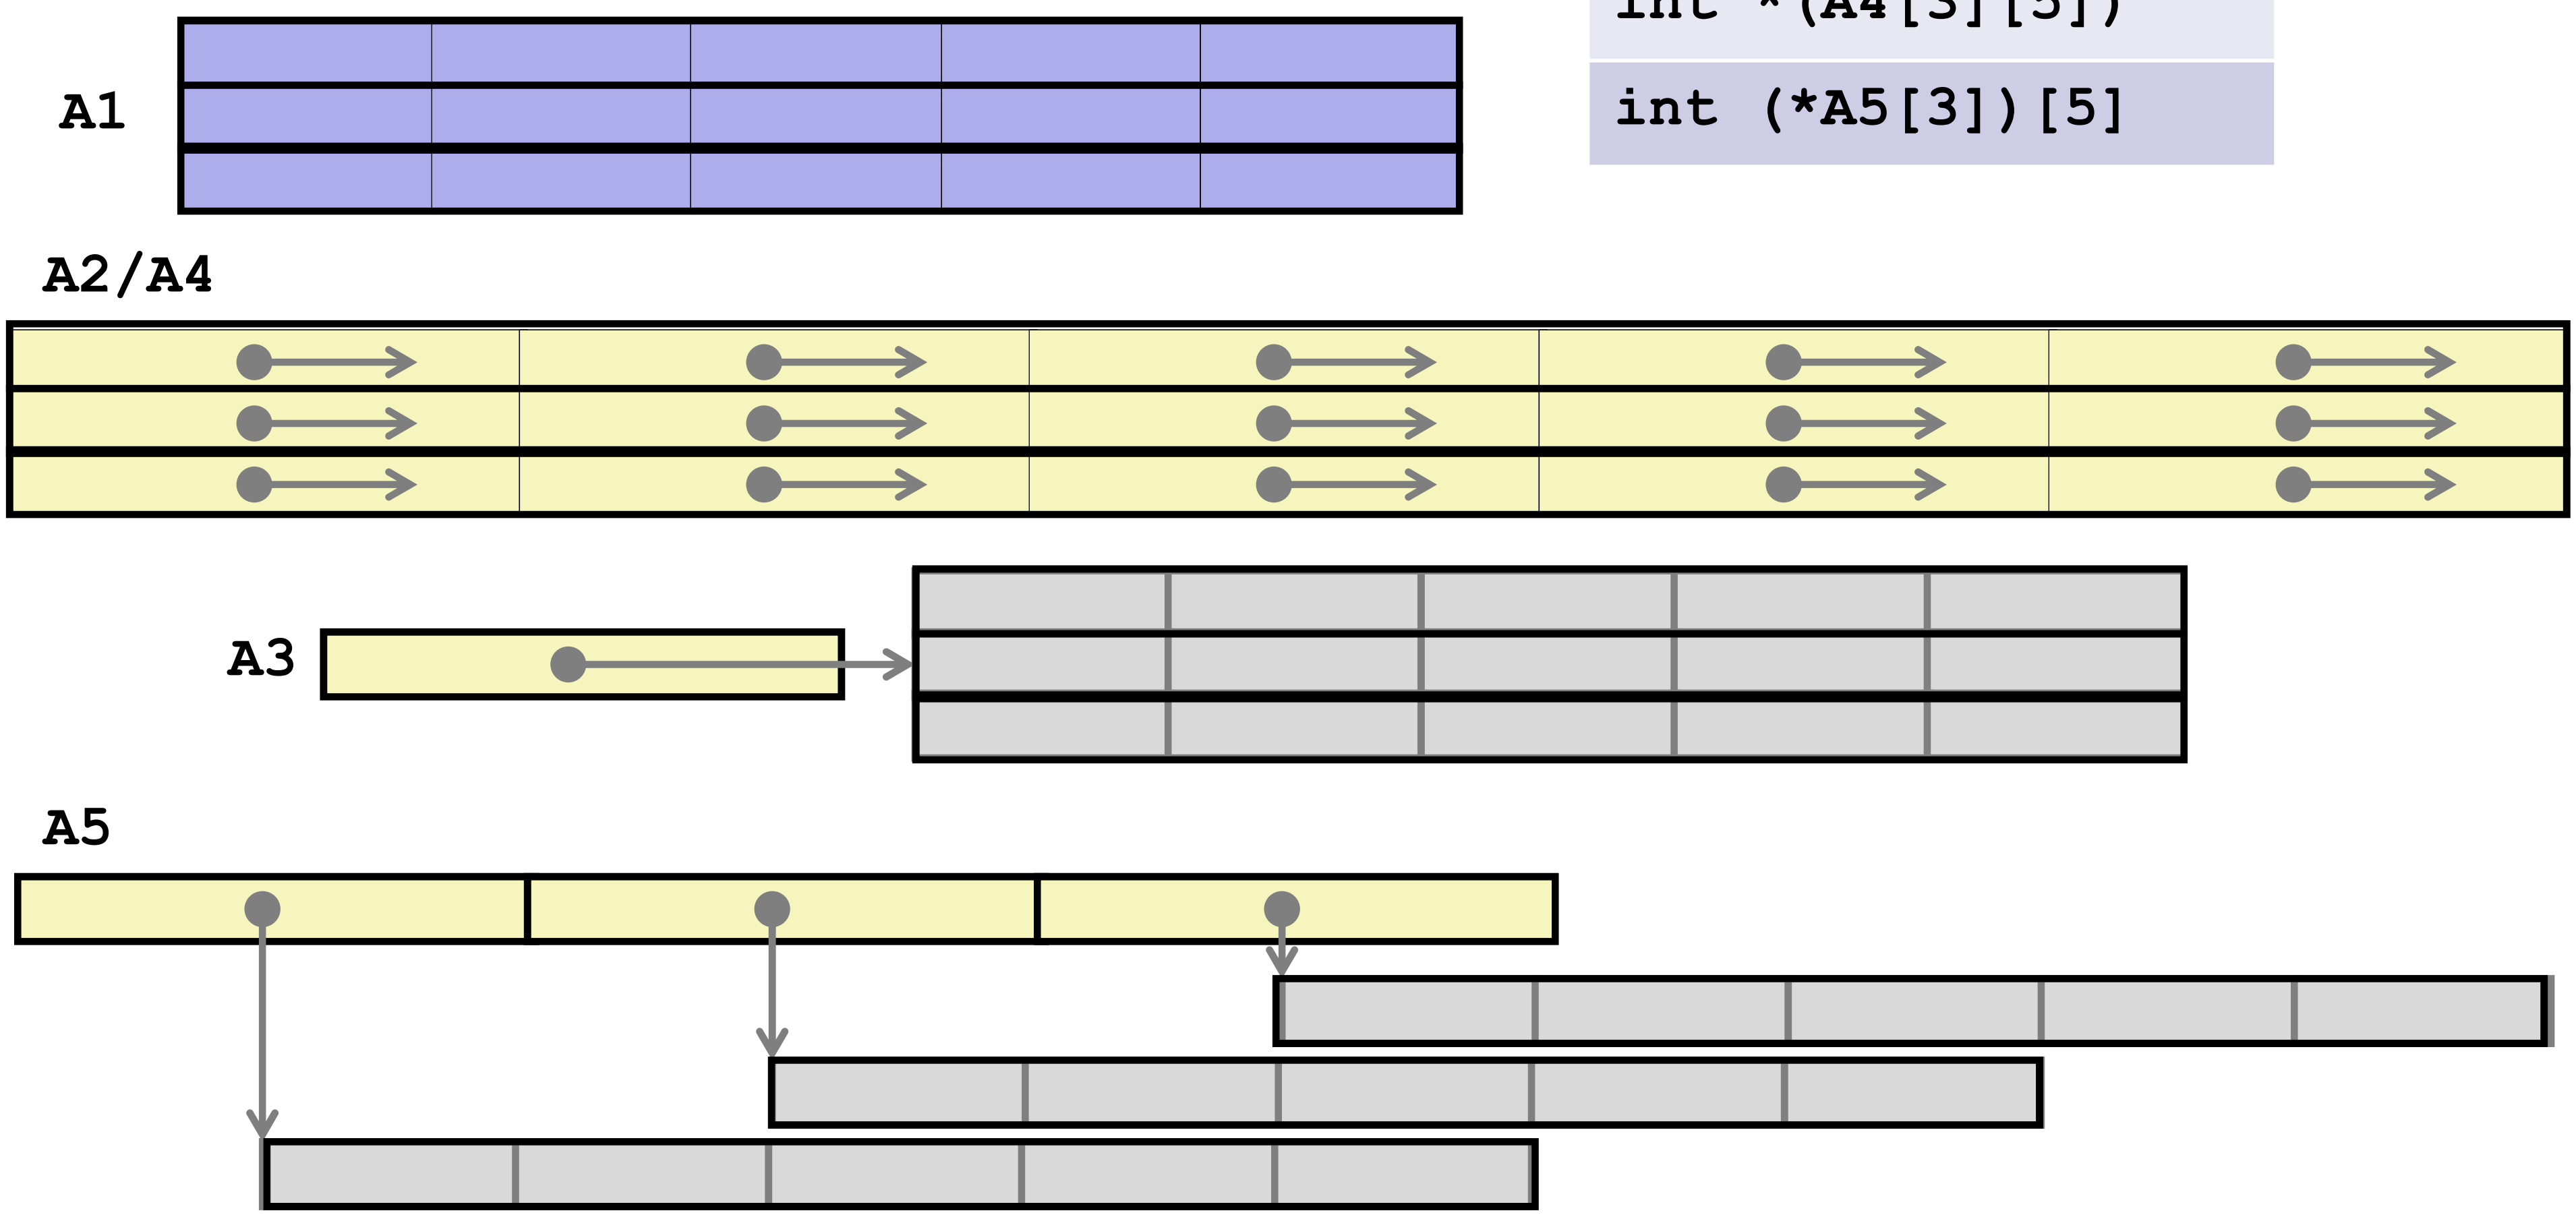

Understanding Pointers & Arrays #3

Decl	An			*An			**An		
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size
`int A1[3][5]`	Y	N	60	Y	N	20	Y	N	4
`int *A2[3][5]`	Y	N	120	Y	N	40	Y	N	8
`int (*A3)[3][5]`	Y	N	8	Y	Y	60	Y	Y	20
`int *(A4[3][5])`	Y	N	120	Y	N	40	Y	N	8
`int (*A5[3])[5]`	Y	N	24	Y	N	8	Y	Y	20

- Cmp: Compiles (Y/N)
- Bad: Possible bad pointer reference (Y/N)
- Size: Value returned by `sizeof`

Decl	***An		
	Cmp	Bad	Size
`int A1[3][5]`	N	-	-
`int *A2[3][5]`	Y	Y	4
`int (*A3)[3][5]`	Y	Y	4
`int *(A4[3][5])`	Y	Y	4
`int (*A5[3])[5]`	Y	Y	4