

Modeling and Analysis of Time Series Data

Chapter 8: Smoothing in the time and frequency domains


Edward L. Ionides

Outline

- 1 Smoothing a time series
- 2 Seasonal adjustment in the frequency domain
 - The frequency response function of a smoother
- 3 Loess smoothing
 - Business cycles in detrended economic data

Introduction to smoothing in time series analysis

- Estimating a nonparametric trend from a time series is known as smoothing. We will review some standard smoothing methods.
- We also smooth the periodogram to estimate a spectral density.
- Smoothers have convenient interpretation in the frequency domain. A smoother typically shrinks high frequency components and preserves low frequency components.

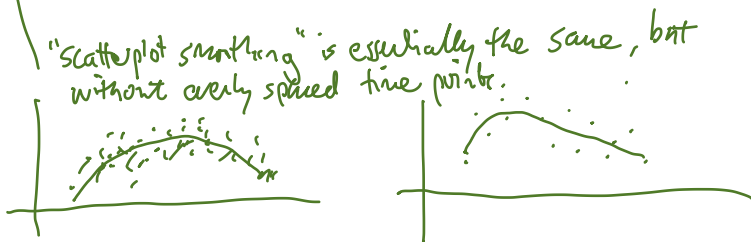

A motivating example

- The economy fluctuates between periods of rapid expansion and periods of slower growth or contraction.
- High unemployment is one of the most visible signs of a dysfunctional economy, in which labor is under-utilized, leading to hardships for many individuals and communities.
- Economists, politicians, businesspeople and the general public therefore have an interest in understanding fluctuations in unemployment.
- Economists try to distinguish between fundamental structural changes in the economy and the shorter-term cyclical booms and busts that appear to be a natural part of capitalist business activity.
- Monthly US unemployment figures are published by the [Bureau of Labor Statistics \(BLS\)](#).
- Measuring unemployment has subtleties, but these are not our immediate focus.

```
system("head unadjusted_unemployment.csv",intern=TRUE)
```

```
[1] "# Data extracted on: February 7, 2024"
[2] "# from http://data.bls.gov/timeseries/LNU04000000"
[3] "# Labor Force Statistics from the Current Population Survey"
[4] "# Not Seasonally Adjusted"
[5] "# Series title:      (Unadj) Unemployment Rate"
[6] "# Series Id:        LNU04000000"
[7] "# Labor force status: Unemployment rate"
[8] "# Type of data:      Percent or rate"
[9] "# Age:               16 years and over"
[10] "Year, Jan, Feb, Mar, Apr, May, Jun, Jul, Aug, Sep, Oct, Nov, Dec"
```

```
U1 <- read.table(file="unadjusted_unemployment.csv",
  sep=" ", header=TRUE)
head(U1,3)
```

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
1948	4.0	4.7	4.5	4.0	3.4	3.9	3.9	3.6	3.4	2.9	3.3	3.6
1949	5.0	5.8	5.6	5.4	5.7	6.4	7.0	6.3	5.9	6.1	5.7	6.0
1950	7.6	7.9	7.1	6.0	5.3	5.6	5.3	4.1	4.0	3.3	3.8	3.9


Question 8.1. A coding exercise: Explain how the tabulated data in U1 are converted to a time series, below.

data originally have class data.frame & actually a list, so columns can have different types. here, we turn them into a matrix.

```
u1 <- t(as.matrix(U1[2:13]))
dim(u1) <- NULL
date <- seq(from=1948,length=length(u1),by=1/12)
plot(date,u1,type="l",ylab="Unemployment rate (unadjusted)")
```

in R, a matrix is just a vector with a dim attribute.


characteristic frequencies?

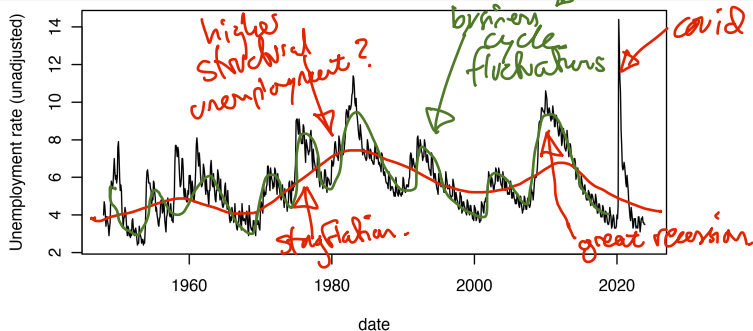

- We see seasonal variation and economic cycles on top of a trend.
- The seasonal variation looks like an additive effect, say an annual fluctuation with amplitude around 1 percentage point.
- Sometimes, we may prefer to look at monthly seasonally adjusted unemployment, **also provided by BLS**.

```
U2 <- read.table(file="adjusted_unemployment.csv", sep="," ,
  header=TRUE)
u2 <- t(as.matrix(U2[2:13]))
```

Unemployment. Raw (black) and seasonally adjusted (red)

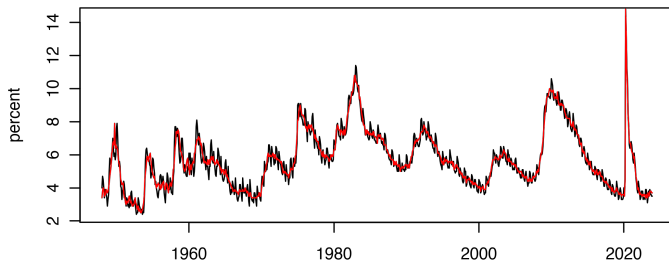


- We can wonder how the BLS adjusts the data, and if this introduces any artifacts that a careful statistician should be aware of.

this is the S3 class structure in R
 modern code may use S4 classes.
 e.g. `plot(x)` will call `plot.ts(x)`
 if `x` has class `ts`.

- To help understand the seasonal adjustment, we look at what it does to the smoothed periodogram.
- Using the `ts` class we can tell R the units of time.

a vector class with extra attributes for start, frequency of time points.

```
u1_ts <- ts(u1, start=1948, frequency=12)
u2_ts <- ts(u2, start=1948, frequency=12)
spectrum(ts.union(u1_ts, u2_ts), spans=c(3, 5, 3),
  main="Unemployment: raw (black), seasonally adjusted (red)")
```

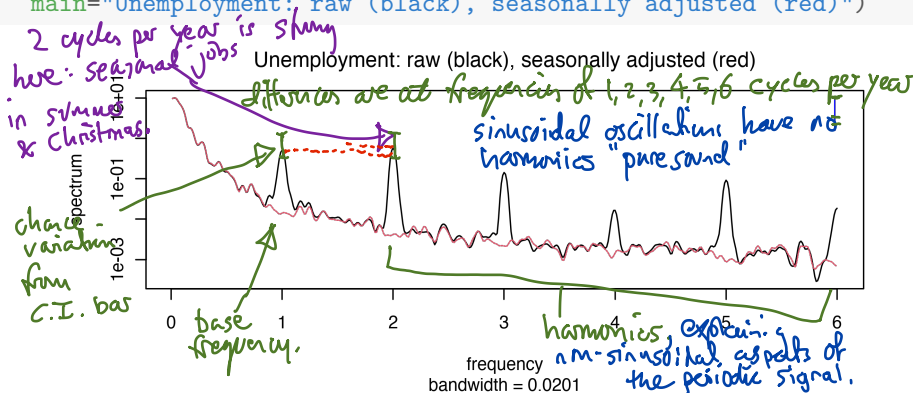

Comments on the smoothed periodogram

- you could read the description
it is the bandwidth of an equivalent kernel smoother.*
- Note: For a report, we should add units to plots. Extra details (like bandwidth in the periodogram plot) should be explained or removed.

Question 8.2. Why does the unadjusted spectrum have peaks at 2,3,4,5,6 cycles per year as well as 1 cycle per year?

see previous slide.

Question 8.3. Comment on what you learn from comparing these smoothed periodograms.

see previous slide

The frequency response function

- The ratio of the periodograms of the smoothed and unsmoothed time series is the **frequency response** of the smoother.
- The frequency response function tells us how much the smoother contracts (or inflates) the sine and cosine components at each frequency ω .
- A frequency response may involve change in phase as well as magnitude, but here we consider only magnitude.
- Linear, time invariant transformations do not move power between frequencies, so they are characterized by their frequency response function.
- Smoothers are linear and time invariant, at least approximately. If we scale or shift the data, we expect the smoothed estimate to have the same scale or shift. We expect a smooth approximation to the sum of two time series to be approximately the sum of the two smoothed series.

MA models are linear, time invariant transformations of the noise process, ε_n

Calculating a frequency response function

- We investigate the frequency response of the smoother used by Bureau of Labor Statistics to deseasonalize the unemployment data.

```
s <- spectrum(ts.union(u1_ts,u2_ts),plot=FALSE)
```


- We find the parts of `s` that we need to plot the frequency response.

```
names(s)
```

```
[1] "freq"      "spec"      "coh"      "phase"     "kernel"
[6] "df"        "bandwidth" "n.used"    "orig.n"    "series"
[11] "snames"    "method"    "taper"    "pad"       "detrend"
[16] "demean"
```

```
plot(s$freq,s$spec[,2]/s$spec[,1],type="l",log="y",
     ylab="frequency ratio", xlab="frequency",
     main="frequency response (red lines at 0.8 and 1.2)")
abline(h=c(0.8,1.2),col="red")
```

frequency response (red lines at 0.8 and 1.2)

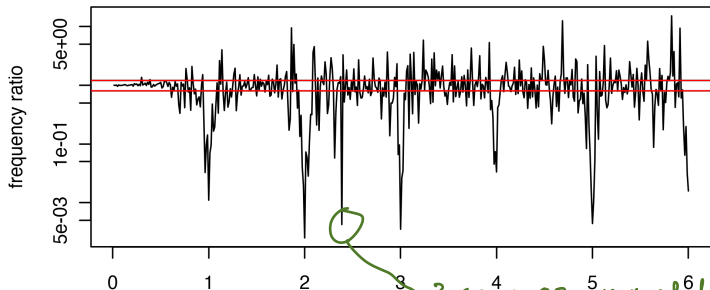

? some ~~non~~ unexpected behaviour
at this frequency - a civil
asset?

Question 8.4. What do you learn from this frequency response plot?


frequency response is close to zero at the 1, 2, 3, 4, 5, 6 cycles per year (this is a log scale; these values are ≈ 2 orders of magnitude smaller).

Estimating trend by Loess smoothing

- Loess is a **Local linear regression** approach (perhaps an acronym for L^Ocal Estimation by Smoothing) also known as **Lowess** (perhaps L^OcallyWEighted Sum of Squares).
- At each point in time, Loess computes a linear regression (a constant, linear or quadratic trend estimate) using only neighboring times.
- We can imagine a moving window of points included in the regression.
- `loess` is an R implementation, with the fraction of points included in the moving window being scaled by the `span` argument.
- We can choose a value of the span that visually separates long term trend from business cycle.


A Loess smooth of unemployment

```
u1_loess <- loess(u1~date,span=0.5)
plot(date,u1,type="l",col="red")
lines(u1_loess$x,u1_loess$fitted,type="l")
```

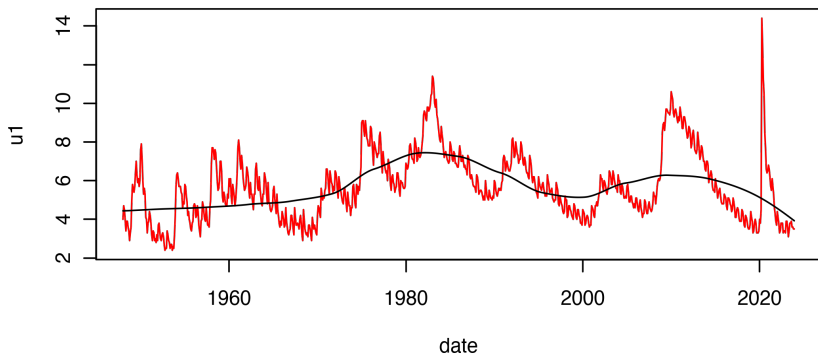

Now, we compute the frequency response function for what we have done.

```
s2 <- spectrum(ts.union(  
  u1_ts, ts(u1_loess$fitted, start=1948, frequency=12)),  
  plot=FALSE)  
plot(s2$freq, s2$spec[,2]/s$spec[,1], type="l", log="y",  
  ylab="frequency ratio", xlab="frequency", xlim=c(0, 1.5),  
  main="frequency response (red line at 1.0)")  
abline(h=1, lty="dashed", col="red")
```

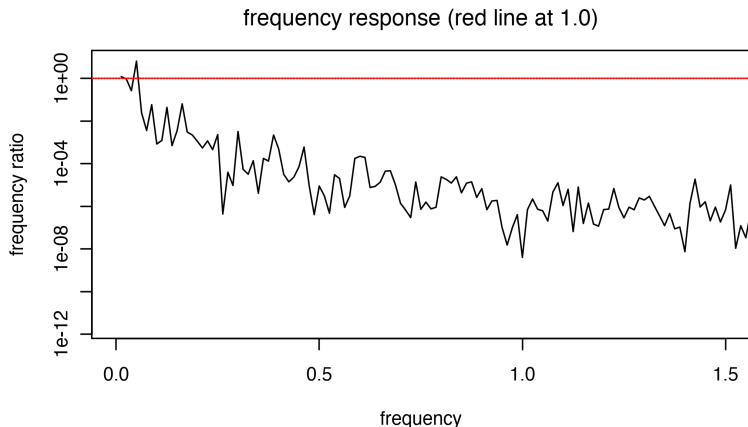


Question 8.5. Describe the frequency domain behavior of this filter.

Extracting business cycles: A band pass filter


- For the unemployment data, high frequency variation might be considered “noise” and low frequency variation might be considered trend.
- A band of mid-range frequencies might be considered to correspond to the business cycle.
- We build a smoothing operation in the time domain to extract business cycles, and then look at its frequency response function.

```
u_low <- ts(loess(u1~date,span=0.5)$fitted,  
            start=1948,frequency=12)  
u_hi <- ts(u1 - loess(u1~date,span=0.1)$fitted,  
           start=1948,frequency=12)  
u_cycles <- u1 - u_hi - u_low  
plot(ts.union(u1, u_low,u_hi,u_cycles),  
     main="Decomposition of unemployment as trend + noise + cycles")
```

Decomposition of unemployment as trend + noise + cycles

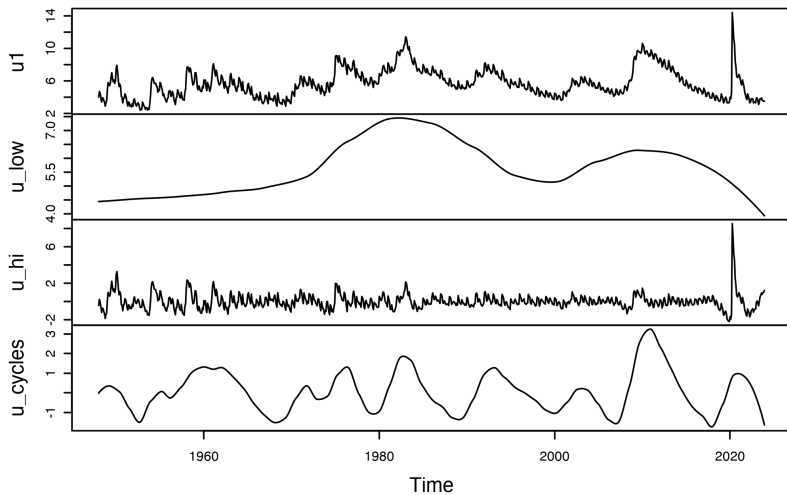


	low	hi
frequency range, region for ratio greater than 0.5	0.051	0.17

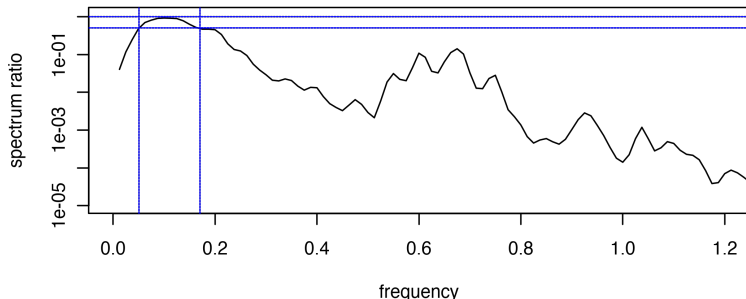

Question 8.6. Describe the frequencies (and corresponding periods) that this decomposition identifies as business cycles. Note: units of frequency are omitted to give you an exercise!

Below is a smoothed periodogram for the raw unemployment data, plotted up to 0.7 cycles per year to focus on relevant frequencies.

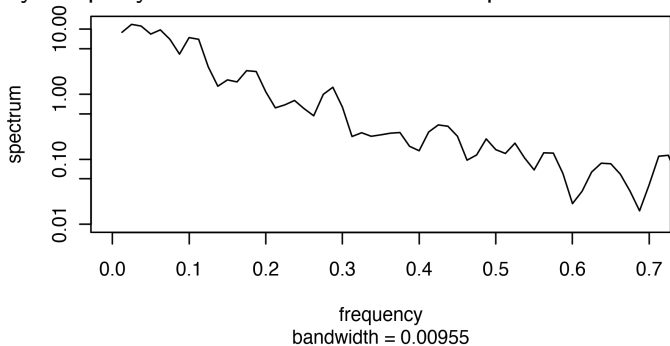

Question 8.7. Comment on the evidence for and against the concept of a business cycle in the above figure.

Common smoothers in R

- Above, we have used the **local regression smoother** `loess` but there are other similar options.
- `ksmooth` is a **kernel smoother**. The default periodogram smoother in `spectrum` is also a kernel smoother. See https://en.wikipedia.org/wiki/Kernel_smoother
- `smooth.spline` is a **spline smoother**. https://en.wikipedia.org/wiki/Smoothing_spline
- You can learn about alternative smoothers, and try them out if you like, but `loess` is a good practical choice for many smoothing applications.

Bandwidth for a smoother

- All these smoothers have some concept of a **bandwidth**, which is a measure of the size of the neighborhood of time points in which data affect the smoothed value at a particular time point.
- The concept of bandwidth is most obvious for kernel smoothers, but exists for other smoothers.
- We usually only interpret bandwidth up to a constant. For a particular smoothing algorithm and software implementation, you learn by experience to interpret the comparative value. Smaller bandwidth means less smoothing.
- Typically, when writing reports, it makes sense to focus on the tuning parameter for the smoother in question, which is not the bandwidth unless you are doing kernel smoothing.

Further reading

- Section 2.3 of Shumway and Stoffer (2017) discusses smoothing of time series, in the time domain.
- Section 4.2 of Shumway and Stoffer (2017) presents a frequency response function for linear filters, related to this chapter but in a different context.

References and Acknowledgements

Shumway RH, Stoffer DS (2017). *Time Series Analysis and its Applications: With R Examples*. 4th edition. Springer.

- Compiled on February 7, 2024 using R version 4.2.3.
- Licensed under the [Creative Commons Attribution-NonCommercial](#) license. Please share and remix non-commercially, mentioning its origin.
- We acknowledge [previous versions of this course](#).

