
Cityranking map – classifica europea

Dati dal sito **European Environmental Agency**

https://www.eea.europa.eu/en/topics/in-depth/air-pollution/european-city-air-quality-viewer*

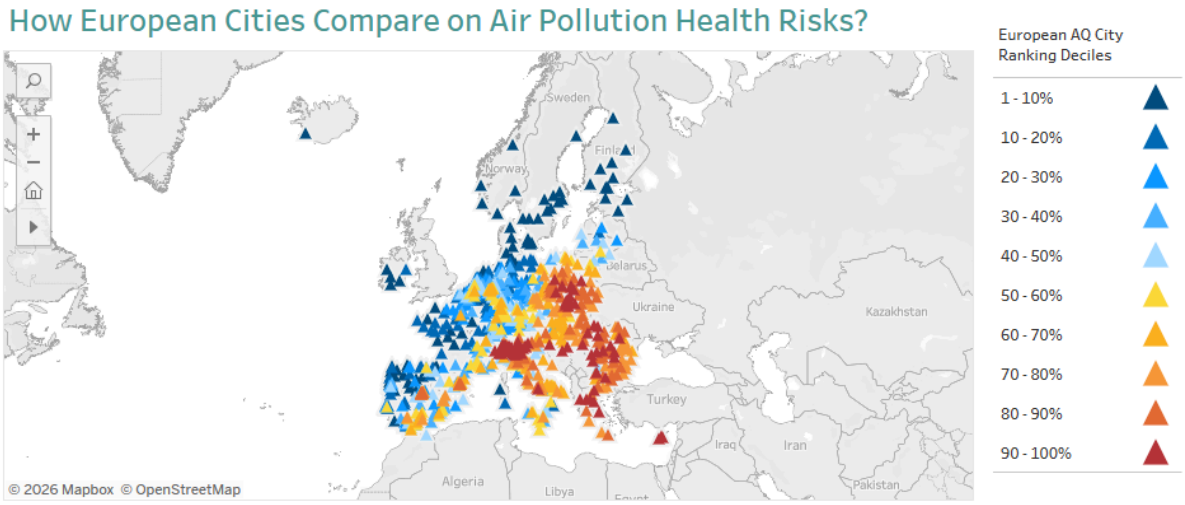

Si scarica un file CSV con elenco delle 761 città maggiori

Il file CSV accorpa le città di una stessa nazione e richiede una piccola pulizia effettuata con excel/google_sheet per maggiore comodità.

Il file CSV ripulito viene quindi caricato in Postgres, schema bronze

---

Data Catalog del file **cityranking_map.csv** caricato in tabella bronze.cityranking_eu

---

Country
Note On Population Data
Classification Pm25 Conc Txt
Classification Pm25 Conc Txt_1
City name
City Centroids Latitude
City Centroids Longitude
Fine particulate matter (ug/m3)
Mrank
Nitrogen dioxide (ug/m3)

Ozone (ug/m3)
Population in the city
Rank
Rank (NO2)
Rank (O3)
Rank (PM2.5)

Viene eseguita una semplice ETL e si selezionano i dati nella tabella silver.city_ranking con la seguente query

```
drop table if exists silver.city_ranking;
create table silver.city_ranking as (
	SELECT "Country" as country,
		"City name" as city_name,
		"Population in the city" as population,
		"City Centroids Latitude" as lat,
		"City Centroids Longitude" as long,
		"Rank" as rank,
		"Fine particulate matter (ug/m3)" as pm25,
		"Rank (PM2.5)" as rank_pm25,
		"Ozone (ug/m3)",
		"Rank (O3)" as rank_o3,
		"Nitrogen dioxide (ug/m3)",
		"Rank (NO2)" as rank_no2
	FROM bronze.cityranking_eu
);
```

Data Catalog della tabella **silver.city_ranking**:

country
city_name
population
lat
long
rank
pm25
rank_pm25
Ozone (ug/m3)
rank_o3
Nitrogen dioxide (ug/m3)
rank_no2

Dalla tabella silver si passa alla view in gold:

```
drop view if exists gold.city_ranking;
create view gold.city_ranking as (
      SELECT country, city_name, population,
               lat, long, rank, pm25, rank_pm25, o3, rank_o3, no2,
rank_no2
      FROM silver.city_ranking
);
```