Introduction to Databases Part 2: MongoDB

jan.schulz@devugees.org

Agenda

- 1. Introduction
- 2. Documents
- 3. Collections
- 4. SQL vs MongoDB
- 5. Install MongoDB

... By the way

HTML

CSS

SQL

JavaScript

NodeJS

Big Project 1

JQuery

... By the way

CSS HTML SQL Big Big **JavaScript NodeJS Project 2 Project 1 JQuery** MongoDB React

... By the way

CSS HTML **SQL** Big Big **NodeJS JavaScript Project 2 Project 1 JQuery** MongoDB React

1. Introduction

- Until now, we dealt with relational databases
- Additionally to tables, we will use documents

1. Introduction

- Until now, we dealt with relational databases
- Additionally to tables, we will use documents
- Document: "A record in a MongoDB collection and the basic unit of data in MongoDB.
 Documents look like JSON objects but exist as BSON"

2. Documents

```
BSON
"title": "Article two",
"category": "Education",
"body": "this is the body"
```

2. Documents

BSON is JSON saved binarily

```
"title": "Article two",
    "category": "Education",
    "body": "this is the body"
}
```

 We do not have a JSON file, we have binary BSON file. Not human-readable.

2. Documents

```
CICON caved hinarily
"title
      Each document is JSON which
"cate
          is saved as a BSON file.
"bod
```


 We do not have a JSON file, we have binary BSON file. Not human-readable.

3. Collections


Collection: A group of MongoDB documents.
 Typically, all documents in a collection have a similar related purpose.

3. Collections

Collection: A group of MongoDB documents.
 Typically, all documents in a collection have a similar related purpose.

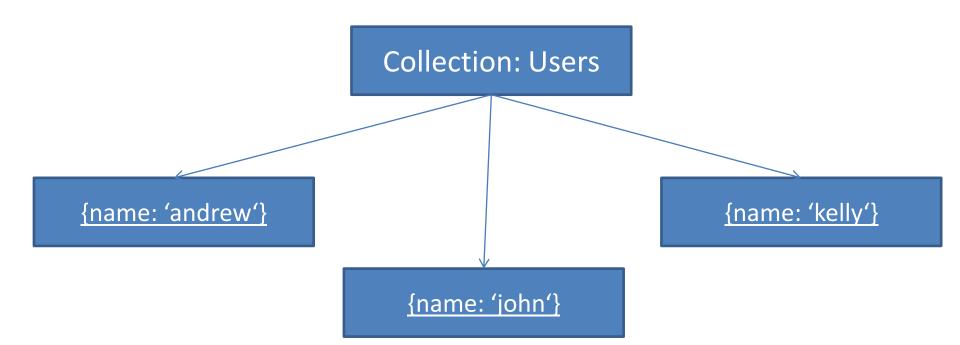

3. Collections

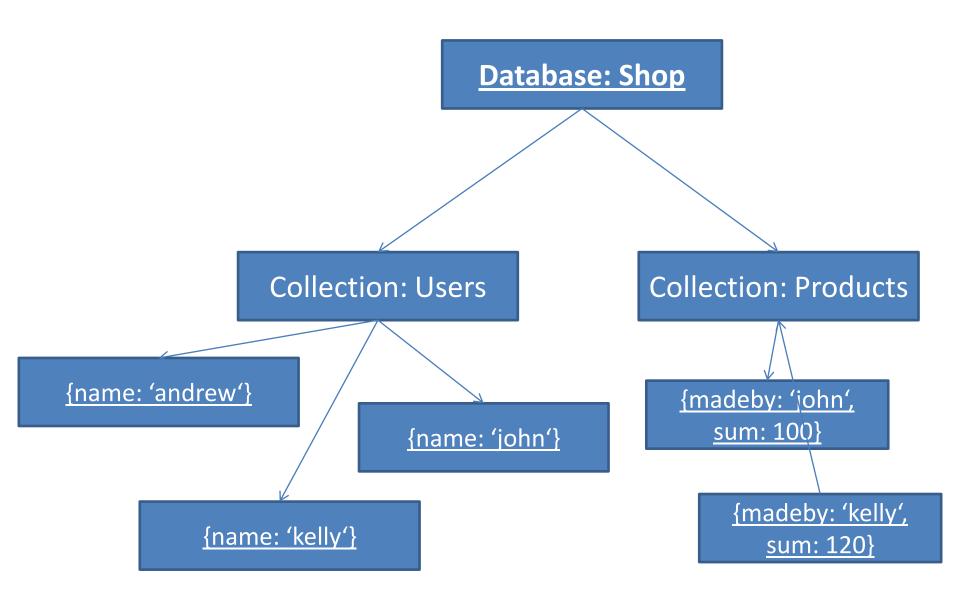

1. Introduction

Biggest difference between SQL and MongoDB

4. SQL vs MongoDB

Biggest difference between SQL and MongoDB

SQL MongoDB

JOINS

REFERENCES

5. Install MongoDB

- sudo apt-get istall –y mongodb-org
- sudo systemctl start mongod
- sudo systemctl status mongodb

6. Data-Types

DATA TYPES



STRING

name: String

{
 name: "John"
}



ARRAY

tags: Array OR

tags: [] {

tags: ["tag1", "tag2"]



NUMBER

likes: Number

{
likes: 5
}



BOOLEAN

published: Boolean

published: true



DATE

timeStamp: Date

{
 timeStamp: ISODate("...")
}



ObjectId

_creator: Schema.ObjectId

{
 _creator: "41239878"
}

1. How do we access the shell?

A: by typing 'mongodb'

B: by typing 'mongo'

C: by loading the browser

D: by typing 'mongo start'

1. How do we access the shell?

A: by typing 'mongodb'

B: by typing 'mongo'

C: by loading the browser

D: by typing 'mongo start'

2. How do we add a new document if the to-beupdated document is not found?

A: \$set

B: \$in

C: upsert=true

D: \$upsert=true

2. How do we add a new document if the to-beupdated document is not found?

A: \$set

B: \$in

C: upsert=true

D: \$upsert=true

3. What command do we use to indicate which database we want to access?

A: use

B: show

C: find

D: list

3. What command do we use to indicate which database we want to access?

A: use

B: show

C: find

D: list

4. What method is used to display our documents in a clean and organized way?

A: insert

B: find

C: pretty

D: clean

E: style

4. What method is used to display our documents in a clean and organized way?

A: insert

B: find

C: pretty

D: clean

E: style

5. Which one of these is not one of the 6 main data types commonly used within the model of our collection?

A: String

B: Boolean

C: Number

D: Date

E: Buffer

F: Array

5. Which one of these is not one of the 6 main data types commonly used within the model of our collection?

A: String

B: Boolean

C: Number

D: Date

E: Buffer

F: Array

Task:

- 1. Create a new database "medialib" that is supposed to save infos about videos and songs. both are saved in the same collection "mediaitem". Find 5 proper keys (title and type is a must, whereas type can either be "movie" or "song") and add 3 songs and 3 movies.
- 2. Write a function listTitles that lists all titles and types of each item in your collection. Therefore, take a look at the collection.forEach() method.