C GO enrichment · molecular function

Nominal mediation candidates; GO p-values use BH correction within each screen and ontology.

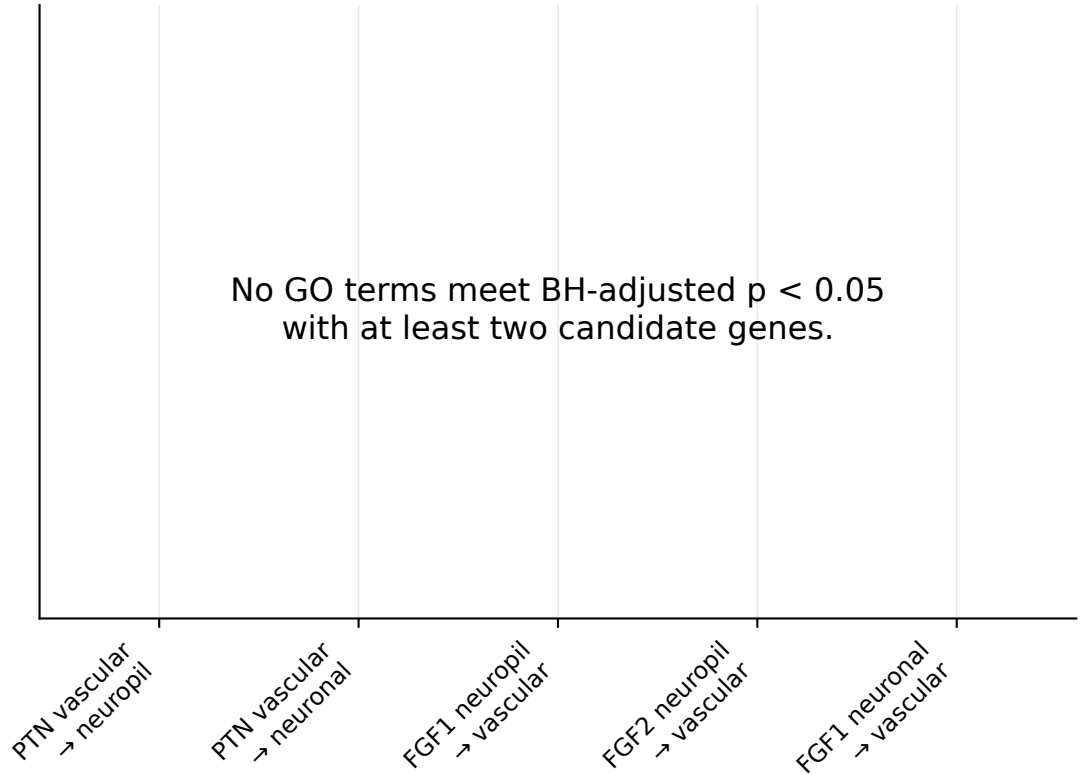

Background: outcome genes passing manuscript and matched-baseline diagnosis p < 0.05 in that screen.
Top three qualifying terms per screen; displayed dots require GO BH p < 0.05 and ≥2 candidate genes.
Separate backgrounds and annotation coverage can change gene-ratio denominators between screens.