



NAME – SOUGATA SAHA

SECTION – A2

ROLL NO – 002311001037

SUBJECT – WEB TECHNOLOGY

TEACHER SIGNATURE:

ASSIGNMENT 1

1. Write a program to display a message when a button is clicked.

Use: #HTML button #JavaScript function #alert() OR text change using DOM

Ans:

q1.html


```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Display Message on Button Click</title>
</head>
<body>
  <h1>Display Message on Button Click</h1>

  <button id="messageBtn">Click Me</button>
  <p id="message"></p>

  <script>
    const messageBtn = document.getElementById('messageBtn');
    const message = document.getElementById('message');

    messageBtn.addEventListener('click', () => {
      message.textContent = 'Welcome! You clicked the button!';
    });
  </script>
</body>
</html>
```


Output:



Display Message on Button Click

Click Me

Welcome! You clicked the button!



Display Message on Button Click

Click Me

2. Write a program to change the text of a paragraph when a button is clicked. Use:

#getElementById()

#innerHTML

Ans:

Q2.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Change Paragraph Text</title>
</head>
<body>
  <h1>Change Paragraph Text on Button Click</h1>

  <p id="paragraph">This is the original text.</p>
```

```

<button id="changeBtn">Change Text</button>

<script>
  const changeBtn = document.getElementById('changeBtn');
  const paragraph = document.getElementById('paragraph');

  changeBtn.addEventListener('click', () => {
    paragraph.innerHTML = 'This text has been changed!';
  });
</script>
</body>
</html>

```


Output:



Change Paragraph Text on Button Click

This text has been changed!

Change Text



Change Paragraph Text on Button Click

This is the original text.

Change Text

3. Write a program to add two numbers using JavaScript and display the result. Use:

#Two input boxes

#Button

#Result display using DOM

Ans:

Q3.html

```

<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Add Two Numbers</title>
</head>
<body>
  <h1>Add Two Numbers</h1>

  <div>
    <label>Number 1:</label>
    <input type="number" id="num1" placeholder="Enter first number" />
  </div>

  <div>
    <label>Number 2:</label>
    <input type="number" id="num2" placeholder="Enter second number" />
  </div>

  <button id="addBtn">Add</button>

  <p id="result"></p>

  <script>
    const num1 = document.getElementById('num1');
    const num2 = document.getElementById('num2');
    const addBtn = document.getElementById('addBtn');
    const result = document.getElementById('result');

```

```


addBtn.addEventListener('click', () => {
    const n1 = parseFloat(num1.value);
    const n2 = parseFloat(num2.value);

    if (isNaN(n1) || isNaN(n2)) {
        result.textContent = 'Please enter valid numbers!';
        result.style.color = 'red';
        return;
    }

    const sum = n1 + n2;
    result.textContent = 'Sum: ' + sum;
    result.style.color = 'green';
});
</script>
</body>
</html>

```

Output:

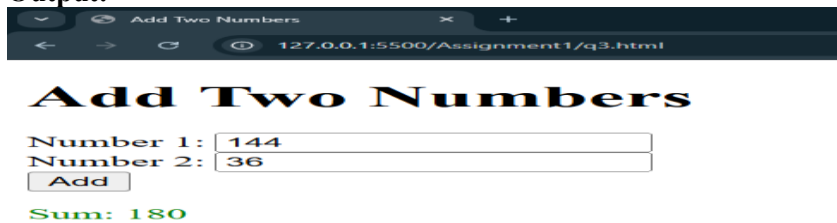

4. Write a program to change the background color of the page on button click. Use: #document.body.style.backgroundColor

Ans:

Q4.html

```

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Change Background Color</title>
</head>
<body>
    <h1>Change Background Color on Button Click</h1>

    <button id="colorBtn">Change Color</button>

    <script>
        const colorBtn = document.getElementById('colorBtn');

        const colors = ['lightblue', 'lightgreen', 'lightyellow', 'lightcoral', 'lightgray', 'lightpink'];
        let colorIndex = 0;

        colorBtn.addEventListener('click', () => {
            document.body.style.backgroundColor = colors[colorIndex];
            colorIndex = (colorIndex + 1) % colors.length;
        });
    </script>
</body>
</html>

```

Output:



5. Write a program to display the current date and time on button click. Use:

#Date() object

#DOM to show output

Ans:

Q5.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Display Current Date and Time</title>
</head>
<body>
  <h1>Display Current Date and Time</h1>


  <button id="dateBtn">Show Date & Time</button>

  <p id="dateTimeDisplay"></p>

  <script>
    const dateBtn = document.getElementById('dateBtn');
    const dateTimeDisplay = document.getElementById('dateTimeDisplay');

    dateBtn.addEventListener('click', () => {
      const currentDateTime = new Date();
      dateTimeDisplay.textContent = 'Current Date and Time: ' + currentDateTime;
    });
  </script>
</body>
</html>
```

Output:



Display Current Date and Time

Show Date & Time

Current Date and Time: Sat Mar 21 2026 19:54:10 GMT+0530 (India Standard Time)

ASSIGNMENT 2

1. Write a program to take a number from an input box and check whether the number is even or odd. Display the result on the webpage without using alert().

Ans:

Q1.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Even or Odd Checker</title>
</head>
<body>
  <h1>Check Even or Odd</h1>

  <input type="number" id="numberInput" placeholder="Enter a number" />
  <button id="checkBtn">Check</button>

  <p id="result"></p>

  <script>
    const numberInput = document.getElementById('numberInput');
    const checkBtn = document.getElementById('checkBtn');
    const result = document.getElementById('result');

    checkBtn.addEventListener('click', () => {
      const num = numberInput.value.trim();


      if (num === "") {
        result.textContent = 'Please enter a number!';
        result.style.color = 'red';
        return;
      }

      const number = parseInt(num);

      if (number % 2 === 0) {
        result.textContent = number + ' is an Even number';
        result.style.color = 'green';
      } else {
        result.textContent = number + ' is an Odd number';
        result.style.color = 'blue';
      }
    });

    numberInput.addEventListener('keypress', (e) => {
      if (e.key === 'Enter') {
        checkBtn.click();
      }
    });
  </script>
</body>
</html>
```

Output:

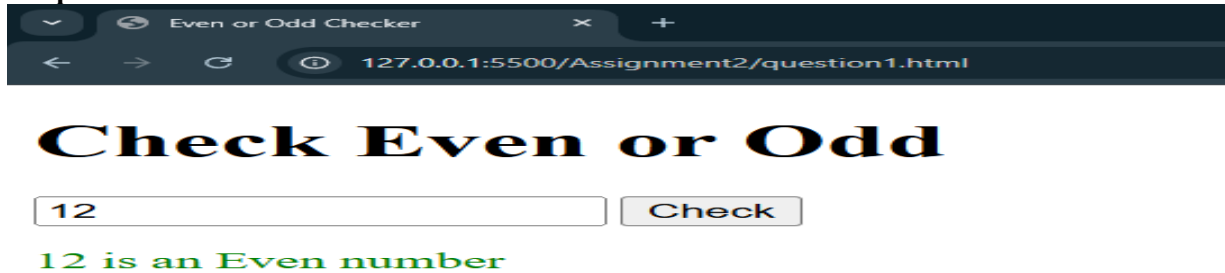

2. Write a program to take a number from the user and display its square and cube when a button is clicked.

Ans:

Q2.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Square and Cube Calculator</title>
</head>
<body>
  <h1>Square and Cube Calculator</h1>

  <input type="number" id="numberInput" placeholder="Enter a number" />
  <button id="calculateBtn">Calculate</button>

  <p id="square"></p>
  <p id="cube"></p>

  <script>
    const numberInput = document.getElementById('numberInput');
    const calculateBtn = document.getElementById('calculateBtn');
    const square = document.getElementById('square');
    const cube = document.getElementById('cube');

    calculateBtn.addEventListener('click', () => {
      const num = numberInput.value.trim();

      if (num === "") {
        square.textContent = 'Please enter a number!';
        cube.textContent = "";
        return;
      }

      Let number = parseInt(num);
      const squareValue = number * number;
      const cubeValue = number * number * number;

      square.textContent = 'Square of ' + number + ' is ' + squareValue;
      cube.textContent = 'Cube of ' + number + ' is ' + cubeValue;
    });


    numberInput.addEventListener('keypress', (e) => {
      if (e.key === 'Enter') {
```

```

        calculateBtn.click();
    }
});
</script>
</body>
</html>

```

Output:



Square and Cube Calculator

Square of 12 is 144

Cube of 12 is 1728

3. Write a program to count how many times a button is clicked and display the count dynamically on the webpage.

Ans:

Q3.html

```

<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Button Click Counter</title>
</head>
<body>
  <h1>Button Click Counter</h1>

  <button id="clickBtn">Click Me</button>
  <p>Button Clicks: <span id="clickCount">0</span></p>


  <script>
    const clickBtn = document.getElementById('clickBtn');
    const clickCount = document.getElementById('clickCount');

    let count = 0;

    clickBtn.addEventListener('click', () => {
      count++;
      clickCount.textContent = count;
    });
  </script>
</body>
</html>

```

Output:



Button Click Counter

Button Clicks: 6

4. Write a program to change the background color of the page randomly every time a button is clicked.

Ans:

Q4.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Random Background Color</title>
</head>
<body>
  <h1>Random Background Color Generator</h1>


  <button id="colorBtn">Change Color</button>

  <script>
    const colorBtn = document.getElementById('colorBtn');

    function getRandomColor() {
      const letters = '0123456789ABCDEF';
      let color = '#';
      for (let i = 0; i < 6; i++) {
        color += letters[Math.floor(Math.random() * 16)];
      }
      return color;
    }

    colorBtn.addEventListener('click', () => {
      const randomColor = getRandomColor();
      document.body.style.backgroundColor = randomColor;
    });
  </script>
</body>
</html>
```

Output:

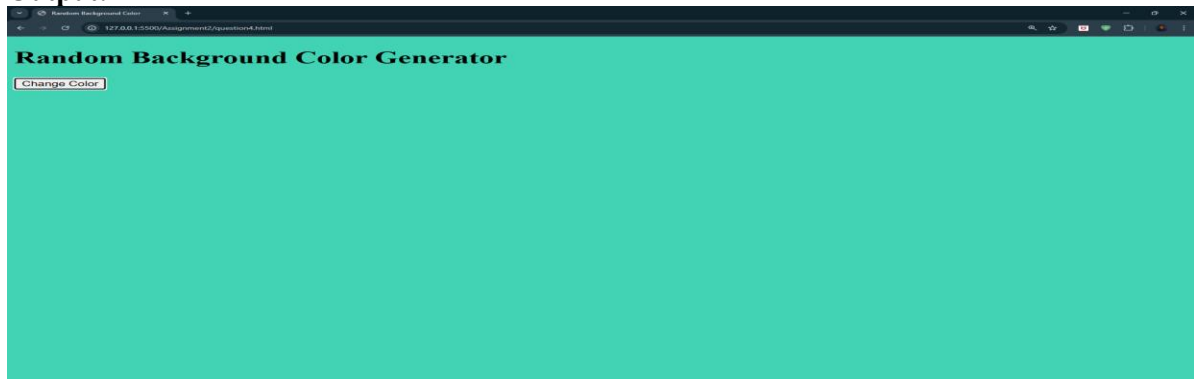

5. Write a program to display the current date, time, and day (Monday, Tuesday, etc.) on button click.

Ans:

Q5.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
```

```

<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Date Time Day Displayer</title>
</head>
<body>
  <h1>Display Current Date, Time, and Day</h1>

  <button id="displayBtn">Show Date & Time</button>

  <div id="dateTimeDisplay" style="margin-top: 20px; padding: 15px; border: 1px solid #ccc;">
    <p id="date"></p>
    <p id="time"></p>
    <p id="day"></p>
  </div>

  <script>
    const displayBtn = document.getElementById('displayBtn');
    const dateDisplay = document.getElementById('date');
    const timeDisplay = document.getElementById('time');
    const dayDisplay = document.getElementById('day');

    const days = ['Sunday', 'Monday', 'Tuesday', 'Wednesday', 'Thursday', 'Friday', 'Saturday'];

    displayBtn.addEventListener('click', () => {
      const currentDate = new Date();

      const date = currentDate.toLocaleDateString();
      const time = currentDate.toLocaleTimeString();
      const day = days[currentDate.getDay()];

      dateDisplay.textContent = 'Date: ' + date;
      timeDisplay.textContent = 'Time: ' + time;
      dayDisplay.textContent = 'Day: ' + day;
    });
  </script>
</body>
</html>

```

Output:



Display Current Date, Time, and Day

Show Date & Time

Date: 3/21/2026
Time: 8:01:32 PM
Day: Saturday

6. Write a program to take marks of three subjects from input boxes and display the total marks, average, and result (Pass/Fail).

Ans:

Q6.html

```

<!DOCTYPE html>
<html lang="en">
<head>

```

```

<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Marks Calculator</title>
</head>
<body>
  <h1>Marks Calculator</h1>

  <div>
    <label>Subject 1 Marks:</label>
    <input type="number" id="subject1" placeholder="Enter marks" />
  </div>

  <div>
    <label>Subject 2 Marks:</label>
    <input type="number" id="subject2" placeholder="Enter marks" />
  </div>

  <div>
    <label>Subject 3 Marks:</label>
    <input type="number" id="subject3" placeholder="Enter marks" />
  </div>

  <button id="calculateBtn">Calculate</button>

  <div id="result" style="margin-top: 20px; padding: 15px; border: 1px solid #ccc;"></div>

  <script>
    const subject1 = document.getElementById('subject1');
    const subject2 = document.getElementById('subject2');
    const subject3 = document.getElementById('subject3');
    const calculateBtn = document.getElementById('calculateBtn');
    const result = document.getElementById('result');

    calculateBtn.addEventListener('click', () => {
      const s1 = parseFloat(subject1.value);
      const s2 = parseFloat(subject2.value);
      const s3 = parseFloat(subject3.value);


      if (isNaN(s1) || isNaN(s2) || isNaN(s3)) {
        result.innerHTML = '<p style="color:red;">Please enter all marks!</p>';
        return;
      }

      const total = s1 + s2 + s3;
      const average = total / 3;
      const resultStatus = average >= 40 ? 'Pass' : 'Fail';

      result.innerHTML = '<p>Total Marks: ' + total + '</p>' +
        '<p>Average: ' + average.toFixed(2) + '</p>' +
        '<p>Result: <strong>' + resultStatus + '</strong></p>';
    });
  </script>
</body>
</html>

```

Output:

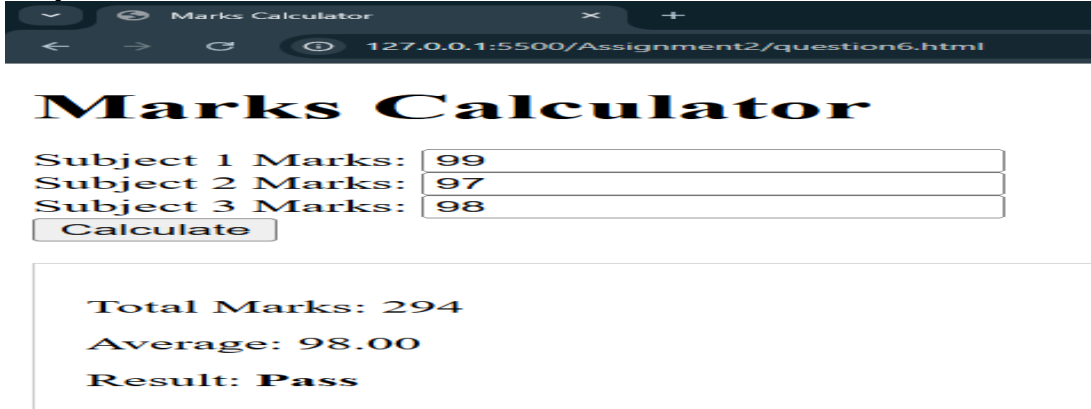

Marks Calculator

Subject 1 Marks:	99
Subject 2 Marks:	97
Subject 3 Marks:	98

Total Marks: 294
Average: 98.00
Result: Pass

7. Write a program to show or hide a paragraph when a button is clicked (toggle functionality).

Ans:

Q7.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Paragraph Toggle</title>
</head>
<body>
  <h1>Show/Hide Paragraph</h1>

  <button id="toggleBtn">Show</button>

  <p id="paragraph" style="display:none; padding: 15px; background-color: #f0f0f0; margin-top: 20px;">
    Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.
  </p>

  <script>
    const toggleBtn = document.getElementById('toggleBtn');
    const paragraph = document.getElementById('paragraph');

    let isVisible = false;

    toggleBtn.addEventListener('click', () => {
      isVisible = !isVisible;

      if (isVisible) {
        paragraph.style.display = 'block';
        toggleBtn.textContent = 'Hide';
      } else {
        paragraph.style.display = 'none';
        toggleBtn.textContent = 'Show';
      }
    });
  </script>
</body>
</html>
```

Output:



8. Write a program to validate a text box input and display a warning message if the input field is left empty.

Ans:

Q8.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Text Validation</title>
</head>
<body>
  <h1>Text Input Validation</h1>

  <input type="text" id="textInput" placeholder="Enter your name" />
  <button id="submitBtn">Submit</button>

  <p id="warning" style="color:red; display:none;">Please fill in the text field!</p>
  <p id="success" style="color:green; display:none;"></p>

  <script>
    const textInput = document.getElementById('textInput');
    const submitBtn = document.getElementById('submitBtn');
    const warning = document.getElementById('warning');
    const success = document.getElementById('success');


    submitBtn.addEventListener('click', () => {
      const inputValue = textInput.value.trim();

      if (inputValue === "") {
        warning.style.display = 'block';
        success.style.display = 'none';
      } else {
        warning.style.display = 'none';
        success.textContent = 'Welcome, ' + inputValue + '!';
        success.style.display = 'block';
        textInput.value = "";
      }
    });

    textInput.addEventListener('keypress', (e) => {
      if (e.key === 'Enter') {
        submitBtn.click();
      }
    });
  </script>
</body>
```

</html>

Output:



Text Input Validation

Welcome, sougata saha!

9. Write a program to display the largest number among three numbers entered by the user.

Ans:

Q9.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Largest Number Finder</title>
</head>
<body>
  <h1>Find Largest Number</h1>

  <div>
    <label>Number 1:</label>
    <input type="number" id="num1" placeholder="Enter first number" />
  </div>

  <div>
    <label>Number 2:</label>
    <input type="number" id="num2" placeholder="Enter second number" />
  </div>

  <div>
    <label>Number 3:</label>
    <input type="number" id="num3" placeholder="Enter third number" />
  </div>

  <button id="findBtn">Find Largest</button>

  <p id="result"></p>

  <script>
    const num1 = document.getElementById('num1');
    const num2 = document.getElementById('num2');
    const num3 = document.getElementById('num3');
    const findBtn = document.getElementById('findBtn');
    const result = document.getElementById('result');

    findBtn.addEventListener('click', () => {
      const n1 = parseFloat(num1.value);
      const n2 = parseFloat(num2.value);
```

```

const n3 = parseFloat(num3.value);

if (isNaN(n1) || isNaN(n2) || isNaN(n3)) {
    result.textContent = 'Please enter all three numbers!';
    result.style.color = 'red';
    return;
}

let largest = n1;


if (n2 > largest) {
    largest = n2;
}

if (n3 > largest) {
    largest = n3;
}

result.textContent = 'The largest number is: ' + largest;
result.style.color = 'green';
});
</script>
</body>
</html>

```

Output:

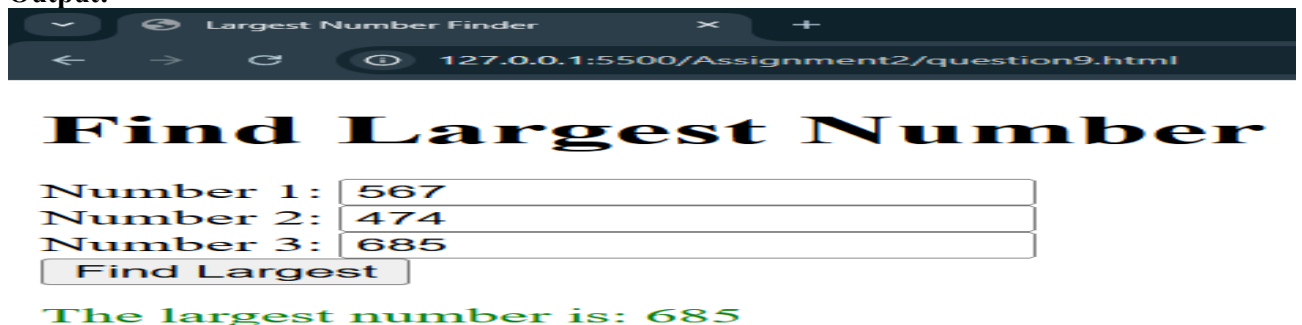

ASSIGNMENT 3

Q1. Write an HTML page including required JavaScript that:

- Takes a number from a text field
- Accepts numbers only in the range 0 to 999
- Displays the number in words
- Does not accept:
 - Four or more digit numbers
 - Alphabets
 - Special characters

Ans:

Q1.html

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Number to Words Converter</title>

  <style>

    body { padding: 20px; max-width: 500px; margin: 0 auto; }

    input { padding: 8px; width: 200px; }

    button { padding: 8px 15px; cursor: pointer; }

  </style>

</head>

<body>

  <h1>Number to Words Converter</h1>

  <p>Enter a number between 0-999:</p>

  <input type="text" id="numInput" placeholder="Enter number" maxlength="3" />

  <button id="convertBtn">Convert</button>

  <p id="result"></p>

  <script>

    const numInput = document.getElementById('numInput');

    const convertBtn = document.getElementById('convertBtn');

    const result = document.getElementById('result');

    const ones = ['', 'One', 'Two', 'Three', 'Four', 'Five', 'Six', 'Seven', 'Eight', 'Nine'];
```

```
const teens = ['Ten', 'Eleven', 'Twelve', 'Thirteen', 'Fourteen', 'Fifteen', 'Sixteen',
'Seventeen', 'Eighteen', 'Nineteen'];

const tens = ['', ' ', 'Twenty', 'Thirty', 'Forty', 'Fifty', 'Sixty', 'Seventy', 'Eighty', 'Ninety'];

numInput.addEventListener('input', (e) => {

    e.target.value = e.target.value.replace(/^[^0-9]/g, "");

    if (e.target.value.length > 3) {

        e.target.value = e.target.value.slice(0, 3);

    }

});

convertBtn.addEventListener('click', () => {

    const num = numInput.value.trim();

    if (num === "") {

        result.textContent = 'Please enter a number!';

        result.style.color = 'red';

        return;

    }

    Let number = parseInt(num);

    if (number > 999) {

        result.textContent = 'Please enter a number between 0-999 only!';

        result.style.color = 'red';

        return;

    }

    if (number === 0) {

        result.textContent = 'Zero';

        result.style.color = 'green';

        return;

    }

});
```

```
}

let words = "";

if (number >= 100) {

    words += ones[Math.floor(number / 100)] + ' Hundred ';

    number = number % 100;

}

if (number >= 20) {

    words += tens[Math.floor(number / 10)];

    if (number % 10 > 0) {

        words += ' ' + ones[number % 10];

    }

} else if (number >= 10) {

    words += teens[number - 10];

} else if (number > 0) {

    words += ones[number];

}

result.textContent = words.trim();

result.style.color = 'green';

});

</script>

</body>

</html>
```

Number to Words Converter

Enter a number between 0-999:

245	Convert
-----	---------

Two Hundred Forty Five

Q2. Design the following static web pages required for an Online Book Store:

a) Home Page

- **Must contain three frames**

b) Login Page

c) Catalogue Page

- **Display details of all available books**
- **Use a table to show:**
 - **Book Name**
 - **Author**
 - **Price**

d) Registration Page

Ans:

Q2_catalogue.html:

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="UTF-8">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<title>Online Book Store - Catalogue</title>
```

```
<style>body{padding:10px;margin:0}.nav{background:#555;padding:5px;text-align:center;margin-bottom:10px}.nav a{color:#fff;margin:0 8px;text-decoration:none;display:inline-block;padding:4px 8px;font-size:.9em}.nav a:hover{background:#333}.container{max-width:1200px;margin:0 auto}h1{text-align:center;margin:5px 0}.search-filter{margin:10px
```

```
0;padding:8px;background:#f9f9f9}.search-filter
input{padding:6px;width:250px;border:1px solid #ddd;font-size:.9em}.search-filter
button{padding:6px 12px;background:#333;color:#fff;border:none;cursor:pointer;margin-
left:5px;font-size:.9em}.search-filter select{padding:6px;margin-left:5px;border:1px solid
#ddd;font-size:.9em}table{width:100%;border-collapse:collapse;margin-
top:10px;background:#fff;font-size:.9em}th{background:#333;color:#fff;padding:8px;text-
align:left}td{padding:8px;border-bottom:1px solid #ddd}.price{color:#e74c3c;font-
weight:bold}tr:hover{background:#f5f5f5}.rating{color:#f39c12;font-size:.85em}.action-
btn{background:#27ae60;color:#fff;padding:4px 8px;border:none;cursor:pointer;font-
size:.85em}.action-btn:hover{background:#229954}.genre-badge{display:inline-
block;background:#ddd;padding:2px 5px;font-size:.75em;border-radius:2px}.stats{text-
align:center;margin:10px 0;padding:8px;background:#f9f9f9;font-size:.9em}</style>
```

```
</head>
```

```
<body>
```

```
<div class="nav">
```

```
<a href="q2_home.html">Home</a> <a href="q2_login.html">Login</a> <a
href="q2_registration.html">Register</a>
```

```
</div>
```

```
<div class="container">
```

```
<h1>📖 Book Catalogue</h1>
```

```
<div class="search-filter">
```

```
<input type="text" id="searchBox" placeholder="Search books..." />
```

```
<button onclick="filterBooks()">Search</button>
```

```
<select id="genreFilter" onchange="filterBooks()">
```

```
<option value="">All</option>
```

```
<option value="Classic">Classic</option>
```

```
<option value="Dystopian">Dystopian</option>
```

```
<option value="Romance">Romance</option>
```

```
<option value="Adventure">Adventure</option>
```

```
</select>
```

```
</div>
```

<div class="stats">

<p>Books: <strong id="totalBooks">8 | Sort: <select
onchange="sortBooks(this.value)" style="padding:4px;font-size:.9em"><option
value="">Default</option><option value="price-low">Price: Low</option><option
value="price-high">Price: High</option><option value="title">Title A-
Z</option></select></p>

</div>

<table id="bookTable">

<thead>

<tr>

<th>Book Title</th>

<th>Author</th>

<th>Genre</th>

<th>Price</th>

<th>Rating</th>

<th>Action</th>

</tr>

</thead>

<tbody>

<tr>

<td>The Great Gatsby</td>

<td>F. Scott Fitzgerald</td>

<td>Classic</td>

<td class="price">Rs. 299</td>

<td class="rating">★★★★★ (4.5)</td>

<td><button class="action-btn" onclick="addToCart('The Great Gatsby',
299)">Add Cart</button></td>

```

</tr>

<tr>

  <td><strong>To Kill a Mockingbird</strong></td>

  <td>Harper Lee</td>

  <td><span class="genre-badge">Classic</span></td>

  <td class="price">Rs. 349</td>

  <td class="rating">★★★★★ (4.7)</td>

  <td><button class="action-btn" onclick="addToCart('To Kill a Mockingbird',
349)">Add Cart</button></td>

</tr>

<tr>

  <td><strong>1984</strong></td>

  <td>George Orwell</td>

  <td><span class="genre-badge">Dystopian</span></td>

  <td class="price">Rs. 399</td>

  <td class="rating">★★★★☆ (4.4)</td>

  <td><button class="action-btn" onclick="addToCart('1984', 399)">Add
Cart</button></td>

</tr>

<tr>

  <td><strong>Pride and Prejudice</strong></td>

  <td>Jane Austen</td>

  <td><span class="genre-badge">Romance</span><span class="genre-
badge">Classic</span></td>

  <td class="price">Rs. 279</td>

  <td class="rating">★★★★★ (4.6)</td>

```

```
        <td><button class="action-btn" onclick="addToCart('Pride and Prejudice',
279)">Add Cart</button></td>
```

```
    </tr>
```

```
    <tr>
```

```
        <td><strong>The Catcher in the Rye</strong></td>
```

```
        <td>J.D. Salinger</td>
```

```
        <td><span class="genre-badge">Classic</span></td>
```

```
        <td class="price">Rs. 319</td>
```

```
        <td class="rating">★★★★☆ (4.0)</td>
```

```
        <td><button class="action-btn" onclick="addToCart('The Catcher in the Rye',
319)">Add Cart</button></td>
```

```
    </tr>
```

```
    <tr>
```

```
        <td><strong>Brave New World</strong></td>
```

```
        <td>Aldous Huxley</td>
```

```
        <td><span class="genre-badge">Dystopian</span></td>
```

```
        <td class="price">Rs. 379</td>
```

```
        <td class="rating">★★★★☆ (4.3)</td>
```

```
        <td><button class="action-btn" onclick="addToCart('Brave New World',
379)">Add Cart</button></td>
```

```
    </tr>
```

```
    <tr>
```

```
        <td><strong>The Hobbit</strong></td>
```

```
        <td>J.R.R. Tolkien</td>
```

```
        <td><span class="genre-badge">Adventure</span></td>
```

```
        <td class="price">Rs. 429</td>
```

```

        <td class="rating">★★★★★ (4.8)</td>

        <td><button class="action-btn" onclick="addToCart('The Hobbit', 429)">Add
        Cart</button></td>

    </tr>

    <tr>

        <td><strong>Wuthering Heights</strong></td>

        <td>Emily Brontë</td>

        <td><span class="genre-badge">Classic</span><span class="genre-
        badge">Romance</span></td>

        <td class="price">Rs. 289</td>

        <td class="rating">★★★★☆ (4.2)</td>

        <td><button class="action-btn" onclick="addToCart('Wuthering Heights',
        289)">Add Cart</button></td>

    </tr>

</tbody>

</table>

</div>

<script>

```

```

function addToCart(b,p){alert(b+' added! (Rs. '+p+')');}

```

```

function filterBooks(){const
s=document.getElementById('searchBox').value.toLowerCase(),g=document.getElementById('genreFilter').value;document.querySelectorAll('#bookTable tbody tr').forEach(e=>{const
t=e.cells[0].textContent.toLowerCase(),r=e.cells[1].textContent.toLowerCase();e.style.display=(t.includes(s)||r.includes(s))&&(!g||e.cells[2].textContent.includes(g))?'':'none'}})

```

```

function sortBooks(s){const
t=document.getElementById('bookTable'),r=Array.from(t.querySelectorAll('tbody
tr'));r.sort((t,e)=>{'price-low'===s?parseInt(t.cells[3].textContent.replace(/^[^0-9]/g,"))-
parseInt(e.cells[3].textContent.replace(/^[^0-9]/g,")):(('price-
high'===s&&(parseInt(e.cells[3].textContent.replace(/^[^0-9]/g,"))-
parseInt(t.cells[3].textContent.replace(/^[^0-9]/g,"))))},r.forEach(e=>t.querySelector('tbody').appendChild(e))}

```

```
</script>

</body>

</html>
```

Q2_home.html

```
<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8">

<meta name="viewport" content="width=device-width, initial-scale=1.0">

<title>Online Book Store - Home</title>

<style>body{margin:0;padding:0}.header{background:#333;color:#fff;padding:10px;text-align:center}.nav{background:#555;padding:5px;text-align:center}.nav a{color:#fff;margin:0 10px;text-decoration:none;display:inline-block;padding:5px 10px;font-size:.9em}.nav a:hover{background:#333}.container{max-width:1200px;margin:10px auto;padding:10px}.featured{display:grid;grid-template-columns:repeat(auto-fit,minmax(200px,1fr));gap:10px;margin:15px 0}.book-card{background:#fff;padding:10px;border:1px solid #ddd;font-size:.95em}.genre-section{margin:15px 0}.genre-section h3{background:#f0f0f0;padding:5px;margin:5px 0;font-size:1em}button{background:#333;color:#fff;padding:8px 15px;border:none;cursor:pointer;font-size:.9em}button:hover{background:#555}.footer{background:#333;color:#fff;padding:10px;text-align:center;margin-top:20px;font-size:.9em}</style>

</head>

<body>

<div class="header">

<h1><img alt="book icon" data-bbox="208 765 228 778" style="vertical-align: middle;"/> Online Book Store</h1>

<p>Your gateway to millions of books</p>

</div>

<div class="nav">
```

[Home](q2_home.html)

[Browse Books](q2_catalogue.html)

[Login](q2_login.html)

[Register](q2_registration.html)

Welcome to Our Book Store!

Discover thousands of books across all genres. From bestsellers to classics, find your next favorite read.

 Featured Books

The Great Gatsby

Author: F. Scott Fitzgerald

Genre: Classic Fiction

Price: Rs. 299

A masterpiece of American literature exploring themes of wealth and the American Dream.

Add to Cart

1984

<p>Author: George Orwell</p>

<p>Genre: Dystopian Fiction</p>

<p>Price: Rs. 399</p>

<p style="color: #666; font-size: 0.9em;">A gripping political thriller set in a totalitarian future society.</p>

<button onclick="alert('Please login to add to cart')">Add to Cart</button>

</div>

<div class="book-card">

<h4>To Kill a Mockingbird</h4>

<p>Author: Harper Lee</p>

<p>Genre: Classic Fiction</p>

<p>Price: Rs. 349</p>

<p style="color: #666; font-size: 0.9em;">A powerful story about racial injustice and childhood innocence in the American South.</p>

<button onclick="alert('Please login to add to cart')">Add to Cart</button>

</div>

<div class="book-card">

<h4>Pride and Prejudice</h4>

<p>Author: Jane Austen</p>

<p>Genre: Romance, Classic</p>

<p>Price: Rs. 279</p>

<p style="color: #666; font-size: 0.9em;">An enduring romance novel about the witty Elizabeth Bennet and the proud Mr. Darcy.</p>

<button onclick="alert('Please login to add to cart')">Add to Cart</button>

</div>

</div>

</div>

<div class="genre-section">

<h3> ✨ Why Choose Us?</h3>

<ul style="line-height: 1.8;">

Wide Selection: Over 100,000 books across all genres and categories

Best Prices: Competitive pricing with frequent discounts and offers

Fast Delivery: Quick shipping to all locations with tracking

Easy Returns: 30-day return policy for all purchases

Secure Payment: Multiple payment options with full security

Expert Reviews: Book recommendations and customer ratings

</div>

<div class="genre-section">

<h3> 🎯 Get Started</h3>

<p>Ready to start reading? Browse our catalogue or create an account to enjoy exclusive deals and personalized recommendations.</p>

</div>

</div>

```
<div class="footer">
```

```
<p>&copy; 2024 Online Book Store. All rights reserved.</p>
```

```
<p>For support, email us at support@bookstore.com</p>
```

```
</div>
```

```
</body>
```

```
</html>
```

Q2_login.html

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="UTF-8">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<title>Online Book Store - Login</title>
```

```
<style>body{padding:10px;margin:0}.nav{background:#555;padding:5px;text-align:center;margin-bottom:10px}.nav a{color:#fff;margin:0 8px;text-decoration:none;display:inline-block;padding:4px 8px;font-size:.9em}.nav a:hover{background:#333}.container{max-width:380px;margin:15px auto;padding:15px;border:1px solid #ddd}h1{text-align:center;margin:5px 0;font-size:1.2em}label{display:block;margin:8px 0 3px;font-weight:bold;font-size:.9em}input{width:100%;padding:6px;margin-bottom:8px;border:1px solid #ddd;box-sizing:border-box;font-size:.9em}.checkbox-group{display:flex;align-items:center;margin-bottom:8px}.checkbox-group input{width:auto;margin-right:8px}.checkbox-group label{margin:0;font-size:.9em}button{width:100%;padding:8px;background:#333;color:#fff;border:none;cursor:pointer;font-weight:bold;font-size:.9em}button:hover{background:#555}.demo-btn{background:#27ae60;margin-top:5px}.demo-btn:hover{background:#229954}p{text-align:center;margin:10px 0;font-size:.9em}a{color:#333;text-decoration:none}a:hover{text-decoration:underline}.error{color:#e74c3c;font-size:11px;margin-top:3px;display:none}.success{color:#27ae60;font-size:11px;margin-top:3px;display:none}</style>
```

```
</head>
```

```
<body>
```

```
<div class="nav">
```

```
<a href="q2_home.html">Home</a> <a href="q2_catalogue.html">Browse</a> <a href="q2_registration.html">Register</a>

</div>

<div class="container">

<h1>Login</h1>

<p style="text-align:center;color:#666;margin-bottom:10px">Access your account</p>

<form id="loginForm" onsubmit="handleLogin(event)">

<label for="email">Email:</label>

<input type="email" id="email" placeholder="email@example.com" required />

<div class="error" id="emailError">Invalid email</div>

<label for="password">Password:</label>

<input type="password" id="password" placeholder="Password" required />

<div class="error" id="passwordError">Password required</div>

<div class="checkbox-group">

<input type="checkbox" id="remember" />

<label for="remember">Remember me</label>

</div>

<button type="submit">Login</button>

<button type="button" class="demo-btn" onclick="useDemoCredentials()">Demo Login</button>

</form>

<div class="success" id="successMsg">Success! Redirecting...</div>

<p style="margin-top:12px"><a href="#" onclick="alert('Reset link sent')">Forgot password?</a></p>

<p style="border-top:1px solid #ddd;padding-top:10px;margin-top:10px">

New user? <a href="q2_registration.html"><strong>Register</strong></a>

</p>
```

</div>

<script>

```
function handleLogin(e){e.preventDefault();const
s=document.getElementById('email').value,a=document.getElementById('password').value,t
=document.getElementById('successMsg');return
s&&a?(s.includes('@')?(document.getElementById('emailError').style.display='none',docume
nt.getElementById('passwordError').style.display='none',t.style.display='block',setTimeout(()
=>{alert('Welcome
'+s),document.getElementById('loginForm').reset(),t.style.display='none'},1500),void
0):(document.getElementById('emailError').style.display='block',void
0)):(s||document.getElementById('emailError').style.display='block',a||document.getElementB
yId('passwordError').style.display='block',void 0)}
```

function

```
useDemoCredentials(){document.getElementById('email').value='demo@bookstore.com',doc
ument.getElementById('password').value='demo123',alert('Demo: Click Login')}
```

```
document.getElementById('email').addEventListener('focus',()=>{document.getElementByI
d('emailError').style.display='none'}),document.getElementById('password').addEventListene
r('focus',()=>{document.getElementById('passwordError').style.display='none'});
```

</script>

</body>

</html>

Q3_registration.html

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8">

<meta name="viewport" content="width=device-width, initial-scale=1.0">

<title>Online Book Store - Registration</title>

```
<style>body{padding:10px;margin:0}.nav{background:#555;padding:5px;text-
align:center;margin-bottom:10px}.nav a{color:#fff;margin:0 8px;text-
decoration:none;display:inline-block;padding:4px 8px;font-size:.9em}.nav
a:hover{background:#333}.container{max-width:500px;margin:10px
auto;padding:15px;border:1px solid #ddd}h1{text-align:center;margin:5px 0;font-
```

```

size:1.2em}.info-text{text-align:center;color:#666;margin-bottom:10px;font-size:.9em}.form-
row{display:grid;grid-template-columns:1fr 1fr;gap:8px}label{display:block;margin:8px 0
3px;font-weight:bold;font-size:.9em}input,textarea,select{width:100%;padding:6px;margin-
bottom:8px;border:1px solid #ddd;box-sizing:border-box;font-size:.9em}.form-row
input{margin-
bottom:0}button{width:100%;padding:8px;background:#333;color:#fff;border:none;cursor:
pointer;font-weight:bold;font-
size:.9em}button:hover{background:#555}.error{color:#e74c3c;font-size:11px;margin-
top:3px;display:none}.success{display:none;background:#d4edda;color:#155724;padding:8p
x;border-radius:3px;margin-bottom:10px;text-align:center;font-size:.9em}p{text-
align:center;margin:8px 0;font-size:.9em}a{color:#333;text-decoration:none}a:hover{text-
decoration:underline}.password-strength{margin-top:3px;padding:3px;border-
radius:2px;font-size:11px}.strength-weak{background:#ffcccc;color:#c92a2a}.strength-
medium{background:#fff3cd;color:#856404}.strength-
strong{background:#d4edda;color:#155724}textarea{resize:vertical}</style>

```

```
</head>
```

```
<body>
```

```
<div class="nav">
```

```
<a href="q2_home.html">Home</a> <a href="q2_login.html">Login</a> <a
href="q2_catalogue.html">Browse</a>
```

```
</div>
```

```
<div class="container">
```

```
<h1>Create Account</h1>
```

```
<p class="info-text">Join to get exclusive deals</p>
```

```
<div class="success" id="successMsg">
```

```
✓ Success! <a href="q2_login.html" style="color:#155724;font-weight:bold">Login</a>
```

```
</div>
```

```
<form id="registrationForm" onsubmit="handleRegistration(event)">
```

```
<div class="form-row">
```

```
<div><label for="firstname">First Name:</label><input type="text" id="firstname"
placeholder="John" required /><div class="error" id="fnameError">Required</div></div>
```

```
<div><label for="lastname">Last Name:</label><input type="text" id="lastname"
placeholder="Doe" required /><div class="error" id="lnameError">Required</div></div>
```

```
</div>
```

<label for="email">Email:</label>

<input type="email" id="email" placeholder="email@example.com" required />

<div class="error" id="emailError">Invalid email</div>

<label for="phone">Phone:</label>

<input type="tel" id="phone" placeholder="10-digit" maxlength="10" required />

<div class="error" id="phoneError">10 digits required</div>

<label for="country">Country:</label>

<select id="country" required>

<option value="">Select</option>

<option value="India">India</option>

<option value="USA">USA</option>

<option value="UK">UK</option>

<option value="Canada">Canada</option>

<option value="Australia">Australia</option>

</select>

<label for="address">Address:</label>

<textarea id="address" rows="2" placeholder="Your address" required></textarea>

<div class="error" id="addressError">Required</div>

<label for="password">Password:</label>

<input type="password" id="password" placeholder="Min 8 chars" required
onkeyup="checkPasswordStrength()" />

<div class="error" id="passwordError">Min 8 chars</div>

<div class="password-strength" id="strengthIndicator" style="display:none"></div>

<label for="confirm">Confirm:</label>

<input type="password" id="confirm" placeholder="Re-enter" required />

<div class="error" id="confirmError">No match</div>

```
<label><input type="checkbox" id="terms" required /> I agree to Terms</label>
```

```
<div class="error" id="termsError">Required</div>
```

```
<button type="submit">Create Account</button>
```

```
</form>
```

```
<p style="border-top:1px solid #ddd;padding-top:10px;margin-top:10px">
```

```
Have account? <a href="q2_login.html"><strong>Login</strong></a>
```

```
</p>
```

```
</div>
```

```
<script>
```

```
function checkPasswordStrength(){const
s=document.getElementById('password').value,t=document.getElementById('strengthIndicat
or');let e='Weak',d='strength-weak';s.length>=8&&(e='Medium',d='strength-
medium'),s.length>=12&&/[A-Z]/.test(s)&&/[0-9]/.test(s)&&(e='Strong',d='strength-
strong'),t.textContent='Strength: '+e,t.className='password-strength
'+d,t.style.display='block'}
```


```
function handleRegistration(e){e.preventDefault();const
s=document.getElementById('firstname').value.trim(),t=document.getElementById('lastname'
).value.trim(),n=document.getElementById('email').value.trim(),r=document.getElementById
('phone').value.trim(),a=document.getElementById('address').value.trim(),o=document.getEl
ementById('password').value,i=document.getElementById('confirm').value,d=document.getEl
ementById('terms').checked;let
l=!0;s?(document.getElementById('fnameError').style.display='none',l=!1):(document.getElem
entById('fnameError').style.display='block',l=!1),t?(document.getElementById('lnameError').
style.display='none',l=!1):(document.getElementById('lnameError').style.display='block',l=!1),
n&&n.includes('@')?(document.getElementById('emailError').style.display='none',l=!1):(docu
ment.getElementById('emailError').style.display='block',l=!1),/^\\d{10}$/.test(r)?(document.g
etElementById('phoneError').style.display='none',l=!1):(document.getElementById('phoneErro
r').style.display='block',l=!1),a?(document.getElementById('addressError').style.display='non
e',l=!1):(document.getElementById('addressError').style.display='block',l=!1),o.length>=8?(do
cument.getElementById('passwordError').style.display='none',l=!1):(document.getElementById
('passwordError').style.display='block',l=!1),o===i?(document.getElementById('confirmErr
or').style.display='none',l=!1):(document.getElementById('confirmError').style.display='block',
l=!1),d?(document.getElementById('termsError').style.display='none',l=!1):(document.getEle
mentById('termsError').style.display='block',l=!1),l&&(document.getElementById('successM
sg').style.display='block',document.getElementById('registrationForm').style.display='none',s
etTimeout(=>{window.location.href='q2_login.html'},3e3))}
```

```
</script>
```

</body>

</html>

Output:

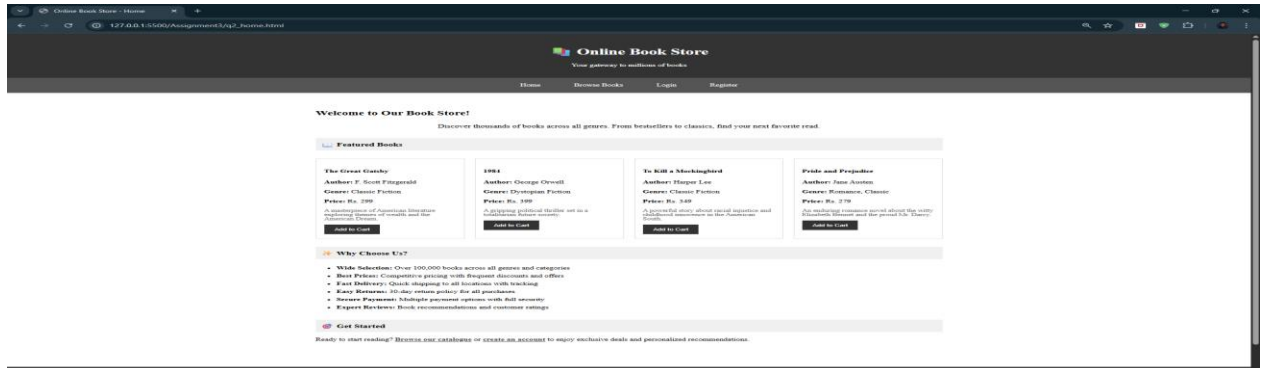

Q3. Create a web page to display your Class Time Table using:

- **HTML table**
- **Proper headings for days and periods**

Ans:

Q3.html

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8">

<meta name="viewport" content="width=device-width, initial-scale=1.0">

<title>Class Time Table</title>

<style>body{padding:10px}h1{text-align:center;margin:5px}table{width:100%;max-width:1000px;margin:15px auto;border-collapse:collapse;font-size:.95em}th,td{padding:8px;border:2px solid #333;text-align:center;font-weight:bold}th{background:#333;color:#fff}.period{width:70px}</style>

</head>

<body>

<h1>Class Time Table</h1>

<table>

```

<thead><tr><th
class="period">Period</th><th>Monday</th><th>Tuesday</th><th>Wednesday</th><th>Th
ursday</th><th>Friday</th></tr></thead>

<tbody>

<tr><td class="period"><strong>9:00-
10:00</strong></td><td>Math</td><td>English</td><td>Science</td><td>History</td><td>
Geography</td></tr>

<tr><td class="period"><strong>10:00-
11:00</strong></td><td>Science</td><td>Math</td><td>English</td><td>Computer</td><
td>Math</td></tr>

<tr><td class="period"><strong>11:00-11:30</strong></td><td colspan="5"
style="background:#ffeb3b;color:#333">BREAK</td></tr>

<tr><td class="period"><strong>11:30-
12:30</strong></td><td>English</td><td>Science</td><td>Math</td><td>Geography</td>
<td>History</td></tr>

<tr><td class="period"><strong>12:30-
1:30</strong></td><td>Computer</td><td>History</td><td>Geography</td><td>English</
td><td>Science</td></tr>

<tr><td class="period"><strong>1:30-2:30</strong></td><td colspan="5"
style="background:#ffeb3b;color:#333">LUNCH</td></tr>

<tr><td class="period"><strong>2:30-
3:30</strong></td><td>History</td><td>Geography</td><td>Computer</td><td>Math</td>
<td>English</td></tr>

<tr><td class="period"><strong>3:30-
4:30</strong></td><td>Geography</td><td>Computer</td><td>History</td><td>Science</
td><td>Computer</td></tr>

</tbody>

</table>

</body>

</html>

```

Output:

Class Time Table

Period	Monday	Tuesday	Wednesday	Thursday	Friday
9:00-10:00	Mathematics	English	Science	History	Geography
10:00-11:00	Science	Mathematics	English	Computer	Mathematics
11:00-11:30	BREAK				
11:30-12:30	English	Science	Mathematics	Geography	History
12:30-1:30	Computer	History	Geography	English	Science
1:30-2:30	LUNCH BREAK				
2:30-3:30	History	Geography	Computer	Mathematics	English
3:30-4:30	Geography	Computer	History	Science	Computer

Q4. Design the required static web pages for an Online Shopping Cart application.

Ans:

Q4.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Online Shopping Cart</title>
  <style>body{margin:0;padding:0}header{background:#333;color:#fff;padding:15px;text-align:center}nav{background:#555;padding:8px;text-align:center}nav a{color:#fff;margin:0 15px;text-decoration:none;cursor:pointer;font-size:.95em}nav a:hover{text-decoration:underline}.container{max-width:1200px;margin:15px auto;padding:15px}.products{display:grid;grid-template-columns:repeat(auto-fit,minmax(220px,1fr));gap:12px}.product-card{background:#fff;padding:10px;border:1px solid #ddd}.product-card img{width:100%;height:180px;background:#ddd}.price{color:#e74c3c;font-weight:bold;font-size:1em}button{background:#333;color:#fff;padding:8px 15px;border:none;cursor:pointer;width:100%;margin-top:8px;font-size:.9em}button:hover{background:#555}.cart-info{background:#f9f9f9;padding:12px;margin-bottom:15px;border:1px solid #ddd}.cart-table{width:100%;border-collapse:collapse;margin-bottom:15px}.cart-table th{background:#333;color:#fff;padding:8px;text-align:left}.cart-table td{padding:8px;border-bottom:1px solid #ddd}.remove-btn{background:#e74c3c;width:auto;padding:4px 12px}.remove-btn:hover{background:#c0392b}.modal{display:none;position:fixed;top:0;left:0;width:100%;height:100%;background:rgba(0,0,0,0.5);z-index:1000}.modal-content{background:#fff;margin:8% auto;padding:20px;max-width:500px}.close{cursor:pointer;font-size:24px;font-weight:bold;float:right}.checkout-btn{background:#27ae60;width:100%;padding:12px;font-size:1em;margin-top:15px}.checkout-btn:hover{background:#229954}footer{background:#333;color:#fff;padding:15px;text-align:center;margin-top:25px}</style>
</head>
<body>
  <header>
    <h1>Online Shopping Cart</h1>
  </header>
```

```
<nav>
  <a href="#" onclick="showSection('products')">Products</a>
  <a href="#" onclick="showSection('cart')">View Cart</a>
  <a href="#" onclick="checkout()>Checkout</a>
</nav>

<div class="container">
  <div id="productsSection">
    <h2>Featured Products</h2>
    <div class="products">
      <div class="product-card">
        <img alt="Product 1" />
        <h3>Wireless Headphones</h3>
        <p>High-quality sound with noise cancellation</p>
        <div class="price">Rs. 299</div>
        <button onclick="addToCart('Wireless Headphones', 299)">Add to Cart</button>
      </div>

      <div class="product-card">
        <img alt="Product 2" />
        <h3>USB-C Cable</h3>
        <p>Fast charging and data transfer</p>
        <div class="price">Rs. 99</div>
        <button onclick="addToCart('USB-C Cable', 99)">Add to Cart</button>
      </div>

      <div class="product-card">
        <img alt="Product 3" />
        <h3>Phone Stand</h3>
        <p>Adjustable and sturdy</p>
        <div class="price">Rs. 149</div>
        <button onclick="addToCart('Phone Stand', 149)">Add to Cart</button>
      </div>

      <div class="product-card">
        <img alt="Product 4" />
        <h3>Portable Charger</h3>
        <p>20000mAh capacity</p>
        <div class="price">Rs. 399</div>
        <button onclick="addToCart('Portable Charger', 399)">Add to Cart</button>
      </div>

      <div class="product-card">
        <img alt="Product 5" />
        <h3>Screen Protector</h3>
        <p>Tempered glass, anti-scratch</p>
        <div class="price">Rs. 79</div>
        <button onclick="addToCart('Screen Protector', 79)">Add to Cart</button>
      </div>

      <div class="product-card">
        <img alt="Product 6" />
        <h3>Bluetooth Speaker</h3>
        <p>Waterproof and portable</p>
        <div class="price">Rs. 499</div>
      </div>
    </div>
  </div>
</div>
```

```

        <button onclick="addToCart('Bluetooth Speaker', 499)">Add to Cart</button>
    </div>
</div>
</div>

<div id="cartSection" style="display: none;">
    <h2>Shopping Cart</h2>
    <div class="cart-info">
        <p>Items in Cart: <strong id="cartCount">0</strong></p>
        <p>Total: <strong id="cartTotal">Rs. 0</strong></p>
    </div>
    <table class="cart-table" id="cartTable">
        <thead>
            <tr>
                <th>Product</th>
                <th>Price</th>
                <th>Quantity</th>
                <th>Total</th>
                <th>Action</th>
            </tr>
        </thead>
        <tbody id="cartBody">
        </tbody>
    </table>
    <div style="text-align: center;">
        <button style="width: 200px;" onclick="showSection('products')">Continue
Shopping Cart</button>
        <button class="checkout-btn" onclick="checkout()">Proceed to Checkout</button>
    </div>
</div>
</div>

<div id="checkoutModal" class="modal">
    <div class="modal-content">
        <span class="close" onclick="closeModal()">&times;</span>
        <h2>Checkout Summary</h2>
        <p>Items: <strong id="summaryCount">0</strong></p>
        <p>Total Amount: <strong id="summaryTotal">Rs. 0</strong></p>
        <input type="text" placeholder="Full Name" id="customerName" style="width: 100%; padding: 10px; margin: 10px 0; border: 1px solid #ddd; box-sizing: border-box;" />
        <input type="email" placeholder="Email Address" id="customerEmail" style="width: 100%; padding: 10px; margin: 10px 0; border: 1px solid #ddd; box-sizing: border-box;" />
        <input type="tel" placeholder="Phone Number" id="customerPhone" style="width: 100%; padding: 10px; margin: 10px 0; border: 1px solid #ddd; box-sizing: border-box;" />
        <button style="width: 100%; background: #27ae60; padding: 15px; font-size: 16px;" onclick="placeOrder()">Place Order</button>
    </div>
</div>

<footer>
    <p>&copy; 2024 Online Shopping Cart. All rights reserved.</p>
</footer>

<script>let cart=[];function addToCart(n,p){const
e=cart.find(e=>e.name===n);e?e.quantity++:cart.push({name:n,price:p,quantity:1});updateCart();ale


```

```

rt(n+' added to cart!'))}function
removeFromCart(n){cart=cart.filter(e=>e.name!==(n));updateCart()}function updateCart(){const
n=document.getElementById('cartCount'),e=document.getElementById('cartTotal'),t=document.getEl
ementById('cartBody');let c=0,o=0;t.innerHTML="";cart.forEach(a=>{c+=a.quantity;const
r=a.price*a.quantity;o+=r,t.innerHTML+=`<tr><td>${a.name}</td><td>Rs.
${a.price}</td><td>${a.quantity}</td><td>Rs. ${r}</td><td><button class="remove-btn"
onclick="removeFromCart('${a.name}')">Remove</button></td></tr>`});n.textContent=c;e.textCont
ent=Rs.
'+o;document.getElementById('summaryCount').textContent=c;document.getElementById('summary
Total').textContent=Rs. '+o}function
showSection(n){document.getElementById('productsSection').style.display='products'===n?'block':'n
one';document.getElementById('cartSection').style.display='cart'===n?'block':'none'}function
checkout(){0===cart.length?alert('Your cart is
empty!'):document.getElementById('checkoutModal').style.display='block'}function
closeModal(){document.getElementById('checkoutModal').style.display='none'}function
placeOrder(){const
n=document.getElementById('customerName').value,e=document.getElementById('customerEmail').
value,t=document.getElementById('customerPhone').value;n&&e&&t?(alert('Order placed
successfully! Order details will be sent to
'+e),cart=[],updateCart(),closeModal(),showSection('products')):alert('Please fill all
details!')}window.onclick=function(n){const
e=document.getElementById('checkoutModal');n.target==e&&(e.style.display='none')}</script>
</body>
</html>

```

Output:

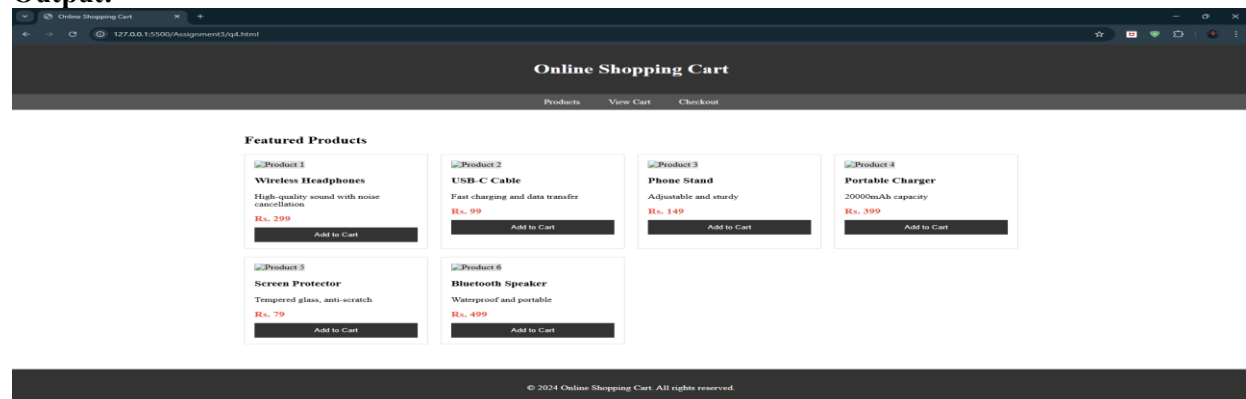

Q5. Write JavaScript code to validate the following fields in a Registration Page:

1. **First Name**
 - Should contain only alphabets
 - Minimum length: 6 characters
2. **Password**
 - Minimum length: 6 characters
3. **E-mail ID**
 - Must follow the standard pattern:
name@domain.com
4. **Mobile Number**
 - Must contain exactly 10 digits
5. **Last Name and Address**
 - Should not be empty

Ans:

Q5.html

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="UTF-8">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<title>Registration Form Validation</title>
```

```
<style>body {padding:10px}.container {max-width:550px;margin:15px
auto;padding:15px}h1 {text-align:center;margin:5px}.form-group {margin-
bottom:10px}label {display:block;margin-bottom:3px;font-weight:bold;font-
size:.95em}input,textarea {width:100%;padding:6px;border:1px solid #ddd;box-
sizing:border-box;font-size:.9em}.error {color:#e74c3c;font-size:11px;margin-
top:3px;display:none}button {width:100%;padding:8px;background:#333;color:#fff;border:n
one;cursor:pointer}.success {display:none;background:#d4edda;color:#155724;padding:10px
;margin-bottom:10px;font-size:.9em}</style>
```

```
</head>
```

```
<body>
```

```
<div class="container">
```

```
<h1>User Registration Form</h1>
```

```
<div class="success" id="successMsg">Registration successful! Thank you for
registering.</div>
```

```
<form id="registrationForm">
```

```
<div class="form-group">
```

```
<label for="fname">First Name:</label>
```

```
<input type="text" id="fname" placeholder="Only alphabets, minimum 6
characters" />
```

```
<div class="error" id="fnameError">First name must contain only alphabets and be  
at least 6 characters</div>
```

```
</div>
```

```
<div class="form-group">
```

```
<label for="lname">Last Name:</label>
```

```
<input type="text" id="lname" placeholder="Should not be empty" />
```

```
<div class="error" id="lnameError">Last name should not be empty</div>
```

```
</div>
```

```
<div class="form-group">
```

```
<label for="email">Email ID:</label>
```

```
<input type="email" id="email" placeholder="Format: name@domain.com" />
```

```
<div class="error" id="emailError">Please enter a valid email  
(name@domain.com)</div>
```

```
</div>
```

```
<div class="form-group">
```

```
<label for="phone">Mobile Number:</label>
```

```
<input type="text" id="phone" placeholder="Exactly 10 digits" maxlength="10" />
```

```
<div class="error" id="phoneError">Mobile number must contain exactly 10  
digits</div>
```

```
</div>
```

```
<div class="form-group">
```

```
<label for="address">Address:</label>
```

```
<textarea id="address" rows="4" placeholder="Should not be empty"></textarea>
```

```
<div class="error" id="addressError">Address should not be empty</div>

</div>

<div class="form-group">

  <label for="password">Password:</label>

  <input type="password" id="password" placeholder="Minimum 6 characters" />

  <div class="error" id="passwordError">Password must be at least 6
characters</div>

</div>

<button type="submit">Register</button>

</form>

</div>

<script>

  const form = document.getElementById('registrationForm');

  const successMsg = document.getElementById('successMsg');

  form.addEventListener('submit', (e) => {

    e.preventDefault();

    const fname = document.getElementById('fname').value.trim();

    const lname = document.getElementById('lname').value.trim();

    const email = document.getElementById('email').value.trim();

    const phone = document.getElementById('phone').value.trim();

    const address = document.getElementById('address').value.trim();
```

```
const password = document.getElementById('password').value;
```

```
let isValid = true;
```

```
// First Name validation
```

```
if (!/^[a-zA-Z]{6,}$/.test(fname)) {
```

```
    showError('fnameError');
```

```
    isValid = false;
```

```
} else {
```

```
    hideError('fnameError');
```

```
}
```

```
// Last Name validation
```

```
if (lname === "") {
```

```
    showError('lnameError');
```

```
    isValid = false;
```

```
} else {
```

```
    hideError('lnameError');
```

```
}
```

```
// Email validation
```

```
if (!/^[^\s@]+@[^\s@]+\.[^\s@]+$/.test(email)) {
```

```
    showError('emailError');
```

```
    isValid = false;
```

```
} else {
```

```
        hideError('emailError');
    }

    // Mobile Number validation
    if (!/^\d{10}$/.test(phone)) {
        showError('phoneError');
        isValid = false;
    } else {
        hideError('phoneError');
    }

    // Address validation
    if (address === "") {
        showError('addressError');
        isValid = false;
    } else {
        hideError('addressError');
    }

    // Password validation
    if (password.length < 6) {
        showError('passwordError');
        isValid = false;
    } else {
        hideError('passwordError');
```

```
}
```

```
if (isValid) {
```

```
    successMsg.style.display = 'block';
```

```
    form.reset();
```

```
    setTimeout(() => {
```

```
        successMsg.style.display = 'none';
```

```
    }, 5000);
```

```
}
```

```
});
```

```
function showError(elementId) {
```

```
    document.getElementById(elementId).style.display = 'block';
```

```
}
```

```
function hideError(elementId) {
```

```
    document.getElementById(elementId).style.display = 'none';
```

```
}
```

```
</script>
```

```
</body>
```

```
</html>
```

Output:

User Registration Form

Registration successful! Thank you for registering.

First Name:
Only alphabets, minimum 6 characters

Last Name:
Should not be empty

Email ID:
Format: name@domain.com

Mobile Number:
Exactly 10 digits

Address:
Should not be empty

Password:
Minimum 6 characters

Register

Q6. Design a web page using CSS that includes the following:

- a) Use different font styles
- b) Control image repetition using:

- background-repeat
- no-repeat

c) Define styles for links:

- a:link
- a:active
- a:hover
- a:visited

d) Add customized cursors for links

Ans:

Q6.html

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="UTF-8">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<title>CSS Styling Demo</title>
```

```
<style>.font-serif{font-family:Georgia,serif}.font-sans{font-family:'Trebuchet MS',sans-serif}.font-mono{font-family:'Courier New',monospace}.font-cursive{font-family:'Brush Script MT',cursive}.bg-repeat{background-image:url('data:image/svg+xml,<svg xmlns="http://www.w3.org/2000/svg" width="50" height="50"><rect fill="red" width="50'
```

```
height="50"/><circle fill="yellow" cx="25" cy="25" r="10"/></svg>');background-repeat:repeat;padding:10px;margin:5px 0;min-height:80px;font-size:.9em}.bg-no-repeat{background-image:url('data:image/svg+xml,<svg xmlns="http://www.w3.org/2000/svg" width="100" height="100"><rect fill="blue" width="100" height="100"><circle fill="white" cx="50" cy="50" r="30"/></svg>');background-repeat:no-repeat;background-size:cover;padding:10px;margin:5px 0;min-height:120px;color:#fff}a.link{color:blue;text-decoration:none;padding:3px 6px;margin:3px;display:inline-block;font-size:.9em}a.visited{color:purple}a.hover{color:red;text-decoration:underline}a.active{color:orange}.cursor-pointer{cursor:pointer}.cursor-help{cursor:help}.cursor-wait{cursor:wait}.cursor-text{cursor:text}.cursor-hand{cursor:grab}.cursor-zoom{cursor:zoom-in}body{padding:12px}.section{background:#fff;padding:10px;margin:10px 0}.section h2{color:#555;border-bottom:2px solid #333;padding-bottom:5px;margin:5px 0;font-size:1.1em}</style>
```

```
</head>
```

```
<body>
```

```
<h1>CSS Styling Demo</h1>
```

```
<div class="section">
```

```
<h2>1. Different Font Styles</h2>
```

```
<p class="font-serif">This is Serif Font (Georgia) - Traditional and formal</p>
```

```
<p class="font-sans">This is Sans-serif Font (Trebuchet) - Modern and clean</p>
```

```
<p class="font-mono">This is Monospace Font (Courier New) - Used for code</p>
```

```
<p class="font-cursive">This is Cursive Font - Elegant and decorative</p>
```

```
</div>
```

```
<div class="section">
```

```
<h2>2. Background Image Repetition</h2>
```

```
<div class="bg-repeat">Background with repeat property - Pattern repeats</div>
```

```
<div class="bg-no-repeat">Background with no-repeat property - Pattern appears once</div>
```

```
</div>
```

```
<div class="section">
```

```
  <h2>3. Link Styles</h2>
```

```
  <p>Hover over links to see different states:</p>
```

```
  <a href="#">:link state - Normal link (blue)</a>
```

```
  <a href="http://example.com">:visited state - Already visited (purple)</a>
```

```
  <a href="#">:hover state - Mouse over (red with underline)</a>
```

```
  <a href="#">:active state - Being clicked (orange)</a>
```

```
</div>
```

```
<div class="section">
```

```
  <h2>4. Customized Cursors for Links</h2>
```

```
  <p>Hover over each link to see different cursors:</p>
```

```
  <a href="#" class="cursor-pointer">Pointer Cursor ↗</a>
```

```
  <a href="#" class="cursor-help">Help Cursor ❓</a>
```

```
  <a href="#" class="cursor-wait">Wait Cursor ⌚</a>
```

```
  <a href="#" class="cursor-text">Text Cursor ✎</a>
```

```
  <a href="#" class="cursor-hand">Grab Cursor 🖐</a>
```


```
  <a href="#" class="cursor-zoom">Zoom Cursor 🔍</a>
```

```
</div>
```

```
</body>
```

```
</html>
```

Output:

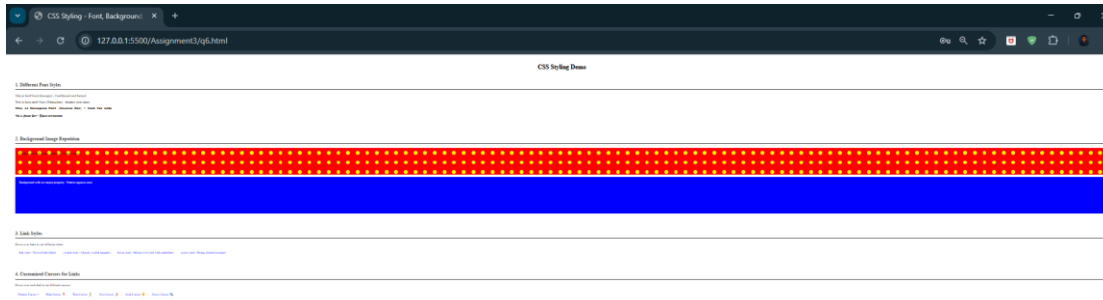

Q7. Create a responsive web page for any one of the following:

- **College Club**
- **Product Promotion Page**
- **Event Information Page**

The page must contain:

- 1. Header**
- 2. Navigation menu**
- 3. Content section**
- 4. Footer**

Apply CSS3 features:

- **Rounded corners**
- **Shadow effects**
- **Gradient background**
- **Transition effect**
- **Transform effect**

(JavaScript may be used for button click / simple interaction)

Ans:

Q7.html

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="UTF-8">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<title>Tech Club - Responsive Website</title>
```

```
<style>{*{margin:0;padding:0;box-sizing:border-box}body{color:#333}header{background:#333;color:#fff;padding:15px 15px;text-
```

```

align:center}header h1 {font-size:1.8em;margin-
bottom:8px}nav {background:#333;position:sticky;top:0;z-index:100}nav ul {list-
style:none;display:flex;justify-content:center;flex-wrap:wrap}nav
a {display:block;color:#fff;padding:8px 12px;text-decoration:none}nav
a:hover {background:#555}.container {max-width:1200px;margin:0 auto;padding:0
15px}.content {padding:30px 15px}.hero {text-align:center;margin-bottom:30px}.hero
h2 {font-size:1.5em;margin-bottom:10px}.cards {display:grid;grid-template-
columns:repeat(auto-fit,minmax(280px,1fr));gap:12px;margin:25px
0}.card {background:#fff;padding:15px;border-left:5px solid #333;border:1px solid
#ddd}.card h3 {margin-bottom:8px}button,btn {background:#333;color:#fff;padding:8px
20px;border:none;cursor:pointer;font-weight:bold;display:inline-block;text-
decoration:none;margin-
top:10px}.button:hover {background:#555}footer {background:#333;color:#fff;text-
align:center;padding:15px 15px;margin-
top:25px}.feature {background:#fff;padding:15px;margin:15px 0;border:1px solid
#ddd}.section-title {text-align:center;margin:25px 0 12px;font-
size:1.4em}.team {display:grid;grid-template-columns:repeat(auto-
fit,minmax(220px,1fr));gap:12px;margin:20px 0}.team-
member {background:#f9f9f9;padding:12px;text-align:center;border:1px solid #ddd}.team-
member h4 {margin:8px 0 3px}.team-member p {font-
size:.85em;color:#666}.benefits {background:#f9f9f9;padding:15px;margin:20px 0}.benefits
ul {list-style:none;padding:10px}.benefits li {padding:8px;border-bottom:1px solid
#ddd}textarea {width:100%!important}input,textarea {padding:8px!important;margin:8px
0!important;border:1px solid #ddd!important;box-sizing:border-box!important}.contact-
form {max-width:550px;margin:20px auto;padding:15px;background:#f9f9f9;border:1px
solid #ddd}@media(max-width:768px){header h1 {font-size:1.3em}.hero h2 {font-
size:1.2em}nav ul {flex-direction:column}nav a {padding:8px 10px}.cards {grid-template-
columns:1fr}}</style>

```

```
</head>
```

```
<body>
```

```
<!-- Header -->
```

```
<header>
```

```
<h1> 🚀 Tech Club Association</h1>
```

```
<p>Explore Technology, Innovation & Programming</p>
```

```
</header>
```

```
<!-- Navigation -->
```

```
<nav>
```

```
<ul>
```

```
<li><a href="#home">Home</a></li>

<li><a href="#about">About</a></li>

<li><a href="#events">Events</a></li>

<li><a href="#team">Team</a></li>

<li><a href="#contact">Contact</a></li>

</ul>
```

```
</nav>
```

```
<!-- Main Content -->
```

```
<section class="content">
```

```
<div class="container">
```

```
<!-- Hero Section -->
```

```
<div class="hero">
```

```
<h2>Welcome to Tech Club</h2>
```

```
<p>Join our community of tech enthusiasts and innovators</p>
```

```
<button onclick="alert('Membership registration coming soon!')">Get
Started</button>
```

```
</div>
```

```
<!-- About Section -->
```

```
<section id="about">
```

```
<h2 class="section-title">About Us</h2>
```

```
<p style="text-align: center; max-width: 800px; margin: 20px auto; line-height:
1.6;">
```

Tech Club is a vibrant community dedicated to fostering innovation and technical excellence.

We provide hands-on training, mentorship, and real-world project experience to students interested in programming,

web development, mobile applications, and emerging technologies. Our mission is to bridge the gap between academic

learning and industry requirements.

</p>

<div class="cards">

<div class="card">

<h3>  Programming</h3>

<p>Learn various programming languages and develop real-world applications with hands-on training.</p>

</div>

<div class="card">

<h3>  Web Development</h3>

<p>Master HTML, CSS, JavaScript and modern frameworks to build responsive websites.</p>

</div>

<div class="card">

<h3>  Mobile Apps</h3>

<p>Develop iOS and Android applications using cutting-edge technologies.</p>

</div>

</div>

</section>

<!-- Benefits Section -->

<section id="benefits">

<h2 class="section-title">Member Benefits</h2>

<div class="benefits">

✓ Free access to premium coding tutorials and online courses

✓ Mentorship from industry professionals and senior developers

✓ Participate in coding competitions and hackathons with prizes

✓ Networking opportunities with tech companies and alumni

✓ Access to project collaboration and portfolio building

✓ Regular workshops and tech talks from industry experts

✓ Job placement assistance and internship opportunities

</div>

</section>

<!-- Events Section -->

<section id="events">

<h2 class="section-title">Upcoming Events</h2>

<div class="feature">

<h3>💡 Code Sprint - March 25</h3>

<p>24-hour coding competition where teams compete to solve challenging problems and build innovative solutions.</p>

Prizes worth Rs. 50,000 for top 3 teams.</p>

<button onclick="alert('Registration link will be sent to your email!')">Register
Now</button>

</div>

<div class="feature">

<h3>🎓 Web Dev Workshop - April 5</h3>

<p>Learn advanced CSS, JavaScript frameworks, and responsive design principles from industry experts.

Limited to 50 participants. Certification provided.</p>

<button onclick="alert('Workshop details will be updated soon!')">Enroll</button>

</div>

<div class="feature">

<h3>🎤 Tech Talk Series - April 15</h3>

<p>Industry leaders discuss the latest trends in AI, Machine Learning, Cloud Computing, and cybersecurity.

Open to all students. Refreshments provided.</p>

<button onclick="alert('Guest speakers will be announced soon!')">Join
Us</button>

</div>

<div class="feature">

<h3>🚀 Startup Showcase - May 10</h3>

<p>Student startups pitch their ideas and projects to investors and industry mentors.

Funding opportunities available for selected projects.</p>

```
<button onclick="alert('Application form coming soon!')">Apply</button>

</div>

</section>

<!-- Team Section -->

<section id="team">

  <h2 class="section-title">Leadership Team</h2>

  <div class="team">

    <div class="team-member">

      <h4>Priya Sharma</h4>

      <p>Club President</p>

      <p style="margin-top: 10px; font-size: 0.85em;">Web Developer & AI
Enthusiast</p>

    </div>

    <div class="team-member">

      <h4>Rajesh Kumar</h4>

      <p>Vice President</p>

      <p style="margin-top: 10px; font-size: 0.85em;">Mobile App Developer</p>

    </div>

    <div class="team-member">

      <h4>Ananya Patel</h4>

      <p>Technical Director</p>

      <p style="margin-top: 10px; font-size: 0.85em;">Systems & DevOps
Engineer</p>
```

</div>

<div class="team-member">

<h4>Arjun Singh</h4>

<p>Events Coordinator</p>

<p style="margin-top: 10px; font-size: 0.85em;">Full Stack Developer</p>

</div>

<div class="team-member">

<h4>Neha Gupta</h4>

<p>Content Manager</p>

<p style="margin-top: 10px; font-size: 0.85em;">Technical Writer</p>

</div>

<div class="team-member">

<h4>Vikram Sharma</h4>

<p>Social Media Manager</p>

<p style="margin-top: 10px; font-size: 0.85em;">UI/UX Designer</p>

</div>

</div>

</section>

<!-- Contact Section -->

<section id="contact">

<h2 class="section-title">Get In Touch</h2>

```
<div class="contact-form">

  <h3>Contact Us</h3>

  <form onsubmit="handleSubmit(event)">

    <input type="text" id="name" placeholder="Your Name" required />

    <input type="email" id="email" placeholder="Your Email" required />

    <input type="text" id="subject" placeholder="Subject" required />

    <textarea id="message" rows="5" placeholder="Your Message"
required></textarea>

    <button type="submit">Send Message</button>

  </form>

</div>

<div style="text-align: center; margin-top: 30px; padding: 20px; background:
#f9f9f9;">

  <p><strong>Email:</strong> techclub@university.edu</p>

  <p><strong>Phone:</strong> +91-XXXX-XXXX-XX</p>

  <p><strong>Location:</strong> Computer Lab, IT Building, Campus</p>

  <p style="margin-top: 15px;"><strong>Follow Us:</strong> Facebook | Twitter |
LinkedIn | Instagram</p>

</div>

</section>

</div>

</section>

<!-- Footer -->

<footer>

  <p>&copy; 2024 Tech Club Association. All rights reserved.</p>

  <p>Empowering future tech leaders | Innovate, Learn, Create</p>
```


</footer>

```
<script>function handleSubmit(e){e.preventDefault();const
t=document.getElementById('name').value,n=document.getElementById('email').value;alert('
Thank you '++t+'! Your message has been sent. We will contact you at
'+n);e.target.reset()}</script>
```

</body>

</html>

Output:

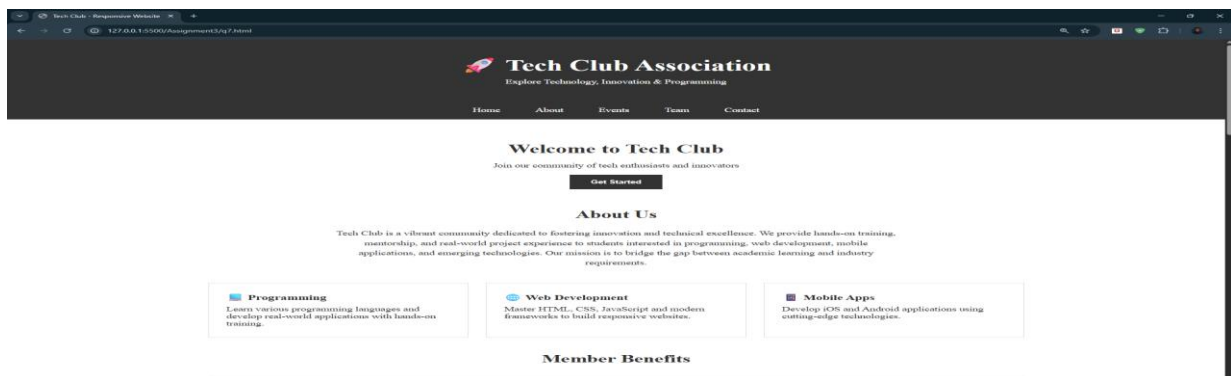

Advanced JavaScript DOM Practice Questions

1. Create a Dynamic To-Do Task Manager. - Add task - Mark as completed - Delete task - Display total pending tasks Use: createElement(), appendChild(), classList.toggle()

Ans:

Q1

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="UTF-8">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
<title>To-Do Task Manager</title>
```

```
</head>
```

```
<body>
```

```
<h1>To-Do Task Manager</h1>
```

```
<div>
```

```
  Total Pending Tasks: <span id="pendingCount">0</span>
```

```
</div>
```

```
<div>
```

```
  <input type="text" id="taskInput" placeholder="Enter a new task..." />
```

```
  <button id="addBtn">Add Task</button>
```

```
</div>
```

```
<ul id="taskList"></ul>
```

```
<script>
```

```
  const
```

```
  taskInput=document.getElementById('taskInput'),addBtn=document.getElementById('addBtn'),taskList=document.getElementById('taskList'),pendingCount=document.getElementById('pendingCount');let
```

```
  tasks=[];addBtn.addEventListener('click',addTask),taskInput.addEventListener('keypress',(e)=>{'Enter'===e.key&&addTask()});function addTask(){const t=taskInput.value.trim();return ""===t?(alert('Please enter a task!'),void
```

```
0):(tasks.push({id:Date.now(),text:t,completed:!1}),renderTasks(),taskInput.value="",taskInput.focus(),void 0)}function
```

```
renderTasks(){taskList.innerHTML="",0===tasks.length?(taskList.innerHTML='<li>No tasks
```

```
yet</li>',updatePendingCount());tasks.forEach((e)=>{const
```

```
t=document.createElement('li');e.completed&&t.classList.add('completed');const
```

```
n=document.createElement('input');n.type='checkbox',n.checked=e.completed,n.addEventListener('change',()=>toggleCompletion(e.id));const
```

```
d=document.createElement('span');d.textContent=e.text;const
```

```
i=document.createElement('button');i.textContent='Delete',i.addEventListener('click',()=>deleteTask(e.id)),t.appendChild(n),t.appendChild(d),t.appendChild(i),taskList.appendChild(t)},updatePendingCount());function toggleCompletion(e){const
```

```
t=tasks.find(t=>t.id===e);t&&(t.completed=!t.completed,renderTasks())}function deleteTask(e){tasks=tasks.filter(t=>t.id!==e),renderTasks()}function
```

```
updatePendingCount(){const
```


```
e=tasks.filter(e=>!e.completed).length;pendingCount.textContent=e}renderTasks();
```

```
</script>
```

```
</body>
```

```
</html>
```

output:

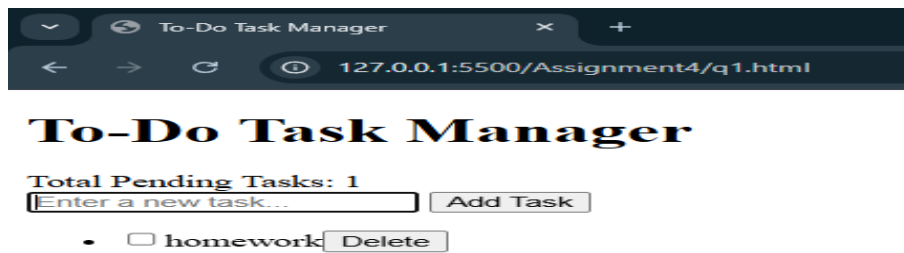

2. Generate a Random 4-digit PIN and verify it. - Generate PIN on button click - 3 attempts only Use: Math.floor(), DOM validation

Ans:

Q2.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>PIN Verification System</title>
</head>
<body>
  <h1>PIN Verification System</h1>


  <div>
    <button id="generateBtn">Generate PIN</button>
  </div>

  <div id="gameContainer" style="display:none;">
    <p>PIN has been generated. Try to guess it!</p>
    <p>Attempts Remaining: <span id="attempts">3</span></p>
    <p id="message"></p>

    <div>
      <input type="text" id="pinInput" placeholder="Enter 4-digit PIN" maxlength="4" />
      <button id="verifyBtn">Verify PIN</button>
    </div>
  </div>
<script>
const
generateBtn=document.getElementById('generateBtn'),verifyBtn=document.getElementById('verifyBtn'),pinInput=document.getElementById('pinInput'),gameContainer=document.getElementById('gameContainer'),message=document.getElementById('message'),attemptsDisplay=document.getElementById('attempts');let generatedPin=null,attempts=3;function
generatePin(){generatedPin=Math.floor(9e3*Math.random()+1e3),attempts=3,pinInput.value="",message.textContent="",attemptsDisplay.textContent=attempts,gameContainer.style.display='block',pinInput.focus()}function verifyPin(){const
e=pinInput.value.trim();return"===e?(message.textContent='Please enter a
PIN!',message.style.color='red',void 0):(4!==e.length||isNaN(e)?(message.textContent='PIN must
be 4 digits!',message.style.color='red',void 0):(attempts--
,e==generatedPin?(message.textContent='Correct PIN! You
```

```
won!',message.style.color='green',pinInput.disabled=!0,verifyBtn.disabled=!0,void
0):0===attempts?(message.textContent='Game Over! The correct PIN was:
'+generatedPin,message.style.color='red',pinInput.disabled=!0,verifyBtn.disabled=!0,attemptsDis
play.textContent='0',void 0):(message.textContent='Wrong PIN! Try
again.',message.style.color='orange',attemptsDisplay.textContent=attempts,pinInput.value='',pinIn
put.focus(),void
0))}}generateBtn.addEventListener('click',generatePin),verifyBtn.addEventListener('click',verifyP
in),pinInput.addEventListener('keypress',(e)=>{'Enter'===e.key&&verifyPin()});
</script>
</body>
</html>
```

output:

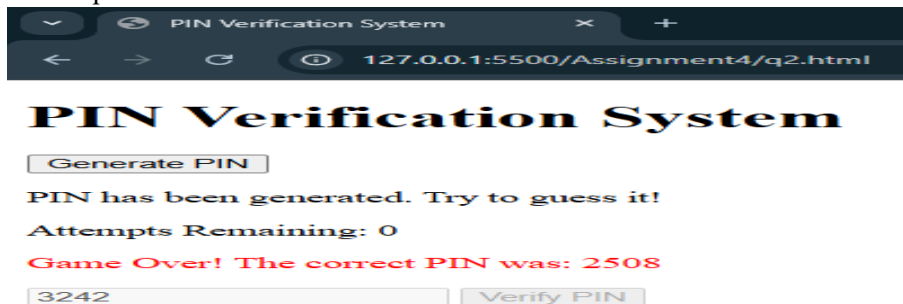

3. Create a Simple Expense Tracker. - Add expense name and amount - Show total expense - Show last 5 expenses Use: Array, reduce(), DOM update

Ans:

q3.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Expense Tracker</title>
</head>
<body>
  <h1>Expense Tracker</h1>

  <div>
    <input type="text" id="expenseName" placeholder="Expense name" />
    <input type="number" id="expenseAmount" placeholder="Amount" />
    <button id="addBtn">Add Expense</button>
  </div>

  <div>
    <h2>Total Expense: $<span id="totalExpense">0</span></h2>
  </div>


  <div>
    <h3>Last 5 Expenses:</h3>
    <ul id="expenseList"></ul>
```

```

</div>
<script>
const
expenseName=document.getElementById('expenseName'),expenseAmount=document.getElementById('expenseAmount'),addBtn=document.getElementById('addBtn'),totalExpense=document.getElementById('totalExpense'),expenseList=document.getElementById('expenseList');let
expenses=[];function addExpense(){const
e=expenseName.value.trim(),s=parseFloat(expenseAmount.value.trim());return"===e?(alert('Please
enter expense name!'),void 0):isNaN(s)||s<=0?(alert('Please enter a valid amount!'),void
0):(expenses.push({id:Date.now(),name:e,amount:s}),updateUI(),expenseName.value="",expenseAmo
unt.value="",expenseName.focus(),void 0)}function
updateUI(){updateTotal(),updateExpenseList()}function updateTotal(){const
e=expenses.reduce((e,s)=>e+s.amount,0);totalExpense.textContent=e.toFixed(2)}function
updateExpenseList(){expenseList.innerHTML="";const e=expenses.slice(-
5).reverse();0===e.length?expenseList.innerHTML='<li>No expenses
yet</li>':e.forEach((e)=>{const s=document.createElement('li');s.textContent=e.name+' -
\\$'+e.amount.toFixed(2),expenseList.appendChild(s)});addBtn.addEventListener('click',addExpense),
expenseAmount.addEventListener('keypress',(e)=>{'Enter'===e.key&&addExpense()});
</script>
</body>
</html>

```

Output:

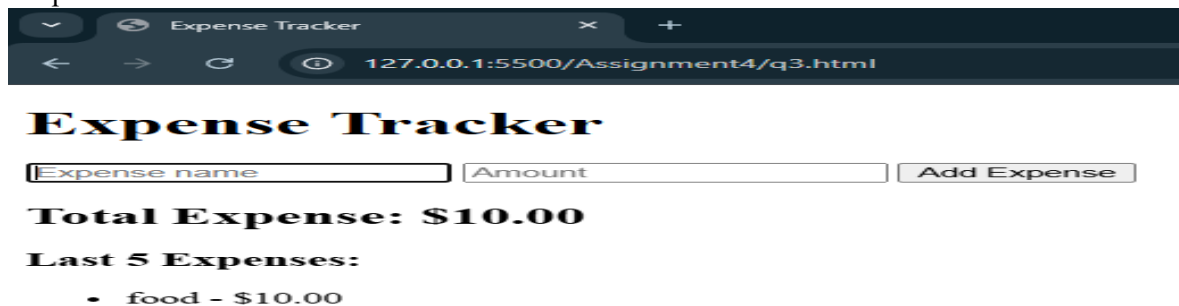

4. Create a Product Search Filter. - Display 15 products - Live filtering - Show 'No product found' Use: oninput, filter(), DOM hide/show

Ans:

Q4.html

```

<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Product Search Filter</title>
</head>
<body>
  <h1>Product Search Filter</h1>

  <div>
    <input type="text" id="searchInput" placeholder="Search products..." />
  </div>

  <div id="noProductMessage" style="display:none;">

```


```

    <p>No product found</p>
  </div>

  <div>
    <ul id="productList"></ul>
  </div>
</script>
const
searchInput=document.getElementById('searchInput'),productList=document.getElementById('productList'),noProductMessage=document.getElementById('noProductMessage'),products=['Apple iPhone 13','Samsung Galaxy S21','Sony Headphones Pro','Dell Laptop XPS 15','Apple MacBook Air','Canon Camera EOS','Nintendo Switch','iPad Pro 12.9','Google Pixel 6','LG Smart TV 55','Sony PlayStation 5','Microsoft Xbox Series X','Lenovo ThinkPad','ASUS Monitor 27','WD External Hard Drive'];function initializeProducts(){products.forEach((e)=>{const t=document.createElement('li');t.textContent=e,t.dataset.product=e.toLowerCase(),productList.appendChild(t)}}}function filterProducts(e){const t=e.toLowerCase(),d=productList.querySelectorAll('li');let o=0;d.forEach((e)=>{const d=e.dataset.product;d.includes(t)?(e.style.display='block',o++):e.style.display='none'}),0===o?noProductMessage.style.display='block':noProductMessage.style.display='none'}searchInput.addEventListener('oninput',()=>{filterProducts(searchInput.value)}),searchInput.addEventListener('input',()=>{filterProducts(searchInput.value)}),initializeProducts();
</script>
</body>
</html>

```

output:

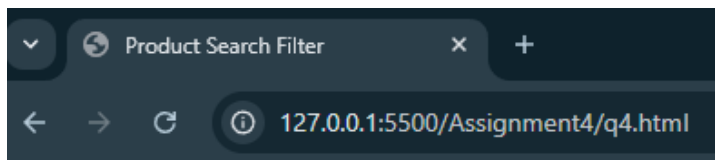

Product Search Filter

Apple iPhone 13
 Samsung Galaxy S21
 Sony Headphones Pro
 Dell Laptop XPS 15
 Apple MacBook Air
 Canon Camera EOS
 iPad Pro 12.9
 LG Smart TV 55
 Sony PlayStation 5
 Lenovo ThinkPad
 ASUS Monitor 27
 WD External Hard Drive

5. Create a Digital Stopwatch. - Start/Stop/Reset - Show seconds Use: setInterval(), clearInterval()

Ans:


q5.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Digital Stopwatch</title>
</head>
<body>
  <h1>Digital Stopwatch</h1>

  <div>
    <h2 id="display">00:00:00</h2>
  </div>

  <div>
    <button id="startBtn">Start</button>
    <button id="stopBtn">Stop</button>
    <button id="resetBtn">Reset</button>
  </div>
<script>
const
display=document.getElementById('display'),startBtn=document.getElementById('startBtn'),stopBtn=
document.getElementById('stopBtn'),resetBtn=document.getElementById('resetBtn');let
seconds=0,minutes=0,hours=0,intervalId=null,isRunning=!1;function
startStopwatch(){isRunning||(isRunning=!0,startBtn.disabled=!0,stopBtn.disabled=!1,intervalId=setIn
terval(()=>{60==++seconds&&(seconds=0,minutes++),60===minutes&&(minutes=0,hours++),upda
teDisplay(),1e3))}function
stopStopwatch(){isRunning&&(isRunning=!1,clearInterval(intervalId),startBtn.disabled=!1)}function
resetStopwatch(){clearInterval(intervalId),isRunning=!1,seconds=0,minutes=0,hours=0,updateDispla
y(),startBtn.disabled=!1,stopBtn.disabled=!0}function updateDisplay(){const
t=(hours<10?'0'+hours:hours)+':'+(minutes<10?'0'+minutes:minutes)+':'+(seconds<10?'0'+seconds:sec
onds);display.textContent=t}startBtn.addEventListener('click',startStopwatch),stopBtn.addEventListe
ner('click',stopStopwatch),resetBtn.addEventListener('click',resetStopwatch),stopBtn.disabled=!0;
</script>
</body>
</html>
```

Output:

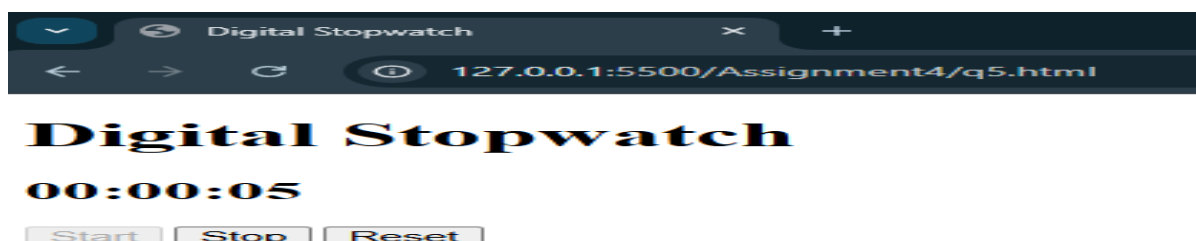

6. Validate a Login Form. - Username min 5 characters - Valid email - Password min 8 characters Use: Regex, preventDefault()

Ans:

q6.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Login Form Validator</title>
</head>
<body>
  <h1>Login Form Validator</h1>

  <form id="loginForm">
    <div>
      <label for="username">Username:</label>
      <input type="text" id="username" placeholder="Enter username (min 5 chars)" />
      <span id="usernameError" style="color:red;"></span>
    </div>

    <div>
      <label for="email">Email:</label>
      <input type="email" id="email" placeholder="Enter valid email" />
      <span id="emailError" style="color:red;"></span>
    </div>

    <div>
      <label for="password">Password:</label>
      <input type="password" id="password" placeholder="Enter password (min 8 chars)" />
      <span id="passwordError" style="color:red;"></span>
    </div>


    <button type="submit">Login</button>
  </form>

  <div id="successMessage" style="display:none;color:green;">
    <p>Login successful!</p>
  </div>
</body>
</html>

<script>
const
loginForm=document.getElementById('loginForm'),usernameInput=document.getElementById('usern
ame'),emailInput=document.getElementById('email'),passwordInput=document.getElementById('pass
word'),usernameError=document.getElementById('usernameError'),emailError=document.getElement
ById('emailError'),passwordError=document.getElementById('passwordError'),successMessage=docu
ment.getElementById('successMessage');function
validateUsername(e){return/^\.{5,}$/.test(e)}function
validateEmail(e){return/^[^\s@]+@[^\s@]+\.[^\s@]+$/.test(e)}function
validatePassword(e){return/^\.{8,}$/.test(e)}loginForm.addEventListener('submit',(e)=>{e.preventDef
ault(),usernameError.textContent="",emailError.textContent="",passwordError.textContent="",successMe
ssage.style.display='none';let
t=10;validateUsername(usernameInput.value)||((usernameError.textContent='Username must be at least
5 characters',t=!1),validateEmail(emailInput.value)||((emailError.textContent='Please enter a valid
```

```
email',t=!1),validatePassword(passwordInput.value)||((passwordError.textContent='Password must be
at least 8 characters',t=!1),t&&(successMessage.style.display='block',loginForm.reset())));
</script>
</body>
</html>
```

Output:



Login Form Validator

Username:
 Email:
 Password:

Login successful!

7. Store and retrieve User Preferences using LocalStorage. - Save favorite color - Apply after reload - Clear preference

ans:


Q7.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>User Preferences</title>
</head>
<body>
  <h1>Save Favorite Color</h1>

  <input type="color" id="colorInput" />
  <button id="saveBtn">Save</button>
  <button id="clearBtn">Clear</button>

  <p id="message"></p>
<script>
const
colorInput=document.getElementById('colorInput'),saveBtn=document.getElementById('saveBtn'),cl
earBtn=document.getElementById('clearBtn'),message=document.getElementById('message'),savedC
olor=localStorage.getItem('favoriteColor');savedColor&&(colorInput.value=savedColor,document.bo
dy.style.backgroundColor=savedColor,message.textContent='Color loaded from
storage'),saveBtn.addEventListener('click',()=>{const
e=colorInput.value;localStorage.setItem('favoriteColor',e),document.body.style.backgroundColor=e,m
essage.textContent='Color
saved!'}),clearBtn.addEventListener('click',()=>{localStorage.removeItem('favoriteColor'),document.
body.style.backgroundColor='white',colorInput.value='#ffffff',message.textContent='Color cleared!'});
</script>
</body>
</html>
```

Output:

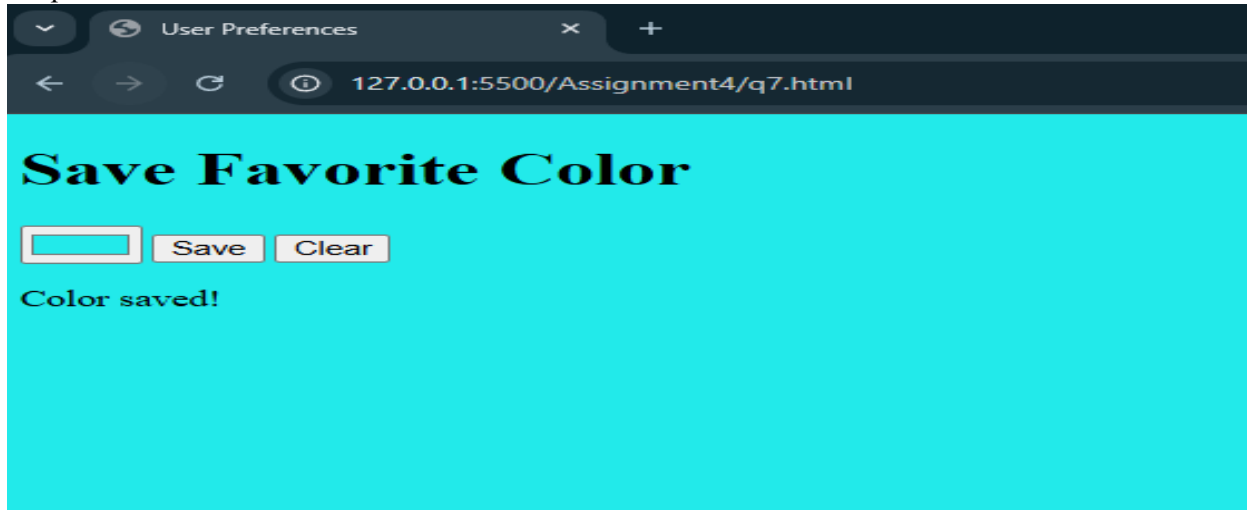


8. Create an Automatic Text Carousel. - Display one quote at a time - Auto change every 4 seconds Use: Array, setInterval()

Ans:

Q8.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Text Carousel</title>
</head>
<body>
  <h1>Automatic Text Carousel</h1>

  <h2 id="quoteDisplay"></h2>
<script>
const quoteDisplay=document.getElementById('quoteDisplay'),quotes=['The only way to do great
work is to love what you do.','Innovation distinguishes between a leader and a follower.','Life is what
happens when you are busy making other plans.','The future belongs to those who believe in the
beauty of their dreams.','It is during our darkest moments that we must focus to see the light.','The
way to get started is to quit talking and begin doing.','Do not go where the path may lead, go instead
where there is no path.'];let currentIndex=0;function
displayQuote(){quoteDisplay.textContent=quotes[currentIndex],currentIndex=(currentIndex+1)%quot
es.length}displayQuote(),setInterval(displayQuote,4e3);
</script>
</body>
</html>
```



Automatic Text Carousel

Innovation distinguishes between a leader and a follower.

9. Create a Voting Poll Application. - 3 options - Show result percentage Use: Objects/Arrays, DOM update

ans:

q9.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Voting Poll</title>
</head>
<body>
  <h1>Voting Poll</h1>

  <div>
    <h2>What is your favorite programming language?</h2>
    <button id="option1">JavaScript</button>
    <button id="option2">Python</button>
    <button id="option3">Java</button>
  </div>

  <hr />

  <div>
    <h2>Results</h2>
    <div>
      <p>JavaScript: <span id="percent1">0</span>% (<span id="votes1">0</span> votes)</p>
      <div style="background-color: #f0f0f0; width: 300px; height: 20px;">
        <div id="bar1" style="background-color: #4CAF50; height: 100%; width: 0%;"></div>
      </div>
    </div>

    <div>
      <p>Python: <span id="percent2">0</span>% (<span id="votes2">0</span> votes)</p>
      <div style="background-color: #f0f0f0; width: 300px; height: 20px;">
        <div id="bar2" style="background-color: #2196F3; height: 100%; width: 0%;"></div>
      </div>
    </div>

    <div>
```

```

    <p>Java: <span id="percent3">0</span>% (<span id="votes3">0</span> votes)</p>
    <div style="background-color: #f0f0f0; width: 300px; height: 20px;">
      <div id="bar3" style="background-color: #FF9800; height: 100%; width: 0%;"></div>
    </div>
  </div>

  <p>Total Votes: <span id="totalVotes">0</span></p>
</div>
<script>
const
option1Btn=document.getElementById('option1'),option2Btn=document.getElementById('option2'),o
ption3Btn=document.getElementById('option3');let votes={javascript:0,python:0,java:0};function
updateResults(){const
e=votes.javascript+votes.python+votes.java,t=0===e?0:Math.round(100*votes.javascript/e),n=0===e
?0:Math.round(100*votes.python/e),o=0===e?0:Math.round(100*votes.java/e);document.getElement
ById('votes1').textContent=votes.javascript,document.getElementById('votes2').textContent=votes.py
thon,document.getElementById('votes3').textContent=votes.java,document.getElementById('percent1
').textContent=t,document.getElementById('percent2').textContent=n,document.getElementById('perc
ent3').textContent=o,document.getElementById('bar1').style.width=t+'%',document.getElementById('
bar2').style.width=n+'%',document.getElementById('bar3').style.width=o+'%',document.getElementB
yId('totalVotes').textContent=e}option1Btn.addEventListener('click',()=>{votes.javascript++,updateR
esults()}),option2Btn.addEventListener('click',()=>{votes.python++,updateResults()}),option3Btn.ad
dEventListener('click',()=>{votes.java++,updateResults()});
</script>
</body>
</html>
Output:

```



10. Fetch and display Product Data from JSON file. - Display in card layout - Add search functionality Use: fetch(), then(), DOM creation

Ans:

q10.html

```

<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">

```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Product Display</title>
<style>
  body {
    font-family: Arial, sans-serif;
    margin: 20px;
  }

  .search-box {
    margin-bottom: 20px;
  }

  .search-box input {
    padding: 10px;
    width: 300px;
    font-size: 16px;
  }

  .products-container {
    display: grid;
    grid-template-columns: repeat(auto-fill, minmax(250px, 1fr));
    gap: 20px;
  }

  .product-card {
    border: 1px solid #ddd;
    border-radius: 8px;
    padding: 15px;
    box-shadow: 0 2px 5px rgba(0, 0, 0, 0.1);
    text-align: center;
  }

  .product-card h3 {
    margin: 10px 0;
  }

  .product-card p {
    margin: 5px 0;
    color: #666;
  }

  .product-card .price {
    font-size: 20px;
    color: #27ae60;
    font-weight: bold;
  }

  .no-products {
    text-align: center;
    padding: 40px;
    color: #999;
  }
```

```


    }
  </style>
</head>
<body>
  <h1>Product Catalog</h1>

  <div class="search-box">
    <input type="text" id="searchInput" placeholder="Search products..." />
  </div>

  <div id="productsContainer" class="products-container"></div>
</script>
const
searchInput=document.getElementById('searchInput'),productsContainer=document.getElementById(
'productsContainer');let
allProducts=[];fetch('products.json').then(e=>e.json()).then(e=>{allProducts=e,displayProducts(allPr
oducts)}),searchInput.addEventListener('input',(e)=>{const
t=e.target.value.toLowerCase(),d=allProducts.filter(e=>e.name.toLowerCase().includes(t));displayPr
oducts(d)});function displayProducts(e){productsContainer.innerHTML="";let
t=document.createElement('div');if(0===e.length)return t.className='no-products',t.textContent='No
products found',productsContainer.appendChild(t),void 0;e.forEach(e=>{let
d=document.createElement('div');d.className='product-card';let
n=document.createElement('h3');n.textContent=e.name;let
o=document.createElement('p');o.textContent='Category: '+e.category;let
s=document.createElement('p');s.className='price',s.textContent='$'+e.price.toFixed(2),d.appendChi
ld(n),d.appendChild(o),d.appendChild(s),productsContainer.appendChild(d)}})
</script>
</body>
</html>

```

Output:

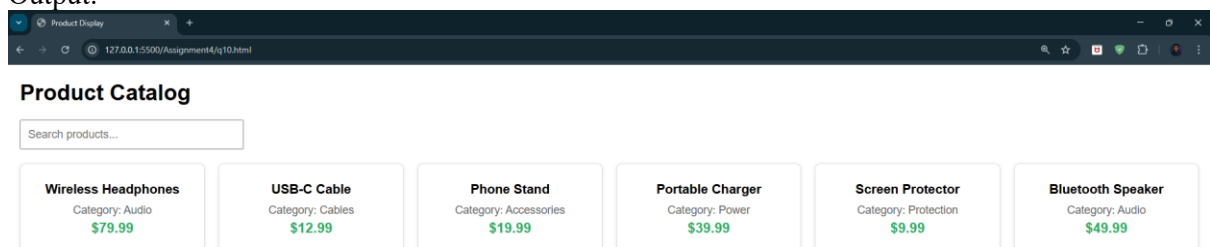

11. Create a Font Size Toggle with saved setting. - Increase/Decrease font size - Save after reload
Use: classList, localStorage

Ans:

Q11.html

```

<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Font Size Toggle</title>
  <style>
    body {
      padding: 20px;
    }
  </style>

```

```

    }

    body.size-small {
        font-size: 14px;
    }

    body.size-medium {
        font-size: 18px;
    }

    body.size-large {
        font-size: 22px;
    }

    body.size-xlarge {
        font-size: 26px;
    }

    .controls {
        margin-bottom: 20px;
    }

    button {
        padding: 10px 20px;
        margin: 5px;
        font-size: 16px;
        cursor: pointer;
    }

    p {
        line-height: 1.6;
    }
</style>
</head>
<body class="size-medium">
    <h1>Font Size Toggle</h1>

    <div class="controls">
        <button id="decreaseBtn">Decrease</button>
        <span id="sizeDisplay">Medium</span>
        <button id="increaseBtn">Increase</button>
    </div>

    <p>
        Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed do eiusmod tempor incididunt ut
        labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris
        nisi ut aliquip ex ea commodo consequat.
    </p>
</script>
const
decreaseBtn=document.getElementById('decreaseBtn'),increaseBtn=document.getElementById('incre

```

```

aseBtn'),sizeDisplay=document.getElementById('sizeDisplay'),body=document.body,sizes=['size-
small','size-medium','size-large','size-xlarge'],sizeNames=['Small','Medium','Large','X-Large'];let
currentSizeIndex=1;const savedSize=localStorage.getItem('fontSize');function
saveSizeAndApply(){localStorage.setItem('fontSize',currentSizeIndex.toString()),applySizeClass()}fu
nction
applySizeClass(){sizes.forEach(e=>body.classList.remove(e)),body.classList.add(sizes[currentSizeIn
dex]),sizeDisplay.textContent=sizeNames[currentSizeIndex]}savedSize&&(currentSizeIndex=parseIn
t(savedSize),applySizeClass()),decreaseBtn.addEventListener('click',()=>{currentSizeIndex>0&&(cu
rrentSizeIndex--
,saveSizeAndApply())}),increaseBtn.addEventListener('click',()=>{currentSizeIndex<sizes.length-
1&&(currentSizeIndex++,saveSizeAndApply())});
</script>
</body>
</html>

```

Output:



Font Size Toggle

Decrease Large Increase

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat.

12. Create a Live Word Counter. - Show word count - Warning if exceed 100 words Use: input event, split(), length validation

ans:

Q12.html

```

<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Live Word Counter</title>
</head>
<body>
  <h1>Live Word Counter</h1>

  <textarea id="textArea" placeholder="Start typing..." style="width:100%;
height:200px;"></textarea>

  <p>Word Count: <span id="wordCount">0</span></p>

  <div id="warning" style="display:none; color:red;">
    ⚠ Warning: You have exceeded 100 words!
  </div>
<script>
const
textArea=document.getElementById('textArea'),wordCount=document.getElementById('wordCount')
,warning=document.getElementById('warning');textArea.addEventListener('input',()=>{let e=0;const

```

```
t=textarea.value.trim();t.length>0&&(e=t.split(/\s+/).length),wordCount.textContent=e,e>100?warnin
g.style.display='block':warning.style.display='none'});
</script>
</body>
</html>
```

