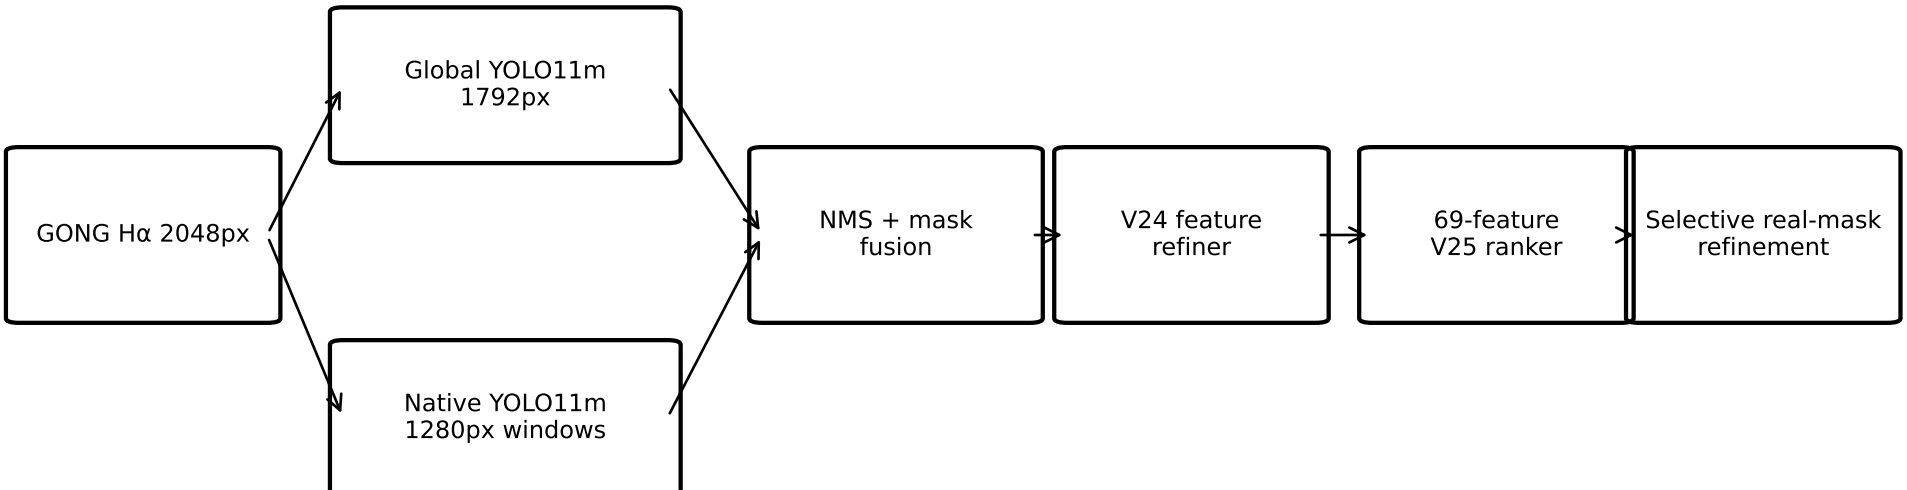

Curve-specialist candidates supply contextual neighborhood features; baseline winning decoder selects detector candidates only.