

# UI Clicker

- VCC -

First release: September 2022.

Table of contents:


1. Introduction
2. Action options and action editor
3. The debugger
4. The HTTP API
5. Testing
6. Clicker client

## 1. Introduction

UI Clicker is a development tool, used for automating UI interactions with different desktop applications. It features searching for controls (buttons, listboxes etc), image recognition, executing apps, clicking on controls, setting control text etc. UI interactions are organized into actions, which can be further organized into callable action templates (lists of actions). UIClicker can interact with local applications (on the same machine), or it can execute actions on another instance from a remote machine. Actions can be executed automatically, or can be run using a built-in debugger.


The tool comes as a single executable (can be 32-bit or 64-bit), with multiple built-in subtools:

- "Preview window", used for taking screenshots and displaying window/control details.
- "Actions window", the action editor, which includes action execution engine and debugger.
- "Window interpreter", can scan a window (or a part of it) and create a map of controls.
- "Template call tree", can take a list of action templates and display them as a call tree.
- "Remote screenshot window", displays a screenshot of the remote desktop, where a second UIClicker is running.

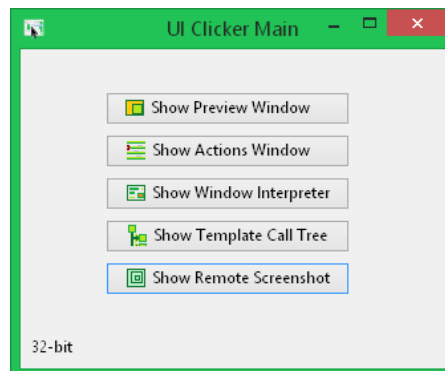


The application can be compiled for 32-bit or 64-bit and it comes as a native Windows application, so it won't need extra frameworks, runtimes or redistributables. It uses the basic win32 API, so it can run even on older versions of Windows (probably down to Windows XP).

To automate the interaction with an application, most of the operations will be done on the "Actions" window. A common interaction pattern is to search for a window, then search for one or more controls on that window and then click or set text on those controls. The Actions window has a small "tool", which can be used to get basic control information from another window, but when users want more information about a control (like current handle, position and size), they can use the Preview window. This is also required when the target window (the one which is automated) is designed to autohide when it loses focus. The Preview window can get window/control information without being focused. It can also be used to display a window/control with zoom.

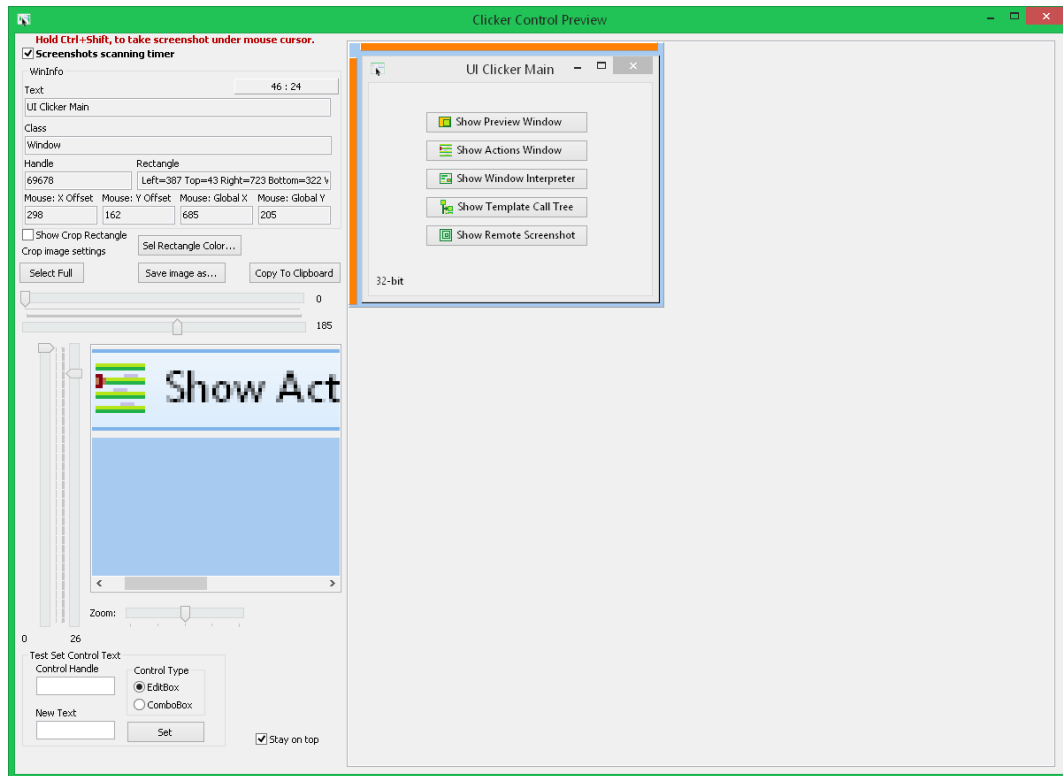

UIClicker can also search for subcontrols (also buttons, checkboxes, listboxes etc), which are interactable areas without a handle number, allocated by the operating system. These subcontrols can't be found on a window, using the same win32 API used to find controls. They can be found using image recognition, i.e. searching for a predefined text or screenshot of a subcontrol.

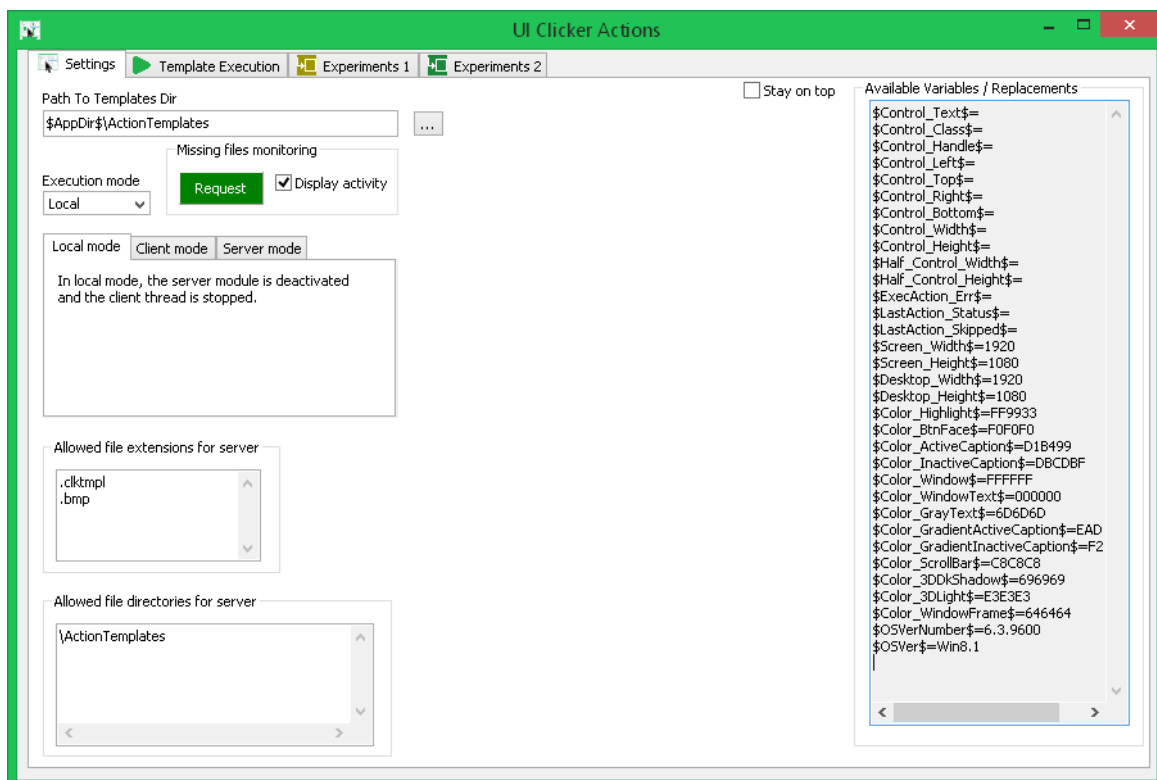


The screenshot of a subcontrol, can be taken using the Preview window or the Window Interpreter. All the screenshots, used for subcontrol searching, have to be available as bitmaps, at action execution time.

The Actions window is organized into multiple pages, the first of which, being "Settings". Most of the application settings, displayed on this page, involve the "remote execution" feature. From the "Execution mode" combobox, users can set where the actions will be executed (on the local machine, targeting local apps, on the local machine as a client, and on a remote machine as a server). There are also two editboxes, which allow users to select which file types and file locations can be used when transferring files from client to server, during template execution.

Action templates can be located anywhere on disk, and be specified as full paths when called, but they can also reside in a "Templates Dir", configured from "Path To Templates Dir" editbox, from where they can be called, without a path.

On the same settings page, the application displays a list of available variables, which can be used during action execution. Some of them are automatically initialized on application startup.

The second page, "Template Execution", shows a list of actions, for the currently loaded template, and an action editor. During action execution, multiple templates can be loaded automatically and displayed as subpages, depending on the call stack (see "Main Player" page).

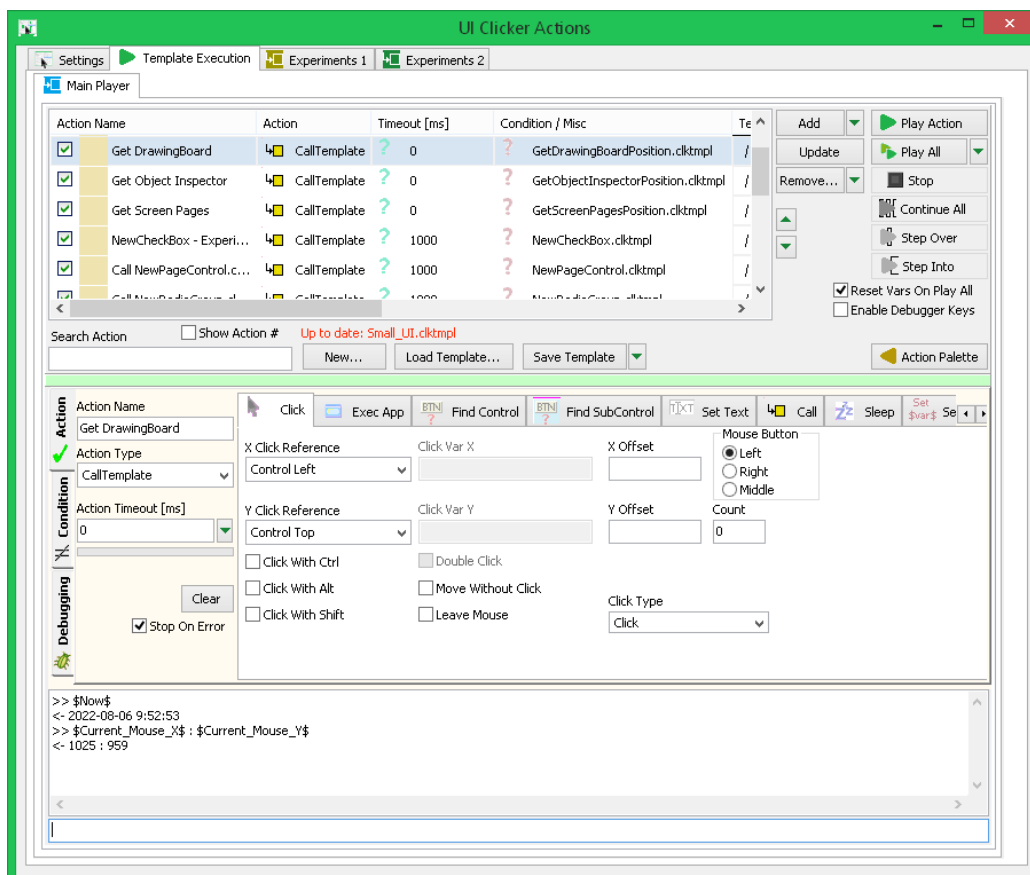

In the first version(s), there are 9 types of actions: Click, ExecApp, FindControl, FindSubControl, SetControlText, CallTemplate, Sleep, SetVar and WindowOperations. Each of these, has various settings, which can be edited from the action editor (the lower part of the Actions window).

For example, the "Click" action can be configured to emulate a click event at absolute screen coordinates, or on a specific control on a window. It can include x/y offsets, can use internal variables, and can emulate a multi-click or a mouse drag event. Every action can be set to be executed or skipped, by a condition (see "Condition" page). Also, after executing a Find(Sub)Control action, in case the search criteria didn't result in a match, i.e. the control is not found, the "Debugging" page may display some useful information. The lower part of the "Template Execution" page is a logger/console, which displays debugging information. It can also be used to quickly evaluate variables or built-in functions. There are also two built-in template editors, under the "Experiments" pages, which can be used to edit a template, while working on another one, in the main editor.

The Window Interpreter is a tool, used for creating a "map of controls", as they exist on the target application. It can do this on a local window, or on the remote machine, where UIClicker is running in server mode.



The yellow panel, in the upper left area of the window, is a "drag panel", which is used to get the basic information from a target window/control, that is to be "interpreted". The process is also called "recording". The recording of a window/control consists of getting the OS allocated handles on every point on that window/control, to determine where the controls are. They are displayed, both as a map of controls and as a tree. Similar to the Preview window, the screenshot of the selected control can be copied to clipboard or saved to bitmap file (right-click on screenshot for pop-up menu). The selected control on screenshot, is "highlighted" by selection lines, which can be manually adjusted. In addition to that, the tree can be saved as a binary file, which can be loaded later. The tree can also be exported as a yaml file. When saving a tree, the currently loaded screenshot and control maps are also saved as png files. If they are available as files, when loading a tree, they are loaded as well. From the arrow button, next to the "Start Recording" button, users can record a window from a remote machine, or record a window with subcontrols on the local machine. Searching for subcontrols works by automatically moving the mouse over a window and looking for changes in appearance. The process is imperfect, i.e. it will miss some subcontrols or find non-existent subcontrols. It is also time consuming and CPU demanding.

The Template call tree window is a small tool, which attempts to display a call tree out of multiple loaded templates. It may be useful when working on a project with many templates and it becomes hard to figure out how they are called. In case of recursive calling, the templates may end up being removed from the tree, because they may be counted multiple times.



The last tool, which can be displayed from UIClicker's main window, is the "Remote Screenshot" window. This is required by Window Interpreter, when recording a window on a remote machine. The selected control, from the Remote Screenshot window is going to be the "root" control in the tree, generated by Window Interpreter. Clicking the "Refresh screenshot" button, will take a screenshot of the remote machine and display it on "Remote Screenshot" window. Depending on the "Mouse tool" combobox selection, clicking on the screenshot can select a component (window or other control), or can send the "MouseDown" / "MouseUp" events to the remote machine. The arrow button, next to "Refresh screenshot", opens a pop-up menu, with an item, which when set, allows automatically refreshing the screenshot after a "MouseUp" event.




## 2. Action options and action editor

As mentioned in the previous sections, actions are organized into action templates. These templates can be saved to files and called from other templates. The flow control is simple. It features conditions for every action, to decide if an action is going to be executed or skipped. Conditions are defined as boolean values, evaluated from existing variables. The execution is mostly linear, without explicit loops. To execute one or more actions multiple times, can be done either by copying those actions multiple times in a template, or calling the template recursively.

There is only one variable namespace in a template call chain, i.e. the same list of variables is passed to a template when called, and updated back on return. The experiment pages from the Action window, have their own variable instances. When executing remote actions, the list of variables from server, is overlayed on top the existing local (client) list. This happens after every explicitly executed action. Variables are automatically evaluated when used in action execution.

Currently, the whole automation process is done with the following actions types:

Click, ExecApp, FindControl, FindSubControl, SetControlText, CallTemplate, Sleep, SetVar and WindowOperations. Each of these actions has multiple options, which can be set from the action editor.




An action can be added to the list, in multiple ways. The action palette can be displayed from the "Action Palette" button (the one with the yellow arrow), from where, an action can be dragged to the list of actions. Once in the list, it can be edited. The second way of adding an action, is from the "Add" button and its arrow button. This will add the current content from the action editor as a new action. The third way is to paste actions from clipboard. Depending on the current

focusing state, the list of actions may not always recognize Ctrl-V as a keypress. While editing an action, the "Update" button displays a red text, indicating that the content in editor is modified, but not the action. When clicking "Update", the content from the editor is updated in the list of actions.

## 2.1. The "Click" action

This action would usually be found as the final action in a chain of actions, involving the interaction with a control. A click event can be emulated at absolute screen coordinates, at a control left/top or right/bottom coordinates, or some x/y coordinates given by user defined variables. It can be done with the left, right or middle mouse buttons. The event can be a click, a drag, a simple mouse move, a single mouse down or mouse up. Usually, the mouse cursor is returned to the initial position (the one before executing the action). Optionally, the mouse cursor can be left at the target coordinates. It may be required as the proper behavior of different controls, or simply as a debugging option. A double-click may be emulated as two clicks. In the current version, the duration of "mouse-down" or the delay between clicks, are not editable. As limitations, there is no option for mouse wheel or click speed control.

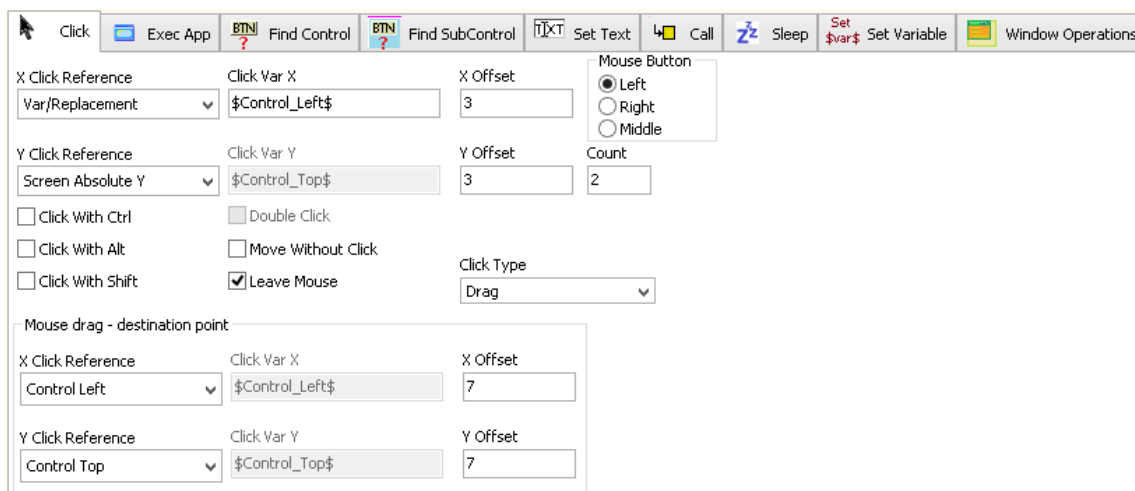

There are also options to emulate key events for Ctrl, Alt and Shift, while executing the click events. Most of the editboxes accept variables as values. Users can hover the editboxes with the mouse cursor, to display their tooltips. They mention whether they accept variables or not.

## 2.2 The "ExecApp" action

Executing other applications may be required as part of the automation, or simply to do some operation, which UIClicker can't do. The executed application can receive a string through StdIn and will store the StdOut in "\$ExecAction\_StdOut\$" variable. Because the list of variables uses CRLF as delimiter for its internal structure, the content of "\$ExecAction\_StdOut\$" variable is automatically modified, to replace CRLF occurrences with ASCII 4 and ASCII 5. A similar format is expected from the string passed through StdIn. A future version of UIClicker may have a different structure for the list of variables, where no delimiter is needed. Users can call the following two built-in functions, to do the CRLF <-> #4#5 conversions:

```
"$FastReplace_45ToReturn(<some_string>)"
"$FastReplace_ReturnTo45(<some_string>)"
```

The "Use InheritHandles" option is one of the parameters of CreateProcess function, from the win32 API. It is required when passing data through StdIn and StdOut. It can also create a problem when executing an application, which will have to stay open, if the UIClicker is running in server mode. That is, the executed application will keep open the socket, created by UIClicker as server. This will prevent new instances of UIClicker to listen on its own port number. At the expense of a bit of CPU overhead, the socket reuse is switched off, so the above behavior should not be present. When the "No console" checkbox is checked, executed console applications will not be displayed.

### 2.3 The "FindControl" action

This is one of the most common actions, users will have to work with. UI interactions usually start by searching for a window (which is also a control), then following a chain of controls on that window, end up to the desired control, which has to be clicked, or having its text box set to a specified value. This action can find controls only, i.e. components which have a handle number, allocated by the operating system. It is a fast operation, because it can rely on available win32 API. A control can be searched on the whole screen (this is usually the case when searching for a window), or it can be searched in a specific area, usually, the rectangle of the parent control/window. A control is most of the times, identified by a class and/or text and is found in a specific area. When multiple controls can be found by the search criteria, users have to constrain the criteria by limiting the search area. UIClicker can't work with multiple controls at once, so the first found control will be returned as the search result.

Some parts of the editor are shared with the FindSubControl action, thus all of the options will be displayed on both action types. Eventually, they may be separated in a future version of the application. For example, in the "Criteria" page, the "Match Text" and "Match Class Name" are FindControl specific options, while "Match Bitmap Text" and "Match Bitmap Files" are FindSubControl specific. Similarly, the same "Match Text" editbox, from the "Text" page is used both for FindControl and FindSubControl actions.

These actions are allowed to fail, because sometimes, a control is expected to not exist.

When a Find(Sub)Control is set to be allowed to fail, and it fails, it sets its execution result as "Allowed Failed". This response can be used for flow control. There is also an option to wait for a control to be hidden or to be destroyed. It can be used to wait for a dialog box to stop indicating that some operation is in progress.



Since the Find(Sub)Control action executes in the UI thread, UIClicker can be blocked if the target application is not responding. The default search mode, set by "Search For Control Mode" radiogroup, is set to generate a grid, as it works both for windows and other types of controls. The other two use window specific APIs. All of the three options are affected by non-responding windows.

*Warning: the EnumerateWindows option may not work, because the callback specified by EnumWindows (see win32 API) function, receives a lot of invalid window handles from the operating system, and sometimes, no valid handles at all.*

When using Find(Sub)Control action, always set a timeout, greater than 0. Otherwise, the action may keep searching for a control, which will never be found. Working with FindControl and FindSubControl, can quickly become frustrating when the desired control is not found. That is because the search criteria may not be properly set, or the search area does not include the searched control. For example, there are applications, which display a variable window title, based on their loaded project(s). For example, a window title may contain the project name, or a "\*" or the word "modified". There are cases when the window class may contain a different random number, every time the application is started. UIClicker has support for searching for these types of windows/controls, by allowing wildcards or multiple predefined text/class values to be searched in a single action. The "Match Text Separator" and "Match Class Separator" editboxes, from the "Text" page, accept user-defined strings, which can be used to separate multiple values in the "Match Text" and "Match Class" editboxes. Currently, there is no support for regex.

Criteria ☒ Text ☐ BMP Text ☐ BMP Files ☒ Search Area ☒ Text/BMP Settings

Match Text: Form1 Match Text Separator: Find control details on window

Match Class Name: TForm1 Match Class Separator: Drag the mouse cursor, from this box to the target window

Found control text: Found control class:

Copy values from found control

Control info


Text matching enabled (text only).

The yellow panel can be used to get a control's text and class, by starting a mouse drag operation from anywhere on that panel, to the target control. When releasing the (left) mouse button, the control's text and class are displayed in the "Found control text" and "Found control class" editboxes. From there, they can be copied to the "Match Text" and "Match Class" editboxes, using the "Copy values from found control" button. Next to this button, there is an arrow button, which opens a pop-up menu, from where similar values can be copied from Preview window or Window Interpreter. It has to be mentioned, that not all controls will have a text. However, all controls should have a class. When searching for a control, which can have any text value, matching text should be disabled.

## 2.4 The "FindSubControl" action

The "BMP Text" and "BMP Files" pages are FindSubControl specific options, which configure how to search for a screenshot of a subcontrol. If the subcontrol is "defined" as a text, most of the time, the text can be generated by UIClicker, using the options under "BMP Text" page. The "image" of the searched text can have multiple font profiles per action, so that it can match a subcontrol in multiple states. For example, focused, unfocused, selected, unselected. Most of the time, text color and background color are standard system colors. UIClicker implements built-in variables, initialized with these color values, for the most common system colors. Two fonts are also commonly found in various system menus and standard controls, which are Tahoma 8 and Segoe UI 9. Depending on application implementation, these fonts may be configured with different "font qualities" (i.e. anti-aliasing), which can also be set, from the "Quality" combobox.




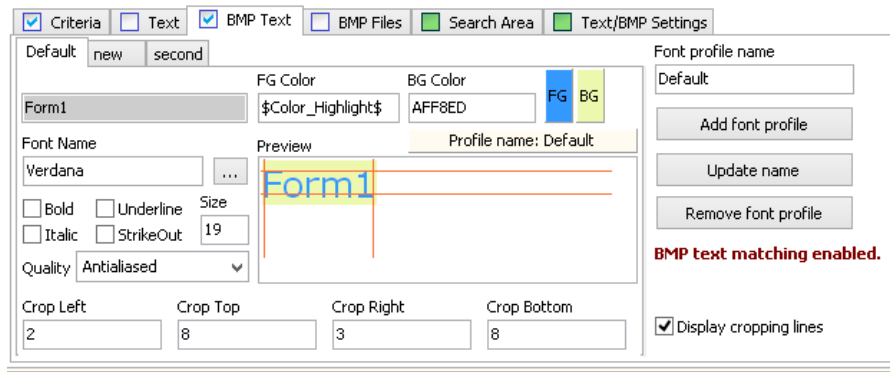

The generated text, as displayed in the "Preview" box, is searched on the window/control defined by the search area. It can be matched pixel to pixel with 100% or less accuracy. When searching for antialiased text, usually, there won't be 100% match, so users will have to configure an expected search error. This can be done from the "Text/BMP Settings" page. Unfortunately, UIClicker does not provide an automated way of finding the minimum error level. The searched text can be cropped, so it can be matched even when its edges are being overlaid by a focus rectangle.

The "BMP Files" page is a list of bitmap files, which contain screenshots of the searched subcontrol. Similarly to the generated text, this allows searching for multiple screenshots of the subcontrol, in its different states.

The advantage of searching for a predefined text, is that it can be easily configured to include multiple font profiles, whenever the operating system settings might influence the text appearance. The disadvantage of using bmp files, is that they have to be present on disk, at the configured location, making the whole project less portable.

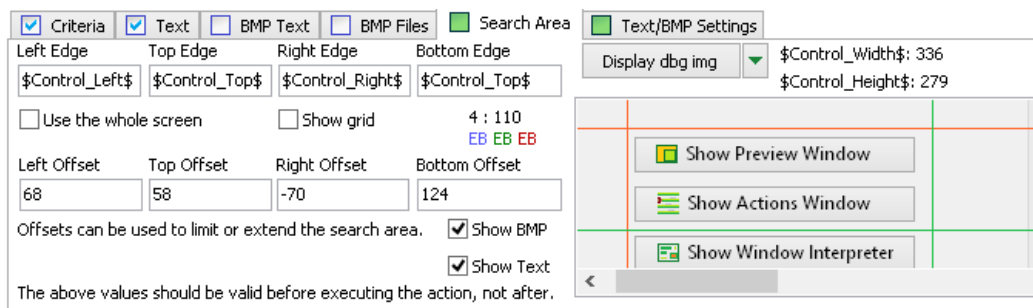

As the name suggests, the "Search Area" page is a collection of settings, defining where to search for a control or a subcontrol. Users will have to take care of the "Use the whole screen" checkbox, when searching for a window (the whole screen) or when searching for any other control. Sometimes, a control can be found if the checkbox is left unchecked, i.e., searched all over the screen, but it is better to limit the search to a specific window or other parent control. The search area is defined by a left/top/right/bottom rectangle. These values are usually found in the "\$Control\_Left\$", "\$Control\_Top\$", "\$Control\_Right\$", "\$Control\_Top\$" variables, automatically set by the previous action(s), which searched for a parent control. The search area can be further limited by offsets. Depending on how the searched control or subcontrol is aligned to its parent control/window, the search area can be defined by different variables. This makes the search more versatile and immune to window resizing, since a control is usually aligned to one of the window's edges. The smaller the search area, the faster the (sub)control will be found.

The "Display dbg img" button, takes a screenshot of the search area, using the current configured edges, by the last executed action. That is, when pressing the button, a successful action has to already be executed, which will define the desired search area. Do not execute the currently worked on action, when pressing this button, because that will result in modifying the "\$Control\_Left\$", "\$Control\_Top\$", "\$Control\_Right\$", "\$Control\_Top\$" variables, leading to an invalid search area. The "Show BMP" and "Show Text" checkboxes can be used to display either

one of the searched texts or bitmap files, overlayed on top of the search area. This helps to visually compare the searched subcontrol, to the searched content. Generating the preview text or preview bmp can be done from the arrow button, next to the "Display dbg img" button. The "Offset" editboxes from this page, can automatically update the position of the orange-green limit lines, from the preview image. This can be done by holding Ctrl or Ctrl-Shift, while "dragging" one of these editboxes up or down with the mouse left button. This feature works only for the case when "Use the whole screen" editbox is not checked. The editboxes are also updated when dragging the lines.

The last set of options can be found on the "Text/BMP Settings" page. Here are the "Color Error" and "Color Error Count" editboxes, from which users can set the color difference and how many error points are allowed for a successful match. At the moment of writing this, there are only two search algorithms, a "brute force" and a "grid" search. The brute force algorithm verifies the searched bmp (text or file) pixel-by-pixel, starting with the top-left corner of the search area, and it continues, towards the bottom-right pixel. The grid algorithm does a similar search, but only for the points matching a multiple of "X" and "Y" values, defined by the "X Multiple Of" and "Y Multiple Of" editboxes. The grid can be shifted by different amounts, from the "X Offset" and "Y Offset" editboxes. The grid algorithm is useful when the search area is known to have a structure (like a listbox, tree, menu etc.), displaying items at specific coordinates.

The "Display dbg img" button and the preview image are automatically displayed on this page as well. When the "Show grid" checkbox is checked, the preview image shows also the generated grid. There is also an option to cache the search coordinates, so that the search algorithm would verify them first (see "Search cached Left/Top vars" checkbox). It has to be mentioned that caching is not efficient when using multiple font profiles, because a cache miss will fall back to searching for text on that particular font profile, before moving to the next one.

When a control or subcontrol is not found, although "it should be", users will have to double check the match criteria, the expected control text and class, font settings, search area and color error. Since this is a search algorithm, it is very difficult to implement a mechanism to track down what is the cause of missing a searched (sub)control.

The action timeout on a FindSubControl action, will stop the action, only after one full search (the entire search area), which can take longer than the timeout itself. It should not be set to 0.

## 2.5 The "SetControlText" action

Similar to clicking, the (sub)control can be interacted with, by emulating the keyboard. The most common control this action will target, is the editbox. It comes either as a standard system control, or can be part of a UI framework, where it is more of a subcontrol (does not have a handle number). When targeting a control, the "SetText" action may be configured to use the "EditBox" option, which is the fastest. This implies setting the editbox using native win32 API. However, it is possible, that depending on the implementation of target application, simply setting the next, won't trigger any "OnChange" event, needed to properly detect that the editbox content has changed. If that's the case, the action has to be configured, to emulate keystrokes, by selecting the "Keystrokes" option. This will trigger any "OnChange" event, configured for that editbox. This option is a bit slower than the "EditBox" one. The "ComboBox" option may be used, when the

target editbox is part of a combobox component. It is similar to the "EditBox" one.

Since this action does not implement emulating special keys (yet), like Ctrl, Shift, Alt, Esc, Return, F1, F2..., Del, PgUp, PgDn etc, there is a case, when an editbox may have to be cleared, before being typed on. If setting its text is not an option, maybe emulating a double click would select the text, which will automatically be overwritten when "typing".

The screenshot shows the 'Set Text' configuration window. At the top is a toolbar with icons for Click, Exec App, Find Control, Find SubControl, Set Text (active), Call, Sleep, Set Variable, and Window Operations. Below the toolbar, the 'New Text' field contains 'my new text'. A 'Control Type' section has three radio buttons: 'EditBox' (selected), 'ComboBox', and 'Keystrokes'. To the right of these buttons is explanatory text: 'Most edit boxes and combo boxes can be set, using the first two options. However, depending on their usage on the target application, this approach might not be enough. For edit boxes, the action can be configured to use key strokes. For combo boxes, this action will have to be replaced by multiple actions, to open the box, finding text, selecting etc.' At the bottom, there is a note: 'The proper control type has to be selected, for the proper API call. Uses \$Control\_Handle\$ variable. HTTP calls are available, as var values, using the following format: \$http://<server:port>[/params]\$', where the slashes are escaped as double slashes.

The content for the "New Text" editbox, can be automatically obtained from an HTTP server, which should respond with the expected text, when being requested with a string of the following format: "\$http://<server:port>/[params]\$" (without double quotes). A similar request can be made by the "http" function, on most action editboxes.

## 2.6 The "CallTemplate" action

As mentioned before, templates can call each other, passing a set of variables and setting new or existing variables when returning. Because the implementation is simple, there is only one namespace, i.e., there is only one set of variables. The ones, mentioned under the "Custom user variables before calling" list, will simply be added to the list of existing variables, right before calling the template. They will remain there, appended to the main list. This is one way of creating new variables. The other way would be from the "SetVar" action.

The screenshot shows the 'CallTemplate' configuration window. The toolbar is identical to the previous window. The 'Template file name' field contains 'CallSetEdit.clktml', followed by a dropdown arrow, an ellipsis button, and a 'Select none' button. A checkbox labeled 'Evaluate vars before calling' is checked. Below this is a section titled 'Custom user variables before calling' containing a table with two columns: 'Variable' and 'Value'. The table has two rows: the first row has '\$Item\$' in the Variable column and 'Open...' in the Value column; the second row has '\$Text\$' in the Variable column and '\$TextValue\$' in the Value column.

This action has one option of evaluating the variables, before calling the template. The path to the called template can be an absolute path, or can be omitted. If only the template filename is mentioned, UIClicker assumes the template should be found in the configured template directory (see "Settings" page).

## 2.7 The "Sleep" action

There are cases when a dialogbox is blinking or automatically resizing, while being displayed, causing UIClicker to miss a searched control.


The screenshot shows the 'Sleep' configuration window. The toolbar is identical to the previous windows. The 'Sleep [ms]' field contains the value '100'. To the right of this field is a note: 'Sleep values, lower than 1, are ignored.' Below this is a paragraph: 'Use this action only as a last resort (e.g. blinking or resizing controls/windows).' At the bottom, there are two fields: 'Elapsed Time [ms]:' and 'Remaining Time [ms]:', both of which are currently empty.

This is a type of race condition, because the searched control is there, but it is still inaccessible. Most of the time, there is no proper way of waiting for a stable state of that dialogbox, so only a sleep action would be a working solution. This action should be used as a last resort only. For all the other windows and controls, there should be other ways of waiting for them. This action is defined by one single option, the time duration, in milliseconds.

While executing, the remaining time is displayed on the action editor.

## 2.7 The "SetVar" action

There are cases, when one or more variables will have to be set, before executing some other actions. The "SetVar" action allows, both setting existing variables to new values, or creating new variables, by simply adding them to the list. By the way they are used, the UIClicker variables are also called replacements, as they are automatically evaluated and replaced with their values when used. Variables are defined as their names, enclosed by two "\$" characters. Their values, can be simple strings, other variables, or built-in functions. Setting a variable to another variable can be evaluated "in-place" or later, depending on how it is configured.

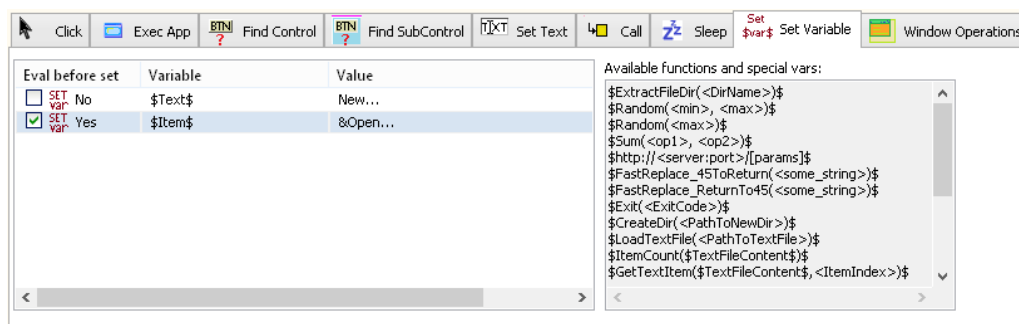

The editor for the "SetVar" action, also displays a list of available built-in functions. This is a simple list, as it was needed by the time of writing this documentation. Future versions of UIClicker might implement more functions. This is highly dependent on the automated applications, as some of them might not need such functions at all.

The "\$ExtractFileDir(<DirName>)\$" function can be used to return the directory from a file path. The "\$Random(<min>, <max>)\$" function can be used when the mouse cursor has to be moved over a control, in a random fashion. The "\$http://<server:port>/[params]\$" function can be used to get a string from an HTTP server. The \$FastReplace..\$ functions were mentioned before, and are used when converting from ASCII #4#5 to/from CRLF. Storing the ASCII #4#5 characters instead of CRLF, allows proper use of the list of variables, which can't store strings containing CRLF. The "\$Current\_Mouse\_X\$" and "\$Current\_Mouse\_Y\$" functions return the live position of the mouse cursor, at the time of calling. The "\$CRLF\$" function returns the ASCII #13#10 characters, i.e. the "return" string, as used on MS Windows. The "\$#4#5\$" function returns the ASCII #4#5 string. The "\$Now\$" function returns a timestamp, at the call time. To stop the execution of the current template, users can add the "\$Exit(<ExitCode>)\$" to the list. Using "\$CreateDir(<PathToNewDir>)\$", a new directory is created. It also creates parent directories.

There are three functions, which work with text files and their content. The "\$LoadTextFile(<PathToTextFile>)\$" function opens a CRLF separated text file as read-only, and returns its content as #4#5 separated list of items, where each item is a line from the text file. The number of items can be returned by "\$ItemCount(<\$TextFileContent\$>)\$" function, which expects a string with #4#5 separated list of items. Every item can be returned, by indexing it, using the "\$GetTextItem(<\$TextFileContent\$>, <ItemIndex>)\$" function. The exceptions, raised by "\$LoadTextFile" or "\$GetTextItem\$ functions are handled and returned in '\$FunctionException\$'.

Although some of the above functions look like ordinary variables, they should not be used to store custom user values. If for example, "\$Current\_Mouse\_X\$" is assigned a value from the console, it is added as a variable to the list of variables, and its value would be returned before being evaluated as a function.

## 2.8 The "WindowOperations" action

UIClicker provides three simple window operations, to directly interact with one of the windows from the target application. These are "Bring to front", "Move / resize" and "Close". The "Bring to front" operation, focuses the target window and brings it to the top-level position on desktop. This is usually required, to have full access to a window when taking a screenshot or when interacting with one of its (sub)controls.

The screenshot shows the 'Window Operations' action configuration window. At the top is a toolbar with icons for Click, Exec App, Find Control, Find SubControl, Set Text, Call, Sleep, Set Variable, and Window Operations. The 'Window Operations' tab is selected. Below the toolbar, the 'Operation:' dropdown is set to 'Move / resize'. There are four input fields: 'New X' (20), 'New Width' (500), 'New Y' (30), and 'New Height' (800). Below these are two checkboxes, 'Set position' and 'Set size', both of which are checked. At the bottom, there are two buttons: 'Set from \$Control\_Left/Top\$' and 'Set from \$Control\_Width/Height\$'.

The next available operation is "Move / resize", which can move and resize a window to the desired position and size. What win32 API allows, is that any standard windows control can be moved or resized, not only windows. Moving a button or resizing it on a 3rd party application, might not be of any practical use, but it should be mentioned, as the API allows it. Positioning and resizing a window may be required, when the actions are configured to expect certain controls in specific areas of the target windows. For example, there may be few actions at the beginning of a template, to arrange the target windows on desktop, then interact with them.

The last available operation is "Close", which can close a window, or the entire application. All of the above operations, rely on the value of `$Control_Handle$` variable, as it is automatically set by a FindControl action.


## 2.9 Action conditions

Every action is conditioned by the successful execution of the previous action, i.e., the value of the `$LastAction_Status$` variable has to be "Successful" or "Allowed Failed". It can also be empty string, for the first action of a template. If this variable is "Failed", the execution stops. To further control the execution, every action has its own condition, in the form of an "evaluable" expression, composed of AND / OR operators. This can be edited on the "Condition" page (see the vertical tabs). When comparing two variables, or a variable against a constant, they can be compared using the following operators: "=", "<>", "<", ">", "<=", ">=". When an action condition is false, the execution is not stopped, the action is simply skipped and the `$LastAction_Status$` is set to "Successful". In addition to that, the `$ExecAction_Err$` variable is set to "Action condition is false.", to indicate why the action wasn't executed. The `$LastAction_Skipped$` variable is also set to "Yes".

## 3. The debugger

As in writing code, creating UIClicker templates, requires a lot of trial and error, i.e. setting options and testing them. Most of the time, users will have to add actions, then run them in place, to see if they are properly configured. Since many actions depend on previous actions, executing a Find(Sub)Control, twice in a row, won't lead to consistent results. This is where executing actions, using the built-in debugger, is required.

An action can be executed (played) on its own, regardless of the execution status vars, from the "Play Action" button. The "Play All" button will start the execution of the entire template, from the first action. Executing all actions, depend on the actions status of previous actions. The execution will stop at breakpoints, only when in debugging mode.

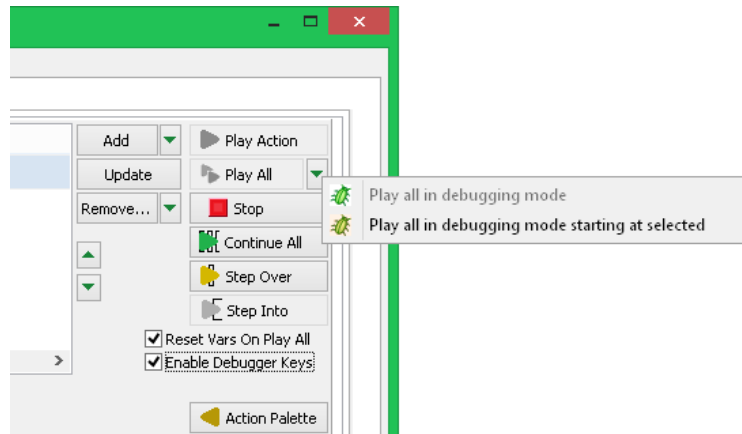

To execute using the debugger, there is an arrow button, next to the "Play All" button, which has two options, to execute the entire template in debugging mode, or start with the first selected action. Once entered the debugging mode, the execution waits for the user to click one of the "Step" buttons, to move to the next action, or "Continue All", to continue normal execution (as without debugger). The "Step Into" button, is used to open a template in a new page (tab), when the execution gets to a CallTemplate action. It allows the debugger to step through the called template.

There are cases when clicking the debugger buttons will interfere with the automated application, because there may be menus, still open, which expect a click. That is, clicking on a debugging button, will close the menus of the target application. The solution was to implement shortcut keys. They can be enabled from the "Enable Debugger Keys" checkbox. In the first version(s) of UIClicker, these keys are not configurable. They are mapped as follows:

- F6 to take a screenshot of the search area (the same as what the "Display dbg img" button does)
- F7 for Step Into
- F8 for Step Over
- F9 for Start execution and Continue All
- Ctrl-Shift-F2 to stop execution (this may require holding the keys for a few seconds, to stop).

It has to be mentioned that, while debugging, the execution engine does not expect the list of actions to change. There is no mechanism to prevent adding/moving/deleting actions, while debugging. If that happens, executing an unexpected action will cause an access violation. It is also possible that adding/moving/deleting actions somewhere at the bottom of a template won't cause access violations, if the execution is currently somewhere at the top.

In addition to the debugging buttons, there is also a dedicated page, called "Debugging" (see the vertical tabs), where users can access all available variables, and see the execution result of FindSubControl action (see "Bitmaps" section), under "Debugging" page. There is also a console-like "logging" box, which displays various debugging information. It also contains an editbox, where users can type any variable to be evaluated, or assigned. It has to be mentioned that complex expressions can't be evaluated properly, as the parser has a simple implementation.

#### 4. The HTTP API

UIClicker implements a simple HTTP API, to communicate between two instances, one in client mode and the other in server mode. The server module is set to use keep-alive connections, because the Internet library (Indy: <https://github.com/IndySockets/Indy>) works by creating new threads for any new request. At server side, there is a thread pool (configured to 30 threads), which allows serving existing threads on new requests, without too much CPU overhead. However, if the client disconnects after receiving a response, the behavior is similar to the case where no keep-alive connection is available. UIClicker uses both types of requests as the implementation allows. At client side, there is a separate thread, which is responsible for sending templates and bitmaps to the server, as the server won't have them available during execution. This connection can benefit from the keep-alive option and will stay alive (connected) as long as possible, sending data continuously. Other requests, are made by a different client module, which is created / destroyed on every request.



This can't benefit from the keep-alive option, so new connections are created for every new request. It is usually an additional overhead to the operating system.

The current implementation requires creating/destroying the client modules, because for every new started template (while calling new templates), a new client module is created. Every such module will keep the connections open, while executing its "subtemplates". This way, the client instance will have multiple connection to the server, where only one is actively transferring something (request/response). This can easily be seen while debugging, when multiple templates are open, multiple connections should also exist.

There is however a limitation, as a safety measure, which involves the read timeout, that will close the connection if no data is transferred in a given amount of time. This timeout is currently hardcoded to 1h. A future implementation might be based on a totally different approach, where connections should be asynchronous and there won't be any waitings of such high timeout values. The current implementation is supposed to be simple, not necessarily efficient.

Some requests will get (request) various screenshots (either a debug image, or a full desktop screenshot) from server as uncompressed bitmap files. In the first version(s), there is no option to get the screenshots in a different file formats or using other forms of compression.

Following, there are short descriptions of HTTP commands, as implemented in UIClicker.

#### **4.1 SendFileToServer**

Type: PUT

Request:

`http://<server:port>/SendFileToServer?FileName=<PathToFileForServer>`

Payload:

The file content (.clktmpl or .bmp)

Expected response(s):

Expecting a valid filename.

Received file: "<Fnm>" of <Size> bytes in size.

Description: SendFileToServer is used to send templates and bitmaps from client to server, as the template execution happens at server side. The current implementation makes use of an in-memory file system, at server side, so all executed templates and the bitmap files they require, are eventually sent to server. They are not saved to disk, they are simply used from memory. The in-mem file system allows its files to have full paths, so the "PathToFileForServer" value will usually have the full path as it exists on disk, at client side. Usually templates are created at client's in-mem file system and sent from there. Bitmaps are sent from client's disk and can have relative paths.

#### **4.2 GetFileExistenceOnServer**

Type: PUT

Request:

`http://<server:port>/GetFileExistenceOnServer?VerifyHashes=<0..1>`

Payload:

CRLF separated list of file paths to be verified

Expected response(s):

CRLF separated "0"s and "1"s, matching file existence on server, in its in-mem file system

Description: GetFileExistenceOnServer is used to find out which files already exist at server side, and which files will have to be sent. In addition to checking the file existence, the "VerifyHashes" parameter, if present and set to "1", causes an additional check, i.e. the file content. This is required, because the file on server side, may be out of date, so the current version would have to be sent. An out of date file is reported as non-existent. When the client wants to also verify file hashes, it sets the "VerifyHashes" to "1" (no quotes), and the list of filenames, it sends to server, will also contain current file hashes, as CRLF separated lines, like: <filename>#1#4<filehash>

where, #1#4 are ASCII characters 1 and 4.



### 4.3 GetListOfWaitingFiles

Type: GET

Request:

`http://<server:port>/GetListOfWaitingFiles`

Expected response(s):

CRLF separated list of file paths

Description: Executing a template at server side is a blocking call, until the template itself and its used files are present. When one or more files are missing, they are placed in a list of missing files, so the client can access this list, using the "GetListOfWaitingFiles" request. This is a continuous polling for missing files and is currently the only request which truly benefits from the keep-alive connections. The polling interval is currently hardcoded at 200ms. With such a low interval, it is clear that creating new connections would quickly become an overhead. Once the client receives the list of files, it sends the files to server, one by one, using the "SendFileToServer" request.

### 4.4 GetCompInfoAtPoint

Type: Get

Request:

`http://<server:port>/GetCompInfoAtPoint?X=<XPointOnComp>&Y=<YPointOnComp>`

Expected response(s):

#8#7 separated list of the following "key=value" pairs:

Err=OK or X or Y are invalid

Handle=<component handle>

Text=<component text> If this value contains CRLF string, only the first line is read.

Class=<component class>

ScreenWidth=<screen width at server side>

ScreenHeight=<screen height at server side>

CompLeft=<component rectangle, left edge>

CompTop=<component rectangle, top edge>

CompWidth=<component width>

CompHeight=<component height>

Description: This request is used by the RemoteScreenshot window, when clicking somewhere on the screenshot. It is expected, that any point in a screenshot, belongs to one control, either the desktop, or a window, or any other control on a window. Some of the received parameters from the clicked component, are displayed on RemoteScreenshot window, others are used internally.

The following commands currently use the same parameter validation, although some parameters won't be needed for various commands. Future (better) implementations might have these validations removed when not needed. Some of the commands address a specific loaded template, during template execution, so the required parameter would be template index, which can directly address, one of those templates. This parameter is `StackLevel=<value>`. It will have to be present and be assigned to a valid value, starting at 0. For most commands, setting `StackLevel` to 0, will be fine, as it will address the main loaded template. For the others, it will have to address an existing loaded template, including the main one.

If this parameter is missing, the response would be:

[Server error] Stack level not specified.

When its value is out of range, the response is:

[Server error] Stack level out of bounds: <param value>

If, for some reason, the above validation fails, and the requested index is still out of range, the default response is:

[Server error] Can't get frame at index: <param value>

The frame, mentioned above, is the internal component, which stores the action template (+ editor).

#### 4.5 ExecuteCommandAtIndex

Type: Get

Request:

```
http://<server:port>/ExecuteCommandAtIndex?
```

```
StackLevel=<value>&ActionIdx=<ActionIndex>&IsDebugging=<0..1>
```

Expected response(s):

ok For a successful execution

If the ActionIndex parameter is invalid, the internal variable, "\$DbgCurrentAction\$" is set to Cannot select action, to load values at index <index>.,

and the variable "\$Exception\$", is set to

```
ActionIndex out of bounds: <index> in ExecuteActionAtIndex(<index>)
```

#8#7 separated list of all the internal variables

Description: ExecuteCommandAtIndex can execute an action at ActionIndex, from the template at StackLevel. This is similar to clicking the "Play Action" button on a selected action. This action, automatically calls the internal handler, assigned to the "GetExecuteCommandAtIndexResult" request. It contains an additional variable, "\$RemoteExecResponse\$", which can be 0 or 1, depending on error condition and action execution result. The value of this variable, controls whether the execution should continue or not at client side. This list will replace the current list of variables at client side.

#### 4.6 GetExecuteCommandAtIndexResult

Type: Get

Request:

```
http://<server:port>/GetExecuteCommandAtIndexResult?StackLevel=<value>
```

Expected response(s):

#8#7 separated list of all the internal variables. It includes "\$RemoteExecResponse\$", which can be 0 or 1.

Description: Returns the list of all the internal variables, from any loaded template.

#### 4.7 ExitTemplate

Type: Get

Request:

```
http://<server:port>/ExitTemplate?StackLevel=<value>
```

Expected response(s):

ok

Description: Closes a template, which has automatically been loaded as a result of calling it from another template. This is usually called by client on the last action of a template, in debugging mode.

#### 4.8 GetAllReplacementVars

Type: Get

Request:

```
http://<server:port>/GetAllReplacementVars?StackLevel=<value>
```

Expected response(s):

#8#7 separated list of all the internal variables.

Description: This request is similar to GetExecuteCommandAtIndexResult, however, the returned list of variables will not include "\$RemoteExecResponse\$".

#### 4.9 GetResultedDebugImage

Type: Get

Request:

```
http://<server:port>/GetResultedDebugImage?StackLevel=<value>&Grid=<0..1>
```

Expected response(s):

A bitmap file, containing the debug image from "Debugging" page (see action editor)

Description: The client sends this request, to get the debug image from "Debugging" page. It will display it as the current debug image. This request is made after executing a FindSubControl action. If the Grid parameter is set to "1" (no quotes), the returned image contains the configured search grid.

#### 4.10 GetSearchAreaDebugImage

Type: Get

Request:

```
http://<server:port>/GetSearchAreaDebugImage?StackLevel=<stack level>
```

Expected response(s):

A bitmap file, containing the screenshot of the latest found (sub)control.

Description: After finding a control or a subcontrol, its position is kept in '\$Control\_Left\$', '\$Control\_Top\$', '\$Control\_Right\$', '\$Control\_Bottom\$' variables. These may be used on a subsequent Find(Sub)Control action, to narrow down another (sub)control. The operation of getting the current (sub)control screenshot is required to manually define a search area for the new action. On UIClicker's action editor, this is done from the "Display dbg img" button, found on "Search Area" page under the "FindControl" or "Find SubControl" pages. In server mode, the GetSearchAreaDebugImage action is used to "click" the "Display dbg img" button remotely. When clicking this button on client side, a screenshot is taken on server machine and displayed on both server and client's editors. Users can define a new search area for the currently worked on action, from this screenshot. As mentioned before, the defined offsets are valid only after executing the action which finds the component from screenshot. If the user executes the currently worked on action (that which the search area is now being defined), the '\$Control\_Left\$', '\$Control\_Top\$', '\$Control\_Right\$', '\$Control\_Bottom\$' variables are modified, resulting in an outdated search area. Often, the user will have to test if the search area is valid, by executing the action. To avoid working with an invalid set of offsets (search area), all the Find(Sub)Control actions, above the currently worked on action, which are part of the component hierarchy, will have to be executed again, to properly update the variables. The screenshot may not have to be updated, as it usually won't change.

The StackLevel parameter should be specified as a valid value for the current execution. UIClicker sets this parameter, depending on the current editor, which sends the request.

#### 4.11 GetScreenShotImage

Type: Get

Request:

```
http://<server:port>/GetScreenShotImage?StackLevel=0
```

Expected response(s):

A bitmap file, containing the desktop screenshot, at the screen size.

Description: This request is made by clicking the "Refresh screenshot" button from the "Remote Screenshot" window. It gets a new screenshot on every request. The screen resolution is expected to be known in advance. In case it is not set yet, it is obtained by requesting GetCompInfoAtPoint.

#### 4.12 GetCurrentlyRecordedScreenShotImage

Type: Get

Request:

```
http://<server:port>/GetCurrentlyRecordedScreenShotImage?StackLevel=0
```

Expected response(s):

A bitmap file, containing the current component screenshot.

Description: This is similar to GetScreenShotImage, but instead, it returns the current screenshot, as it is displayed on the Window Interpreter from server side.

#### 4.13 LoadTemplateInExecList

Type: Get

Request:

`http://<server:port>/LoadTemplateInExecList?  
StackLevel=0&FileName=<PathToTemplateFile>`

Expected response(s):

`Loaded`

Description: LoadTemplateInExecList is used to load an existing template into the Actions window. It is expected that the template already exists in server's in-mem file system, sent via the SendFileToServer request. If the file does not exist, the server puts its name into the list of missing files, then enters a waiting state. While waiting, it does not respond to the LoadTemplateInExecList request. The client has to use a separate connection, to monitor for missing files, via the GetListOfWaitingFiles request. It will get the name of the missing template, then it will have to send it to server. When available on server, the file is loaded, and the LoadTemplateInExecList request is served.

#### 4.14 GetFileExpectancy

Type: Get

Request:

`http://<server:port>/GetFileExpectancy?StackLevel=0`

Expected response(s):

`OnDisk` or `FromClient` or `Unkown`, depending on the "Files existence" combobox from the "Settings page".

Description: This request is used by the client, when calling a new template, to get the server setting of "Files existence". If the the response is `FromClient`, then the client sends missing files to server.

#### 4.15 RecordComponent

Type: Get

Request:

`http://<server:port>/RecordComponent?StackLevel=0`

Expected response(s):

Binary content of the tree structure, as recorded by Window Interpreter. This is similar to the file, saved using the "Save Tree..." button.

Description: Records the selected component from Window Interpreter and returns the tree structure. This structure is then loaded by the Window Interpreter tool from client side, and displayed there. The request is made from the arrow button, next to the "Start Recording" button, from Window Interpreter.

#### 4.16 TestConnection

Type: Get

Request:

`http://<server:port>/TestConnection`

Expected response(s):

`Connection ok`

Description: This is a simple request, which can be used to verify if the server is available.

#### 4.17 ClearInMemFileSystem

Type: Get

Request:

`http://<server:port>/ClearInMemFileSystem?StackLevel=0`

Expected response(s):

`Done`

Description: This request is used to delete all files from the in-mem filesystem. Usually, it shouldn't be required. It is mostly used for debugging. All the existing file transfer mechanisms should already be capable of updating the required files, regardless of their existence.

#### 4.18 SetVariable

Type: Get

Request:

```
http://<server:port>/SetVariable?  
StackLevel=0&Var=<$SomeVarName$>&Value=<SomeValue>
```

Expected response(s):

Done

Description: This request is useful mostly for debugging, as setting a variable during action execution, may influence the execution outcome. It can change only one variable at a time. Sending this request with a variable name which does not exist, will "create" that variable, i.e. will add it to the list. There is no restriction about which variable can be changed, so updating a predefined variable may lead to an unusable application (the server instance), which can be "fixed" either by restarting it or setting the variable back to its initial value. This can also be useful if a new version of the operating system implements system colors which are not predefined in UIClicker. There are also cases when the automated application works with multiple projects and the user wants to automatically create new variables, which store project paths or other project related settings.

#### 4.19 TerminateWaitingForFileAvailability

Type: Get

Request:

```
http://<server:port>/TerminateWaitingForFileAvailability?  
StackLevel=0&Loop=<All, Single, Multi>
```

Expected response(s):

Done

Description: When UIClicker runs in server mode and has to execute a template in a CallTemplate action, or to execute a FindSubControl action, it requires one or more files (the template to be executed or some bmp files). When configured to look for these files in its in-mem file system, the server will wait for them either until they are received from client or the waiting loop times out. There are two types of waiting loops, one which waits for a single file only, usually a template, and the other, which is able to wait for multiple files, usually a list of bitmaps. This command can terminate one or both of the waiting loops, before they time out. When this command is sent to server, the action waiting for the missing files, will report that the files do not exist and then fails.

The timeout to wait for a file is hardcoded (for now) to 60s. When waiting for multiple files, the timeout is 60s multiplied by file count. That is, for 3 files, the timeout would be 3min. This command would be useful in testing and when closing the server, in case it is waiting for some files.

A disadvantage of the current implementation, is that a usual command, for executing actions (see commands below) is a blocking call. Because of this, stopping the server's waiting loop, requires sending "TerminateWaitingForFileAvailability" from a separate thread, at client side.

The following, are low level commands, mapped directly to internal action execution commands, as described in chapter 2. Some of them still depend on the action editor and the list of variables. Commands, like FindControl, FindSubControl, SetControlText and WindowOperations, rely on the current value of '\$Control\_Handle\$' variable, to interact with a control, so they will need this variable to be set to the proper control handle. This can be done by calling the "SetVariable" command (from this API) in advance, or using the value automatically set by executing the previous action. The "FindControl" action, sets the '\$Control\_Handle\$' variable to the searched control handle when it is found. Executing the "SetVar" action can also set the '\$Control\_Handle\$' variable.

A significant difference between previous API commands and these "low-level" ones, is that the previous ones rely on creating a template in memory and sending it to the server, while the

"low-level" ones, send each action setting as an HTTP URL parameter.

The actions, which depend on the editor (like FindSubControl or Sleep), will access the editor from the level 0 of the execution stack (the "Main Player"). This tab of the editor is set to allow creating new tabs for new stack levels. When an action reads or writes to a variable, it uses the list of variables from level 0. This is why, in the "low-level" action execution commands, the "StackLevel" parameter must be 0.

The advantage of using "low-level" action execution commands, over creating templates and executing them, is that the user has more control of the execution flow, by using, for example an if statement over multiple action calls, instead of setting the same condition to all those actions in a template, or by using programming features, which are not available in UIClicker, like while or for loops. This also allow combining custom user code with calls to these "low-level" commands.

Some of the action parameters are integers or enums used as integers, which come as string values in an HTTP call. If these values cannot be converted to an integer, they default to 0. Enum values are sent as integers in the range 0..MaxEnum, and currently they do not accept strings. The list of parameters, for every command, matches the list of fields in the structure for that particular command. When parameters are missing from an URL, their value is set to 0, for integers and enums, and to empty string for strings. One particular case is the "FindSubControl" action, which allows searching by multiple font profiles. These are represented as items of an array and should be indexed. Also, there is an additional parameter, which does not have an explicit field in the structure, for setting the array length.

All of the "low-level" action execution commands respond with a list of variables, similar to the "ExecuteCommandAtIndex" command. When an integer or enum parameter is out of range, the "\$ExecAction\_Err\$" variable is set to an error message, like "MouseButton is out of range.". Similar to "ExecuteCommandAtIndex" command, the "\$RemoteExecResponse\$" variable is set to 0 when an action fails, and to 1, when it succeeds.

In the following examples, the URL parameters will be displayed, one per line, for easy readability, but they should not be separated by LF or CRLF when creating the URL.

#### 4.20 ExecuteClickAction

Type: Get

Request:

```
http://<server:port>/ExecuteClickAction?
StackLevel=0&
XClickPointReference=<0..4>&
YClickPointReference=<0..4>&
XClickPointVar=<value>&
YClickPointVar=<value>&
XOffset=<value>&
YOffset=<value>&
MouseButton=<0..4>&
ClickWithCtrl=<0..1>&
ClickWithAlt=<0..1>&
ClickWithShift=<0..1>&
ClickWithDoubleClick=<0..1>&
Count=<1..2147483647>&
LeaveMouse=<0..1>&
MoveWithoutClick=<0..1>&
ClickType=<0..3>&
XClickPointReferenceDest=<0..4>&
YClickPointReferenceDest=<0..4>&
XClickPointVarDest=<value>&
YClickPointVarDest=<value>&
XOffsetDest=<value>&
YOffsetDest=<value>
```

Expected response(s):

#8#7 separated list of all the internal variables.

Description: Depending on the `ClickType` parameter, this action can simulate one or more click/mouse-down/mouse-up operations, or one or more drag operations. When configured to click/mouse-down/mouse-up (`ClickType` is 0, 2 or 3), the parameters ending in "Dest" are ignored. Otherwise, they perform the same role as their non-Dest parameters, but for the destination point. The `ClickWithDoubleClick` parameter is present for backwards compatibility, but it is deprecated and may be omitted. It is superseded by the `Count` parameter, which allows multiple clicks.

The `XClickPointVar` and the `YClickPointVar` parameters can be set to the name of existing variables, which should be evaluated to valid integers, or can be set to some integer values. Negative values are allowed as long as they, together with the `XOffset` and the `YOffset` parameters, will result in values `0..ScreenWidth-1` and `0..ScreenHeight-1`, respectively. The `XClickPointVar` and the `YClickPointVar` parameters are evaluated, only when the `XClickPointReference` and/or the `YClickPointReference` parameters are set to 3, which correspond to "xrefVar" and "yrefVar" enum values. The same goes for their Dest equivalent parameters. For the `XClickPointReference` and the `YClickPointReference` parameters, as well as their Dest equivalent, the 0..4 possible values are defined as enum like:

```
xrefLeft, xrefRight, xrefWidth, xrefVar, xrefAbsolute
yrefTop, yrefBottom, yrefHeight, yrefVar, yrefAbsolute
```

Unfortunately, the above "xref" and "yref" values cannot be used as values. Only integer values, 0 to 4 are accepted. As mentioned before, invalid values or unset parameters are converted to 0.

The `MouseButton` parameter is also an enum, which has its values defined as:

```
mbLeft, mbRight, mbMiddle, mbExtra1, mbExtra2. The value has to also be set as 0..4.
```

When the `LeaveMouse` parameter is set to 1, the mouse cursor is moved and left at the specified coordinates, otherwise it is brought back to its initial position (the one before executing the action). The `MoveWithoutClick` parameter, when set to 1, causes the action to execute only a mouse move operation to the specified coordinates, without actually clicking.



## 4.21 ExecuteExecAppAction

Type: Get

Request:

```
http://<server:port>/ExecuteExecAppAction?
StackLevel=0&
PathToApp=<full path to executable>&
ListOfParams=<#4#5 separated list of command line arguments>&
WaitForApp=<0..1>&
AppStdIn=<#4#5 separated list of strings or a single line string>&
CurrentDir=<either executable directory or some "work" directory>&
UseInheritHandles=<0..2>&
NoConsole=<0..1>&
ActionName=<meaningful action name for error messages>&
ActionTimeout=<0..2147483647>
```

Expected response(s):

#8#7 separated list of all the internal variables.

Description: The path to the executed application is expected to be a full path, or can be relative to the current directory, as set when executing UIClicker. Unfortunately, this action cannot execute applications using the PATH environment variable.

The ListOfParams parameter should be set to a #4#5 separated list of command line arguments for the target application. None of the paths should include double quotes as used in consoles when specifying paths with blanks. That is why the ListOfParams parameter should not be a blank separated list, because that would interfere with the folder names, if they contain blanks.

When the WaitForApp parameter is set to 1, UIClicker does not return from the action, until the executed application terminates or the action times out. In case of a timeout, the action fails. It is required to be set to 1, when the target application outputs on StdOut and that output is required. The ActionTimeout parameter is used when WaitForApp is set to 1. It represents milliseconds.

Similar to the ListOfParams parameter, AppStdIn is a #4#5 separated list of strings, as should be passed through the StdIn stream (pipe). When set to empty string, or not set at all, this parameter is ignored, i.e. no StdIn stream is used. To properly send a string through StdIn, the UseInheritHandles parameter should be set to 1 or 2. The same goes when reading from StdOut.

The CurrentDir parameter is usually set to the directory where the executable can be found. It can also be set to other "work" directory, depending on target application.

For the UseInheritHandles parameter, there can only be three values, 0, 1, and 2. They correspond to the following enum values:

uihNo, uihYes, uihOnlyWithStdInOut

When executing console applications, they are usually displayed in a console window (similar to cmd). To avoid displaying these consoles, the "No console" checkbox has to be checked. There are UI applications, which can also create and display a console window. If they are run by UIClicker, then the console might not properly show the output, although it is there. As a limitation, if the executed console application, requires user interaction (like displaying text, then expecting the user to input something), then only a simple interaction might actually work. For example, the console application might expect the user to input three values and press Enter (return) after each. Before reading the values, the console might display a small text, saying what input it expects, one for each value. From the StdIn/StdOut perspective, this looks like a ping-pong interaction. If the number of expected values, is constant (or predictable), then a string can be constructed, to be passed through StdIn. Usually, multiple values are input to a console, by pressing return (i.e. CRLF). Thus, the string should contain (ASCII 4 and 5), which will automatically be converted to CRLF when sending the string to the executed application. When users need the "#4#5" string, they can type "\$#4#5\$" variable in UIClicker's console, to be evaluated.

## 4.22 ExecuteFindControlAction and ExecuteFindSubControlAction

Type: Get

Request:

```
http://<server:port>/ExecuteFindControlAction?
StackLevel=0&
MatchCriteria.SearchForControlMode=<0..2>&
MatchCriteria.WillMatchText=<0..1>&
MatchCriteria.WillMatchClassName=<0..1>&
MatchCriteria.WillMatchBitmapText=<0..1>&
MatchCriteria.WillMatchBitmapFiles=<0..1>&
AllowToFail=<0..1>&
MatchText=<value>&
MatchClassName=<value>&
MatchTextSeparator=<value>&
MatchClassNameSeparator=<value>&
MatchBitmapText.Count=<0..100>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].ForegroundColor=<6-digit hex BGR>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].BackgroundColor=<6-digit hex BGR>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].FontName=<value>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].FontSize=<2..200>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].Bold=<0..1>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].Italic=<0..1>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].Underline=<0..1>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].StrikeOut=<0..1>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].FontQuality=<0..6>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].FontQualityUsesReplacement=<0..1>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].FontQualityReplacement=<value>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].ProfileName=<unique value>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].CropLeft=<value>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].CropTop=<value>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].CropRight=<value>&
MatchBitmapText[<0..MatchBitmapText.Count-1>].CropBottom=<value>&
MatchBitmapFiles=<#4#5 separated list of bmp file paths>&
MatchBitmapAlgorithm=<0..1>&
MatchBitmapAlgorithmSettings.XMultipleOf=<32-bit integer value>&
MatchBitmapAlgorithmSettings.YMultipleOf=<32-bit integer value>&
MatchBitmapAlgorithmSettings.XOffset=<32-bit integer value>&
MatchBitmapAlgorithmSettings.YOffset=<32-bit integer value>&
InitialRectangle.Left=<var name or 32-bit integer value>&
InitialRectangle.Top=<var name or 32-bit integer value>&
InitialRectangle.Right=<var name or 32-bit integer value>&
InitialRectangle.Bottom=<var name or 32-bit integer value>&
InitialRectangle.LeftOffset=<var name or 32-bit integer value>&
InitialRectangle.TopOffset=<var name or 32-bit integer value>&
InitialRectangle.RightOffset=<var name or 32-bit integer value>&
InitialRectangle.BottomOffset=<var name or 32-bit integer value>&
UseWholeScreen=<0..1>&
ColorError=<value>&
AllowedColorErrorCount=<value>&
WaitForControlToGoAway=<0..1>&
StartSearchingWithCachedControl=<0..1>&
CachedControlLeft=<value>&
CachedControlTop=<value>&
ActionName=<meaningful action name for error messages>&
ActionTimeout=<0..2147483647>
FileLocation=<Mem, Disk>
```

Expected response(s):

#8#7 separated list of all the internal variables.

Description: The underlying mechanism of executing FindControl and FindSubControl actions, is the same. Some of the settings are shared, the others are particular to one action type or the other.

For the FindSubControl action, the request starts with:

`http://<server:port>/ExecuteFindSubControlAction`

The parameters are identical. For example, the bitmap text and bitmap files – related parameters will be ignored on "FindControl", while they are required on "FindSubControl". The ActionTimeout parameter has to have a positive value (usually between 1000 and 30000 for this action), in case the action has to be stopped by timeout, if it doesn't find the searched control/subcontrol.

The settings for the MatchCriteria parameters can be found on the "Criteria" tab on the "Find (Sub) Control" section of the action editor. The MatchCriteria.SearchForControlMode can have one of the three values, 0, 1, 2, which correspond to the following enum values: `sfcGenGrid`, `sfcEnumWindows`, `sfcFindWindow`

The MatchCriteria.WillMatchText parameter is used by both "FindControl" and "FindSubControl" actions as the searched text. The control class name can be specified on the MatchCriteria.WillMatchClassName parameter. The other two fields, WillMatchBitmapText and WillMatchBitmapFiles, from MatchCriteria are "FindSubControl" only.

This action is expected to find nothing, so it can be allowed to fail, by setting the AllowToFail parameter to 1. Then, it sets the "\$LastAction\_Status\$" variable to "Allowed Failed".

When multiple matches are expected for the Text or Class fields of a control, the MatchTextSeparator and MatchTextSeparator parameters should be set to the user-defined strings, used as list separators. Then, MatchText and MatchClassName are expected to be lists of search strings.

If searching for a subcontrol, using bitmap text, the MatchBitmapText.Count parameter specifies the number of font profiles that action will have. It can be 0, when no font profiles are used (when searching for a control or when searching by bitmap files) and is limited to 100 profiles, to limit memory usage. All parameters under the MatchBitmapText prefix, will be indexed like array parameters. For example, the FontName parameter will appear as:

```
MatchBitmapText[0].FontName=Tahoma
MatchBitmapText[1].FontName=Verdana
MatchBitmapText[2].FontName=Segoe UI
```

The index starts at 0 and can go up to MatchBitmapText.Count – 1. Text color and background color are set by the ForegroundColor and BackgroundColor parameters, under the same indexed MatchBitmapText. They can be set to an existing variable name or to an RGB value, written as 6-digit hex BGR value (see win32 API, about BGR). For example, yellow would be 00FFFF, while aqua would be FFFF00. As mentioned before, UIClicker provides already existing variables for usual system colors. To set the expected font anti-aliasing algorithm, the FontQuality parameter can be one of the 0 to 6 values, corresponding to the following enum values:

```
fqDefault, fqDraft, fqProof, fqNonAntialiased, fqAntialiased, fqCleartype,
fqCleartypeNatural
```

There are cases when a template expects multiple font qualities (anti-aliasing algorithms), so the FontQualityUsesReplacement parameter should be set to 1, while the FontQualityReplacement parameter is expected to have one of the above seven string values, without the "fq" prefix. The CropLeft, CropTop, CropRight, CropBottom, parameters, are used to crop a text, before being sent to the matching algorithm. All four parameters expect 0 or positive values. Variables can also be used. If these parameters are not specified, they default to 0. Positive values will cause the text to be cropped towards the center, while 0 causes no cropping. Every font profile can have its own set of cropping values. This is useful when the searched text can be overlapped by a focus rectangle.

When searching for bitmaps as SubControl, the list of bmp files can be set by the MatchBitmapFiles parameter, as a #4#5 separated list of paths. This parameter is used only when MatchCriteria.WillMatchBitmapFiles is set to 1. If using a search grid, all the parameters under the MatchBitmapAlgorithmSettings prefix should be a valid 32-bit integer, defining the grid points and grid offset.

The InitialRectangle parameters correspond to the editboxes from the "Search Area" page, under Find(Sub)Control page of the action editor. They define the edges/offsets of the search area.

Can be set to 32-bit integers or to existing var names. Combining these values, the search area has to be a "positive" rectangle, i.e. Left "edge" should be less than the Right "edge", while Top "edge" has to be less than Bottom "edge". The Left, Top, Right, Bottom, parameters, from InitialRectangle, are ignored when UseWholeScreen is set to 1, as they are internally set to the edges of the screen.

For ColorError and AllowedColorErrorCount parameters, the values can be 32-bit integers or var names. Searching can start with a cached position, defined by CachedControlLeft and CachedControlTop, when StartSearchingWithCachedControl is 1.

Similar to "ExecuteExecAppAction" command, the ExecuteFindControlAction and ExecuteFindSubControlAction commands, require setting the ActionName parameter, because in case of not finding the searched (sub)control, they set an error message, containing the action name. Usually, the error message is either about a negative search area, or a timeout.

For debugging purposes, there is a parameter, which controls where UIClicker (in server mode) should look for files. It is FileLocation and can be Mem or Disk. If not specified, it defaults to disk. The FindSubControl action may require bitmap files, which UIClicker will wait for, if not available. When UIClicker waits (in server mode) for missing files, and the user works with low-level API functions for executing actions, the waiting loop can be closed by starting a second instance of UIClicker and setting it to be a client, connected to the existing server. It automatically sends missing files to server if they are available at client side. However, users will eventually have to implement a client, capable of sending missing files to server, using the available API functions.

#### 4.23 ExecuteSetControlTextAction

Type: Get

Request:

```
http://<server:port>/ExecuteSetControlTextAction?
StackLevel=0&
Text=<value>&
ControlType=<0..2>
```

Expected response(s):

#8#7 separated list of all the internal variables.

Description: Based on the value of ControlType parameter, this command can set a control text (an editbox or a window title), or an editbox, as part of a system combobox, or to simulate keystrokes.

The 0..2 possible values correspond to the following enum values:

stEditBox, stComboBox, stKeystrokes

#### 4.24 ExecuteCallTemplateAction

Type: Get

Request:

```
http://<server:port>/ExecuteCallTemplateAction?
StackLevel=0&
TemplateFileName=<path to template>&
ListOfCustomVarsAndValues=<#4#5 separated list of $var$=value pairs>&
EvaluateBeforeCalling=<0..1>&
IsDebugging=<0..1>
FileLocation=<Mem, Disk>
```

Expected response(s):

#8#7 separated list of all the internal variables.

Description: This request loads a template, specified by TemplateFileName parameter and calls it. The value of TemplateFileName can be a full path or the filename only, if the file is in the "Templates Dir" directory, as configured on the "Settings" page of UIClicker. The path should not be enclosed by double quotes, even if it contains blanks.

To add or set custom vars, before calling the template, they can be passed, through the

`ListOfCustomVarsAndValues` parameter as a #4#5 separated list of `$VarName$=VarValue` pairs. When `EvaluateBeforeCalling` is 1, all the var values are evaluated if they have the var format (e.g. `$VarName$=$OtherVarName$`). Those, which are not already in the main list, will be added. When `IsDebugging` is set to 1, the template is executed in debugging mode. This will require manual interaction at server side.

The called template can set the `"$LastAction_Status"` variable to "Allowed Failed", if its last action is a `Find(Sub)Control` and is allowed to fail. This status is preserved on template exiting. Similar to `FindSubControl`, there is `FileLocation` parameter, which can be set to `Mem` or `Disk`. If not specified, it defaults to `disk`. It controls where the server should look for the called template. When set to `Mem`, and the template is not found in server's in-mem file system, the server enters a waiting loop for missing files. The client should implement a mechanism of verifying the missing files and sending them to server (see `"GetListOfWaitingFiles"` and `"SendFileToServer"` commands).

#### 4.25 ExecuteSleepAction

Type: Get

Request:

```
http://<server:port>/ExecuteSleepAction?
StackLevel=0&
Value=<value>&
ActionName=<meaningful action name for error messages>
```

Expected response(s):

#8#7 separated list of all the internal variables.

Description: This command requires the amount of milliseconds to sleep, set by the `Value` parameter, which can be a 32-bit integer, or a var name. It also requires an action name, in `ActionName`, for error messages.

#### 4.26 ExecuteSetVarAction

Type: Get

Request:

```
http://<server:port>/ExecuteSetVarAction?
StackLevel=0&
ListOfVarNames=<#4#5 separated list of var names>&
ListOfVarValues=<#4#5 separated list of var values>&
ListOfVarEvalBefore=<#4#5 separated list of 0s or 1s>
```

Expected response(s):

#8#7 separated list of all the internal variables.

Description: All three lists, passed through the `ListOf<...>` parameters, should have the same number of items. The items from `ListOfVarValues`, can contain names of existing variables. These values are evaluated if the corresponding items (of the same index) from `ListOfVarEvalBefore`, are set to 1.

#### 4.27 ExecuteWindowOperationsAction

Type: Get

Request:

```
http://<server:port>/ExecuteWindowOperationsAction?
StackLevel=0&
Operation=<0..2>&
NewX=<value>&
NewY=<value>&
NewWidth=<value>&
NewHeight=<value>&
NewPositionEabled=<0..1>&
NewSizeEabled=<0..1>
```

Expected response(s):

#8#7 separated list of all the internal variables.

Description: There are three available operations, set by the `Operation` parameter as 0, 1, 2, corresponding to the following enum values:

`woBringToFront`, `woMoveResize`, `woClose`

When set to 0 or 2, the other parameters are not required, so they are ignored. They are required when `Operation` is 1, i.e. for moving or resizing a window (or another control). Since the same operation is used for moving and resizing, these two can be individually enabled, from the `NewPositionEnabled` and `NewSizeEnabled` parameters, when set to 1. The `NewX` and `NewY` parameters, are used for position, while `NewWidth` and `NewHeight` are used for size.

Since this command requires a valid control handle, this would usually be set by a `FindControl` action. It is also possible that the desired control is a window, which can be partially or totally overlapped by another window. If that is the case, the `FindControl` action will have to be configured to use the "Find Window" option, instead of the usual "Generate Grid". This is because, when using the "Generate Grid" option, `FindControl` requires the window to be visible, and not covered by other windows, or moved outside the screen. The "Find Window" option does not have this limitation.

## 5. Testing

Most of the current testing implementation relies on the HTTP API, which is limited to action execution only. The UI part of the application (e.g. template editor) does not currently have any automated testing. It's the same for its bitmap processing features. Indeed, there are still some known interaction bugs or inconsistent behaviors across similar UI features of the action editor. Also, in the first version(s) there are incomplete implementations of some features, which appear to be bugs. For example, if `UIClicker`, in server mode, expects some files, it stays in a waiting loop and can't be closed, either until timeout or the files are received. The missing part of the implementation is to safely terminate those loops. Similarly, the application can't be closed while debugging, because of another waiting loop.

For automated testing, there is a "\\Tests" directory, with a standard FPCUnit project. It is called "UIClickerHTTPTests" and it targets the HTTP API only. Since the HTTP API is split into low-level and template-level functions (from an action's perspective), the tests are also organized into multiple files. There is also a third file, with miscellaneous tests.

The "UIClickerHTTPTests" project should be compilable, both for 32 and 64-bit and be compatible (across the HTTP API) to both 32 and 64-bit versions of `UIClicker`. In the first version(s) the test coverage is pretty low, but it gives a good start on how to organize tests. Similarly to `UIClicker`, the test project depends on some units, from "UIClicker\\..\\Misc" directory.

## 6. Clicker client

Because the implementation is not intended to become a full featured language, the HTTP API can be used by a 3rd party client, which should be able to implement a more complex logic than what `UIClicker` provides for action execution. There is a project, in "UIClicker\\ClickerClient" directory, which compiles a native dll. It thus can be used by other applications/scripts, written in different languages. In the first version(s), it features mostly the template-level part of the HTTP API, as this one requires more than sending simple requests to execute actions, i.e. it can send templates and bitmaps to server, as "missing files", in a separate thread. The project should be compiled as 32 or 64-bit dll, depending on the loader bitness.

There is also a Python wrapper, which implements some of the exported functions from `ClickerClient.dll`. It can be found under "UIClicker\\py" and it currently comes as two files, `UIClickerTypes.py` and `wrapper.py`. The primary limitation is the compatibility between the UTF8 implementation of Python strings and the UTF16 implementation in Windows API. There have been some implementation difficulties in `UIClicker` (both the executable and the client dll) for UTF-8, so the compatibility might be limited to the lower 128 ASCII characters.