

CONFIGURING & SECURING CASELIGHT

Administrator Guide

Set up users, tailor the system to your programs without code, and operate its security controls — everything under Manage and the admin surfaces.

Lighthouse Nonprofit Technologies · CaseLight · AGPL-3.0 — screens show synthetic demo data only

CaseLight — Administrator Guide

Configuring & securing CaseLight — set up users, tailor the system to your programs without code, and operate its security controls: everything under **Manage** and the admin surfaces.

All screenshots in this guide show synthetic demo data — fictional names, addresses, and records.

1 • Users & access

Under **Users**, add a staff account for each person and assign a role — the role decides what they can see and do (see the User Guide's role table). Add a user, set their role, and export the roster to XLS.

CaseLight

Ava Adminson
admin

Dashboards

Individuals26

Households10

Partners0

Users6

Manage

Changelogs

Access Review

T

Add New User

Export to XLS

6 Results

ID	NAME	DATE OF BIRTH	MOBILE	EMAIL
1	Dev Admin			dev@local.test
10	Ava Adminson			demo.admin@caselight.test
11	Devon Director			demo.director@caselight.test
12	Maria Manders			demo.manager@caselight.test
13	Wes Worker			demo.worker@caselight.test
14	QA Totp			qa.totp@caselight.test

Users — one account per staff member.

Access Review — periodic recertification

The **Access Review** report (AC-2) lists every account with its role, last sign-in, MFA and passkey status, and whether it's locked or disabled. It flags disabled staff who still hold caseloads, and summarizes the least-privilege and authorization shadow windows. Export to CSV for your records.

Routing Error

No route matches [GET] "/access_reviews"

Rails.root: /app

[Application Trace](#) | [Framework Trace](#) | [Full Trace](#)
 config/initializers/assets_unloads_guard.rb:29:in 'uploadsStaticGuard.call'

Routes

Routes match in priority from top to bottom

Helper (Path / Url)	HTTP Verb	Path	Controller#Action	Source Location
Search				
root_path	GET	/	organizations#index	/app/config/routes.rb:3
access_review_path	GET	/admin/access_review(.:format)	access_reviews#index	/app/config/routes.rb:6
enforcement_settings_path	GET	/admin/enforcement_settings(.:format)	enforcement_settings#show	/app/config/routes.rb:10
admin_enforcement_settings_path	PATCH	/admin/enforcement_settings(.:format)	enforcement_settings#update	/app/config/routes.rb:11
authorized_download_path	GET	/downloads/record_type/record_id/mount(/:index)(.:format)	downloads#show (record_type: /attachment/custom_field_property/case_note_domain_group/form_builder_attachment/record_id: /d+/, mount: /file[image attachments/, index: /d+])	/app/config/routes.rb:16
new_user_session_path	GET	/users/sign_in(.:format)	sessions#new	devise (5.0.4) lib/devise/rails/routes.rb:378
user_session_path	POST	/users/sign_in(.:format)	sessions#create	devise (5.0.4) lib/devise/rails/routes.rb:379
destroy_user_session_path	DELETE	/users/sign_out(.:format)	sessions#destroy	devise (5.0.4) lib/devise/rails/routes.rb:380
new_user_password_path	GET	/users/password/new(.:format)	passwords#new	devise (5.0.4) lib/devise/rails/routes.rb:385
edit_user_password_path	GET	/users/password/edit(.:format)	passwords#edit	devise (5.0.4) lib/devise/rails/routes.rb:385
user_password_path	PATCH	/users/password(.:format)	passwords#update	devise (5.0.4) lib/devise/rails/routes.rb:385
	PUT	/users/password(.:format)	passwords#update	devise (5.0.4) lib/devise/rails/routes.rb:385

Access Review — recertify accounts and catch orphaned caseloads.

2 · Configure without code: the form builder

Rather than editing the data model, add **custom forms** (attachable to individuals, households, users, or partners) with a drag-and-drop builder under **Manage** → **Form Builder**.

The form builder — choose type, frequency, and the form's sensitivity, then drag in fields.

Every form carries a **sensitivity**, set at design time:

- **Standard** — any authorized reader of the record.
- **Restricted** — caseload- or role-scoped readers only.
- **Emergency only** — hidden unless a break-glass grant is active (see §6).

Because sensitivity is chosen when the form is designed, a brand-new form can never accidentally expose data — it inherits an explicit classification from the start.

3 · Program streams

Define the programs your organization actually runs under **Manage** → **Program Streams**. Each stream is enrollable, has its own custom form, and supports recurring, date-stamped trackings.

CaseLight

Ava Adminson
admin

Dashboards

Individuals 26

Households 10

Partners 0

Users 6

Manage

Agencies

Departments

Domains

Domain Groups

Donors

Referral Sources

Quantitative Types

Progress Note

Form Builder

Program Streams

Release logs

Changelogs

Access Review

Program Streams Listing

Add New Program

My NGO's Program Streams

All NGO's Program Streams

NAME	DOMAINS	STATUS	ENROLLED	MAXIMUM PROGRAM ENROLLMENT	ACTION
Adult Education / ESL		Completed	1		
Benefits		Completed	9		
Childcare		Completed	1		
Employment		Completed	15		
Housing		Completed	10		
Immigration / Legal		Completed	15		
K-12 Education		Completed	11		

Program streams — the enrollable programs behind every case.

4 • Assessment domains & groups

The assessment engine scores needs across **life domains**, organized into **domain groups**. Configure both under Manage, and set each domain's **sensitivity** so the most protected domains stay restricted.

CaseLight

Ava Adminson
admin

Dashboards

Individuals 26

Households 10

Partners 0

Users 6

Manage

Agencies

Departments

Domains

Domain Groups

6 Domain Groups

Add New Domain Group

DOMAIN GROUP NAME	DESCRIPTION	MANAGE		CHANGELOG
1. Housing & Basic Needs				View
2. Economic Self-Sufficiency				View
3. Language & Education				View
4. Health & Well-Being				View
5. Legal & Immigration				View
6. Community & Safety				View

Domain groups.

CaseLight

Ava Adminson
admin

Dashboards

Individuals 26

Households 10

Partners 0

Users 6

Manage

Agencies

Departments

Domains

Domain Groups

Donors

Referral Sources

Quantitative Types

Progress Note

Form Builder

Program Streams

Release logs

Changelogs

Access Review

12 Domains

Add New Domain

Domains : 1A (Housing Stability)

Changelog

Score 1 Score 2 Score 3 Score 4

Goal: The household has safe, stable, affordable housing.

Sample questions:

- What is the household's current housing situation?
- Is the rent affordable relative to income?
- Is the housing safe and adequate for the family size?
- Is the lease or tenancy secure?

Score interpretations (1 = in crisis → 4 = self-sufficient):

- 1: In crisis — homeless or in emergency / temporary shelter.
- 2: At risk — housed but unstable; at risk of eviction, overcrowded, or unaffordable.
- 3: Stable — safe, adequate housing with a secure lease; rent is manageable.
- 4: Self-sufficient — housing is stable, affordable, and maintained without ongoing assistance.

Domains : 1B (Food Security)

Changelog

Score 1 Score 2 Score 3 Score 4

Goal: The household has reliable access to enough nutritious food.

Sample questions:

- Does the household have enough food throughout the month?
- Are they enrolled in CalFresh / food assistance if eligible?
- Can they shop for and prepare culturally appropriate food?

Domains (with sensitivity).

5 • Reference data

The lists that populate dropdowns and organize your work — all editable under **Manage**. Keep them tidy and every record downstream stays consistent.

CaseLight

Ava Adminson
admin

Dashboards

Individuals 26

Households 10

Partners 0

Users 6

Manage

Agencies

Departments

Domains

0 Agencies

Add New Agency

AGENCY NAME	DESCRIPTION	MANAGE	CHANGELOG
-------------	-------------	--------	-----------

CaseLight

Ava Adminson
admin

Dashboards

Individuals 26

Households 10

Partners 0

Users 6

Manage

Agencies

Departments


Domains

0 Departments


Add New Department

DEPARTMENT NAME	DESCRIPTION	MANAGE	CHANGELOG
-----------------	-------------	--------	-----------

Agencies — partner and referring organizations. · Departments — internal structure for staff.

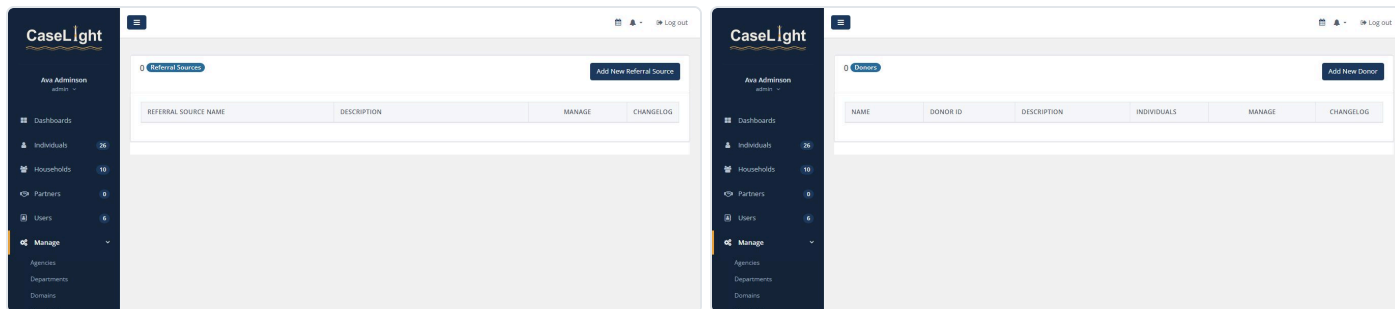


Referral sources — how clients reach you. · Donors — funding sources for reporting.

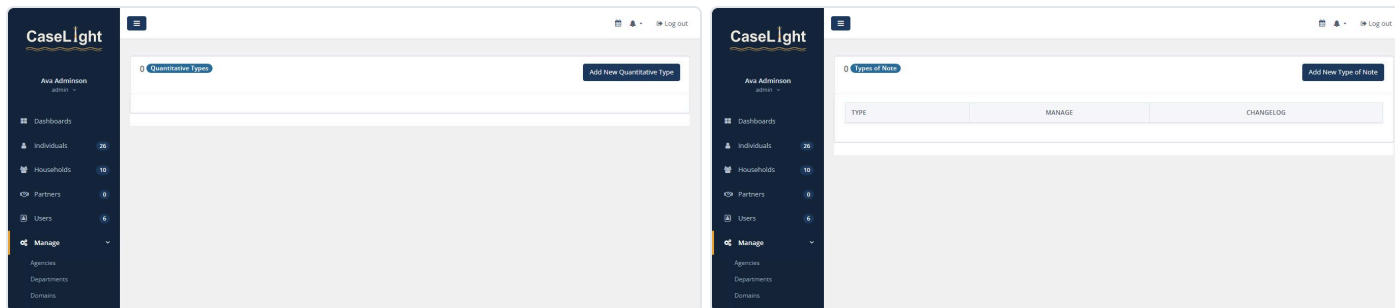

Quantitative types — countable service categories. · Types of Note — categories for progress notes.

Partners

External **Partners** (agencies you coordinate with) get their own records and custom forms, tracked separately from the individuals you serve.

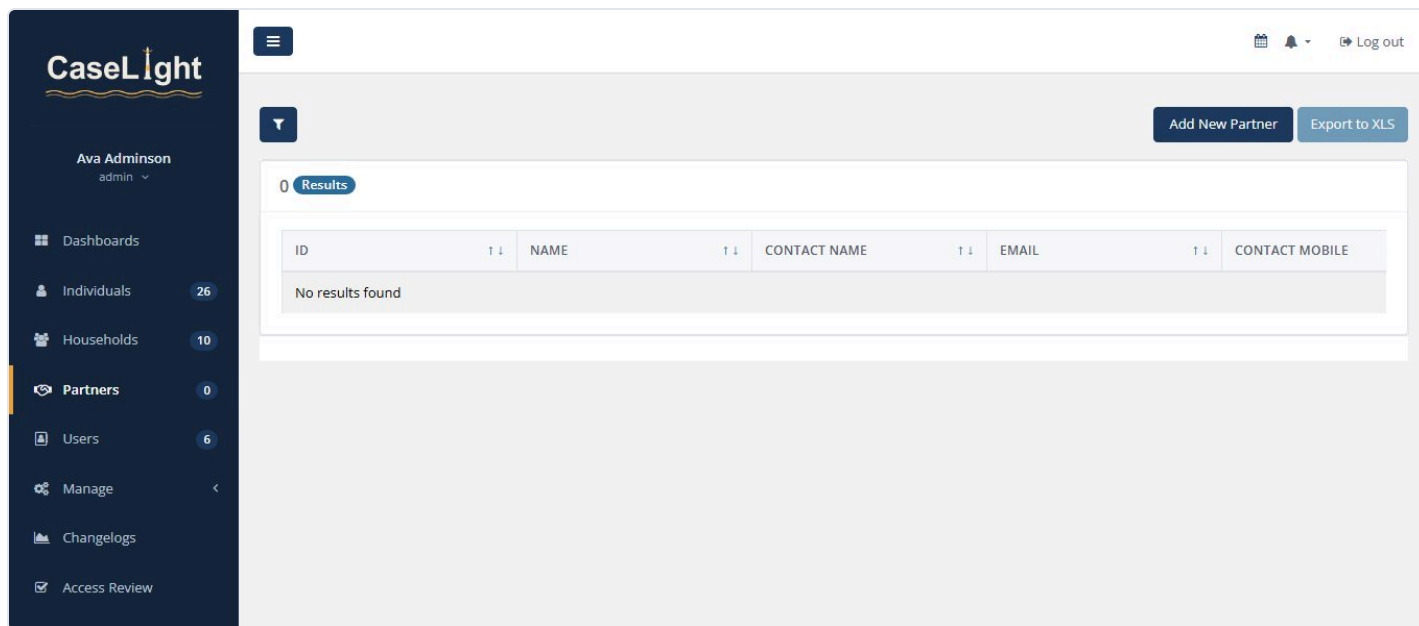

Partners.

6 · Security enforcement & break-glass

The **Security Enforcement** panel turns live security controls on or off for your organization, each mapped to a NIST 800-53 control, and each showing a **shadow window** — what the stricter rule *would have* denied — so you can review impact before enabling.

Routing Error

No route matches [GET] "/enforcement_settings"

Rails.root: /app

[Application Trace](#) | [Framework Trace](#) | [Full Trace](#)

config/initializers/assets_upload_guard.rb:29:in "UploadsStaticGuard#call"

Routes

Routes match in priority from top to bottom

Helper (Path / Url)	HTTP Verb	Path	Controller#Action	Source Location
Search				
root_path	GET	/	organizations#index	/app/config/routes.rb:3
access_review_path	GET	/admin/access_review(.:format)	access_reviews#index	/app/config/routes.rb:6
enforcement_settings_path	GET	/admin/enforcement_settings(.:format)	enforcement_settings#show	/app/config/routes.rb:10
admin_enforcement_settings_path	PATCH	/admin/enforcement_settings(.:format)	enforcement_settings#update	/app/config/routes.rb:11
authorized_download_path	GET	/downloads/:record_type/:record_id/:mount(/:index)(.:format)	downloads#show {record_type: /attachment custom_field_property case_note_domain_group form_builder_attachment/, record_id: /\d+/, mount: /file image attachments/, index: /\d+/}	/app/config/routes.rb:16
new_user_session_path	GET	/users/sign_in(.:format)	sessions#new	devise (5.0.4) lib/devise/rails/routes.rb:378
user_session_path	POST	/users/sign_in(.:format)	sessions#create	devise (5.0.4) lib/devise/rails/routes.rb:379
destroy_user_session_path	DELETE	/users/sign_out(.:format)	sessions#destroy	devise (5.0.4) lib/devise/rails/routes.rb:380
new_user_password_path	GET	/users/password/new(.:format)	passwords#new	devise (5.0.4) lib/devise/rails/routes.rb:385
edit_user_password_path	GET	/users/password/edit(.:format)	passwords#edit	devise (5.0.4) lib/devise/rails/routes.rb:385
user_password_path	PATCH	/users/password(.:format)	passwords#update	devise (5.0.4) lib/devise/rails/routes.rb:385
	PUT	/users/password(.:format)	passwords#update	devise (5.0.4) lib/devise/rails/routes.rb:385
	POST	/users/password(.:format)	passwords#create	devise (5.0.4) lib/devise/rails/routes.rb:385
cancel_user_registration_path	GET	/users/cancel(.:format)	registrations#cancel	devise (5.0.4) lib/devise/rails/routes.rb:416
new_user_registration_path	GET	/users/sign_up(.:format)	registrations#new	devise (5.0.4) lib/devise/rails/routes.rb:415
edit_user_registration_path	GET	/users/edit(.:format)	registrations#edit	devise (5.0.4) lib/devise/rails/routes.rb:415
user_registration_path	PATCH	/users(.:format)	registrations#update	devise (5.0.4) lib/devise/rails/routes.rb:415
	PUT	/users(.:format)	registrations#update	devise (5.0.4) lib/devise/rails/routes.rb:415
	DELETE	/users(.:format)	registrations#destroy	devise (5.0.4) lib/devise/rails/routes.rb:415

	POST	/users(.:format)	registrations#create	devise (5.0.4) lib/devise/rails/routes.rb:415
user_password_expired_path	GET	/users/password_expired(.:format)	password_expired#show	devise-security (0.18.0) lib/devise-security/routes.rb:9
	PATCH	/users/password_expired(.:format)	password_expired#update	devise-security (0.18.0) lib/devise-security/routes.rb:9
	PUT	/users/password_expired(.:format)	password_expired#update	devise-security (0.18.0) lib/devise-security/routes.rb:9
two_factor_challenge_path	GET	/users/two_factor(.:format)	sessions#two_factor_challenge	/app/config/routes.rb:32
verify_two_factor_path	POST	/users/two_factor(.:format)	sessions#verify_otp	/app/config/routes.rb:33
passkey_login_options_path	POST	/users/passkey/options(.:format)	sessions#passkey_options	/app/config/routes.rb:38
passkey_login_callback_path	POST	/users/passkey/callback(.:format)	sessions#passkey_callback	/app/config/routes.rb:39
two_factor_settings_path	GET	/two_factor_settings(.:format)	two_factor_settings#show	/app/config/routes.rb:43
	DELETE	/two_factor_settings(.:format)	two_factor_settings#destroy	/app/config/routes.rb:43
	POST	/two_factor_settings(.:format)	two_factor_settings#create	/app/config/routes.rb:43
regenerate_two_factor_backup_codes_path	POST	/two_factor_settings/backup_codes(.:format)	two_factor_settings#regenerate_backup_codes	/app/config/routes.rb:44
passkeys_path	GET	/passkeys(.:format)	passkeys#show	/app/config/routes.rb:50
	POST	/passkeys(.:format)	passkeys#create	/app/config/routes.rb:50
passkey_registration_options_path	POST	/passkeys/options(.:format)	passkeys#create_options	/app/config/routes.rb:51
passkey_path	DELETE	/passkeys/:id(.:format)	passkeys#destroy	/app/config/routes.rb:52
	GET	/robots.txt(.:format)	organizations#robots	/app/config/routes.rb:54
		/404(.:format)	errors#show {code: "404"}	/app/config/routes.rb:57
		/500(.:format)	errors#show {code: "500"}	/app/config/routes.rb:57
csp_reports_path	POST	/csp_reports(.:format)	csp_reports#create	/app/config/routes.rb:63
dashboards_path	GET	/dashboards(.:format)	dashboards#index	/app/config/routes.rb:65
quantitative_data_path	GET	/quantitative_data(.:format)	clients#quantitative_case	/app/config/routes.rb:67
redirect_path	GET	/redirect(.:format)	calendars#redirect	/app/config/routes.rb:70
callback_path	GET	/callback(.:format)	calendars#callback	/app/config/routes.rb:71
calendar_sync_path	GET	/calendar/sync(.:format)	calendars#sync	/app/config/routes.rb:72
calendars_path	GET	/calendars(.:format)	calendars#index	/app/config/routes.rb:73
	POST	/calendars(.:format)	calendars#create	/app/config/routes.rb:73
new_calendar_path	GET	/calendars/new(.:format)	calendars#new	/app/config/routes.rb:73
edit_calendar_path	GET	/calendars/:id/edit(.:format)	calendars#edit	/app/config/routes.rb:73
calendar_path	GET	/calendars/:id(.:format)	calendars#show	/app/config/routes.rb:73

	PATCH	/calendars/:id(.:format)	calendars#update	/app/config/routes.rb:73
	PUT	/calendars/:id(.:format)	calendars#update	/app/config/routes.rb:73
	DELETE	/calendars/:id(.:format)	calendars#destroy	/app/config/routes.rb:73
agency_version_path	GET	/agencies/:agency_id/version(.:format)	agencies#version	/app/config/routes.rb:76
agencies_path	GET	/agencies(.:format)	agencies#index	/app/config/routes.rb:75
	POST	/agencies(.:format)	agencies#create	/app/config/routes.rb:75
new_agency_path	GET	/agencies/new(.:format)	agencies#new	/app/config/routes.rb:75
edit_agency_path	GET	/agencies/:id/edit(.:format)	agencies#edit	/app/config/routes.rb:75
agency_path	PATCH	/agencies/:id(.:format)	agencies#update	/app/config/routes.rb:75
	PUT	/agencies/:id(.:format)	agencies#update	/app/config/routes.rb:75
	DELETE	/agencies/:id(.:format)	agencies#destroy	/app/config/routes.rb:75
user_custom_field_properties_path	GET	/admin/users/:user_id/custom_field_properties(.:format)	custom_field_properties#index	/app/config/routes.rb:81
	POST	/admin/users/:user_id/custom_field_properties(.:format)	custom_field_properties#create	/app/config/routes.rb:81
new_user_custom_field_property_path	GET	/admin/users/:user_id/custom_field_properties/new(.:format)	custom_field_properties#new	/app/config/routes.rb:81
edit_user_custom_field_property_path	GET	/admin/users/:user_id/custom_field_properties/:id/edit(.:format)	custom_field_properties#edit	/app/config/routes.rb:81
user_custom_field_property_path	GET	/admin/users/:user_id/custom_field_properties/:id(.:format)	custom_field_properties#show	/app/config/routes.rb:81
	PATCH	/admin/users/:user_id/custom_field_properties/:id(.:format)	custom_field_properties#update	/app/config/routes.rb:81
	PUT	/admin/users/:user_id/custom_field_properties/:id(.:format)	custom_field_properties#update	/app/config/routes.rb:81
	DELETE	/admin/users/:user_id/custom_field_properties/:id(.:format)	custom_field_properties#destroy	/app/config/routes.rb:81
user_version_path	GET	/admin/users/:user_id/version(.:format)	users#version	/app/config/routes.rb:82
user_disable_path	GET	/admin/users/:user_id/disable(.:format)	users#disable	/app/config/routes.rb:83
users_path	GET	/admin/users(.:format)	users#index	/app/config/routes.rb:80
	POST	/admin/users(.:format)	users#create	/app/config/routes.rb:80
new_user_path	GET	/admin/users/new(.:format)	users#new	/app/config/routes.rb:80
edit_user_path	GET	/admin/users/:id/edit(.:format)	users#edit	/app/config/routes.rb:80
user_path	GET	/admin/users/:id(.:format)	users#show	/app/config/routes.rb:80
	PATCH	/admin/users/:id(.:format)	users#update	/app/config/routes.rb:80
	PUT	/admin/users/:id(.:format)	users#update	/app/config/routes.rb:80
	DELETE	/admin/users/:id(.:format)	users#destroy	/app/config/routes.rb:80
quantitative_type_version_path	GET	/quantitative_types/:quantitative_type_id/version(.:format)	quantitative_types#version	/app/config/routes.rb:88
quantitative_types_path	GET	/quantitative_types(.:format)	quantitative_types#index	/app/config/routes.rb:87
	POST	/quantitative_types(.:format)	quantitative_types#create	/app/config/routes.rb:87

new_quantitative_type_path	GET	/quantitative_types/new(.format)	quantitative_types#new	/app/config/routes.rb:87
edit_quantitative_type_path	GET	/quantitative_types/:id/edit(.format)	quantitative_types#edit	/app/config/routes.rb:87
quantitative_type_path	GET	/quantitative_types/:id(.format)	quantitative_types#show	/app/config/routes.rb:87
	PATCH	/quantitative_types/:id(.format)	quantitative_types#update	/app/config/routes.rb:87
	PUT	/quantitative_types/:id(.format)	quantitative_types#update	/app/config/routes.rb:87
	DELETE	/quantitative_types/:id(.format)	quantitative_types#destroy	/app/config/routes.rb:87
quantitative_case_version_path	GET	/quantitative_cases/:quantitative_case_id/version(.format)	quantitative_cases#version	/app/config/routes.rb:92
quantitative_cases_path	GET	/quantitative_cases(.format)	quantitative_cases#index	/app/config/routes.rb:91
	POST	/quantitative_cases(.format)	quantitative_cases#create	/app/config/routes.rb:91
new_quantitative_case_path	GET	/quantitative_cases/new(.format)	quantitative_cases#new	/app/config/routes.rb:91
edit_quantitative_case_path	GET	/quantitative_cases/:id/edit(.format)	quantitative_cases#edit	/app/config/routes.rb:91
quantitative_case_path	GET	/quantitative_cases/:id(.format)	quantitative_cases#show	/app/config/routes.rb:91
	PATCH	/quantitative_cases/:id(.format)	quantitative_cases#update	/app/config/routes.rb:91
	PUT	/quantitative_cases/:id(.format)	quantitative_cases#update	/app/config/routes.rb:91
	DELETE	/quantitative_cases/:id(.format)	quantitative_cases#destroy	/app/config/routes.rb:91
referral_source_version_path	GET	/referral_sources/:referral_source_id/version(.format)	referral_sources#version	/app/config/routes.rb:96
referral_sources_path	GET	/referral_sources(.format)	referral_sources#index	/app/config/routes.rb:95
	POST	/referral_sources(.format)	referral_sources#create	/app/config/routes.rb:95
new_referral_source_path	GET	/referral_sources/new(.format)	referral_sources#new	/app/config/routes.rb:95
edit_referral_source_path	GET	/referral_sources/:id/edit(.format)	referral_sources#edit	/app/config/routes.rb:95
referral_source_path	PATCH	/referral_sources/:id(.format)	referral_sources#update	/app/config/routes.rb:95
	PUT	/referral_sources/:id(.format)	referral_sources#update	/app/config/routes.rb:95
	DELETE	/referral_sources/:id(.format)	referral_sources#destroy	/app/config/routes.rb:95
domain_group_version_path	GET	/domain_groups/:domain_group_id/version(.format)	domain_groups#version	/app/config/routes.rb:100
domain_groups_path	GET	/domain_groups(.format)	domain_groups#index	/app/config/routes.rb:99
	POST	/domain_groups(.format)	domain_groups#create	/app/config/routes.rb:99
new_domain_group_path	GET	/domain_groups/new(.format)	domain_groups#new	/app/config/routes.rb:99
edit_domain_group_path	GET	/domain_groups/:id/edit(.format)	domain_groups#edit	/app/config/routes.rb:99
domain_group_path	PATCH	/domain_groups/:id(.format)	domain_groups#update	/app/config/routes.rb:99
	PUT	/domain_groups/:id(.format)	domain_groups#update	/app/config/routes.rb:99
	DELETE	/domain_groups/:id(.format)	domain_groups#destroy	/app/config/routes.rb:99
domain_version_path	GET	/domains/:domain_id/version(.format)	domains#version	/app/config/routes.rb:104

domains_path	GET	/domains(.:format)	domains#index	/app/config/routes.rb:103
	POST	/domains(.:format)	domains#create	/app/config/routes.rb:103
new_domain_path	GET	/domains/new(.:format)	domains#new	/app/config/routes.rb:103
edit_domain_path	GET	/domains/:id/edit(.:format)	domains#edit	/app/config/routes.rb:103
domain_path	PATCH	/domains/:id(.:format)	domains#update	/app/config/routes.rb:103
	PUT	/domains/:id(.:format)	domains#update	/app/config/routes.rb:103
	DELETE	/domains/:id(.:format)	domains#destroy	/app/config/routes.rb:103
province_version_path	GET	/provinces/:province_id/version(.:format)	provinces#version	/app/config/routes.rb:108
provinces_path	GET	/provinces(.:format)	provinces#index	/app/config/routes.rb:107
	POST	/provinces(.:format)	provinces#create	/app/config/routes.rb:107
new_province_path	GET	/provinces/new(.:format)	provinces#new	/app/config/routes.rb:107
edit_province_path	GET	/provinces/:id/edit(.:format)	provinces#edit	/app/config/routes.rb:107
province_path	PATCH	/provinces/:id(.:format)	provinces#update	/app/config/routes.rb:107
	PUT	/provinces/:id(.:format)	provinces#update	/app/config/routes.rb:107
	DELETE	/provinces/:id(.:format)	provinces#destroy	/app/config/routes.rb:107
department_version_path	GET	/departments/:department_id/version(.:format)	departments#version	/app/config/routes.rb:112
departments_path	GET	/departments(.:format)	departments#index	/app/config/routes.rb:111
	POST	/departments(.:format)	departments#create	/app/config/routes.rb:111
new_department_path	GET	/departments/new(.:format)	departments#new	/app/config/routes.rb:111
edit_department_path	GET	/departments/:id/edit(.:format)	departments#edit	/app/config/routes.rb:111
department_path	PATCH	/departments/:id(.:format)	departments#update	/app/config/routes.rb:111
	PUT	/departments/:id(.:format)	departments#update	/app/config/routes.rb:111
	DELETE	/departments/:id(.:format)	departments#destroy	/app/config/routes.rb:111
donor_version_path	GET	/donors/:donor_id/version(.:format)	donors#version	/app/config/routes.rb:116
donors_path	GET	/donors(.:format)	donors#index	/app/config/routes.rb:115
	POST	/donors(.:format)	donors#create	/app/config/routes.rb:115
new_donor_path	GET	/donors/new(.:format)	donors#new	/app/config/routes.rb:115
edit_donor_path	GET	/donors/:id/edit(.:format)	donors#edit	/app/config/routes.rb:115
donor_path	PATCH	/donors/:id(.:format)	donors#update	/app/config/routes.rb:115
	PUT	/donors/:id(.:format)	donors#update	/app/config/routes.rb:115
	DELETE	/donors/:id(.:format)	donors#destroy	/app/config/routes.rb:115
preview_program_streams_path	GET	/program_streams/preview(.:format)	program_streams#preview	/app/config/routes.rb:120

program_streams_path	GET	/program_streams/:id(.format)	program_streams#index	/app/config/routes.rb:119
	POST	/program_streams(.format)	program_streams#create	/app/config/routes.rb:119
new_program_stream_path	GET	/program_streams/new(.format)	program_streams#new	/app/config/routes.rb:119
edit_program_stream_path	GET	/program_streams/:id/edit(.format)	program_streams#edit	/app/config/routes.rb:119
program_stream_path	GET	/program_streams/:id(.format)	program_streams#show	/app/config/routes.rb:119
	PATCH	/program_streams/:id(.format)	program_streams#update	/app/config/routes.rb:119
	PUT	/program_streams/:id(.format)	program_streams#update	/app/config/routes.rb:119
	DELETE	/program_streams/:id(.format)	program_streams#destroy	/app/config/routes.rb:119
changelog_version_path	GET	/changelogs/:changelog_id/version(.format)	changelogs#version	/app/config/routes.rb:124
changelogs_path	GET	/changelogs(.format)	changelogs#index	/app/config/routes.rb:123
	POST	/changelogs(.format)	changelogs#create	/app/config/routes.rb:123
new_changelog_path	GET	/changelogs/new(.format)	changelogs#new	/app/config/routes.rb:123
edit_changelog_path	GET	/changelogs/:id/edit(.format)	changelogs#edit	/app/config/routes.rb:123
changelog_path	GET	/changelogs/:id(.format)	changelogs#show	/app/config/routes.rb:123
	PATCH	/changelogs/:id(.format)	changelogs#update	/app/config/routes.rb:123
	PUT	/changelogs/:id(.format)	changelogs#update	/app/config/routes.rb:123
	DELETE	/changelogs/:id(.format)	changelogs#destroy	/app/config/routes.rb:123
data_trackers_path	GET	/data_trackers(.format)	data_trackers#index	/app/config/routes.rb:127
able_screens_question_submissions_stages_path	GET	/stages(.format)	able_screens/question_submissions/stages#index	/app/config/routes.rb:131
	POST	/stages(.format)	able_screens/question_submissions/stages#create	/app/config/routes.rb:131
new_able_screens_question_submissions_stage_path	GET	/stages/new(.format)	able_screens/question_submissions/stages#new	/app/config/routes.rb:131
edit_able_screens_question_submissions_stage_path	GET	/stages/:id/edit(.format)	able_screens/question_submissions/stages#edit	/app/config/routes.rb:131
able_screens_question_submissions_stage_path	GET	/stages/:id(.format)	able_screens/question_submissions/stages#show	/app/config/routes.rb:131
	PATCH	/stages/:id(.format)	able_screens/question_submissions/stages#update	/app/config/routes.rb:131
	PUT	/stages/:id(.format)	able_screens/question_submissions/stages#update	/app/config/routes.rb:131
	DELETE	/stages/:id(.format)	able_screens/question_submissions/stages#destroy	/app/config/routes.rb:131
able_screens_question_submissions_able_screening_questions_path	POST	/able_screening_questions(.format)	able_screens/question_submissions/able_screening_questions#create	/app/config/routes.rb:132
new_able_screens_question_submissions_able_screening_question_path	GET	/able_screening_questions/new(.format)	able_screens/question_submissions/able_screening_questions#new	/app/config/routes.rb:132

edit_able_screens_question_submissions_able_screening_question_path	GET	/able_screening_questions/:id(.format)	able_screens/question_submissions/able_screening_questions#edit	/app/config/routes.rb:132
able_screens_question_submissions_able_screening_question_path	PATCH	/able_screening_questions/:id(.format)	able_screens/question_submissions/able_screening_questions#update	/app/config/routes.rb:132
	PUT	/able_screening_questions/:id(.format)	able_screens/question_submissions/able_screening_questions#update	/app/config/routes.rb:132
	DELETE	/able_screening_questions/:id(.format)	able_screens/question_submissions/able_screening_questions#destroy	/app/config/routes.rb:132
able_screens_answer_submissions_client_able_screening_answers_new_path	GET	/answer_submissions/clients/:client_id/able_screening_answers/new(.format)	able_screens/answer_submissions/able_screening_answers#new	/app/config/routes.rb:137
able_screens_answer_submissions_client_able_screening_answers_create_path	POST	/answer_submissions/clients/:client_id/able_screening_answers/create(.format)	able_screens/answer_submissions/able_screening_answers#create	/app/config/routes.rb:138
able_screens_answer_submissions_clients_path	GET	/answer_submissions/clients(.format)	able_screens/answer_submissions/clients#index	/app/config/routes.rb:136
	POST	/answer_submissions/clients(.format)	able_screens/answer_submissions/clients#create	/app/config/routes.rb:136
new_able_screens_answer_submissions_client_path	GET	/answer_submissions/clients/new(.format)	able_screens/answer_submissions/clients#new	/app/config/routes.rb:136
edit_able_screens_answer_submissions_client_path	GET	/answer_submissions/clients/:id(.format)	able_screens/answer_submissions/clients#edit	/app/config/routes.rb:136
able_screens_answer_submissions_client_path	GET	/answer_submissions/clients/:id(.format)	able_screens/answer_submissions/clients#show	/app/config/routes.rb:136
	PATCH	/answer_submissions/clients/:id(.format)	able_screens/answer_submissions/clients#update	/app/config/routes.rb:136
	PUT	/answer_submissions/clients/:id(.format)	able_screens/answer_submissions/clients#update	/app/config/routes.rb:136
	DELETE	/answer_submissions/clients/:id(.format)	able_screens/answer_submissions/clients#destroy	/app/config/routes.rb:136
material_version_path	GET	/materials/:material_id/version(.format)	materials#version	/app/config/routes.rb:144
materials_path	GET	/materials(.format)	materials#index	/app/config/routes.rb:143
	POST	/materials(.format)	materials#create	/app/config/routes.rb:143
new_material_path	GET	/materials/new(.format)	materials#new	/app/config/routes.rb:143
edit_material_path	GET	/materials/:id(.format)	materials#edit	/app/config/routes.rb:143
material_path	PATCH	/materials/:id(.format)	materials#update	/app/config/routes.rb:143
	PUT	/materials/:id(.format)	materials#update	/app/config/routes.rb:143
	DELETE	/materials/:id(.format)	materials#destroy	/app/config/routes.rb:143
location_version_path	GET	/locations/:location_id/version(.format)	locations#version	/app/config/routes.rb:148
locations_path	GET	/locations(.format)	locations#index	/app/config/routes.rb:147
	POST	/locations(.format)	locations#create	/app/config/routes.rb:147
new_location_path	GET	/locations/new(.format)	locations#new	/app/config/routes.rb:147

Resource Path	HTTP Method	URL	Controller Action	File Location
edit_location_path	GET	/locations/:id/edit(.:format)	locations#edit	/app/config/routes.rb:147
location_path	PATCH	/locations/:id(.:format)	locations#update	/app/config/routes.rb:147
	PUT	/locations/:id(.:format)	locations#update	/app/config/routes.rb:147
	DELETE	/locations/:id(.:format)	locations#destroy	/app/config/routes.rb:147
progress_note_type_version_path	GET	/progress_note_types/progress_note_type_id/version(.:format)	progress_note_types#version	/app/config/routes.rb:152
progress_note_types_path	GET	/progress_note_types(.:format)	progress_note_types#index	/app/config/routes.rb:151
	POST	/progress_note_types(.:format)	progress_note_types#create	/app/config/routes.rb:151
new_progress_note_type_path	GET	/progress_note_types/new(.:format)	progress_note_types#new	/app/config/routes.rb:151
edit_progress_note_type_path	GET	/progress_note_types/:id/edit(.:format)	progress_note_types#edit	/app/config/routes.rb:151
progress_note_type_path	PATCH	/progress_note_types/:id(.:format)	progress_note_types#update	/app/config/routes.rb:151
	PUT	/progress_note_types/:id(.:format)	progress_note_types#update	/app/config/routes.rb:151
	DELETE	/progress_note_types/:id(.:format)	progress_note_types#destroy	/app/config/routes.rb:151
intervention_version_path	GET	/interventions/intervention_id/version(.:format)	interventions#version	/app/config/routes.rb:156
interventions_path	GET	/interventions(.:format)	interventions#index	/app/config/routes.rb:155
	POST	/interventions(.:format)	interventions#create	/app/config/routes.rb:155
new_intervention_path	GET	/interventions/new(.:format)	interventions#new	/app/config/routes.rb:155
edit_intervention_path	GET	/interventions/:id/edit(.:format)	interventions#edit	/app/config/routes.rb:155
intervention_path	PATCH	/interventions/:id(.:format)	interventions#update	/app/config/routes.rb:155
	PUT	/interventions/:id(.:format)	interventions#update	/app/config/routes.rb:155
	DELETE	/interventions/:id(.:format)	interventions#destroy	/app/config/routes.rb:155
tasks_path	GET	/tasks(.:format)	tasks#index	/app/config/routes.rb:159
advanced_search_clients_path	GET	/clients/advanced_search(.:format)	clients#advanced_search	/app/config/routes.rb:163
report_client_client_enrollments_path	GET	/clients/:client_id/client_enrollments/report(.:format)	client_enrollments#report	/app/config/routes.rb:167
report_client_client_enrollment_client_enrollment_trackings_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings/report(.:format)	client_enrollment_trackings#report	/app/config/routes.rb:169
client_client_enrollment_client_enrollment_trackings_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings(.:format)	client_enrollment_trackings#index	/app/config/routes.rb:168
	POST	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings(.:format)	client_enrollment_trackings#create	/app/config/routes.rb:168
new_client_client_enrollment_client_enrollment_tracking_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings/new(.:format)	client_enrollment_trackings#new	/app/config/routes.rb:168
edit_client_client_enrollment_client_enrollment_tracking_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings/:id/edit(.:format)	client_enrollment_trackings#edit	/app/config/routes.rb:168
client_client_enrollment_client_enrollment_tracking_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings/:id(.:format)	client_enrollment_trackings#show	/app/config/routes.rb:168
	PATCH	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings/:id(.:format)	client_enrollment_trackings#update	/app/config/routes.rb:168

		client_enrollment_id/client_enrollment_trackings/:id(.:format)	date	/app/config/routes.rb:168
	PUT	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings/:id(.:format)	client_enrollment_trackings#update	/app/config/routes.rb:168
	DELETE	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings/:id(.:format)	client_enrollment_trackings#destroy	/app/config/routes.rb:168
client_client_enrollment_leave_programs_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs(.:format)	leave_programs#index	/app/config/routes.rb:171
	POST	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs(.:format)	leave_programs#create	/app/config/routes.rb:171
new_client_client_enrollment_leave_program_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs/new(.:format)	leave_programs#new	/app/config/routes.rb:171
edit_client_client_enrollment_leave_program_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs/:id/edit(.:format)	leave_programs#edit	/app/config/routes.rb:171
client_client_enrollment_leave_program_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs/:id(.:format)	leave_programs#show	/app/config/routes.rb:171
	PATCH	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs/:id(.:format)	leave_programs#update	/app/config/routes.rb:171
	PUT	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs/:id(.:format)	leave_programs#update	/app/config/routes.rb:171
	DELETE	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs/:id(.:format)	leave_programs#destroy	/app/config/routes.rb:171
client_client_enrollments_path	GET	/clients/:client_id/client_enrollments(.:format)	client_enrollments#index	/app/config/routes.rb:166
	POST	/clients/:client_id/client_enrollments(.:format)	client_enrollments#create	/app/config/routes.rb:166
new_client_client_enrollment_path	GET	/clients/:client_id/client_enrollments/new(.:format)	client_enrollments#new	/app/config/routes.rb:166
edit_client_client_enrollment_path	GET	/clients/:client_id/client_enrollments/:id/edit(.:format)	client_enrollments#edit	/app/config/routes.rb:166
client_client_enrollment_path	GET	/clients/:client_id/client_enrollments/:id(.:format)	client_enrollments#show	/app/config/routes.rb:166
	PATCH	/clients/:client_id/client_enrollments/:id(.:format)	client_enrollments#update	/app/config/routes.rb:166
	PUT	/clients/:client_id/client_enrollments/:id(.:format)	client_enrollments#update	/app/config/routes.rb:166
	DELETE	/clients/:client_id/client_enrollments/:id(.:format)	client_enrollments#destroy	/app/config/routes.rb:166
report_client_client_enrolled_programs_path	GET	/clients/:client_id/client_enrolled_programs/report(.:format)	client_enrolled_programs#report	/app/config/routes.rb:175
report_client_client_enrolled_program_client_enrolled_program_tracking_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings/report(.:format)	client_enrolled_program_trackings#report	/app/config/routes.rb:177
client_client_enrolled_program_client_enrolled_program_trackings_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings(.:format)	client_enrolled_program_trackings#index	/app/config/routes.rb:176
	POST	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings(.:format)	client_enrolled_program_trackings#create	/app/config/routes.rb:176
new_client_client_enrolled_program_client_enrolled_program_tracking_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings/new(.:format)	client_enrolled_program_trackings#new	/app/config/routes.rb:176
edit_client_client_enrolled_program_client_enrolled_program_tracking_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings/:id/edit(.:format)	client_enrolled_program_trackings#edit	/app/config/routes.rb:176
client_client_enrolled_program_client_enrolled_program_tracking_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings/:id(.:format)	client_enrolled_program_trackings#show	/app/config/routes.rb:176
	PATCH	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings/:id(.:format)	client_enrolled_program_trackings#update	/app/config/routes.rb:176

	PATCH	client_enrolled_program_trackings/id(.format)	gs#update	/app/config/routes.rb:176
	PUT	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings/id(.format)	client_enrolled_program_trackings#update	/app/config/routes.rb:176
	DELETE	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings/id(.format)	client_enrolled_program_trackings#destroy	/app/config/routes.rb:176
client_client_enrolled_program_leave_enrolled_programs_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs(.format)	leave_enrolled_programs#index	/app/config/routes.rb:179
	POST	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs(.format)	leave_enrolled_programs#create	/app/config/routes.rb:179
new_client_client_enrolled_program_leave_enrolled_program_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs/new(.format)	leave_enrolled_programs#new	/app/config/routes.rb:179
edit_client_client_enrolled_program_leave_enrolled_program_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs/id/edit(.format)	leave_enrolled_programs#edit	/app/config/routes.rb:179
client_client_enrolled_program_leave_enrolled_program_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs/id(.format)	leave_enrolled_programs#show	/app/config/routes.rb:179
	PATCH	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs/id(.format)	leave_enrolled_programs#update	/app/config/routes.rb:179
	PUT	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs/id(.format)	leave_enrolled_programs#update	/app/config/routes.rb:179
	DELETE	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs/id(.format)	leave_enrolled_programs#destroy	/app/config/routes.rb:179
client_client_enrolled_programs_path	GET	/clients/:client_id/client_enrolled_programs(.format)	client_enrolled_programs#index	/app/config/routes.rb:174
	POST	/clients/:client_id/client_enrolled_programs(.format)	client_enrolled_programs#create	/app/config/routes.rb:174
new_client_client_enrolled_program_path	GET	/clients/:client_id/client_enrolled_programs/new(.format)	client_enrolled_programs#new	/app/config/routes.rb:174
edit_client_client_enrolled_program_path	GET	/clients/:client_id/client_enrolled_programs/id/edit(.format)	client_enrolled_programs#edit	/app/config/routes.rb:174
client_client_enrolled_program_path	GET	/clients/:client_id/client_enrolled_programs/id(.format)	client_enrolled_programs#show	/app/config/routes.rb:174
	PATCH	/clients/:client_id/client_enrolled_programs/id(.format)	client_enrolled_programs#update	/app/config/routes.rb:174
	PUT	/clients/:client_id/client_enrolled_programs/id(.format)	client_enrolled_programs#update	/app/config/routes.rb:174
	DELETE	/clients/:client_id/client_enrolled_programs/id(.format)	client_enrolled_programs#destroy	/app/config/routes.rb:174
client_custom_field_properties_path	GET	/clients/:client_id/custom_field_properties(.format)	custom_field_properties#index	/app/config/routes.rb:182
	POST	/clients/:client_id/custom_field_properties(.format)	custom_field_properties#create	/app/config/routes.rb:182
new_client_custom_field_property_path	GET	/clients/:client_id/custom_field_properties/new(.format)	custom_field_properties#new	/app/config/routes.rb:182
edit_client_custom_field_property_path	GET	/clients/:client_id/custom_field_properties/id/edit(.format)	custom_field_properties#edit	/app/config/routes.rb:182
client_custom_field_property_path	GET	/clients/:client_id/custom_field_properties/id(.format)	custom_field_properties#show	/app/config/routes.rb:182
	PATCH	/clients/:client_id/custom_field_properties/id(.format)	custom_field_properties#update	/app/config/routes.rb:182
	PUT	/clients/:client_id/custom_field_properties/id(.format)	custom_field_properties#update	/app/config/routes.rb:182
	DELETE	/clients/:client_id/custom_field_properties/id(.format)	custom_field_properties#destroy	/app/config/routes.rb:182

download_attachment_client_assessment_path	GET	/clients/:client_id/assessments/:id/assessment_domains/:assessment_domain_id/attachments/:index(.:format)	assessments#download_attachment	/app/config/routes.rb:187
client_assessments_path	GET	/clients/:client_id/assessments(.:format)	assessments#index	/app/config/routes.rb:184
	POST	/clients/:client_id/assessments(.:format)	assessments#create	/app/config/routes.rb:184
new_client_assessment_path	GET	/clients/:client_id/assessments/new(.:format)	assessments#new	/app/config/routes.rb:184
edit_client_assessment_path	GET	/clients/:client_id/assessments/:id/edit(.:format)	assessments#edit	/app/config/routes.rb:184
client_assessment_path	GET	/clients/:client_id/assessments/:id(.:format)	assessments#show	/app/config/routes.rb:184
	PATCH	/clients/:client_id/assessments/:id(.:format)	assessments#update	/app/config/routes.rb:184
	PUT	/clients/:client_id/assessments/:id(.:format)	assessments#update	/app/config/routes.rb:184
	DELETE	/clients/:client_id/assessments/:id(.:format)	assessments#destroy	/app/config/routes.rb:184
client_case_notes_path	GET	/clients/:client_id/case_notes(.:format)	case_notes#index	/app/config/routes.rb:190
	POST	/clients/:client_id/case_notes(.:format)	case_notes#create	/app/config/routes.rb:190
new_client_case_note_path	GET	/clients/:client_id/case_notes/new(.:format)	case_notes#new	/app/config/routes.rb:190
edit_client_case_note_path	GET	/clients/:client_id/case_notes/:id/edit(.:format)	case_notes#edit	/app/config/routes.rb:190
client_case_note_path	GET	/clients/:client_id/case_notes/:id(.:format)	case_notes#show	/app/config/routes.rb:190
	PATCH	/clients/:client_id/case_notes/:id(.:format)	case_notes#update	/app/config/routes.rb:190
	PUT	/clients/:client_id/case_notes/:id(.:format)	case_notes#update	/app/config/routes.rb:190
	DELETE	/clients/:client_id/case_notes/:id(.:format)	case_notes#destroy	/app/config/routes.rb:190
client_case_quarterly_reports_path	GET	/clients/:client_id/cases/:case_id/quarterly_reports(.:format)	case/quarterly_reports#index	/app/config/routes.rb:193
client_case_quarterly_report_path	GET	/clients/:client_id/cases/:case_id/quarterly_reports/:id(.:format)	case/quarterly_reports#show	/app/config/routes.rb:193
client_cases_path	GET	/clients/:client_id/cases(.:format)	cases#index	/app/config/routes.rb:191
	POST	/clients/:client_id/cases(.:format)	cases#create	/app/config/routes.rb:191
new_client_case_path	GET	/clients/:client_id/cases/new(.:format)	cases#new	/app/config/routes.rb:191
edit_client_case_path	GET	/clients/:client_id/cases/:id/edit(.:format)	cases#edit	/app/config/routes.rb:191
client_case_path	GET	/clients/:client_id/cases/:id(.:format)	cases#show	/app/config/routes.rb:191
	PATCH	/clients/:client_id/cases/:id(.:format)	cases#update	/app/config/routes.rb:191
	PUT	/clients/:client_id/cases/:id(.:format)	cases#update	/app/config/routes.rb:191
	DELETE	/clients/:client_id/cases/:id(.:format)	cases#destroy	/app/config/routes.rb:191
client_tasks_path	GET	/clients/:client_id/tasks(.:format)	client/tasks#index	/app/config/routes.rb:197
	POST	/clients/:client_id/tasks(.:format)	client/tasks#create	/app/config/routes.rb:197
new_client_task_path	GET	/clients/:client_id/tasks/new(.:format)	client/tasks#new	/app/config/routes.rb:197
edit_client_task_path	GET	/clients/:client_id/tasks/:id/edit(.:format)	client/tasks#edit	/app/config/routes.rb:197

client_task_path	GET	/clients/:client_id/tasks/:id(.:format)	client/tasks#show	/app/config/routes.rb:197
	PATCH	/clients/:client_id/tasks/:id(.:format)	client/tasks#update	/app/config/routes.rb:197
	PUT	/clients/:client_id/tasks/:id(.:format)	client/tasks#update	/app/config/routes.rb:197
	DELETE	/clients/:client_id/tasks/:id(.:format)	client/tasks#destroy	/app/config/routes.rb:197
client_progress_note_version_path	GET	/clients/:client_id/progress_notes/:progress_note_id/version(.:format)	progress_notes#version	/app/config/routes.rb:202
client_progress_notes_path	GET	/clients/:client_id/progress_notes(.:format)	progress_notes#index	/app/config/routes.rb:201
	POST	/clients/:client_id/progress_notes(.:format)	progress_notes#create	/app/config/routes.rb:201
new_client_progress_note_path	GET	/clients/:client_id/progress_notes/new(.:format)	progress_notes#new	/app/config/routes.rb:201
edit_client_progress_note_path	GET	/clients/:client_id/progress_notes/:id/edit(.:format)	progress_notes#edit	/app/config/routes.rb:201
client_progress_note_path	GET	/clients/:client_id/progress_notes/:id(.:format)	progress_notes#show	/app/config/routes.rb:201
	PATCH	/clients/:client_id/progress_notes/:id(.:format)	progress_notes#update	/app/config/routes.rb:201
	PUT	/clients/:client_id/progress_notes/:id(.:format)	progress_notes#update	/app/config/routes.rb:201
	DELETE	/clients/:client_id/progress_notes/:id(.:format)	progress_notes#destroy	/app/config/routes.rb:201
client_version_path	GET	/clients/:client_id/version(.:format)	clients#version	/app/config/routes.rb:205
clients_path	GET	/clients(.:format)	clients#index	/app/config/routes.rb:161
	POST	/clients(.:format)	clients#create	/app/config/routes.rb:161
new_client_path	GET	/clients/new(.:format)	clients#new	/app/config/routes.rb:161
edit_client_path	GET	/clients/:id/edit(.:format)	clients#edit	/app/config/routes.rb:161
client_path	GET	/clients/:id(.:format)	clients#show	/app/config/routes.rb:161
	PATCH	/clients/:id(.:format)	clients#update	/app/config/routes.rb:161
	PUT	/clients/:id(.:format)	clients#update	/app/config/routes.rb:161
	DELETE	/clients/:id(.:format)	clients#destroy	/app/config/routes.rb:161
delete_attachments_path	GET	/attachments/delete(.:format)	attachments#delete	/app/config/routes.rb:210
attachments_path	GET	/attachments(.:format)	attachments#index	/app/config/routes.rb:208
family_custom_field_properties_path	GET	/families/:family_id/custom_field_properties(.:format)	custom_field_properties#index	/app/config/routes.rb:215
	POST	/families/:family_id/custom_field_properties(.:format)	custom_field_properties#create	/app/config/routes.rb:215
new_family_custom_field_property_path	GET	/families/:family_id/custom_field_properties/new(.:format)	custom_field_properties#new	/app/config/routes.rb:215
edit_family_custom_field_property_path	GET	/families/:family_id/custom_field_properties/:id/edit(.:format)	custom_field_properties#edit	/app/config/routes.rb:215
family_custom_field_property_path	GET	/families/:family_id/custom_field_properties/:id(.:format)	custom_field_properties#show	/app/config/routes.rb:215
	PATCH	/families/:family_id/custom_field_properties/:id(.:format)	custom_field_properties#update	/app/config/routes.rb:215
	PUT	/families/:family_id/custom_field_properties/:id(.:format)	custom_field_properties#update	/app/config/routes.rb:215
	DELETE	/families/:family_id/custom_field_properties/:id(.:format)	custom_field_properties#destroy	/app/config/routes.rb:215

family_version_path	GET	/families/:family_id/version(:format)	families#version	/app/config/routes.rb:216
families_path	GET	/families(:format)	families#index	/app/config/routes.rb:214
	POST	/families(:format)	families#create	/app/config/routes.rb:214
new_family_path	GET	/families/new(:format)	families#new	/app/config/routes.rb:214
edit_family_path	GET	/families/:id/edit(:format)	families#edit	/app/config/routes.rb:214
family_path	GET	/families/:id(:format)	families#show	/app/config/routes.rb:214
	PATCH	/families/:id(:format)	families#update	/app/config/routes.rb:214
	PUT	/families/:id(:format)	families#update	/app/config/routes.rb:214
	DELETE	/families/:id(:format)	families#destroy	/app/config/routes.rb:214
partner_custom_field_properties_path	GET	/partners/:partner_id/custom_field_properties(:format)	custom_field_properties#index	/app/config/routes.rb:220
	POST	/partners/:partner_id/custom_field_properties(:format)	custom_field_properties#create	/app/config/routes.rb:220
new_partner_custom_field_property_path	GET	/partners/:partner_id/custom_field_properties/new(:format)	custom_field_properties#new	/app/config/routes.rb:220
edit_partner_custom_field_property_path	GET	/partners/:partner_id/custom_field_properties/:id/edit(:format)	custom_field_properties#edit	/app/config/routes.rb:220
partner_custom_field_property_path	GET	/partners/:partner_id/custom_field_properties/:id(:format)	custom_field_properties#show	/app/config/routes.rb:220
	PATCH	/partners/:partner_id/custom_field_properties/:id(:format)	custom_field_properties#update	/app/config/routes.rb:220
	PUT	/partners/:partner_id/custom_field_properties/:id(:format)	custom_field_properties#update	/app/config/routes.rb:220
	DELETE	/partners/:partner_id/custom_field_properties/:id(:format)	custom_field_properties#destroy	/app/config/routes.rb:220
partner_version_path	GET	/partners/:partner_id/version(:format)	partners#version	/app/config/routes.rb:221
partners_path	GET	/partners(:format)	partners#index	/app/config/routes.rb:219
	POST	/partners(:format)	partners#create	/app/config/routes.rb:219
new_partner_path	GET	/partners/new(:format)	partners#new	/app/config/routes.rb:219
edit_partner_path	GET	/partners/:id/edit(:format)	partners#edit	/app/config/routes.rb:219
partner_path	GET	/partners/:id(:format)	partners#show	/app/config/routes.rb:219
	PATCH	/partners/:id(:format)	partners#update	/app/config/routes.rb:219
	PUT	/partners/:id(:format)	partners#update	/app/config/routes.rb:219
	DELETE	/partners/:id(:format)	partners#destroy	/app/config/routes.rb:219
notifications_path	GET	/notifications(:format)	notifications#index	/app/config/routes.rb:224
api_form_builder_attachment_path	DELETE	/api/form_builder_attachments/:id(:format)	api/form_builder_attachments#destroy	/app/config/routes.rb:231
find_event_api_calendars_path	GET	/api/calendars/find_event(:format)	api/calendars#find_event	/app/config/routes.rb:234
program_clients_api_calendars_path	GET	/api/calendars/program_clients(:format)	api/calendars#program_clients	/app/config/routes.rb:235
api_calendars_path	GET	/api/calendars(:format)	api/calendars#index	/app/config/routes.rb:233
	POST	/api/calendars(:format)	api/calendars#create	/app/config/routes.rb:233

new_api_calendar_path	GET	/api/calendars/new(.format)	api/calendars#new	/app/config/routes.rb:233
edit_api_calendar_path	GET	/api/calendars/:id/edit(.format)	api/calendars#edit	/app/config/routes.rb:233
api_calendar_path	GET	/api/calendars/:id(.format)	api/calendars#show	/app/config/routes.rb:233
	PATCH	/api/calendars/:id(.format)	api/calendars#update	/app/config/routes.rb:233
	PUT	/api/calendars/:id(.format)	api/calendars#update	/app/config/routes.rb:233
	DELETE	/api/calendars/:id(.format)	api/calendars#destroy	/app/config/routes.rb:233
compare_api_clients_path	GET	/api/clients/compare(.format)	api/clients#compare	/app/config/routes.rb:239
api_clients_path	GET	/api/clients(.format)	api/clients#index	/app/config/routes.rb:238
	POST	/api/clients(.format)	api/clients#create	/app/config/routes.rb:238
new_api_client_path	GET	/api/clients/new(.format)	api/clients#new	/app/config/routes.rb:238
edit_api_client_path	GET	/api/clients/:id/edit(.format)	api/clients#edit	/app/config/routes.rb:238
api_client_path	GET	/api/clients/:id(.format)	api/clients#show	/app/config/routes.rb:238
	PATCH	/api/clients/:id(.format)	api/clients#update	/app/config/routes.rb:238
	PUT	/api/clients/:id(.format)	api/clients#update	/app/config/routes.rb:238
	DELETE	/api/clients/:id(.format)	api/clients#destroy	/app/config/routes.rb:238
fetch_custom_fields_api_custom_fields_path	GET	/api/custom_fields/fetch_custom_fields(.format)	api/custom_fields#fetch_custom_fields	/app/config/routes.rb:242
api_custom_field_fields_path	GET	/api/custom_fields/:custom_field_id/fi elds(.format)	api/custom_fields#fields	/app/config/routes.rb:243
api_custom_fields_path	GET	/api/custom_fields(.format)	api/custom_fields#index	/app/config/routes.rb:241
	POST	/api/custom_fields(.format)	api/custom_fields#create	/app/config/routes.rb:241
new_api_custom_field_path	GET	/api/custom_fields/new(.format)	api/custom_fields#new	/app/config/routes.rb:241
edit_api_custom_field_path	GET	/api/custom_fields/:id/edit(.format)	api/custom_fields#edit	/app/config/routes.rb:241
api_custom_field_path	GET	/api/custom_fields/:id(.format)	api/custom_fields#show	/app/config/routes.rb:241
	PATCH	/api/custom_fields/:id(.format)	api/custom_fields#update	/app/config/routes.rb:241
	PUT	/api/custom_fields/:id(.format)	api/custom_fields#update	/app/config/routes.rb:241
	DELETE	/api/custom_fields/:id(.format)	api/custom_fields#destroy	/app/config/routes.rb:241
get_custom_field_api_client_advanced_searches_path	GET	/api/client_advanced_searches/get_c ustom_field(.format)	api/client_advanced_searches# get_custom_field	/app/config/routes.rb:247
get_basic_field_api_client_advanced_searches_path	GET	/api/client_advanced_searches/get_b asic_field(.format)	api/client_advanced_searches# get_basic_field	/app/config/routes.rb:248
get_enrollment_field_api_client_advanced_searches_path	GET	/api/client_advanced_searches/get_e nrollment_field(.format)	api/client_advanced_searches# get_enrollment_field	/app/config/routes.rb:249
get_tracking_field_api_client_advanced_searches_path	GET	/api/client_advanced_searches/get_t racking_field(.format)	api/client_advanced_searches# get_tracking_field	/app/config/routes.rb:250
get_exit_program_field_api_client_advanced_searches_path	GET	/api/client_advanced_searches/get_e xit_program_field(.format)	api/client_advanced_searches# get_exit_program_field	/app/config/routes.rb:251

get_fields_api_program_stream_add_rule_index_path	GET	/api/program_stream_add_rule/get_fields(.:format)	api/program_stream_add_rule#get_fields	/app/config/routes.rb:256
api_program_stream_enrollment_fields_path	GET	/api/program_streams/:program_stream_id/enrollment_fields(.:format)	api/program_streams#enrollment_fields	/app/config/routes.rb:261
api_program_stream_exit_program_fields_path	GET	/api/program_streams/:program_stream_id/exit_program_fields(.:format)	api/program_streams#exit_program_fields	/app/config/routes.rb:262
api_program_stream_tracking_fields_path	GET	/api/program_streams/:program_stream_id/tracking_fields(.:format)	api/program_streams#tracking_fields	/app/config/routes.rb:263
search_custom_fields_path	GET	/custom_fields/search(.:format)	form_builder/custom_fields#search	/app/config/routes.rb:271
preview_custom_fields_path	GET	/custom_fields/preview(.:format)	form_builder/custom_fields#show	/app/config/routes.rb:272
custom_fields_path	GET	/custom_fields(.:format)	form_builder/custom_fields#index	/app/config/routes.rb:269
	POST	/custom_fields(.:format)	form_builder/custom_fields#create	/app/config/routes.rb:269
new_custom_field_path	GET	/custom_fields/new(.:format)	form_builder/custom_fields#new	/app/config/routes.rb:269
edit_custom_field_path	GET	/custom_fields/:id/edit(.:format)	form_builder/custom_fields#edit	/app/config/routes.rb:269
custom_field_path	GET	/custom_fields/:id(.:format)	form_builder/custom_fields#show	/app/config/routes.rb:269
	PATCH	/custom_fields/:id(.:format)	form_builder/custom_fields#update	/app/config/routes.rb:269
	PUT	/custom_fields/:id(.:format)	form_builder/custom_fields#update	/app/config/routes.rb:269
	DELETE	/custom_fields/:id(.:format)	form_builder/custom_fields#destroy	/app/config/routes.rb:269
client_advanced_searches_path	GET	/client_advanced_searches(.:format)	client_advanced_searches#index	/app/config/routes.rb:277
papertrail_queries_path	GET	/papertrail_queries(.:format)	papertrail_queries#index	/app/config/routes.rb:278
break_glass_grants_path	POST	/break_glass_grants(.:format)	break_glass_grants#create	/app/config/routes.rb:284

Request

Parameters:

None

[Toggle session dump](#)

[Toggle env dump](#)

Response

Headers:

None

Security Enforcement — per-organization control toggles.

Control	NIST	What it does
Global authorization	AC-3	Require every action to authorize explicitly.
Least-privilege narrowing	AC-6	Scope reads to need-to-know.
Tenant-boundary tripwire	SC-7	Refuse any cross-tenant request.
MFA & idle timeout	IA-2 · AC-12	Require MFA; invalidate idle sessions.
Lockout & password expiry	AC-7 · IA-5	Lock after failed sign-ins; rotate passwords.
Inactive-account auto-disable	AC-2(3)	Disable dormant accounts automatically.

Break-glass emergency access

When a genuine life-safety need requires an emergency-only field, an eligible worker can self-elevate for **one hour** — with a mandatory reason and the audit record written *first*. Access is scoped to the specific record, expires automatically, and is fully logged.

7 · Data protection & privacy

CaseLight is hardened at the application layer toward **NIST 800-53 Moderate** and **SOC 2** (Security, Confidentiality, Privacy), and aligns with the **HIPAA Security Rule**.

- **Field-level sensitivity** — Standard / Restricted / Emergency-only on forms and domains; records mask what a role isn't cleared to see.
- **Encryption at rest** — sensitive PII is encrypted in the database across multiple tiers.
- **Append-only audit trail** — reads and changes logged to a separate, tenant-isolated store, with change history and retention.
- **Tenant isolation** — each organization is its own subdomain and database schema.
- **Data lifecycle** — retention/deletion routines, guarded and audited deletion, and a subject-access export.

The full compliance package — System Security Plan, SOC 2 control matrix, policies, POA&M, and a reproducible `rake compliance:evidence` bundle — lives in `docs/compliance/`. Data-handling posture and the production gate for real client data are in `SECURITY.md`. **Pilot data is synthetic only.**