

WORKING IN CASELIGHT

User Guide

A screen-by-screen walkthrough for staff — individuals, households, programs, assessments, case notes, and the calendar.

Lighthouse Nonprofit Technologies · CaseLight · AGPL-3.0 — screens show synthetic demo data only



CaseLight — User Guide

CaseLight is a case-management system for refugee resettlement and other frontline nonprofits. It tracks the people you serve, the households they belong to, the programs they move through, and the assessments and notes that record how the work is going — with security controls usually reserved for far more expensive software.

This guide walks through the app the way staff actually use it, role by role and screen by screen.


All screenshots in this guide show synthetic demo data — fictional names, addresses, and records generated for demonstration. No real client information appears anywhere.

Printable editions: polished PDFs live in [docs/pdf/](#) — [User Guide](#), [Administrator Guide](#), and a [Brochure](#).

Contents

1. [Signing in](#)
 2. [Roles at a glance](#)
 3. [The dashboard](#)
 4. [Individuals & households](#)
 5. [The individual record](#)
 6. [Programs & enrollments](#)
 7. [Case notes](#)
 8. [Assessments & domains](#)
 9. [The calendar](#)
 10. [Custom forms — the form builder](#)
 11. [Security & administration](#)
 12. [Data protection & privacy](#)
 13. [Administration reference — the Manage menu](#)
-

1. Signing in

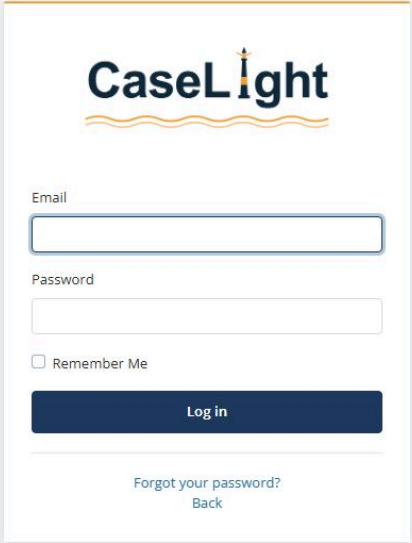The image shows a login form for CaseLight. At the top is the CaseLight logo, which consists of the word "CaseLight" in a dark blue font with a small torch icon above the "i", and three wavy orange lines below it. Below the logo are two input fields: "Email" and "Password". The "Email" field is highlighted with a blue border. Below the "Password" field is a checkbox labeled "Remember Me". Below the checkbox is a dark blue button with the text "Log in" in white. At the bottom of the form, there is a link that says "Forgot your password?" and a "Back" link below it. The entire form is centered on a light gray background.

Each staff member has their own account — one person per login, so the audit history is meaningful. Sign in with your email and password. CaseLight supports two additional protections you can enable:

- **Multi-factor authentication (MFA)** — a time-based one-time code from an authenticator app, with one-time recovery codes.
- **Passkeys** — phishing-resistant WebAuthn sign-in (Face ID / Touch ID / a security key), via the **"Sign in with a passkey"** button.

Administrators can require MFA for privileged roles. Repeated failed sign-ins lock an account temporarily; it unlocks automatically after a set interval.

2. Roles at a glance

CaseLight shows the **same records** to everyone who's authorized, but presents them in the way each role works — and limits what lower-privilege roles can see.

Role	Sees	Individuals view
Administrator	Everything; manages users, forms, programs, and security	Dense table
Strategic overviewer	Read-only overview across the organization (standard-sensitivity data)	Dense table
Manager	The caseloads of the case workers they manage	Cards
Case worker	Only the clients assigned to them	Cards
Specialized managers (EC / FC / KC / Able)	Program-specific management	Cards

Sensitive fields are additionally gated by **field-level sensitivity** (see [§12](#)) — a role that can open a record still won't see fields marked above its clearance.

3. The dashboard

CaseLight
Ava Adminson
admin

Resettlement Dashboard
Households and individuals across active resettlement programs.

Headline counts:

- 10 HOUSEHOLDS
- 26 INDIVIDUALS
- 62 ACTIVE PROGRAM ENROLLMENTS
- 7 PROGRAMS OFFERED

Active enrollments by program

Program	Count
Adult Education / ESL	1
Benefits	9
Childcare	1
Employment	15
Housing	10
Immigration / Legal	15
K-12 Education	11

Households

Household	Members
Al-Rashid Family (DEMO)	5 members
Castillo Household (DEMO)	1 member
Diallo Family (DEMO)	3 members
Haddad Household (DEMO)	2 members
Hassan Family (DEMO)	3 members
Mwangi Household (DEMO)	2 members
Nguyen Household (DEMO)	3 members
Okonkwo Family (DEMO)	5 members
Pham Household (DEMO)	1 member
Tran Household (DEMO)	1 member

Recent program activity

INDIVIDUAL	PROGRAM	UPDATE	LOGGED
Aissatou Diallo	K-12 Education	School Check-in	Jun 22, 2026
Ibrahim Diallo	K-12 Education	School Check-in	Jun 22, 2026
Mamadou Diallo	Immigration / Legal	Application Milestone	Jun 22, 2026
Mamadou Diallo	Employment	Employment Progress	Jun 22, 2026

The dashboard is the landing page after sign-in. It summarizes the organization at a glance:

- **Headline counts** — households, individuals, active program enrollments, and programs offered.
- **Active enrollments by program** — how many people are currently in Housing, Employment, Immigration/Legal, Education, Benefits, and so on.
- **Households** — every household with its member count, each a link into the record.

- **Recent program activity** — the latest dated updates across the caseload.

4. Individuals & households

Every person in CaseLight is an **individual**, and every individual belongs to a **household**. Households are listed under **Households**; individuals under **Individuals**.

The screenshot displays the CaseLight application interface. On the left is a dark sidebar with the CaseLight logo and user information (Ava Adminson, admin). Below the logo are navigation links: Dashboards, Individuals (26), Households (10), Partners (0), Users (6), Manage, Changelogs, Access Review, and Security Enforcement. The main content area is titled 'Households' and shows a list of 10 results. At the top right of the main area are buttons for 'Add New Household' and 'Export to XLS', and a 'Sort by...' dropdown. The table below has the following structure:

NAME	HOUSEHOLD ID	HOUSEHOLD TYPE	INDIVIDUALS	STATE
Al-Rashid Family (DEMO)	SLO-DEMO-6	Kinship	Khalid Al-Rashid Fatima Al-Rashid Omar Al-Rashid Yara Al-Rashid +1	—
Castillo Household (DEMO)	SLO-DEMO-9	Kinship	Rosa Castillo	—
Diallo Family (DEMO)	SLO-DEMO-10	Kinship	Mamadou Diallo Ibrahim Diallo Aissatou Diallo	—
Haddad Household (DEMO)	SLO-DEMO-4	Kinship	Sami Haddad Layal Haddad	—
Hassan Family (DEMO)	SLO-DEMO-1	Kinship	Yusuf Hassan Amina Hassan Layla Hassan	—
Mwangi Household (DEMO)	SLO-DEMO-8	Kinship	Joseph Mwangi Grace Mwangi	—
Nguyen Household (DEMO)	SLO-DEMO-7	Kinship	Linh Nguyen Duc Nguyen Kim Nguyen	—
Okonkwo Family (DEMO)	SLO-DEMO-3	Kinship	Emeka Okonkwo Ngozi Okonkwo Chidi Okonkwo Amara Okonkwo +1	—
Pham Household (DEMO)	SLO-DEMO-5	Kinship	Bao Pham	—
Tran Household (DEMO)	SLO-DEMO-2	Kinship	Minh Tran	—

Depending on your role, the **Individuals** list appears one of two ways:

Administrators & strategic overviews get a dense, sortable table — name, case manager, gender/age, status, and program-stream tags — with export and advanced search:

CaseLight

Ava Adminson
admin ▾

- Dashboards
- Individuals** 26
- Households 10
- Partners 0
- Users 6
- Manage <
- Changelogs
- Access Review
- Security Enforcement

⌵ Reports

[Add New Individual](#)
[Advanced Search](#)
[View All Active Tasks](#)
[Export Program Data](#)
[Export to XLS](#)

26 Results

Sort by... ▾

NAME	CASE MANAGER	GENDER / AGE	STATUS	PROGRAM STREAMS	
Chidi Okonkwo	Wes Worker, Dev Admin	Male · 14 yrs 4 mos	Active	K-12 Education	
Yara Al-Rashid	Dev Admin	Female · 12 yrs 7 mos	Active	K-12 Education	
Rosa Castillo	Dev Admin	Female · 68 yrs 8 mos	Active	Housing Benefits Employment Immigration / Legal	
Ibrahim Diallo	Dev Admin	Male · 16 yrs 5 mos	Active	K-12 Education	
Ngozi Okonkwo	Wes Worker, Dev Admin	Female · 40 yrs 7 mos	Active	Employment Immigration / Legal	
Tariq Al-Rashid	Dev Admin	Male · 9 yrs 11 mos	Active	K-12 Education	
Emeka Okonkwo	Wes Worker, Dev Admin	Male · 44 yrs 0 mos	Active	Housing Benefits Employment Immigration / Legal	
Kim Nguyen	Dev Admin	Female · 11 yrs 2 mos	Active	K-12 Education	
Fatima Al-Rashid	Dev Admin	Female · 40 yrs 1 mo	Active	Employment Immigration / Legal	
Layal Haddad	Wes Worker, Dev Admin	Female · 33 yrs 10 mos	Active	Employment Immigration / Legal	
Linh Nguyen	Dev Admin	Female · 38 yrs 3 mos	Active	Housing Benefits Employment Immigration / Legal	
Joseph Mwangi	Dev Admin	Male · 35 yrs 6 mos	Active	Housing Benefits Employment Immigration / Legal	
Aissatou Diallo	Dev Admin	Female · 11 yrs 7 mos	Active	K-12 Education	
Amina Hassan	Wes Worker, Dev Admin	Female · 35 yrs 10 mos	Active	Employment Adult Education / ESL Immigration / Legal	
Sami Haddad	Wes Worker, Dev Admin	Male · 36 yrs 2 mos	Active	Housing Benefits Employment Immigration / Legal	
Khalid Al-Rashid	Dev Admin	Male · 46 yrs 5 mos	Active	Housing Benefits Employment Immigration / Legal	

Managers & case workers get a card per person, scoped to the caseload they carry:

Wes Worker
case worker ▾

- Dashboards
- Individuals** 12
- Manage

☰
🔔 2
[Log out](#)

T

Add New Individual
Advanced Search
View All Active Tasks
Export Program Data
Export to XLS

12 Results
Sort by... ▾

BP Bao Pham 2011 · Male · #cases-12 Active Housing Benefits Employment Immigration / Legal 👁️ 📝 🗑️	LH Layla Hassan 2002 · Female · #cases-3 Active K-12 Education Childcare 👁️ 📝 🗑️	LH Layal Haddad 2010 · Female · #cases-11 Active Employment Immigration / Legal 👁️ 📝 🗑️
AO Amara Okonkwo 2007 · Female · #cases-8 Active K-12 Education 👁️ 📝 🗑️	SH Sami Haddad 2009 · Male · #cases-10 Active Housing Benefits Employment Immigration / Legal 👁️ 📝 🗑️	OO Obi Okonkwo 2008 · Male · #cases-9 Active K-12 Education 👁️ 📝 🗑️
CO Chidi Okonkwo 2006 · Male · #cases-7 Active K-12 Education 👁️ 📝 🗑️	YH Yusuf Hassan 2000 · Male · #cases-1 Active Housing Employment Immigration / Legal Benefits 👁️ 📝 🗑️	EO Emeka Okonkwo 2004 · Male · #cases-5 Active Housing Benefits Employment Immigration / Legal 👁️ 📝 🗑️
MT Minh Tran 2003 · Male · #cases-4 Active Housing Employment Immigration / Legal 👁️ 📝 🗑️	AH Amina Hassan 2001 · Female · #cases-2 Active Employment Adult Education / ESL Immigration / Legal 👁️ 📝 🗑️	NO Ngozi Okonkwo 2005 · Female · #cases-6 Active Employment Immigration / Legal 👁️ 📝 🗑️

From either view you can **add a new individual**, run an **advanced search**, view **all active tasks**, and **export** program data.

5. The individual record

CaseLight

Ava Adminson
admin

Dashboards

Individuals26

Households10

Partners0

Users6

Manage

Changelogs

Access Review

Security Enforcement

Chidi OkonkwoActive

cases-7 Male

Code : 2006Date of Birth : March 08, 2012

Age : 14 years 4 monthsState :

Open Resettlement Case5 Tasks1 Assessments0 Case NotesAdditional FormsAdd FormEnrolled Program StreamsProgram Streams

About Individual

HOUSEHOLDS

ADDRESS47 Higuera St, San Luis Obispo, CA 93401

COUNTRY OF ORIGIN

SCHOOL NAME

SCHOOL GRADE0

RELEVANT REFERRAL INFORMATION

CASE MANAGERWes WorkerDev Admin

AGENCIES INVOLVED

Accept/RejectAccepted

Resettlement Case

EditRemove Client from Program

Intake DateJune 22, 2026

HouseholdOkonkwo Family (DEMO)

Case ManagerDev Admin, Wes Worker

StatusActive

Enrolled programs

K-12 EducationActive

An individual's page brings the whole picture together:

- **About the individual** — code, date of birth, age, address, country of origin, school information, referral source, **assigned case managers**, and accept/reject status.
- **Household link** — one click to the household the person belongs to.
- **Resettlement case** — intake date, household, case managers, and status.
- **Action bar** — open the resettlement case, view **Tasks**, **Assessments**, **Case Notes**, add **Additional Forms**, and manage **Program Streams**.

6. Programs & enrollments

Programs are modeled as **program streams** — enrollable programs, each with its own custom form and recurring, date-stamped check-ins ("trackings"). Administrators define the streams the organization actually runs.

CaseLight — User Guide

Page 8 of 35

Ava Adminson

admin

Dashboards

Individuals 26

Households 10

Partners 0

Users 6

Manage

Agencies

Departments

Domains

Domain Groups

Donors

Referral Sources

Quantitative Types

Progress Note

Form Builder

Program Streams

Release logs

Changelogs

Access Review

Program Streams Listing

Add New Program

My NGO's Program Streams

All NGO's Program Streams

NAME	DOMAINS	STATUS	ENROLLED	MAXIMUM PROGRAM ENROLLMENT	ACTION
Adult Education / ESL		Completed	1		
Benefits		Completed	9		
Childcare		Completed	1		
Employment		Completed	15		
Housing		Completed	10		
Immigration / Legal		Completed	15		
K-12 Education		Completed	11		

Enroll an individual in one or more streams, then log dated trackings against each enrollment as the work progresses. The history of the case is captured as it happens.

CaseLight

Ava Adminson
admin

Dashboards

Individuals26

Households10

Partners0

Users6

Manage<

Changelogs

Access Review


Security Enforcement

Chidi Okonkwo - Programs List

Back

STATUS	PROGRAM NAME	DOMAIN	NUMBER OF PLACE AVAILABLE	REPORT	ACTIONS
	Adult Education / ESL				Enroll
	Benefits				Enroll
	Childcare				Enroll
	Employment				Enroll
	Housing				Enroll
	Immigration / Legal				Enroll

7. Case notes

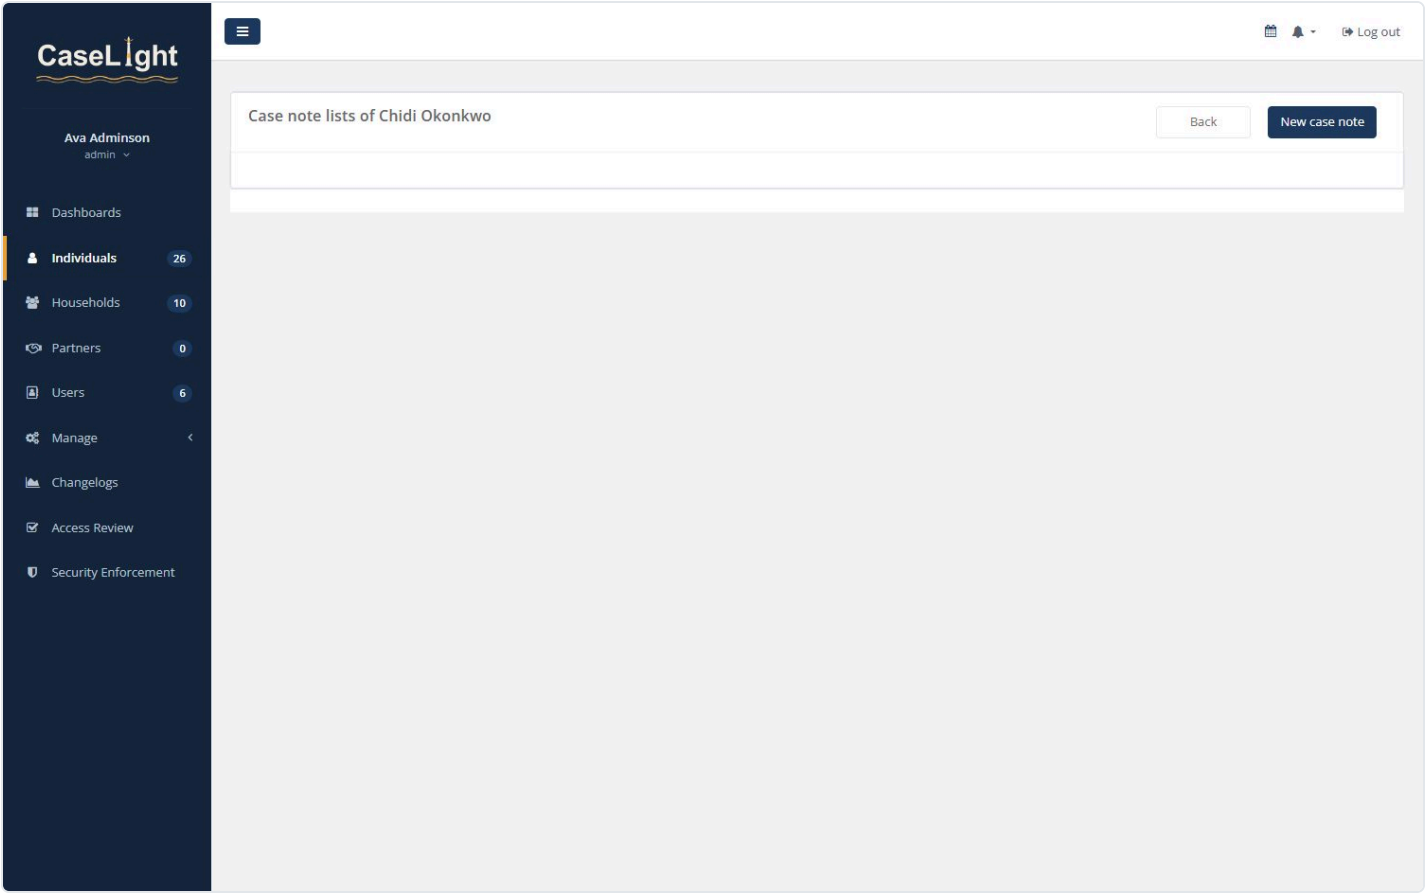

Case notes are the running narrative of the work with a person — dated entries attached to the individual, visible to the staff authorized to see that record.

8. Assessments & domains

CaseLight includes a structured **assessment** engine: periodic, scored needs assessments across **life domains** (for example Health, Mental Health, Immigration Status, Personal Safety, Education). Administrators configure the domains and their scoring under **Manage** → **Domains**.

CaseLight

Ava Adminson
admin

Dashboards

Individuals26

Households10

Partners0

Users6

Manage

Agencies

Departments

Domains

Domain Groups

Donors

Referral Sources

Quantitative Types

Progress Note

Form Builder

Program Streams

Release logs

Changelogs

Access Review

12 Domains

Add New Domain

Domains : 1A (Housing Stability)

Score 1

Score 2

Score 3

Score 4

Changelog

Goal: The household has safe, stable, affordable housing.

Sample questions:

- What is the household's current housing situation?
- Is the rent affordable relative to income?
- Is the housing safe and adequate for the family size?
- Is the lease or tenancy secure?

Score interpretations (1 = in crisis → 4 = self-sufficient):

1: In crisis — homeless or in emergency / temporary shelter.

2: At risk — housed but unstable: at risk of eviction, overcrowded, or unaffordable.

3: Stable — safe, adequate housing with a secure lease; rent is manageable.

4: Self-sufficient — housing is stable, affordable, and maintained without ongoing assistance.

Domains : 1B (Food Security)

Score 1

Score 2

Score 3

Score 4

Changelog


Goal: The household has reliable access to enough nutritious food.

Sample questions:

- Does the household have enough food throughout the month?
- Are they enrolled in CalFresh / food assistance if eligible?
- Can they shop for and prepare culturally appropriate food?

Each domain can be marked with a **sensitivity level**, so the most protected domains (for example Mental Health or Immigration Status) are only visible to appropriately cleared roles.

9. The calendar

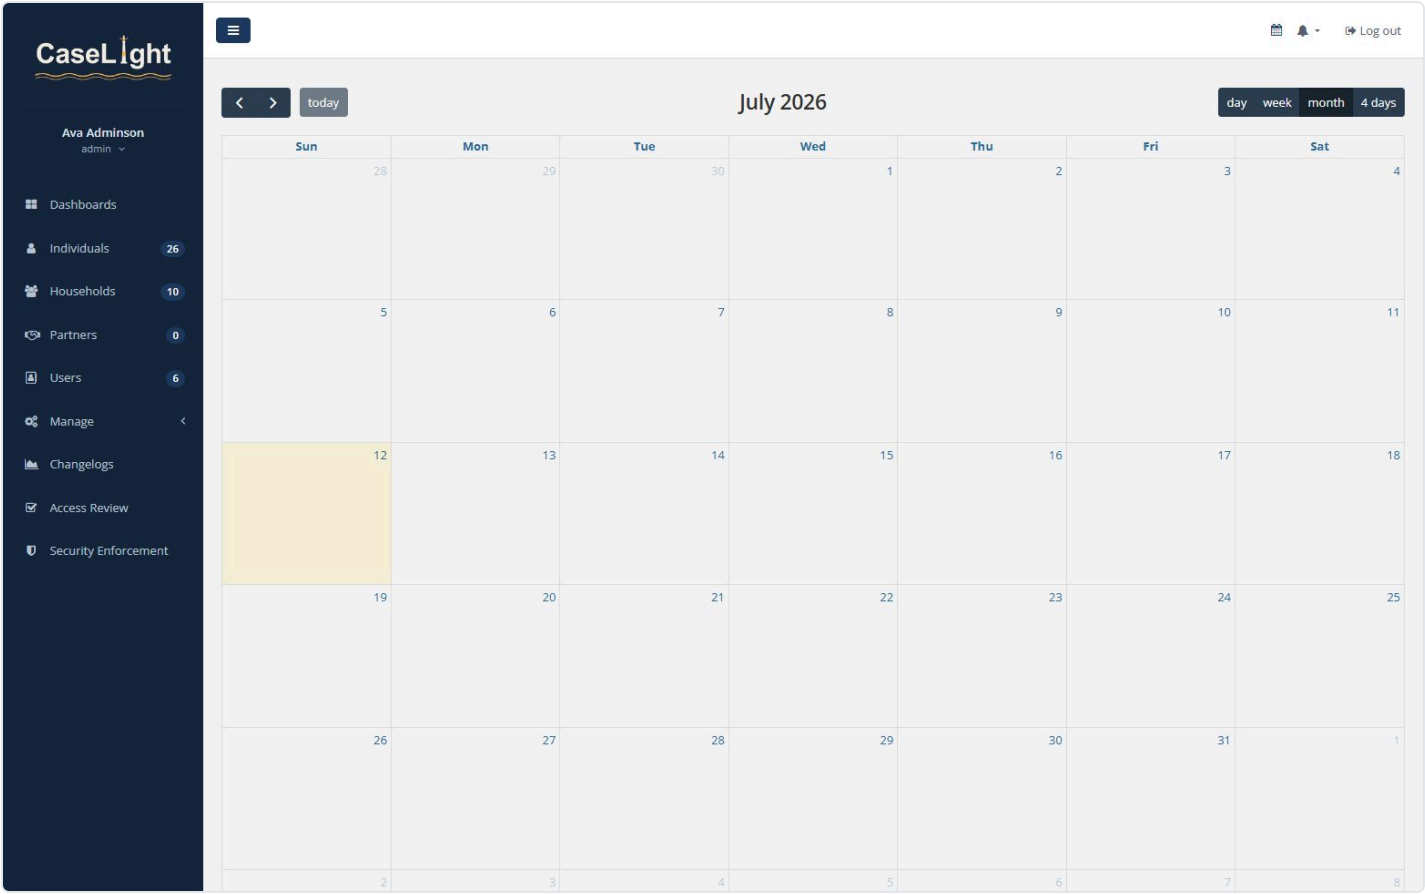

Appointments, recertification dates, and program milestones appear on a shared calendar with month / week / day views. Each user sees the events for the caseloads they're allowed to see. Clicking a day lets you schedule a task against a program, person, and domain.

10. Custom forms — the form builder (administrators)

CaseLight is configurable **without code**. Rather than editing the data model, administrators add **custom forms** (attachable to individuals, households, users, or partners) using a drag-and-drop builder under **Manage → Form Builder**.

Choose the record **type**, an optional **frequency**, and — importantly — the form's **sensitivity**:

- **Standard** — any authorized reader of the record.
- **Restricted** — caseload- or role-scoped readers only.
- **Emergency only** — hidden unless a **break-glass** grant is active (see below).

Then drag fields (text, number, date, select, checkbox/radio groups, file upload, text area) into the form. When the organization needs to capture something new, an administrator designs it here — no developer and no database migration required.

11. Security & administration (administrators)

CaseLight surfaces its security posture to the administrators who own it, rather than hiding it in a vendor's data center.

Access Review

Routing Error

No route matches [GET] "/access_reviews"

Rails.root: /app

[Application Trace](#) | [Framework Trace](#) | [Full Trace](#)

config/initializers/assets_upload_guard.rb:29:in "uploadsStatic(Guardcall)"

Routes

Routes match in priority from top to bottom

Helper (Path / Url)	HTTP Verb	Path	Controller#Action	Source Location
Search				
root_path	GET	/	organizations#index	/app/config/routes.rb:3
access_review_path	GET	/admin/access_review(.format)	access_reviews#index	/app/config/routes.rb:6
enforcement_settings_path	GET	/admin/enforcement_settings(.format)	enforcement_settings#show	/app/config/routes.rb:10
admin_enforcement_settings_path	PATCH	/admin/enforcement_settings(.format)	enforcement_settings#update	/app/config/routes.rb:11
authorized_download_path	GET	/downloads/record_type/record_id/mount(/.index)(.format)	downloads#show (record_type: /attachment(custom_field_property)/case_note_domain_group/form_builder_attachment/record_id: /d+/, mount: /file/image/attachments/, index: /d+)	/app/config/routes.rb:16
new_user_session_path	GET	/users/sign_in(.format)	sessions#new	devise (5.0.4) lib/devise/rails/routes.rb:378
user_session_path	POST	/users/sign_in(.format)	sessions#create	devise (5.0.4) lib/devise/rails/routes.rb:379
destroy_user_session_path	DELETE	/users/sign_out(.format)	sessions#destroy	devise (5.0.4) lib/devise/rails/routes.rb:380
new_user_password_path	GET	/users/password/new(.format)	passwords#new	devise (5.0.4) lib/devise/rails/routes.rb:385
edit_user_password_path	GET	/users/password/edit(.format)	passwords#edit	devise (5.0.4) lib/devise/rails/routes.rb:385
user_password_path	PATCH	/users/password(.format)	passwords#update	devise (5.0.4) lib/devise/rails/routes.rb:385
	PUT	/users/password(.format)	passwords#update	devise (5.0.4) lib/devise/rails/routes.rb:385

Access Review (under the main menu) is a periodic account-recertification report: every account with its role, last sign-in, MFA and passkey status, and whether it's locked or disabled. It also flags **disabled staff who still hold caseloads** and summarizes the least-privilege and authorization "shadow" windows. Export it to CSV for your records.

Security Enforcement

Routing Error

No route matches [GET] "/enforcement_settings"

Rails.root: /app

[Application Trace](#) | [Framework Trace](#) | [Full Trace](#)

`config/initializers/assets_upload_guard.rb:29:in "UploadsStaticGuard#call"`

Routes

Routes match in priority from top to bottom

Helper (Path / Url)	HTTP Verb	Path	Controller#Action	Source Location
Search				
root_path	GET	/	organizations#index	/app/config/routes.rb:3
access_review_path	GET	/admin/access_review(.:format)	access_reviews#index	/app/config/routes.rb:6
enforcement_settings_path	GET	/admin/enforcement_settings(.:format)	enforcement_settings#show	/app/config/routes.rb:10
admin_enforcement_settings_path	PATCH	/admin/enforcement_settings(.:format)	enforcement_settings#update	/app/config/routes.rb:11
authorized_download_path	GET	/downloads/:record_type/:record_id/:mount(/:index)(.:format)	downloads#show {record_type: /attachment custom_field_property case_note_domain_group form_builder_attachment/, record_id: /\d+/, mount: /file image attachments/, index: /\d+/}	/app/config/routes.rb:16
new_user_session_path	GET	/users/sign_in(.:format)	sessions#new	devise (5.0.4) lib/devise/rails/routes.rb:378
user_session_path	POST	/users/sign_in(.:format)	sessions#create	devise (5.0.4) lib/devise/rails/routes.rb:379
destroy_user_session_path	DELETE	/users/sign_out(.:format)	sessions#destroy	devise (5.0.4) lib/devise/rails/routes.rb:380
new_user_password_path	GET	/users/password/new(.:format)	passwords#new	devise (5.0.4) lib/devise/rails/routes.rb:385
edit_user_password_path	GET	/users/password/edit(.:format)	passwords#edit	devise (5.0.4) lib/devise/rails/routes.rb:385
user_password_path	PATCH	/users/password(.:format)	passwords#update	devise (5.0.4) lib/devise/rails/routes.rb:385
	PUT	/users/password(.:format)	passwords#update	devise (5.0.4) lib/devise/rails/routes.rb:385
	POST	/users/password(.:format)	passwords#create	devise (5.0.4) lib/devise/rails/routes.rb:385
cancel_user_registration_path	GET	/users/cancel(.:format)	registrations#cancel	devise (5.0.4) lib/devise/rails/routes.rb:416
new_user_registration_path	GET	/users/sign_up(.:format)	registrations#new	devise (5.0.4) lib/devise/rails/routes.rb:415
edit_user_registration_path	GET	/users/edit(.:format)	registrations#edit	devise (5.0.4) lib/devise/rails/routes.rb:415
user_registration_path	PATCH	/users(.:format)	registrations#update	devise (5.0.4) lib/devise/rails/routes.rb:415
	PUT	/users(.:format)	registrations#update	devise (5.0.4) lib/devise/rails/routes.rb:415
	DELETE	/users(.:format)	registrations#destroy	devise (5.0.4) lib/devise/rails/routes.rb:415

	POST	/users(.:format)	registrations#create	devise (5.0.4) lib/devise/rails/routes.rb:415
user_password_expired_path	GET	/users/password_expired(.:format)	password_expired#show	devise-security (0.18.0) lib/devise-security/routes.rb:9
	PATCH	/users/password_expired(.:format)	password_expired#update	devise-security (0.18.0) lib/devise-security/routes.rb:9
	PUT	/users/password_expired(.:format)	password_expired#update	devise-security (0.18.0) lib/devise-security/routes.rb:9
two_factor_challenge_path	GET	/users/two_factor(.:format)	sessions#two_factor_challenge	/app/config/routes.rb:32
verify_two_factor_path	POST	/users/two_factor(.:format)	sessions#verify_otp	/app/config/routes.rb:33
passkey_login_options_path	POST	/users/passkey/options(.:format)	sessions#passkey_options	/app/config/routes.rb:38
passkey_login_callback_path	POST	/users/passkey/callback(.:format)	sessions#passkey_callback	/app/config/routes.rb:39
two_factor_settings_path	GET	/two_factor_settings(.:format)	two_factor_settings#show	/app/config/routes.rb:43
	DELETE	/two_factor_settings(.:format)	two_factor_settings#destroy	/app/config/routes.rb:43
	POST	/two_factor_settings(.:format)	two_factor_settings#create	/app/config/routes.rb:43
regenerate_two_factor_backup_codes_path	POST	/two_factor_settings/backup_codes(.:format)	two_factor_settings#regenerate_backup_codes	/app/config/routes.rb:44
passkeys_path	GET	/passkeys(.:format)	passkeys#show	/app/config/routes.rb:50
	POST	/passkeys(.:format)	passkeys#create	/app/config/routes.rb:50
passkey_registration_options_path	POST	/passkeys/options(.:format)	passkeys#create_options	/app/config/routes.rb:51
passkey_path	DELETE	/passkeys/:id(.:format)	passkeys#destroy	/app/config/routes.rb:52
	GET	/robots.txt(.:format)	organizations#robots	/app/config/routes.rb:54
		/404(.:format)	errors#show {code: "404"}	/app/config/routes.rb:57
		/500(.:format)	errors#show {code: "500"}	/app/config/routes.rb:57
csp_reports_path	POST	/csp_reports(.:format)	csp_reports#create	/app/config/routes.rb:63
dashboards_path	GET	/dashboards(.:format)	dashboards#index	/app/config/routes.rb:65
quantitative_data_path	GET	/quantitative_data(.:format)	clients#quantitative_case	/app/config/routes.rb:67
redirect_path	GET	/redirect(.:format)	calendars#redirect	/app/config/routes.rb:70
callback_path	GET	/callback(.:format)	calendars#callback	/app/config/routes.rb:71
calendar_sync_path	GET	/calendar/sync(.:format)	calendars#sync	/app/config/routes.rb:72
calendars_path	GET	/calendars(.:format)	calendars#index	/app/config/routes.rb:73
	POST	/calendars(.:format)	calendars#create	/app/config/routes.rb:73
new_calendar_path	GET	/calendars/new(.:format)	calendars#new	/app/config/routes.rb:73
edit_calendar_path	GET	/calendars/:id/edit(.:format)	calendars#edit	/app/config/routes.rb:73
calendar_path	GET	/calendars/:id(.:format)	calendars#show	/app/config/routes.rb:73

	PATCH	/calendars/:id(.:format)	calendars#update	/app/config/routes.rb:73
	PUT	/calendars/:id(.:format)	calendars#update	/app/config/routes.rb:73
	DELETE	/calendars/:id(.:format)	calendars#destroy	/app/config/routes.rb:73
agency_version_path	GET	/agencies/:agency_id/version(.:format)	agencies#version	/app/config/routes.rb:76
agencies_path	GET	/agencies(.:format)	agencies#index	/app/config/routes.rb:75
	POST	/agencies(.:format)	agencies#create	/app/config/routes.rb:75
new_agency_path	GET	/agencies/new(.:format)	agencies#new	/app/config/routes.rb:75
edit_agency_path	GET	/agencies/:id/edit(.:format)	agencies#edit	/app/config/routes.rb:75
agency_path	PATCH	/agencies/:id(.:format)	agencies#update	/app/config/routes.rb:75
	PUT	/agencies/:id(.:format)	agencies#update	/app/config/routes.rb:75
	DELETE	/agencies/:id(.:format)	agencies#destroy	/app/config/routes.rb:75
user_custom_field_properties_path	GET	/admin/users/:user_id/custom_field_properties(.:format)	custom_field_properties#index	/app/config/routes.rb:81
	POST	/admin/users/:user_id/custom_field_properties(.:format)	custom_field_properties#create	/app/config/routes.rb:81
new_user_custom_field_property_path	GET	/admin/users/:user_id/custom_field_properties/new(.:format)	custom_field_properties#new	/app/config/routes.rb:81
edit_user_custom_field_property_path	GET	/admin/users/:user_id/custom_field_properties/:id/edit(.:format)	custom_field_properties#edit	/app/config/routes.rb:81
user_custom_field_property_path	GET	/admin/users/:user_id/custom_field_properties/:id(.:format)	custom_field_properties#show	/app/config/routes.rb:81
	PATCH	/admin/users/:user_id/custom_field_properties/:id(.:format)	custom_field_properties#update	/app/config/routes.rb:81
	PUT	/admin/users/:user_id/custom_field_properties/:id(.:format)	custom_field_properties#update	/app/config/routes.rb:81
	DELETE	/admin/users/:user_id/custom_field_properties/:id(.:format)	custom_field_properties#destroy	/app/config/routes.rb:81
user_version_path	GET	/admin/users/:user_id/version(.:format)	users#version	/app/config/routes.rb:82
user_disable_path	GET	/admin/users/:user_id/disable(.:format)	users#disable	/app/config/routes.rb:83
users_path	GET	/admin/users(.:format)	users#index	/app/config/routes.rb:80
	POST	/admin/users(.:format)	users#create	/app/config/routes.rb:80
new_user_path	GET	/admin/users/new(.:format)	users#new	/app/config/routes.rb:80
edit_user_path	GET	/admin/users/:id/edit(.:format)	users#edit	/app/config/routes.rb:80
user_path	GET	/admin/users/:id(.:format)	users#show	/app/config/routes.rb:80
	PATCH	/admin/users/:id(.:format)	users#update	/app/config/routes.rb:80
	PUT	/admin/users/:id(.:format)	users#update	/app/config/routes.rb:80
	DELETE	/admin/users/:id(.:format)	users#destroy	/app/config/routes.rb:80
quantitative_type_version_path	GET	/quantitative_types/:quantitative_type_id/version(.:format)	quantitative_types#version	/app/config/routes.rb:88
quantitative_types_path	GET	/quantitative_types(.:format)	quantitative_types#index	/app/config/routes.rb:87
	POST	/quantitative_types(.:format)	quantitative_types#create	/app/config/routes.rb:87

new_quantitative_type_path	GET	/quantitative_types/new(.format)	quantitative_types#new	/app/config/routes.rb:87
edit_quantitative_type_path	GET	/quantitative_types/:id/edit(.format)	quantitative_types#edit	/app/config/routes.rb:87
quantitative_type_path	GET	/quantitative_types/:id(.format)	quantitative_types#show	/app/config/routes.rb:87
	PATCH	/quantitative_types/:id(.format)	quantitative_types#update	/app/config/routes.rb:87
	PUT	/quantitative_types/:id(.format)	quantitative_types#update	/app/config/routes.rb:87
	DELETE	/quantitative_types/:id(.format)	quantitative_types#destroy	/app/config/routes.rb:87
quantitative_case_version_path	GET	/quantitative_cases/:quantitative_case_id/version(.format)	quantitative_cases#version	/app/config/routes.rb:92
quantitative_cases_path	GET	/quantitative_cases(.format)	quantitative_cases#index	/app/config/routes.rb:91
	POST	/quantitative_cases(.format)	quantitative_cases#create	/app/config/routes.rb:91
new_quantitative_case_path	GET	/quantitative_cases/new(.format)	quantitative_cases#new	/app/config/routes.rb:91
edit_quantitative_case_path	GET	/quantitative_cases/:id/edit(.format)	quantitative_cases#edit	/app/config/routes.rb:91
quantitative_case_path	GET	/quantitative_cases/:id(.format)	quantitative_cases#show	/app/config/routes.rb:91
	PATCH	/quantitative_cases/:id(.format)	quantitative_cases#update	/app/config/routes.rb:91
	PUT	/quantitative_cases/:id(.format)	quantitative_cases#update	/app/config/routes.rb:91
	DELETE	/quantitative_cases/:id(.format)	quantitative_cases#destroy	/app/config/routes.rb:91
referral_source_version_path	GET	/referral_sources/:referral_source_id/version(.format)	referral_sources#version	/app/config/routes.rb:96
referral_sources_path	GET	/referral_sources(.format)	referral_sources#index	/app/config/routes.rb:95
	POST	/referral_sources(.format)	referral_sources#create	/app/config/routes.rb:95
new_referral_source_path	GET	/referral_sources/new(.format)	referral_sources#new	/app/config/routes.rb:95
edit_referral_source_path	GET	/referral_sources/:id/edit(.format)	referral_sources#edit	/app/config/routes.rb:95
referral_source_path	PATCH	/referral_sources/:id(.format)	referral_sources#update	/app/config/routes.rb:95
	PUT	/referral_sources/:id(.format)	referral_sources#update	/app/config/routes.rb:95
	DELETE	/referral_sources/:id(.format)	referral_sources#destroy	/app/config/routes.rb:95
domain_group_version_path	GET	/domain_groups/:domain_group_id/version(.format)	domain_groups#version	/app/config/routes.rb:100
domain_groups_path	GET	/domain_groups(.format)	domain_groups#index	/app/config/routes.rb:99
	POST	/domain_groups(.format)	domain_groups#create	/app/config/routes.rb:99
new_domain_group_path	GET	/domain_groups/new(.format)	domain_groups#new	/app/config/routes.rb:99
edit_domain_group_path	GET	/domain_groups/:id/edit(.format)	domain_groups#edit	/app/config/routes.rb:99
domain_group_path	PATCH	/domain_groups/:id(.format)	domain_groups#update	/app/config/routes.rb:99
	PUT	/domain_groups/:id(.format)	domain_groups#update	/app/config/routes.rb:99
	DELETE	/domain_groups/:id(.format)	domain_groups#destroy	/app/config/routes.rb:99
domain_version_path	GET	/domains/:domain_id/version(.format)	domains#version	/app/config/routes.rb:104

domains_path	GET	/domains(.:format)	domains#index	/app/config/routes.rb:103
	POST	/domains(.:format)	domains#create	/app/config/routes.rb:103
new_domain_path	GET	/domains/new(.:format)	domains#new	/app/config/routes.rb:103
edit_domain_path	GET	/domains/:id/edit(.:format)	domains#edit	/app/config/routes.rb:103
domain_path	PATCH	/domains/:id(.:format)	domains#update	/app/config/routes.rb:103
	PUT	/domains/:id(.:format)	domains#update	/app/config/routes.rb:103
	DELETE	/domains/:id(.:format)	domains#destroy	/app/config/routes.rb:103
province_version_path	GET	/provinces/:province_id/version(.:format)	provinces#version	/app/config/routes.rb:108
provinces_path	GET	/provinces(.:format)	provinces#index	/app/config/routes.rb:107
	POST	/provinces(.:format)	provinces#create	/app/config/routes.rb:107
new_province_path	GET	/provinces/new(.:format)	provinces#new	/app/config/routes.rb:107
edit_province_path	GET	/provinces/:id/edit(.:format)	provinces#edit	/app/config/routes.rb:107
province_path	PATCH	/provinces/:id(.:format)	provinces#update	/app/config/routes.rb:107
	PUT	/provinces/:id(.:format)	provinces#update	/app/config/routes.rb:107
	DELETE	/provinces/:id(.:format)	provinces#destroy	/app/config/routes.rb:107
department_version_path	GET	/departments/:department_id/version(.:format)	departments#version	/app/config/routes.rb:112
departments_path	GET	/departments(.:format)	departments#index	/app/config/routes.rb:111
	POST	/departments(.:format)	departments#create	/app/config/routes.rb:111
new_department_path	GET	/departments/new(.:format)	departments#new	/app/config/routes.rb:111
edit_department_path	GET	/departments/:id/edit(.:format)	departments#edit	/app/config/routes.rb:111
department_path	PATCH	/departments/:id(.:format)	departments#update	/app/config/routes.rb:111
	PUT	/departments/:id(.:format)	departments#update	/app/config/routes.rb:111
	DELETE	/departments/:id(.:format)	departments#destroy	/app/config/routes.rb:111
donor_version_path	GET	/donors/:donor_id/version(.:format)	donors#version	/app/config/routes.rb:116
donors_path	GET	/donors(.:format)	donors#index	/app/config/routes.rb:115
	POST	/donors(.:format)	donors#create	/app/config/routes.rb:115
new_donor_path	GET	/donors/new(.:format)	donors#new	/app/config/routes.rb:115
edit_donor_path	GET	/donors/:id/edit(.:format)	donors#edit	/app/config/routes.rb:115
donor_path	PATCH	/donors/:id(.:format)	donors#update	/app/config/routes.rb:115
	PUT	/donors/:id(.:format)	donors#update	/app/config/routes.rb:115
	DELETE	/donors/:id(.:format)	donors#destroy	/app/config/routes.rb:115
preview_program_streams_path	GET	/program_streams/preview(.:format)	program_streams#preview	/app/config/routes.rb:120

program_streams_path	GET	/program_streams(/.format)	program_streams#index	/app/config/routes.rb:119
	POST	/program_streams(/.format)	program_streams#create	/app/config/routes.rb:119
new_program_stream_path	GET	/program_streams/new(/.format)	program_streams#new	/app/config/routes.rb:119
edit_program_stream_path	GET	/program_streams/:id/edit(/.format)	program_streams#edit	/app/config/routes.rb:119
program_stream_path	GET	/program_streams/:id(/.format)	program_streams#show	/app/config/routes.rb:119
	PATCH	/program_streams/:id(/.format)	program_streams#update	/app/config/routes.rb:119
	PUT	/program_streams/:id(/.format)	program_streams#update	/app/config/routes.rb:119
	DELETE	/program_streams/:id(/.format)	program_streams#destroy	/app/config/routes.rb:119
changelog_version_path	GET	/changelogs/:changelog_id/version(/.format)	changelogs#version	/app/config/routes.rb:124
changelogs_path	GET	/changelogs(/.format)	changelogs#index	/app/config/routes.rb:123
	POST	/changelogs(/.format)	changelogs#create	/app/config/routes.rb:123
new_changelog_path	GET	/changelogs/new(/.format)	changelogs#new	/app/config/routes.rb:123
edit_changelog_path	GET	/changelogs/:id/edit(/.format)	changelogs#edit	/app/config/routes.rb:123
changelog_path	GET	/changelogs/:id(/.format)	changelogs#show	/app/config/routes.rb:123
	PATCH	/changelogs/:id(/.format)	changelogs#update	/app/config/routes.rb:123
	PUT	/changelogs/:id(/.format)	changelogs#update	/app/config/routes.rb:123
	DELETE	/changelogs/:id(/.format)	changelogs#destroy	/app/config/routes.rb:123
data_trackers_path	GET	/data_trackers(/.format)	data_trackers#index	/app/config/routes.rb:127
able_screens_question_submissions_stages_path	GET	/stages(/.format)	able_screens/question_submissions/stages#index	/app/config/routes.rb:131
	POST	/stages(/.format)	able_screens/question_submissions/stages#create	/app/config/routes.rb:131
new_able_screens_question_submissions_stage_path	GET	/stages/new(/.format)	able_screens/question_submissions/stages#new	/app/config/routes.rb:131
edit_able_screens_question_submissions_stage_path	GET	/stages/:id/edit(/.format)	able_screens/question_submissions/stages#edit	/app/config/routes.rb:131
able_screens_question_submissions_stage_path	GET	/stages/:id(/.format)	able_screens/question_submissions/stages#show	/app/config/routes.rb:131
	PATCH	/stages/:id(/.format)	able_screens/question_submissions/stages#update	/app/config/routes.rb:131
	PUT	/stages/:id(/.format)	able_screens/question_submissions/stages#update	/app/config/routes.rb:131
	DELETE	/stages/:id(/.format)	able_screens/question_submissions/stages#destroy	/app/config/routes.rb:131
able_screens_question_submissions_able_screening_questions_path	POST	/able_screening_questions(/.format)	able_screens/question_submissions/able_screening_questions#create	/app/config/routes.rb:132
new_able_screens_question_submissions_able_screening_question_path	GET	/able_screening_questions/new(/.format)	able_screens/question_submissions/able_screening_questions#new	/app/config/routes.rb:132

edit_able_screens_question_submissions_able_screening_question_path	GET	/able_screening_questions/:id(.:format)	able_screens/question_submissions/able_screening_questions#edit	/app/config/routes.rb:132
able_screens_question_submissions_able_screening_question_path	PATCH	/able_screening_questions/:id(.:format)	able_screens/question_submissions/able_screening_questions#update	/app/config/routes.rb:132
	PUT	/able_screening_questions/:id(.:format)	able_screens/question_submissions/able_screening_questions#update	/app/config/routes.rb:132
	DELETE	/able_screening_questions/:id(.:format)	able_screens/question_submissions/able_screening_questions#destroy	/app/config/routes.rb:132
able_screens_answer_submissions_client_able_screening_answers_new_path	GET	/answer_submissions/clients/:client_id/able_screening_answers/new(.:format)	able_screens/answer_submissions/able_screening_answers#new	/app/config/routes.rb:137
able_screens_answer_submissions_client_able_screening_answers_create_path	POST	/answer_submissions/clients/:client_id/able_screening_answers/create(.:format)	able_screens/answer_submissions/able_screening_answers#create	/app/config/routes.rb:138
able_screens_answer_submissions_clients_path	GET	/answer_submissions/clients(.:format)	able_screens/answer_submissions/clients#index	/app/config/routes.rb:136
	POST	/answer_submissions/clients(.:format)	able_screens/answer_submissions/clients#create	/app/config/routes.rb:136
new_able_screens_answer_submissions_client_path	GET	/answer_submissions/clients/new(.:format)	able_screens/answer_submissions/clients#new	/app/config/routes.rb:136
edit_able_screens_answer_submissions_client_path	GET	/answer_submissions/clients/:id/edit(.:format)	able_screens/answer_submissions/clients#edit	/app/config/routes.rb:136
able_screens_answer_submissions_client_path	GET	/answer_submissions/clients/:id(.:format)	able_screens/answer_submissions/clients#show	/app/config/routes.rb:136
	PATCH	/answer_submissions/clients/:id(.:format)	able_screens/answer_submissions/clients#update	/app/config/routes.rb:136
	PUT	/answer_submissions/clients/:id(.:format)	able_screens/answer_submissions/clients#update	/app/config/routes.rb:136
	DELETE	/answer_submissions/clients/:id(.:format)	able_screens/answer_submissions/clients#destroy	/app/config/routes.rb:136
material_version_path	GET	/materials/:material_id/version(.:format)	materials#version	/app/config/routes.rb:144
materials_path	GET	/materials(.:format)	materials#index	/app/config/routes.rb:143
	POST	/materials(.:format)	materials#create	/app/config/routes.rb:143
new_material_path	GET	/materials/new(.:format)	materials#new	/app/config/routes.rb:143
edit_material_path	GET	/materials/:id/edit(.:format)	materials#edit	/app/config/routes.rb:143
material_path	PATCH	/materials/:id(.:format)	materials#update	/app/config/routes.rb:143
	PUT	/materials/:id(.:format)	materials#update	/app/config/routes.rb:143
	DELETE	/materials/:id(.:format)	materials#destroy	/app/config/routes.rb:143
location_version_path	GET	/locations/:location_id/version(.:format)	locations#version	/app/config/routes.rb:148
locations_path	GET	/locations(.:format)	locations#index	/app/config/routes.rb:147
	POST	/locations(.:format)	locations#create	/app/config/routes.rb:147
new_location_path	GET	/locations/new(.:format)	locations#new	/app/config/routes.rb:147

Resource Path	HTTP Method	URL	Controller Action	File Path
edit_location_path	GET	/locations/:id/edit(.:format)	locations#edit	/app/config/routes.rb:147
location_path	PATCH	/locations/:id(.:format)	locations#update	/app/config/routes.rb:147
	PUT	/locations/:id(.:format)	locations#update	/app/config/routes.rb:147
	DELETE	/locations/:id(.:format)	locations#destroy	/app/config/routes.rb:147
progress_note_type_version_path	GET	/progress_note_types/progress_note_type_id/version(.:format)	progress_note_types#version	/app/config/routes.rb:152
progress_note_types_path	GET	/progress_note_types(.:format)	progress_note_types#index	/app/config/routes.rb:151
	POST	/progress_note_types(.:format)	progress_note_types#create	/app/config/routes.rb:151
new_progress_note_type_path	GET	/progress_note_types/new(.:format)	progress_note_types#new	/app/config/routes.rb:151
edit_progress_note_type_path	GET	/progress_note_types/:id/edit(.:format)	progress_note_types#edit	/app/config/routes.rb:151
progress_note_type_path	PATCH	/progress_note_types/:id(.:format)	progress_note_types#update	/app/config/routes.rb:151
	PUT	/progress_note_types/:id(.:format)	progress_note_types#update	/app/config/routes.rb:151
	DELETE	/progress_note_types/:id(.:format)	progress_note_types#destroy	/app/config/routes.rb:151
intervention_version_path	GET	/interventions/intervention_id/version(.:format)	interventions#version	/app/config/routes.rb:156
interventions_path	GET	/interventions(.:format)	interventions#index	/app/config/routes.rb:155
	POST	/interventions(.:format)	interventions#create	/app/config/routes.rb:155
new_intervention_path	GET	/interventions/new(.:format)	interventions#new	/app/config/routes.rb:155
edit_intervention_path	GET	/interventions/:id/edit(.:format)	interventions#edit	/app/config/routes.rb:155
intervention_path	PATCH	/interventions/:id(.:format)	interventions#update	/app/config/routes.rb:155
	PUT	/interventions/:id(.:format)	interventions#update	/app/config/routes.rb:155
	DELETE	/interventions/:id(.:format)	interventions#destroy	/app/config/routes.rb:155
tasks_path	GET	/tasks(.:format)	tasks#index	/app/config/routes.rb:159
advanced_search_clients_path	GET	/clients/advanced_search(.:format)	clients#advanced_search	/app/config/routes.rb:163
report_client_client_enrollments_path	GET	/clients/:client_id/client_enrollments/report(.:format)	client_enrollments#report	/app/config/routes.rb:167
report_client_client_enrollment_client_enrollment_trackings_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings/report(.:format)	client_enrollment_trackings#report	/app/config/routes.rb:169
client_client_enrollment_client_enrollment_trackings_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings(.:format)	client_enrollment_trackings#index	/app/config/routes.rb:168
	POST	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings(.:format)	client_enrollment_trackings#create	/app/config/routes.rb:168
new_client_client_enrollment_client_enrollment_tracking_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings/new(.:format)	client_enrollment_trackings#new	/app/config/routes.rb:168
edit_client_client_enrollment_client_enrollment_tracking_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings/:id/edit(.:format)	client_enrollment_trackings#edit	/app/config/routes.rb:168
client_client_enrollment_client_enrollment_tracking_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings/:id(.:format)	client_enrollment_trackings#show	/app/config/routes.rb:168
	PATCH	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings/:id(.:format)	client_enrollment_trackings#update	/app/config/routes.rb:168

		client_enrollment_id/client_enrollment_trackings/:id(.:format)	date	/app/config/routes.rb:168
	PUT	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings/:id(.:format)	client_enrollment_trackings#update	/app/config/routes.rb:168
	DELETE	/clients/:client_id/client_enrollments/:client_enrollment_id/client_enrollment_trackings/:id(.:format)	client_enrollment_trackings#destroy	/app/config/routes.rb:168
client_client_enrollment_leave_programs_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs(.:format)	leave_programs#index	/app/config/routes.rb:171
	POST	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs(.:format)	leave_programs#create	/app/config/routes.rb:171
new_client_client_enrollment_leave_program_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs/new(.:format)	leave_programs#new	/app/config/routes.rb:171
edit_client_client_enrollment_leave_program_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs/:id/edit(.:format)	leave_programs#edit	/app/config/routes.rb:171
client_client_enrollment_leave_program_path	GET	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs/:id(.:format)	leave_programs#show	/app/config/routes.rb:171
	PATCH	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs/:id(.:format)	leave_programs#update	/app/config/routes.rb:171
	PUT	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs/:id(.:format)	leave_programs#update	/app/config/routes.rb:171
	DELETE	/clients/:client_id/client_enrollments/:client_enrollment_id/leave_programs/:id(.:format)	leave_programs#destroy	/app/config/routes.rb:171
client_client_enrollments_path	GET	/clients/:client_id/client_enrollments(.:format)	client_enrollments#index	/app/config/routes.rb:166
	POST	/clients/:client_id/client_enrollments(.:format)	client_enrollments#create	/app/config/routes.rb:166
new_client_client_enrollment_path	GET	/clients/:client_id/client_enrollments/new(.:format)	client_enrollments#new	/app/config/routes.rb:166
edit_client_client_enrollment_path	GET	/clients/:client_id/client_enrollments/:id/edit(.:format)	client_enrollments#edit	/app/config/routes.rb:166
client_client_enrollment_path	GET	/clients/:client_id/client_enrollments/:id(.:format)	client_enrollments#show	/app/config/routes.rb:166
	PATCH	/clients/:client_id/client_enrollments/:id(.:format)	client_enrollments#update	/app/config/routes.rb:166
	PUT	/clients/:client_id/client_enrollments/:id(.:format)	client_enrollments#update	/app/config/routes.rb:166
	DELETE	/clients/:client_id/client_enrollments/:id(.:format)	client_enrollments#destroy	/app/config/routes.rb:166
report_client_client_enrolled_programs_path	GET	/clients/:client_id/client_enrolled_programs/report(.:format)	client_enrolled_programs#report	/app/config/routes.rb:175
report_client_client_enrolled_program_client_enrolled_program_tracking_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings/report(.:format)	client_enrolled_program_trackings#report	/app/config/routes.rb:177
client_client_enrolled_program_client_enrolled_program_trackings_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings(.:format)	client_enrolled_program_trackings#index	/app/config/routes.rb:176
	POST	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings(.:format)	client_enrolled_program_trackings#create	/app/config/routes.rb:176
new_client_client_enrolled_program_client_enrolled_program_tracking_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings/new(.:format)	client_enrolled_program_trackings#new	/app/config/routes.rb:176
edit_client_client_enrolled_program_client_enrolled_program_tracking_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings/:id/edit(.:format)	client_enrolled_program_trackings#edit	/app/config/routes.rb:176
client_client_enrolled_program_client_enrolled_program_tracking_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings/:id(.:format)	client_enrolled_program_trackings#show	/app/config/routes.rb:176
	PATCH	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings/:id(.:format)	client_enrolled_program_trackings#update	/app/config/routes.rb:176

	PATCH	client_enrolled_program_trackings/:id(.format)	gs#update	/app/config/routes.rb:176
	PUT	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings/:id(.format)	client_enrolled_program_trackings#update	/app/config/routes.rb:176
	DELETE	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/client_enrolled_program_trackings/:id(.format)	client_enrolled_program_trackings#destroy	/app/config/routes.rb:176
client_client_enrolled_program_leave_enrolled_programs_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs(.format)	leave_enrolled_programs#index	/app/config/routes.rb:179
	POST	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs(.format)	leave_enrolled_programs#create	/app/config/routes.rb:179
new_client_client_enrolled_program_leave_enrolled_program_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs/new(.format)	leave_enrolled_programs#new	/app/config/routes.rb:179
edit_client_client_enrolled_program_leave_enrolled_program_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs/:id/edit(.format)	leave_enrolled_programs#edit	/app/config/routes.rb:179
client_client_enrolled_program_leave_enrolled_program_path	GET	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs/:id(.format)	leave_enrolled_programs#show	/app/config/routes.rb:179
	PATCH	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs/:id(.format)	leave_enrolled_programs#update	/app/config/routes.rb:179
	PUT	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs/:id(.format)	leave_enrolled_programs#update	/app/config/routes.rb:179
	DELETE	/clients/:client_id/client_enrolled_programs/:client_enrolled_program_id/leave_enrolled_programs/:id(.format)	leave_enrolled_programs#destroy	/app/config/routes.rb:179
client_client_enrolled_programs_path	GET	/clients/:client_id/client_enrolled_programs(.format)	client_enrolled_programs#index	/app/config/routes.rb:174
	POST	/clients/:client_id/client_enrolled_programs(.format)	client_enrolled_programs#create	/app/config/routes.rb:174
new_client_client_enrolled_program_path	GET	/clients/:client_id/client_enrolled_programs/new(.format)	client_enrolled_programs#new	/app/config/routes.rb:174
edit_client_client_enrolled_program_path	GET	/clients/:client_id/client_enrolled_programs/:id/edit(.format)	client_enrolled_programs#edit	/app/config/routes.rb:174
client_client_enrolled_program_path	GET	/clients/:client_id/client_enrolled_programs/:id(.format)	client_enrolled_programs#show	/app/config/routes.rb:174
	PATCH	/clients/:client_id/client_enrolled_programs/:id(.format)	client_enrolled_programs#update	/app/config/routes.rb:174
	PUT	/clients/:client_id/client_enrolled_programs/:id(.format)	client_enrolled_programs#update	/app/config/routes.rb:174
	DELETE	/clients/:client_id/client_enrolled_programs/:id(.format)	client_enrolled_programs#destroy	/app/config/routes.rb:174
client_custom_field_properties_path	GET	/clients/:client_id/custom_field_properties(.format)	custom_field_properties#index	/app/config/routes.rb:182
	POST	/clients/:client_id/custom_field_properties(.format)	custom_field_properties#create	/app/config/routes.rb:182
new_client_custom_field_property_path	GET	/clients/:client_id/custom_field_properties/new(.format)	custom_field_properties#new	/app/config/routes.rb:182
edit_client_custom_field_property_path	GET	/clients/:client_id/custom_field_properties/:id/edit(.format)	custom_field_properties#edit	/app/config/routes.rb:182
client_custom_field_property_path	GET	/clients/:client_id/custom_field_properties/:id(.format)	custom_field_properties#show	/app/config/routes.rb:182
	PATCH	/clients/:client_id/custom_field_properties/:id(.format)	custom_field_properties#update	/app/config/routes.rb:182
	PUT	/clients/:client_id/custom_field_properties/:id(.format)	custom_field_properties#update	/app/config/routes.rb:182
	DELETE	/clients/:client_id/custom_field_properties/:id(.format)	custom_field_properties#destroy	/app/config/routes.rb:182

download_attachment_client_assessment_path	GET	/clients/:client_id/assessments/:id/assessment_domains/:assessment_domain_id/attachments/:index(.:format)	assessments#download_attachment	/app/config/routes.rb:187
client_assessments_path	GET	/clients/:client_id/assessments(.:format)	assessments#index	/app/config/routes.rb:184
	POST	/clients/:client_id/assessments(.:format)	assessments#create	/app/config/routes.rb:184
new_client_assessment_path	GET	/clients/:client_id/assessments/new(.:format)	assessments#new	/app/config/routes.rb:184
edit_client_assessment_path	GET	/clients/:client_id/assessments/:id/edit(.:format)	assessments#edit	/app/config/routes.rb:184
client_assessment_path	GET	/clients/:client_id/assessments/:id(.:format)	assessments#show	/app/config/routes.rb:184
	PATCH	/clients/:client_id/assessments/:id(.:format)	assessments#update	/app/config/routes.rb:184
	PUT	/clients/:client_id/assessments/:id(.:format)	assessments#update	/app/config/routes.rb:184
	DELETE	/clients/:client_id/assessments/:id(.:format)	assessments#destroy	/app/config/routes.rb:184
client_case_notes_path	GET	/clients/:client_id/case_notes(.:format)	case_notes#index	/app/config/routes.rb:190
	POST	/clients/:client_id/case_notes(.:format)	case_notes#create	/app/config/routes.rb:190
new_client_case_note_path	GET	/clients/:client_id/case_notes/new(.:format)	case_notes#new	/app/config/routes.rb:190
edit_client_case_note_path	GET	/clients/:client_id/case_notes/:id/edit(.:format)	case_notes#edit	/app/config/routes.rb:190
client_case_note_path	GET	/clients/:client_id/case_notes/:id(.:format)	case_notes#show	/app/config/routes.rb:190
	PATCH	/clients/:client_id/case_notes/:id(.:format)	case_notes#update	/app/config/routes.rb:190
	PUT	/clients/:client_id/case_notes/:id(.:format)	case_notes#update	/app/config/routes.rb:190
	DELETE	/clients/:client_id/case_notes/:id(.:format)	case_notes#destroy	/app/config/routes.rb:190
client_case_quarterly_reports_path	GET	/clients/:client_id/cases/:case_id/quarterly_reports(.:format)	case/quarterly_reports#index	/app/config/routes.rb:193
client_case_quarterly_report_path	GET	/clients/:client_id/cases/:case_id/quarterly_reports/:id(.:format)	case/quarterly_reports#show	/app/config/routes.rb:193
client_cases_path	GET	/clients/:client_id/cases(.:format)	cases#index	/app/config/routes.rb:191
	POST	/clients/:client_id/cases(.:format)	cases#create	/app/config/routes.rb:191
new_client_case_path	GET	/clients/:client_id/cases/new(.:format)	cases#new	/app/config/routes.rb:191
edit_client_case_path	GET	/clients/:client_id/cases/:id/edit(.:format)	cases#edit	/app/config/routes.rb:191
client_case_path	GET	/clients/:client_id/cases/:id(.:format)	cases#show	/app/config/routes.rb:191
	PATCH	/clients/:client_id/cases/:id(.:format)	cases#update	/app/config/routes.rb:191
	PUT	/clients/:client_id/cases/:id(.:format)	cases#update	/app/config/routes.rb:191
	DELETE	/clients/:client_id/cases/:id(.:format)	cases#destroy	/app/config/routes.rb:191
client_tasks_path	GET	/clients/:client_id/tasks(.:format)	client/tasks#index	/app/config/routes.rb:197
	POST	/clients/:client_id/tasks(.:format)	client/tasks#create	/app/config/routes.rb:197
new_client_task_path	GET	/clients/:client_id/tasks/new(.:format)	client/tasks#new	/app/config/routes.rb:197
edit_client_task_path	GET	/clients/:client_id/tasks/:id/edit(.:format)	client/tasks#edit	/app/config/routes.rb:197

client_task_path	GET	/clients/:client_id/tasks/:id(.:format)	client/tasks#show	/app/config/routes.rb:197
	PATCH	/clients/:client_id/tasks/:id(.:format)	client/tasks#update	/app/config/routes.rb:197
	PUT	/clients/:client_id/tasks/:id(.:format)	client/tasks#update	/app/config/routes.rb:197
	DELETE	/clients/:client_id/tasks/:id(.:format)	client/tasks#destroy	/app/config/routes.rb:197
client_progress_note_version_path	GET	/clients/:client_id/progress_notes/:progress_note_id/version(.:format)	progress_notes#version	/app/config/routes.rb:202
client_progress_notes_path	GET	/clients/:client_id/progress_notes(.:format)	progress_notes#index	/app/config/routes.rb:201
	POST	/clients/:client_id/progress_notes(.:format)	progress_notes#create	/app/config/routes.rb:201
new_client_progress_note_path	GET	/clients/:client_id/progress_notes/new(.:format)	progress_notes#new	/app/config/routes.rb:201
edit_client_progress_note_path	GET	/clients/:client_id/progress_notes/:id/edit(.:format)	progress_notes#edit	/app/config/routes.rb:201
client_progress_note_path	GET	/clients/:client_id/progress_notes/:id(.:format)	progress_notes#show	/app/config/routes.rb:201
	PATCH	/clients/:client_id/progress_notes/:id(.:format)	progress_notes#update	/app/config/routes.rb:201
	PUT	/clients/:client_id/progress_notes/:id(.:format)	progress_notes#update	/app/config/routes.rb:201
	DELETE	/clients/:client_id/progress_notes/:id(.:format)	progress_notes#destroy	/app/config/routes.rb:201
client_version_path	GET	/clients/:client_id/version(.:format)	clients#version	/app/config/routes.rb:205
clients_path	GET	/clients(.:format)	clients#index	/app/config/routes.rb:161
	POST	/clients(.:format)	clients#create	/app/config/routes.rb:161
new_client_path	GET	/clients/new(.:format)	clients#new	/app/config/routes.rb:161
edit_client_path	GET	/clients/:id/edit(.:format)	clients#edit	/app/config/routes.rb:161
client_path	GET	/clients/:id(.:format)	clients#show	/app/config/routes.rb:161
	PATCH	/clients/:id(.:format)	clients#update	/app/config/routes.rb:161
	PUT	/clients/:id(.:format)	clients#update	/app/config/routes.rb:161
	DELETE	/clients/:id(.:format)	clients#destroy	/app/config/routes.rb:161
delete_attachments_path	GET	/attachments/delete(.:format)	attachments#delete	/app/config/routes.rb:210
attachments_path	GET	/attachments(.:format)	attachments#index	/app/config/routes.rb:208
family_custom_field_properties_path	GET	/families/:family_id/custom_field_properties(.:format)	custom_field_properties#index	/app/config/routes.rb:215
	POST	/families/:family_id/custom_field_properties(.:format)	custom_field_properties#create	/app/config/routes.rb:215
new_family_custom_field_property_path	GET	/families/:family_id/custom_field_properties/new(.:format)	custom_field_properties#new	/app/config/routes.rb:215
edit_family_custom_field_property_path	GET	/families/:family_id/custom_field_properties/:id/edit(.:format)	custom_field_properties#edit	/app/config/routes.rb:215
family_custom_field_property_path	GET	/families/:family_id/custom_field_properties/:id(.:format)	custom_field_properties#show	/app/config/routes.rb:215
	PATCH	/families/:family_id/custom_field_properties/:id(.:format)	custom_field_properties#update	/app/config/routes.rb:215
	PUT	/families/:family_id/custom_field_properties/:id(.:format)	custom_field_properties#update	/app/config/routes.rb:215
	DELETE	/families/:family_id/custom_field_properties/:id(.:format)	custom_field_properties#destroy	/app/config/routes.rb:215

family_version_path	GET	/families/:family_id/version(:format)	families#version	/app/config/routes.rb:216
families_path	GET	/families(:format)	families#index	/app/config/routes.rb:214
	POST	/families(:format)	families#create	/app/config/routes.rb:214
new_family_path	GET	/families/new(:format)	families#new	/app/config/routes.rb:214
edit_family_path	GET	/families/:id/edit(:format)	families#edit	/app/config/routes.rb:214
family_path	GET	/families/:id(:format)	families#show	/app/config/routes.rb:214
	PATCH	/families/:id(:format)	families#update	/app/config/routes.rb:214
	PUT	/families/:id(:format)	families#update	/app/config/routes.rb:214
	DELETE	/families/:id(:format)	families#destroy	/app/config/routes.rb:214
partner_custom_field_properties_path	GET	/partners/:partner_id/custom_field_properties(:format)	custom_field_properties#index	/app/config/routes.rb:220
	POST	/partners/:partner_id/custom_field_properties(:format)	custom_field_properties#create	/app/config/routes.rb:220
new_partner_custom_field_property_path	GET	/partners/:partner_id/custom_field_properties/new(:format)	custom_field_properties#new	/app/config/routes.rb:220
edit_partner_custom_field_property_path	GET	/partners/:partner_id/custom_field_properties/:id/edit(:format)	custom_field_properties#edit	/app/config/routes.rb:220
partner_custom_field_property_path	GET	/partners/:partner_id/custom_field_properties/:id(:format)	custom_field_properties#show	/app/config/routes.rb:220
	PATCH	/partners/:partner_id/custom_field_properties/:id(:format)	custom_field_properties#update	/app/config/routes.rb:220
	PUT	/partners/:partner_id/custom_field_properties/:id(:format)	custom_field_properties#update	/app/config/routes.rb:220
	DELETE	/partners/:partner_id/custom_field_properties/:id(:format)	custom_field_properties#destroy	/app/config/routes.rb:220
partner_version_path	GET	/partners/:partner_id/version(:format)	partners#version	/app/config/routes.rb:221
partners_path	GET	/partners(:format)	partners#index	/app/config/routes.rb:219
	POST	/partners(:format)	partners#create	/app/config/routes.rb:219
new_partner_path	GET	/partners/new(:format)	partners#new	/app/config/routes.rb:219
edit_partner_path	GET	/partners/:id/edit(:format)	partners#edit	/app/config/routes.rb:219
partner_path	GET	/partners/:id(:format)	partners#show	/app/config/routes.rb:219
	PATCH	/partners/:id(:format)	partners#update	/app/config/routes.rb:219
	PUT	/partners/:id(:format)	partners#update	/app/config/routes.rb:219
	DELETE	/partners/:id(:format)	partners#destroy	/app/config/routes.rb:219
notifications_path	GET	/notifications(:format)	notifications#index	/app/config/routes.rb:224
api_form_builder_attachment_path	DELETE	/api/form_builder_attachments/:id(:format)	api/form_builder_attachments#destroy	/app/config/routes.rb:231
find_event_api_calendars_path	GET	/api/calendars/find_event(:format)	api/calendars#find_event	/app/config/routes.rb:234
program_clients_api_calendars_path	GET	/api/calendars/program_clients(:format)	api/calendars#program_clients	/app/config/routes.rb:235
api_calendars_path	GET	/api/calendars(:format)	api/calendars#index	/app/config/routes.rb:233
	POST	/api/calendars(:format)	api/calendars#create	/app/config/routes.rb:233

new_api_calendar_path	GET	/api/calendars/new(.format)	api/calendars#new	/app/config/routes.rb:233
edit_api_calendar_path	GET	/api/calendars/:id/edit(.format)	api/calendars#edit	/app/config/routes.rb:233
api_calendar_path	GET	/api/calendars/:id(.format)	api/calendars#show	/app/config/routes.rb:233
	PATCH	/api/calendars/:id(.format)	api/calendars#update	/app/config/routes.rb:233
	PUT	/api/calendars/:id(.format)	api/calendars#update	/app/config/routes.rb:233
	DELETE	/api/calendars/:id(.format)	api/calendars#destroy	/app/config/routes.rb:233
compare_api_clients_path	GET	/api/clients/compare(.format)	api/clients#compare	/app/config/routes.rb:239
api_clients_path	GET	/api/clients(.format)	api/clients#index	/app/config/routes.rb:238
	POST	/api/clients(.format)	api/clients#create	/app/config/routes.rb:238
new_api_client_path	GET	/api/clients/new(.format)	api/clients#new	/app/config/routes.rb:238
edit_api_client_path	GET	/api/clients/:id/edit(.format)	api/clients#edit	/app/config/routes.rb:238
api_client_path	GET	/api/clients/:id(.format)	api/clients#show	/app/config/routes.rb:238
	PATCH	/api/clients/:id(.format)	api/clients#update	/app/config/routes.rb:238
	PUT	/api/clients/:id(.format)	api/clients#update	/app/config/routes.rb:238
	DELETE	/api/clients/:id(.format)	api/clients#destroy	/app/config/routes.rb:238
fetch_custom_fields_api_custom_fields_path	GET	/api/custom_fields/fetch_custom_fields(.format)	api/custom_fields#fetch_custom_fields	/app/config/routes.rb:242
api_custom_field_fields_path	GET	/api/custom_fields/:custom_field_id/fi elds(.format)	api/custom_fields#fields	/app/config/routes.rb:243
api_custom_fields_path	GET	/api/custom_fields(.format)	api/custom_fields#index	/app/config/routes.rb:241
	POST	/api/custom_fields(.format)	api/custom_fields#create	/app/config/routes.rb:241
new_api_custom_field_path	GET	/api/custom_fields/new(.format)	api/custom_fields#new	/app/config/routes.rb:241
edit_api_custom_field_path	GET	/api/custom_fields/:id/edit(.format)	api/custom_fields#edit	/app/config/routes.rb:241
api_custom_field_path	GET	/api/custom_fields/:id(.format)	api/custom_fields#show	/app/config/routes.rb:241
	PATCH	/api/custom_fields/:id(.format)	api/custom_fields#update	/app/config/routes.rb:241
	PUT	/api/custom_fields/:id(.format)	api/custom_fields#update	/app/config/routes.rb:241
	DELETE	/api/custom_fields/:id(.format)	api/custom_fields#destroy	/app/config/routes.rb:241
get_custom_field_api_client_advanced_searches_path	GET	/api/client_advanced_searches/get_c ustom_field(.format)	api/client_advanced_searches# get_custom_field	/app/config/routes.rb:247
get_basic_field_api_client_advanced_searches_path	GET	/api/client_advanced_searches/get_b asic_field(.format)	api/client_advanced_searches# get_basic_field	/app/config/routes.rb:248
get_enrollment_field_api_client_advanced_searches_path	GET	/api/client_advanced_searches/get_e nrollment_field(.format)	api/client_advanced_searches# get_enrollment_field	/app/config/routes.rb:249
get_tracking_field_api_client_advanced_searches_path	GET	/api/client_advanced_searches/get_t racking_field(.format)	api/client_advanced_searches# get_tracking_field	/app/config/routes.rb:250
get_exit_program_field_api_client_advanced_searches_path	GET	/api/client_advanced_searches/get_e xit_program_field(.format)	api/client_advanced_searches# get_exit_program_field	/app/config/routes.rb:251

get_fields_api_program_stream_add_rule_index_path	GET	/api/program_stream_add_rule/get_fields(.format)	api/program_stream_add_rule#get_fields	/app/config/routes.rb:256
api_program_stream_enrollment_fields_path	GET	/api/program_streams/:program_stream_id/enrollment_fields(.format)	api/program_streams#enrollment_fields	/app/config/routes.rb:261
api_program_stream_exit_program_fields_path	GET	/api/program_streams/:program_stream_id/exit_program_fields(.format)	api/program_streams#exit_program_fields	/app/config/routes.rb:262
api_program_stream_tracking_fields_path	GET	/api/program_streams/:program_stream_id/tracking_fields(.format)	api/program_streams#tracking_fields	/app/config/routes.rb:263
search_custom_fields_path	GET	/custom_fields/search(.format)	form_builder/custom_fields#search	/app/config/routes.rb:271
preview_custom_fields_path	GET	/custom_fields/preview(.format)	form_builder/custom_fields#show	/app/config/routes.rb:272
custom_fields_path	GET	/custom_fields(.format)	form_builder/custom_fields#index	/app/config/routes.rb:269
	POST	/custom_fields(.format)	form_builder/custom_fields#create	/app/config/routes.rb:269
new_custom_field_path	GET	/custom_fields/new(.format)	form_builder/custom_fields#new	/app/config/routes.rb:269
edit_custom_field_path	GET	/custom_fields/:id/edit(.format)	form_builder/custom_fields#edit	/app/config/routes.rb:269
custom_field_path	GET	/custom_fields/:id(.format)	form_builder/custom_fields#show	/app/config/routes.rb:269
	PATCH	/custom_fields/:id(.format)	form_builder/custom_fields#update	/app/config/routes.rb:269
	PUT	/custom_fields/:id(.format)	form_builder/custom_fields#update	/app/config/routes.rb:269
	DELETE	/custom_fields/:id(.format)	form_builder/custom_fields#destroy	/app/config/routes.rb:269
client_advanced_searches_path	GET	/client_advanced_searches(.format)	client_advanced_searches#index	/app/config/routes.rb:277
papertrail_queries_path	GET	/papertrail_queries(.format)	papertrail_queries#index	/app/config/routes.rb:278
break_glass_grants_path	POST	/break_glass_grants(.format)	break_glass_grants#create	/app/config/routes.rb:284

Request

Parameters:

None

Toggle session dump

Toggle env dump

Response

Headers:

None

The **Security Enforcement** panel lets an administrator turn live security controls on or off **for their organization**, each mapped to a NIST 800-53 control:

- **Global authorization enforcement** (AC-3) — require every action to authorize explicitly.
- **Least-privilege narrowing** (AC-6) — scope reads to need-to-know.

- **Tenant-boundary tripwire** (SC-7) — refuse any cross-tenant request.
- **Require MFA** (IA-2), **idle session timeout** (AC-12), **account lockout threshold** (AC-7), **password expiry** (IA-5), and **inactive-account auto-disable** (AC-2(3)).

Each control shows a **shadow window** first — what the stricter rule *would* have denied — so you can review the impact before enabling it.

Break-glass emergency access

When a genuine life-safety need requires seeing an **emergency-only** field, an eligible worker can **self-elevate for one hour** — with a **mandatory reason** and the audit record written *first*. Access is scoped to the specific record, expires automatically, and is fully logged.

12. Data protection & privacy

CaseLight is hardened at the application layer toward **NIST 800-53 Moderate** and **SOC 2** (Security, Confidentiality, Privacy), and aligns with the **HIPAA Security Rule**. Highlights:

- **Field-level sensitivity** — Standard / Restricted / Emergency-only on forms and assessment domains; records mask what a role isn't cleared to see.
- **Encryption at rest** — sensitive PII is encrypted in the database across multiple tiers.
- **Append-only audit trail** — record reads and changes are logged to a separate, tenant-isolated store, with change history and retention.
- **Tenant isolation** — each organization is its own subdomain and database schema.
- **Data lifecycle** — retention/deletion routines, guarded and audited deletion, and a **subject-access export** for producing everything held about an individual.

The full compliance package lives in [docs/compliance/](#) — the System Security Plan, SOC 2 control matrix, policies, and a reproducible evidence bundle. Data-handling posture and the production gate for **real** client data are in [../SECURITY.md](#).

Pilot data is synthetic only. Moving to real client records is a deliberate, separate decision that requires meeting the production gate documented in [SECURITY.md](#).

13. Administration reference — the Manage menu

Administrators configure CaseLight from the **Manage** menu (plus **Users** and **Partners**). The form builder ([§10](#)), program streams ([§6](#)), and assessment domains ([§8](#)) are covered above; the remaining items are reference lists that populate dropdowns and organize your work. The [Administrator Guide PDF](#) is the full walkthrough.


Users

One account per staff member, each with a role. Add users, and export the roster to XLS.

ID	NAME	DATE OF BIRTH	MOBILE	EMAIL
1	Dev Admin			dev@local.test
10	Ava Adminson			demo.admin@caselight.test
11	Devon Director			demo.director@caselight.test
12	Maria Manders			demo.manager@caselight.test
13	Wes Worker			demo.worker@caselight.test
14	QA Totp			qa.totp@caselight.test

Reference lists

Manage item	What it's for
Agencies	Partner and referring organizations
Departments	Internal structure for staff
Domain Groups	Grouping for assessment domains
Donors	Funding sources, for reporting
Referral Sources	How clients reach you
Quantitative Types	Countable service categories
Types of Note	Categories for progress notes

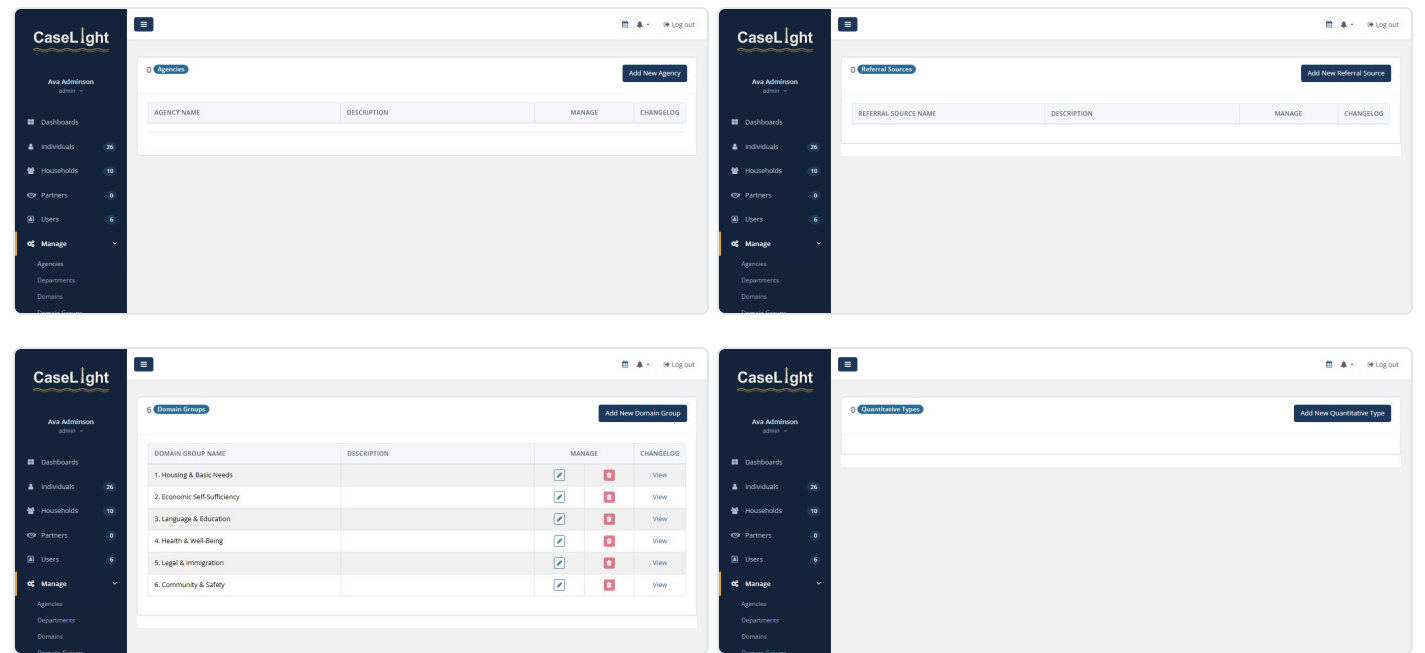

Partners

External partner organizations you coordinate with get their own records and custom forms, tracked separately from the individuals you serve.

