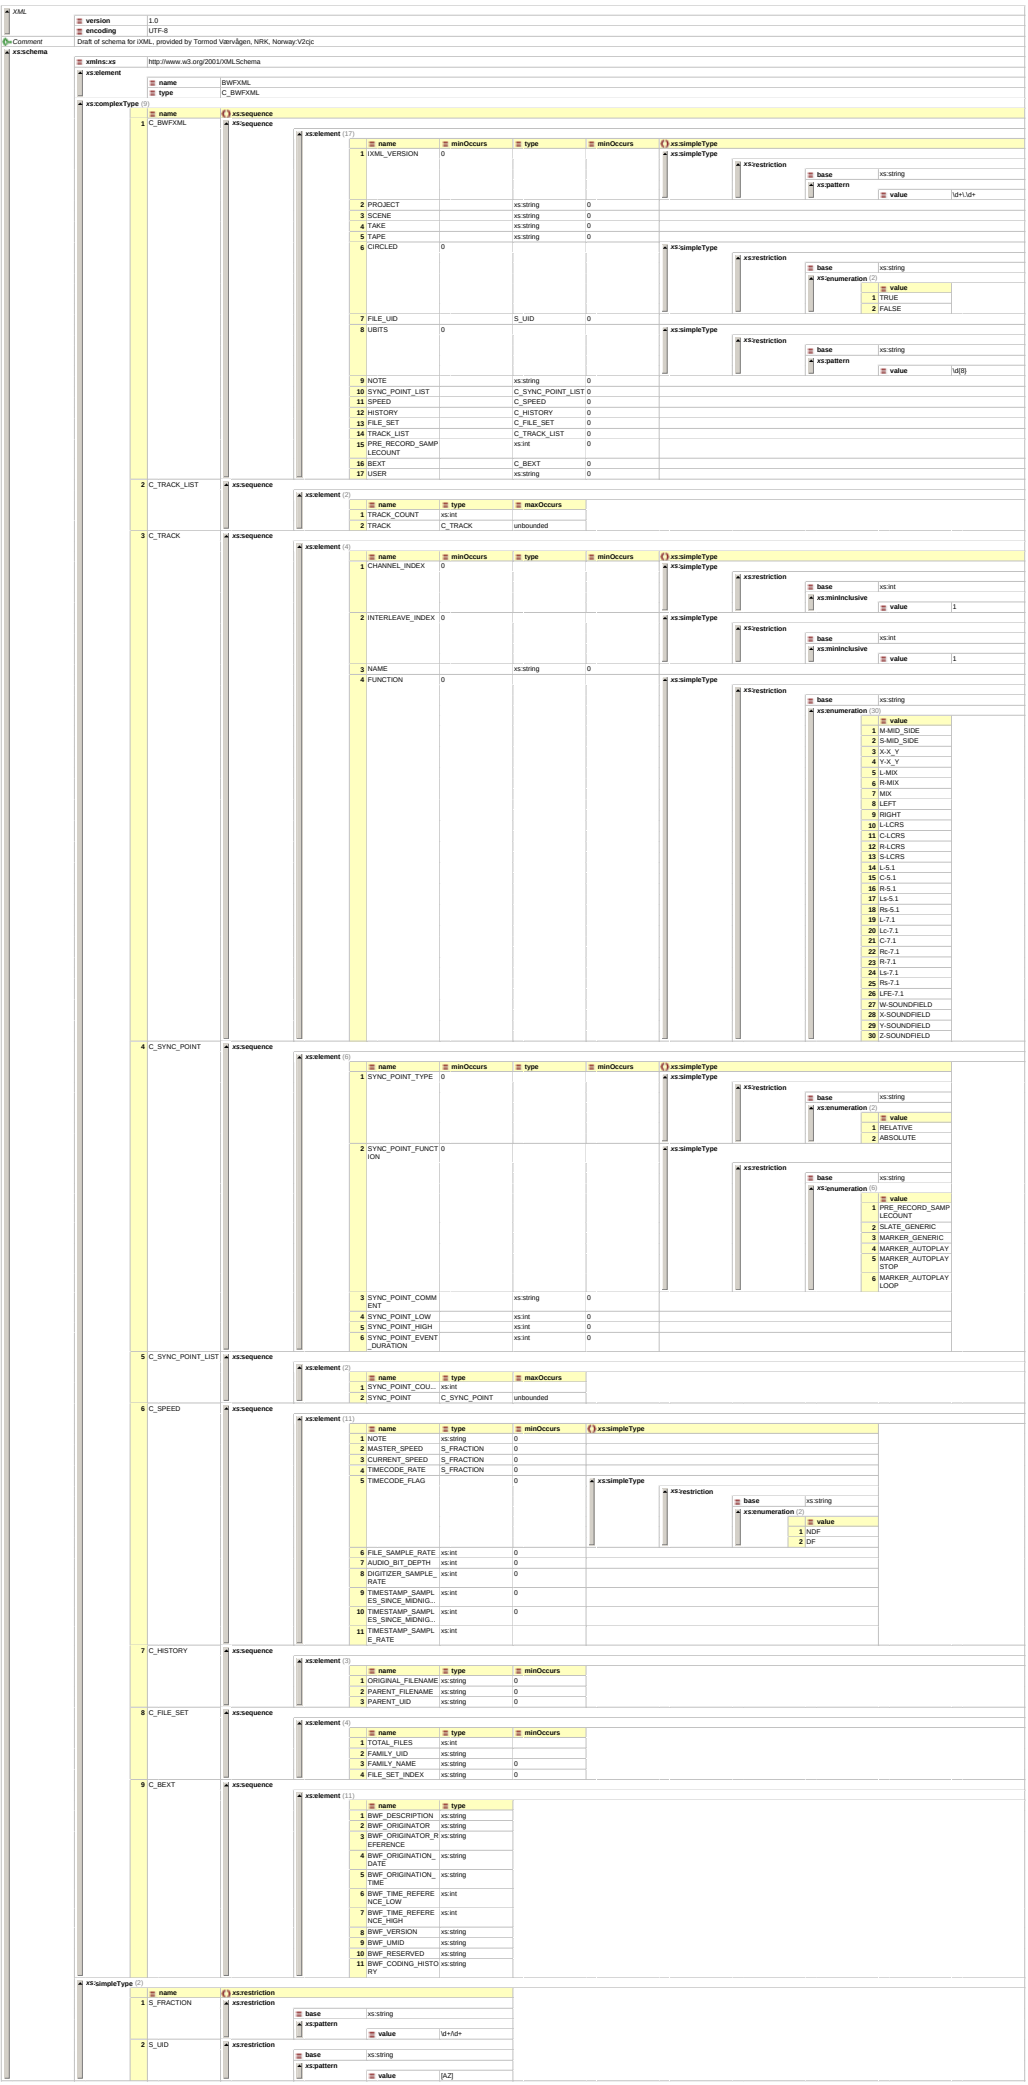


XML
- version: 1.0
- encoding: UTF-8

Comment: Draft of schema for iXML, provided by Tormod Værvågen, NRK, Norway.V2cjc

xs:schema
- xmlns:xs: http://www.w3.org/2001/XMLSchema

xs:element
- name: BWFXML
- type: C_BWFXML

xs:complexType (9)

	name	xs:sequence
1	C_BWFXML	xs:sequence

xs:element (17)

	name	minOccurs	type	minOccurs	xs:simpleType
1	IXML_VERSION	0			xs:simpleType → xs:restriction (base: xs:string) → xs:pattern (value: \d+\.\d+)
2	PROJECT		xs:string	0	
3	SCENE		xs:string	0	
4	TAKE		xs:string	0	
5	TAPE		xs:string	0	
6	CIRCLED	0			xs:simpleType → xs:restriction (base: xs:string) → xs:enumeration (2): 1 TRUE, 2 FALSE
7	FILE_UID		S_UID	0	
8	UBITS	0			xs:simpleType → xs:restriction (base: xs:string) → xs:pattern (value: \d{8})
9	NOTE		xs:string	0	
10	SYNC_POINT_LIST		C_SYNC_POINT_LIST	0	
11	SPEED		C_SPEED	0	
12	HISTORY		C_HISTORY	0	
13	FILE_SET		C_FILE_SET	0	
14	TRACK_LIST		C_TRACK_LIST	0	
15	PRE_RECORD_SAMPLECOUNT		xs:int	0	
16	BEXT		C_BEXT	0	
17	USER		xs:string	0	

2	C_TRACK_LIST	xs:sequence

xs:element (2)

	name	type	maxOccurs
1	TRACK_COUNT	xs:int	
2	TRACK	C_TRACK	unbounded

3	C_TRACK	xs:sequence

xs:element (4)

	name	minOccurs	type	minOccurs	xs:simpleType
1	CHANNEL_INDEX	0			xs:simpleType → xs:restriction (base: xs:int) → xs:minInclusive (value: 1)
2	INTERLEAVE_INDEX	0			xs:simpleType → xs:restriction (base: xs:int) → xs:minInclusive (value: 1)
3	NAME		xs:string	0	
4	FUNCTION	0			xs:simpleType → xs:restriction (base: xs:string) → xs:enumeration (30): 1 M-MID_SIDE, 2 S-MID_SIDE, 3 X-X_Y, 4 Y-X_Y, 5 L-MIX, 6 R-MIX, 7 MIX, 8 LEFT, 9 RIGHT, 10 L-LCRS, 11 C-LCRS, 12 R-LCRS, 13 S-LCRS, 14 L-5.1, 15 C-5.1, 16 R-5.1, 17 Ls-5.1, 18 Rs-5.1, 19 L-7.1, 20 Lc-7.1, 21 C-7.1, 22 Rc-7.1, 23 R-7.1, 24 Ls-7.1, 25 Rs-7.1, 26 LFE-7.1, 27 W-SOUNDFIELD, 28 X-SOUNDFIELD, 29 Y-SOUNDFIELD, 30 Z-SOUNDFIELD

4	C_SYNC_POINT	xs:sequence

xs:element (6)

	name	minOccurs	type	minOccurs	xs:simpleType
1	SYNC_POINT_TYPE	0			xs:simpleType → xs:restriction (base: xs:string) → xs:enumeration (2): 1 RELATIVE, 2 ABSOLUTE
2	SYNC_POINT_FUNCTION	0			xs:simpleType → xs:restriction (base: xs:string) → xs:enumeration (6): 1 PRE_RECORD_SAMPLECOUNT, 2 SLATE_GENERIC, 3 MARKER_GENERIC, 4 MARKER_AUTOPLAY, 5 MARKER_AUTOPLAY STOP, 6 MARKER_AUTOPLAY LOOP
3	SYNC_POINT_COMMENT		xs:string	0	
4	SYNC_POINT_LOW		xs:int	0	
5	SYNC_POINT_HIGH		xs:int	0	
6	SYNC_POINT_EVENT_DURATION		xs:int	0	

5	C_SYNC_POINT_LIST	xs:sequence

xs:element (2)

	name	type	maxOccurs
1	SYNC_POINT_COU...	xs:int	
2	SYNC_POINT	C_SYNC_POINT	unbounded

6	C_SPEED	xs:sequence

xs:element (11)

	name	type	minOccurs	xs:simpleType
1	NOTE	xs:string	0	
2	MASTER_SPEED	S_FRACTION	0	
3	CURRENT_SPEED	S_FRACTION	0	
4	TIMECODE_RATE	S_FRACTION	0	
5	TIMECODE_FLAG		0	xs:simpleType → xs:restriction (base: xs:string) → xs:enumeration (2): 1 NDF, 2 DF
6	FILE_SAMPLE_RATE	xs:int	0	
7	AUDIO_BIT_DEPTH	xs:int	0	
8	DIGITIZER_SAMPLE_RATE	xs:int	0	
9	TIMESTAMP_SAMPLES_SINCE_MIDNIG...	xs:int	0	
10	TIMESTAMP_SAMPLES_SINCE_MIDNIG...	xs:int	0	
11	TIMESTAMP_SAMPLE_RATE	xs:int		

7	C_HISTORY	xs:sequence

xs:element (3)

	name	type	minOccurs
1	ORIGINAL_FILENAME	xs:string	0
2	PARENT_FILENAME	xs:string	0
3	PARENT_UID	xs:string	0

8	C_FILE_SET	xs:sequence

xs:element (4)

	name	type	minOccurs
1	TOTAL_FILES	xs:int	
2	FAMILY_UID	xs:string	
3	FAMILY_NAME	xs:string	0
4	FILE_SET_INDEX	xs:string	0

9	C_BEXT	xs:sequence

xs:element (11)

	name	type
1	BWF_DESCRIPTION	xs:string
2	BWF_ORIGINATOR	xs:string
3	BWF_ORIGINATOR_REFERENCE	xs:string
4	BWF_ORIGINATION_DATE	xs:string
5	BWF_ORIGINATION_TIME	xs:string
6	BWF_TIME_REFERENCE_LOW	xs:int
7	BWF_TIME_REFERENCE_HIGH	xs:int
8	BWF_VERSION	xs:string
9	BWF_UMID	xs:string
10	BWF_RESERVED	xs:string
11	BWF_CODING_HISTORY	xs:string

xs:simpleType (2)

	name	xs:restriction
1	S_FRACTION	xs:restriction (base: xs:string) → xs:pattern (value: \d+/\d+)
2	S_UID	xs:restriction (base: xs:string) → xs:pattern (value: [A2])