


Roll: 2420090142
Name: Y.V. Likhith

Docker

1. Install **Docker Desktop**.
2. Open **Command Prompt**.

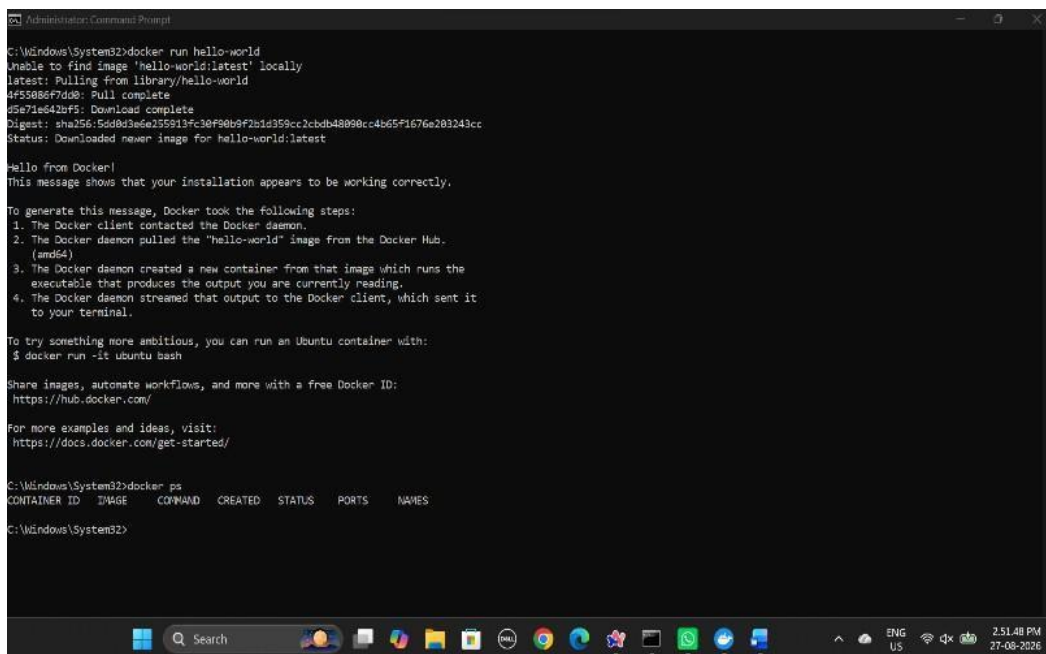

```
C:\Windows\System32>docker run hello-world
Unable to find image 'hello-world:latest' locally
latest: Pulling from library/hello-world
445586f7d08: Pull complete
d5e71e642bf5: Download complete
Digest: sha256:5dd03e6e255913fc30f90b9f7b1d359cc2cbb48090cc4b65f1676e281243cc
Status: Downloaded newer image for hello-world:latest

Hello from Docker!
This message shows that your installation appears to be working correctly.

To generate this message, Docker took the following steps:
1. The Docker client contacted the Docker daemon.
2. The Docker daemon pulled the "hello-world" image from the Docker Hub.
   (amd64)
3. The Docker daemon created a new container from that image which runs the
   executable that produces the output you are currently reading.
4. The Docker daemon streamed that output to the Docker client, which sent it
   to your terminal.


To try something more ambitious, you can run an Ubuntu container with:
$ docker run -it ubuntu bash

Share images, automate workflows, and more with a free Docker ID:
https://hub.docker.com/

For more examples and ideas, visit:
https://docs.docker.com/get-started/


C:\Windows\System32>docker ps
CONTAINER ID   IMAGE     COMMAND   CREATED   STATUS    PORTS   NAMES
C:\Windows\System32>
```

3. Type **docker** to check Docker.
4. Open **Docker Desktop**.

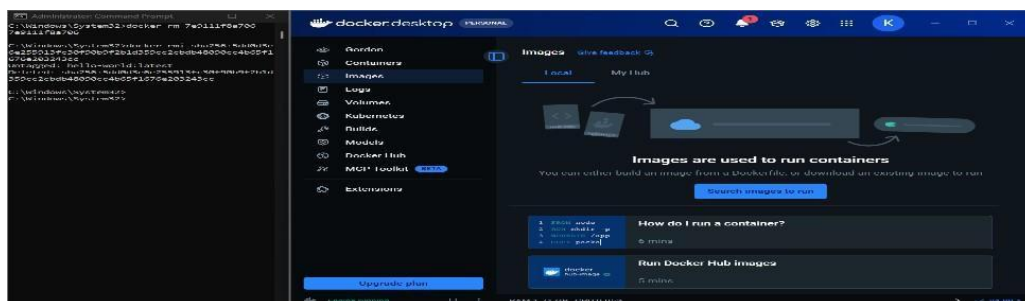


5. Open **Docker Hub** and search for an image such as **Hello World** or **Ubuntu**.

6. Pull the required image using the Docker command.

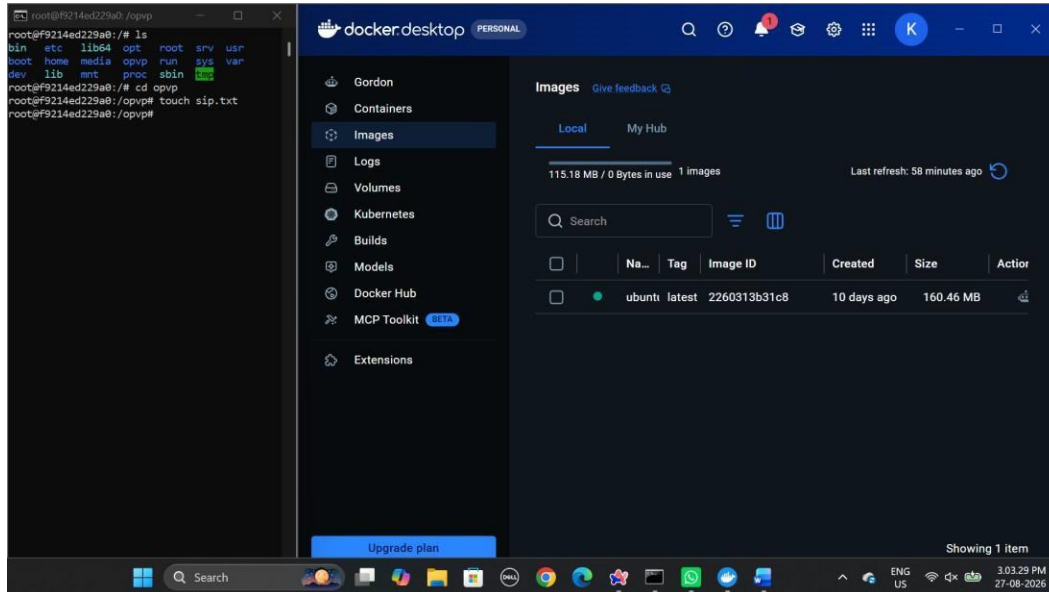

7. Run the image using the docker run command.

8. Stop the container using `docker stop <container-id>`.

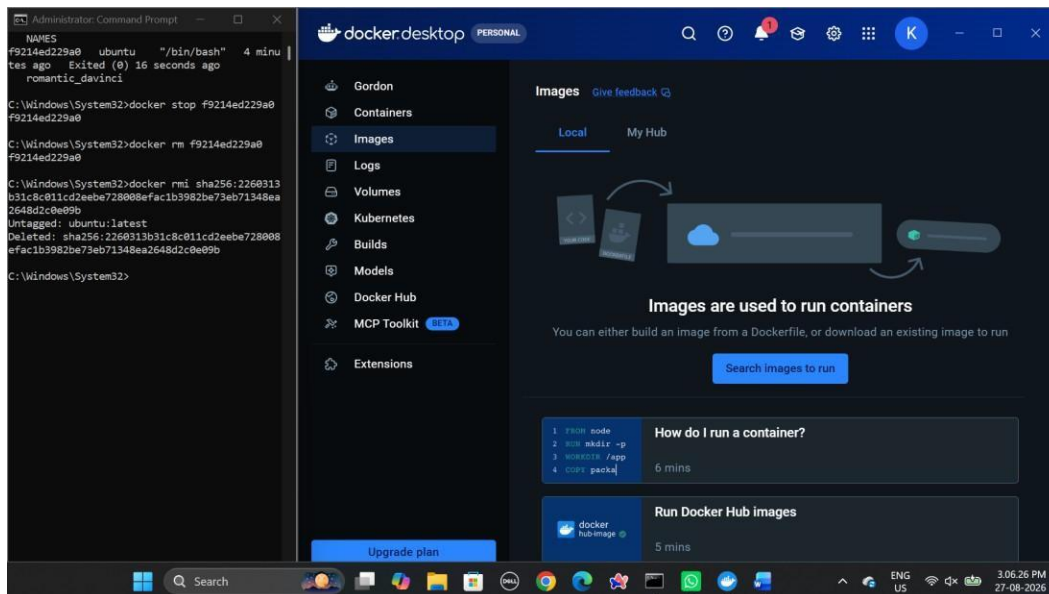

9. Remove the container using `docker rm <container-id>`.

10. For Ubuntu interactive mode, use `docker run -it ubuntu`.

