Vellore Institute of Technology
(Deemed to be University under section 3 of UGC Act, 1956)

LAB ASSESSMENT 2 : JENKINS

NAME: P.LIKITHA

REG NO. :23MIS0243

COURSE CODE: ISWE406P

SLOT : L49+L50

I. Learning Goal

1. What is CI/CD? (Real-world example)

CI (Continuous Integration):
Developers regularly push code → system automatically builds & tests.

CD (Continuous Delivery/Deployment):
After CI, app is automatically delivered/deployed to users.

Real example:
A developer updates a shopping app → pushes to GitHub → Jenkins builds → tests → deploys → users see update.

2.Install Jenkins (Windows / Linux)

```
C:\Users\likit>where java
C:\Program Files\Java\jdk-21.0.10\bin\java.exe

C:\Users\likit>java -version
java version "21.0.10" 2026-01-20 LTS
Java(TM) SE Runtime Environment (build 21.0.10+8-LTS-217)
Java HotSpot(TM) 64-Bit Server VM (build 21.0.10+8-LTS-217, mixed mode, sharing)

C:\Users\likit>cd C:\Users\likit\Downloads

C:\Users\likit\Downloads>java -jar jenkins.war
Running from: C:\Users\likit\Downloads\jenkins.war
webroot: C:\Users\likit\.jenkins\war
2026-02-04 10:57:33.809+0000 [id=1]     INFO    winstone.Logger#logInternal: Beginning extraction from war file
2026-02-04 10:57:37.173+0000 [id=1]     WARNING o.e.j.ee9.nested.ContextHandler#setContextPath: Empty contextPath
2026-02-04 10:57:37.291+0000 [id=1]     INFO    org.eclipse.jetty.server.Server#doStart: jetty-12.0.25; built: 2025-08-11T23:52:37.219Z; git: a862b76d8372e2
4205765182d9ae1d1d333ce2ea; jvm 21.0.10+8-LTS-217
2026-02-04 10:57:39.175+0000 [id=1]     INFO    o.e.j.e.w.StandardDescriptorProcessor#visitServlet: NO JSP Support for /, did not find org.eclipse.jetty.ee9
.jsp.JettyJspServlet
2026-02-04 10:57:39.272+0000 [id=1]     INFO    o.e.j.s.DefaultSessionIdManager#doStart: Session workerName=node0
2026-02-04 10:57:40.181+0000 [id=1]     INFO    hudson.WebAppMain#contextInitialized: Jenkins home directory: C:\Users\likit\.jenkins found at: $user.home/.
jenkins
2026-02-04 10:57:40.407+0000 [id=1]     INFO    o.e.j.s.handler.ContextHandler#doStart: Started oeje9n.ContextHandler$CoreContextHandler@2bc9a775{Jenkins v2
.528.3,/,b=file:///C:/Users/likit/.jenkins/war/,a=AVAILABLE,h=oeje9n.ContextHandler$CoreContextHandler$CoreToNestedHandler@27b000f7{STARTED}}
2026-02-04 10:57:40.457+0000 [id=1]     INFO    o.e.j.server.AbstractConnector#doStart: Started ServerConnector@58a4a74d{HTTP/1.1, (http/1.1)}{0.0.0.0:8080}
2026-02-04 10:57:40.500+0000 [id=1]     INFO    org.eclipse.jetty.server.Server#doStart: Started oejs.Server@6853425f{STARTING}[12.0.25,sto=0] @7877ms
2026-02-04 10:57:40.503+0000 [id=44]    INFO    winstone.Logger#logInternal: Winstone Servlet Engine running: controlPort=disabled
2026-02-04 10:57:40.747+0000 [id=41]    INFO    jenkins.model.Jenkins#<init>: Starting version 2.528.3
2026-02-04 10:57:40.942+0000 [id=52]    INFO    jenkins.InitReactorRunner$1#onAttained: Started initialization
2026-02-04 10:57:40.983+0000 [id=72]    INFO    jenkins.InitReactorRunner$1#onAttained: Listed all plugins
2026-02-04 10:57:42.802+0000 [id=50]    INFO    jenkins.InitReactorRunner$1#onAttained: Prepared all plugins
2026-02-04 10:57:42.815+0000 [id=65]    INFO    jenkins.InitReactorRunner$1#onAttained: Started all plugins
2026-02-04 10:57:42.816+0000 [id=68]    INFO    jenkins.InitReactorRunner$1#onAttained: Augmented all extensions
2026-02-04 10:57:43.153+0000 [id=50]    INFO    jenkins.InitReactorRunner$1#onAttained: System config loaded
2026-02-04 10:57:43.154+0000 [id=54]    INFO    jenkins.InitReactorRunner$1#onAttained: System config adapted
2026-02-04 10:57:43.155+0000 [id=71]    INFO    jenkins.InitReactorRunner$1#onAttained: Loaded all jobs
2026-02-04 10:57:43.158+0000 [id=72]    INFO    jenkins.InitReactorRunner$1#onAttained: Configuration for all jobs updated
2026-02-04 10:57:43.204+0000 [id=87]    INFO    hudson.util.Retrier#start: Attempt #1 to do the action check updates server
```

```
[CRLF]> *************************************************************
[CRLF]> *************************************************************
[CRLF]> *************************************************************
[CRLF]>
[CRLF]> Jenkins initial setup is required. An admin user has been created and a password generated.
[CRLF]> Please use the following password to proceed to installation:
[CRLF]>
[CRLF]> 79af67ef86ba4bee914a29f65eacb858
[CRLF]>
[CRLF]> This may also be found at: C:\Users\likit\.jenkins\secrets\initialAdminPassword
[CRLF]>
[CRLF]> *************************************************************
[CRLF]> *************************************************************
[CRLF]> *************************************************************

2026-02-04 11:16:43.030+0000 [id=62]    INFO    jenkins.InitReactorRunner$1#onAttained: Completed initialization
2026-02-04 11:16:43.072+0000 [id=41]    INFO    hudson.lifecycle.Lifecycle#onReady: Jenkins is fully up and running
```

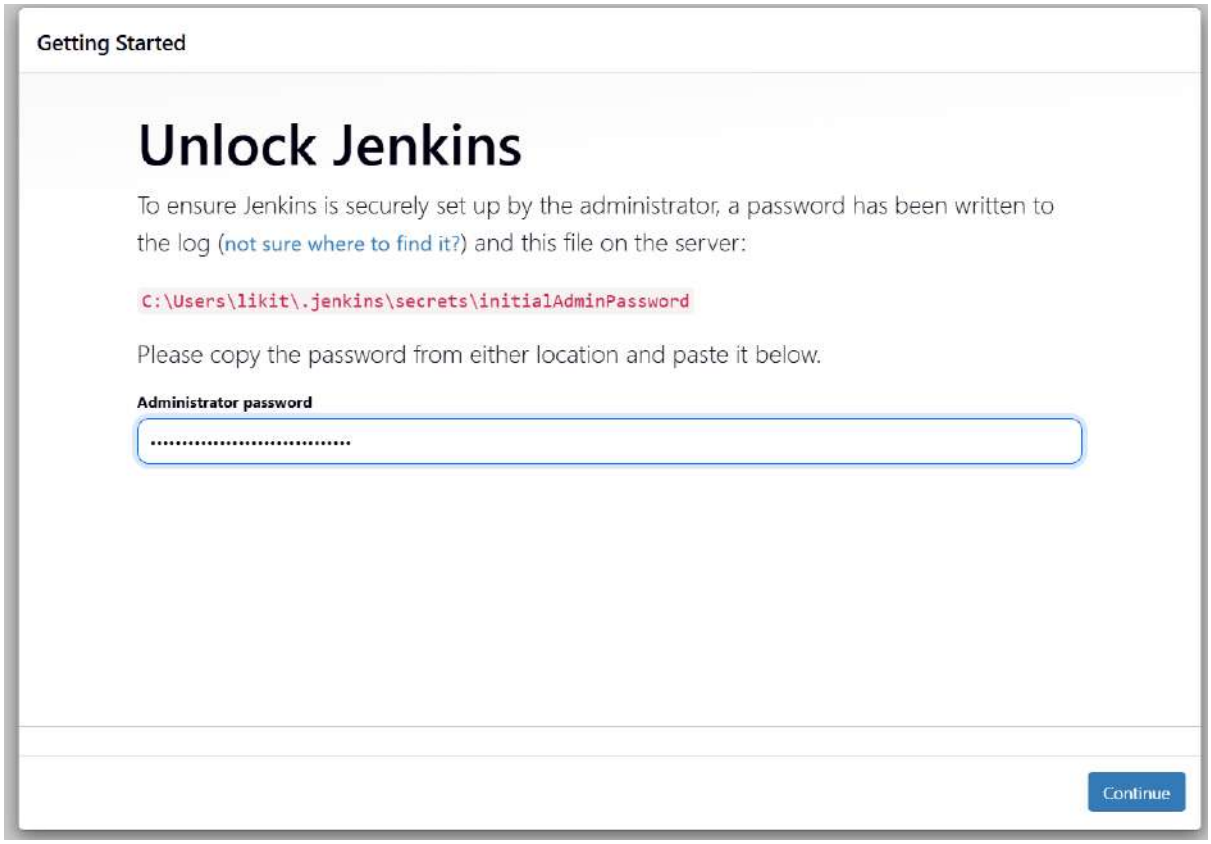

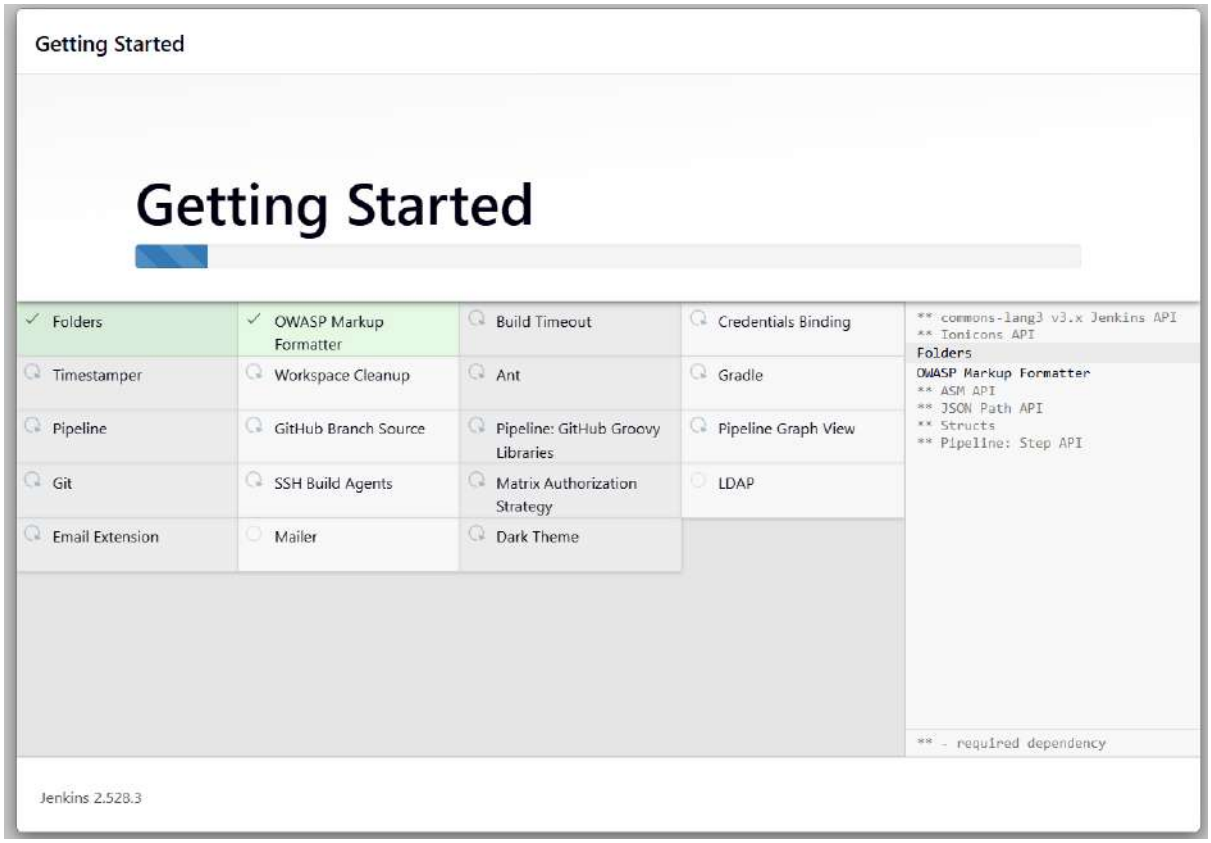

3 &4 Jenkins UI overview & Create **Freestyle Job**

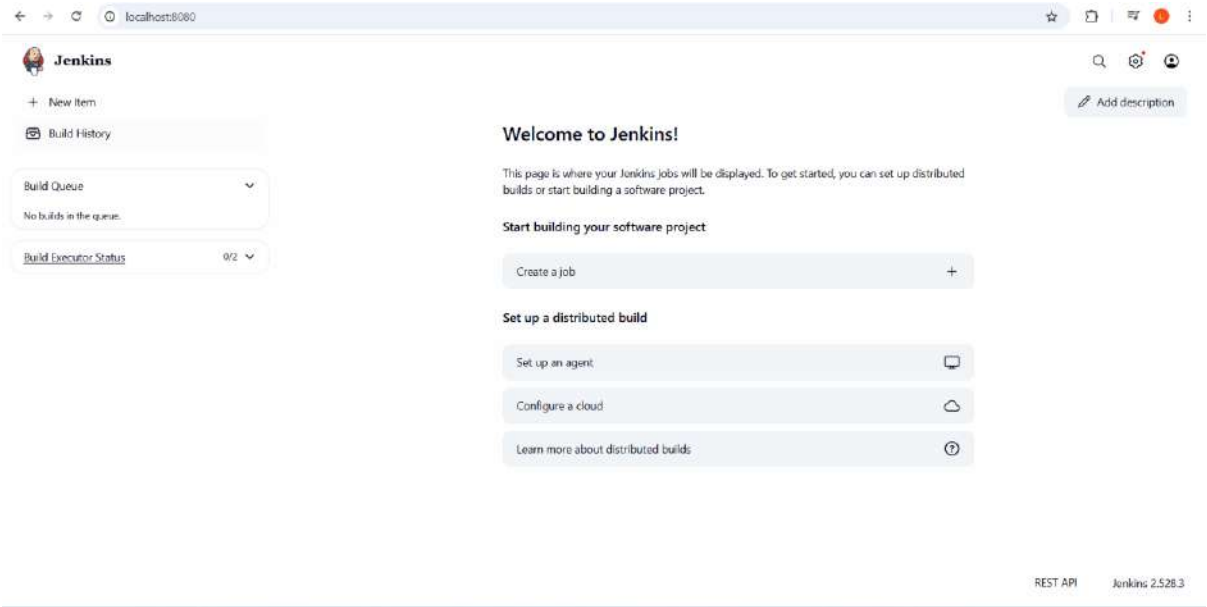

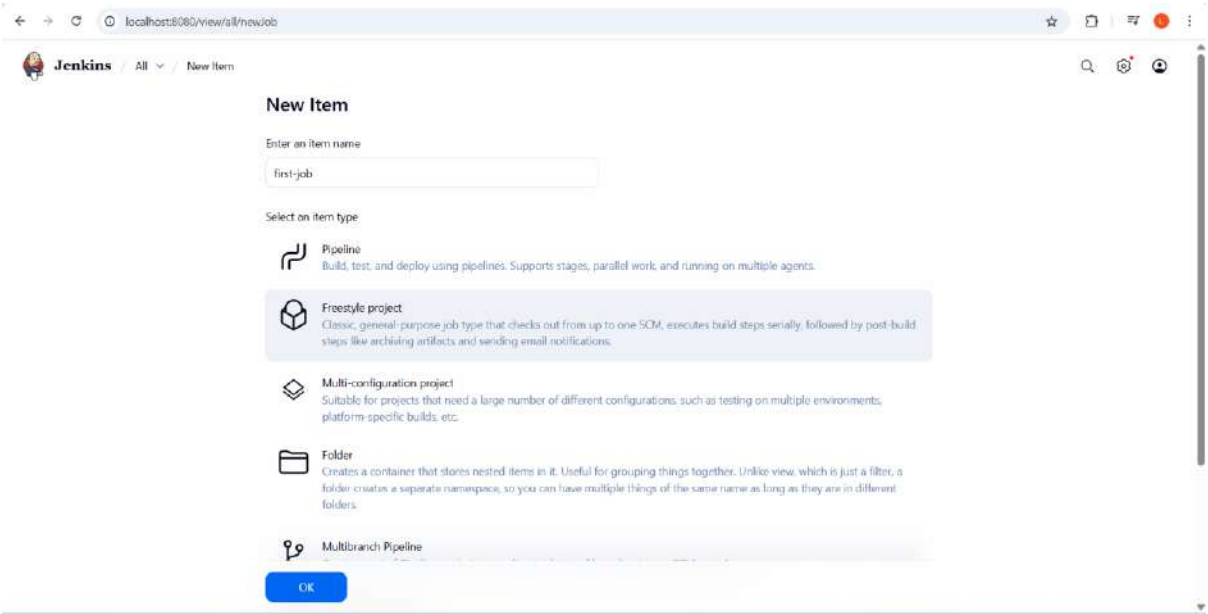

5 Add simple build step:

- Windows: echo Hello Jenkins

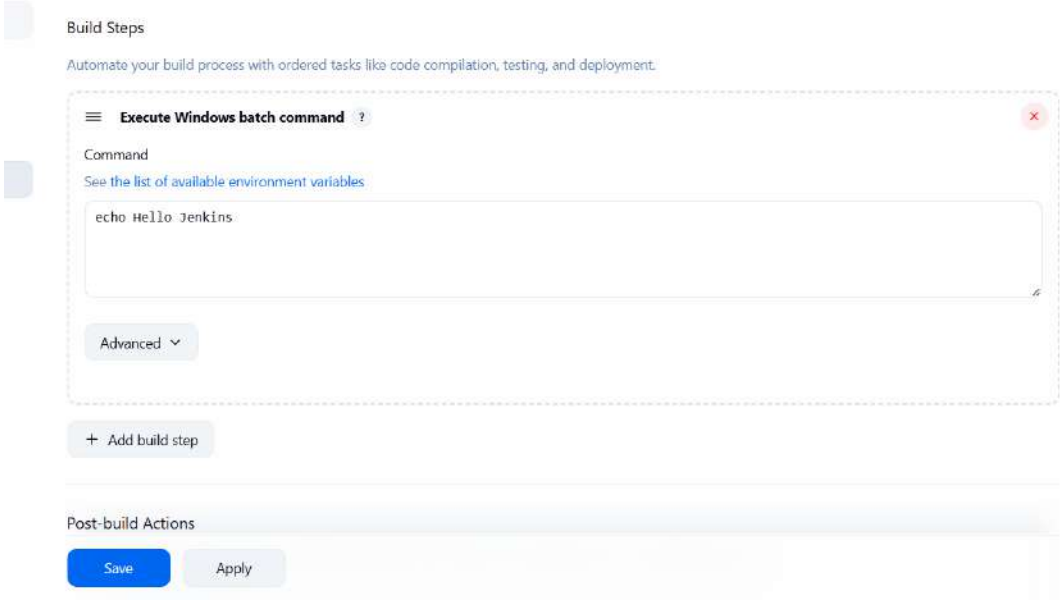

6.Run job manually

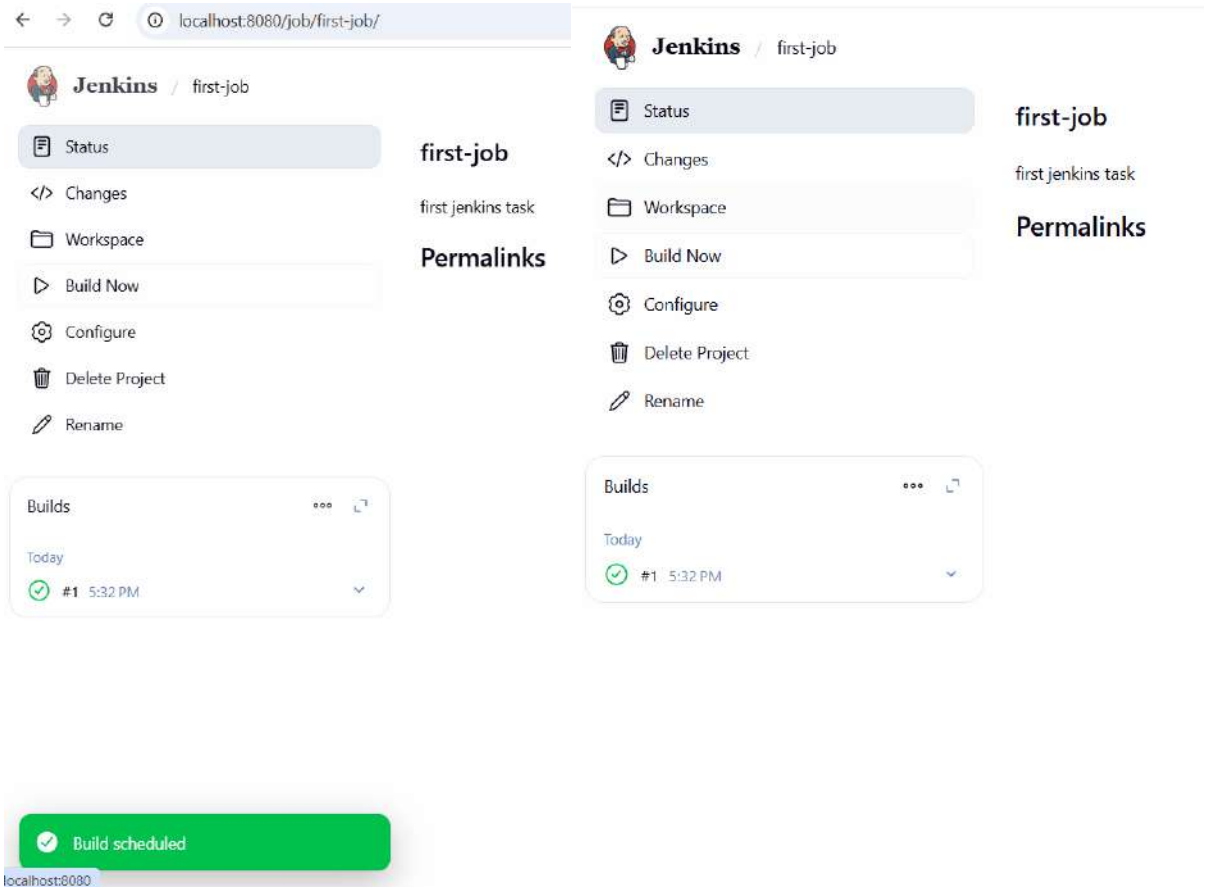

7. View:

- Console Output

- Build History

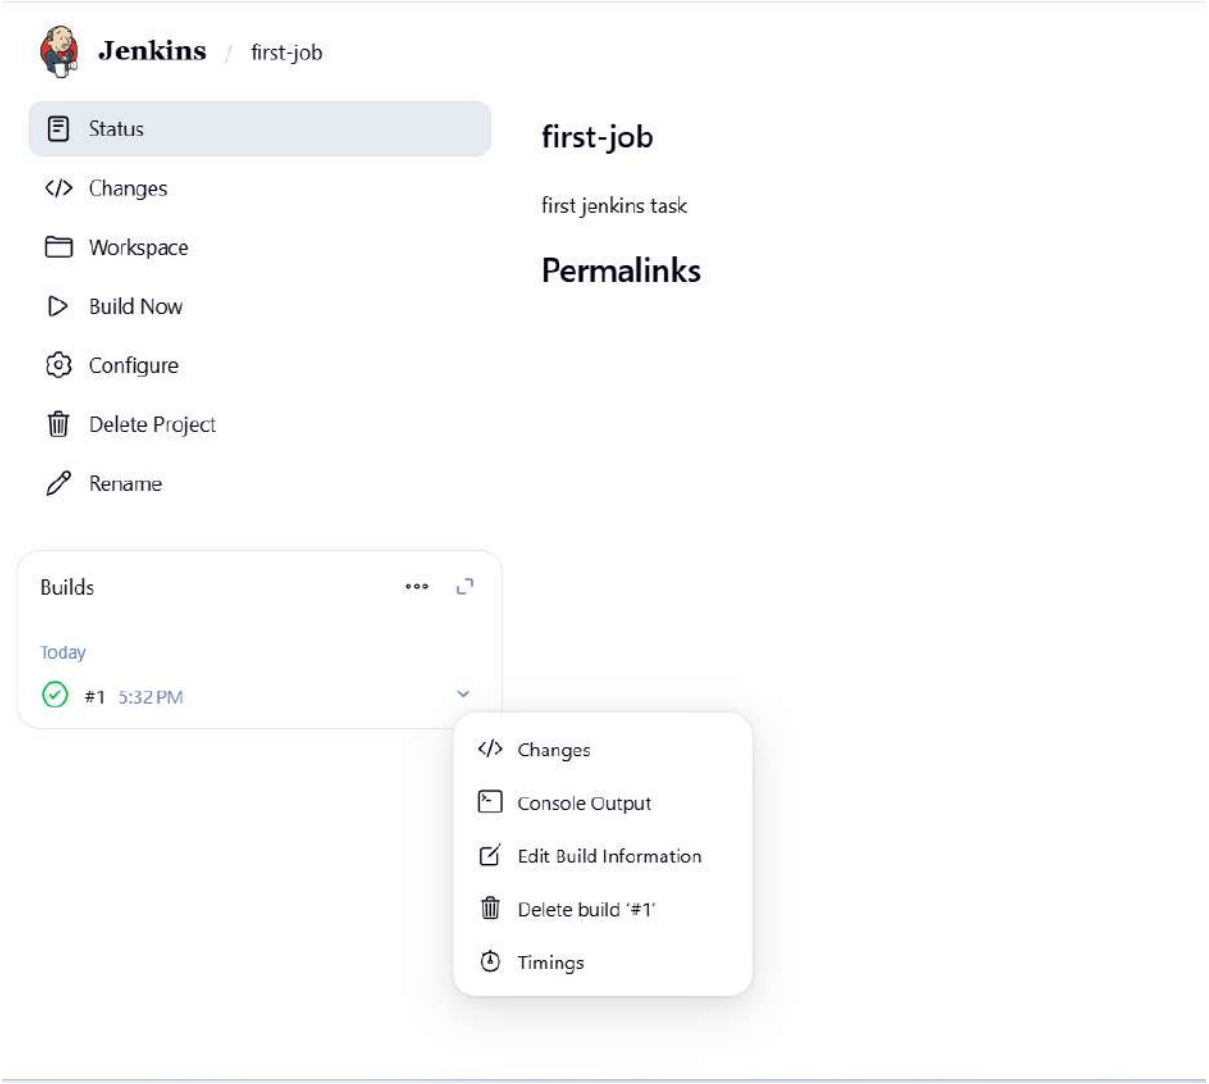

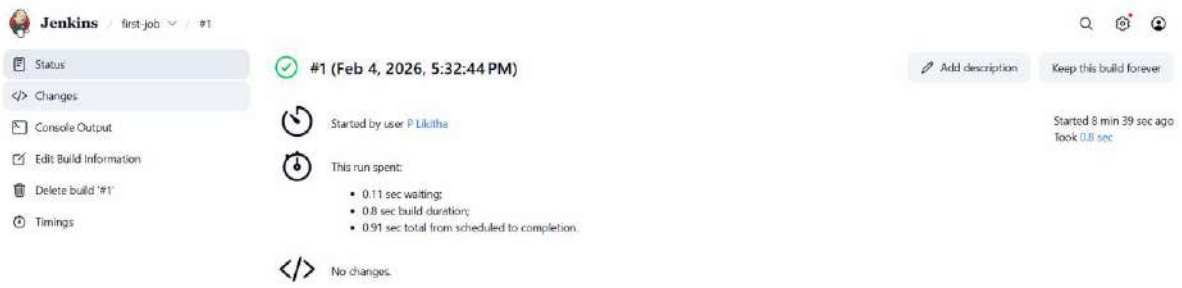

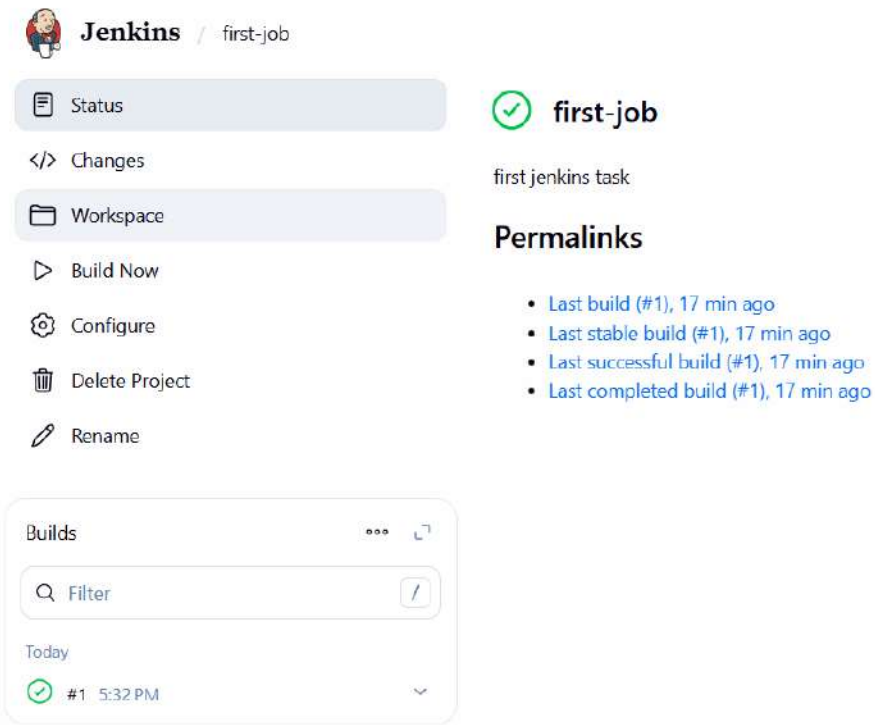

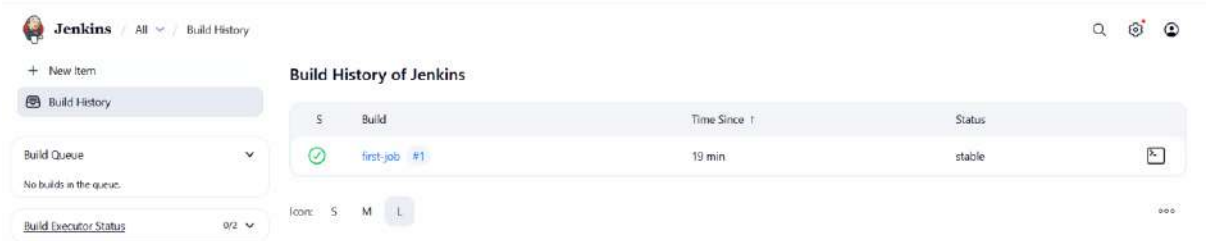

II. Learning Goal

Create GitHub repository

1 General

Owner * Repository name *

Liki-git / jenkins-demo

jenkins-demo is available.

Great repository names are short and memorable. How about solid-doodle?

Description

0 / 350 characters

2 Configuration

Choose visibility *
Choose who can see and commit to this repository — Public

Add README
READMEs can be used as longer descriptions. About READMEs — On

Add .gitignore
.gitignore tells git which files not to track. About ignoring files — No .gitignore

Add license
Licenses explain how others can use your code. About licenses — No license

Create repository

Configure Git in Jenkins

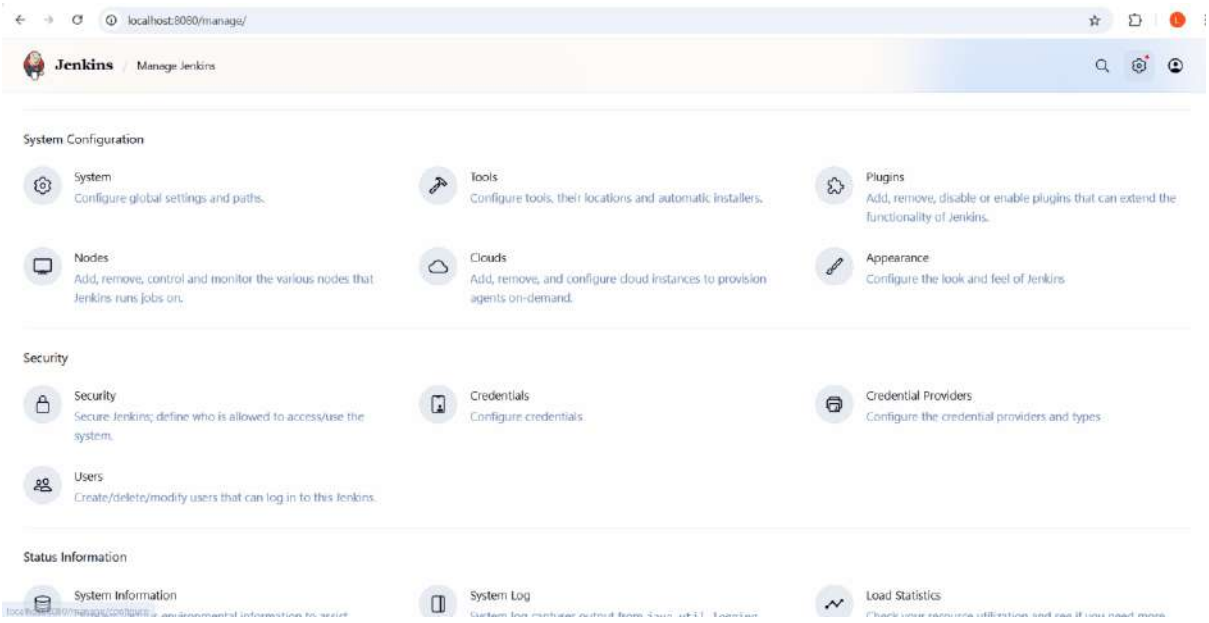

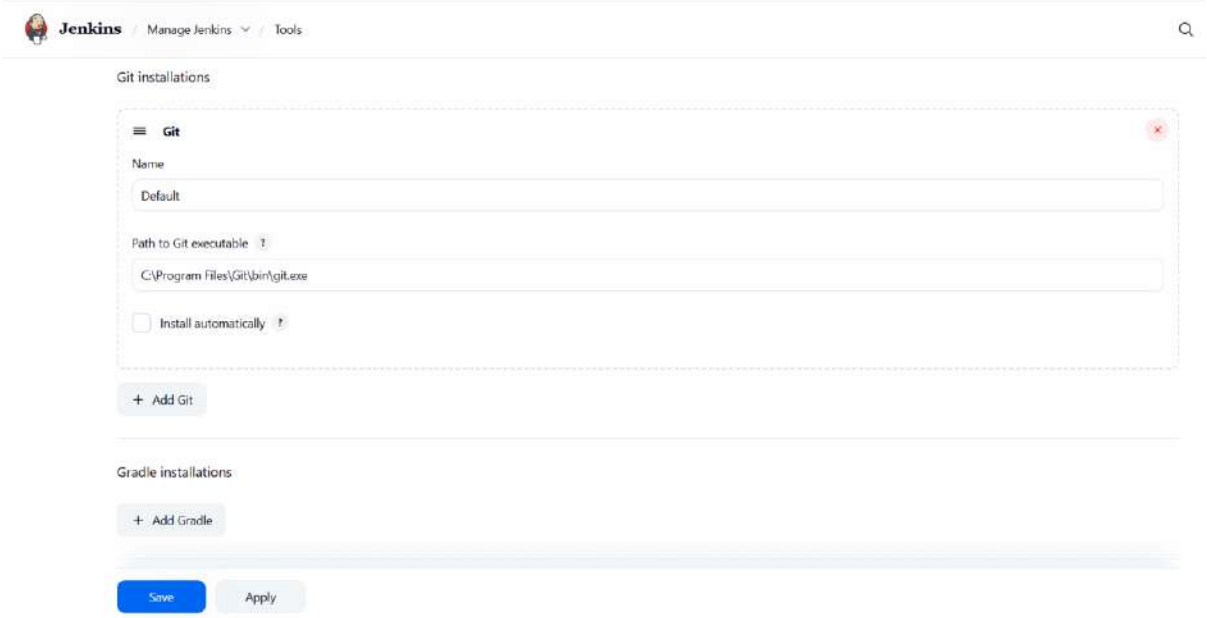

Create Freestyle Job:

- Source Code Management → Git

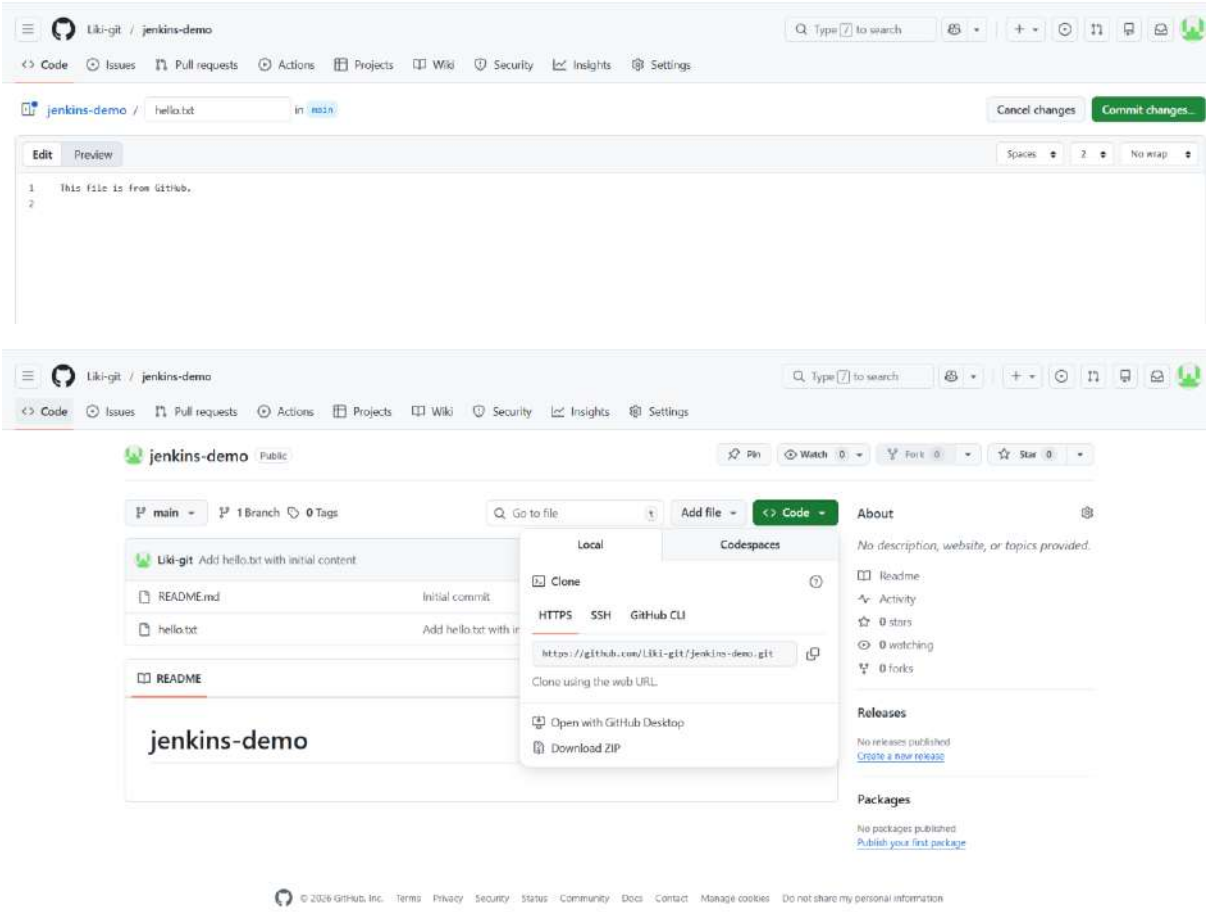

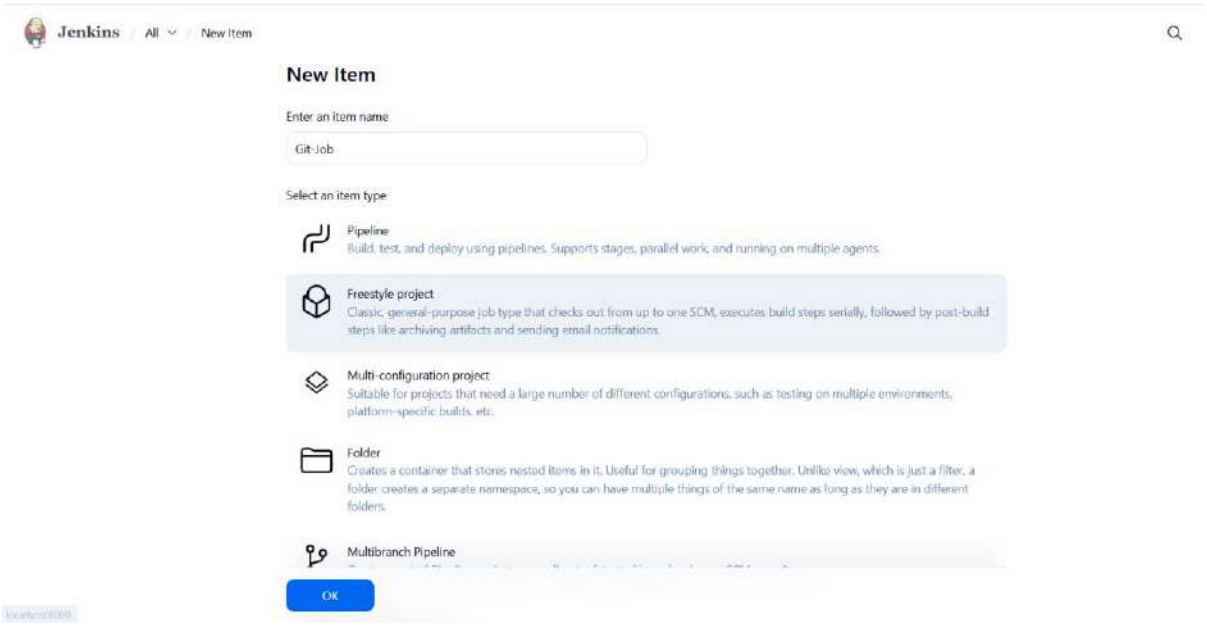

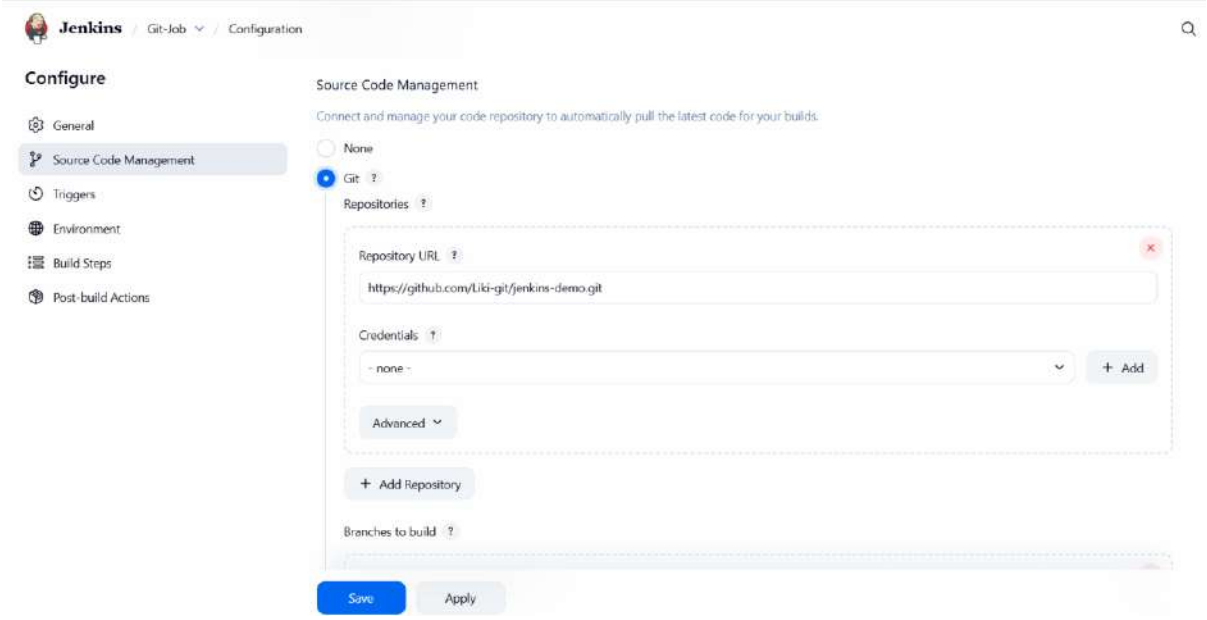

Add build step:

- Windows batch / Shell

Jenkins / Git-Job / Configuration

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps
- Post-build Actions

Add timestamps to the Console Output

Inspect build log for published build scans

Terminate a build if it's stuck

With Ant

Build Steps

Automate your build process with ordered tasks like code compilation, testing, and deployment.

Execute Windows batch command

Command

See the list of available environment variables

```
echo Code pulled successfully
dir
```

Advanced

+ Add build step

Save Apply

Jenkins / Git-Job

- Status
- Changes
- Workspace
- Build Now
- Configure
- Delete Project
- Rename

Builds

Filter /

Today

#2 6:13 PM

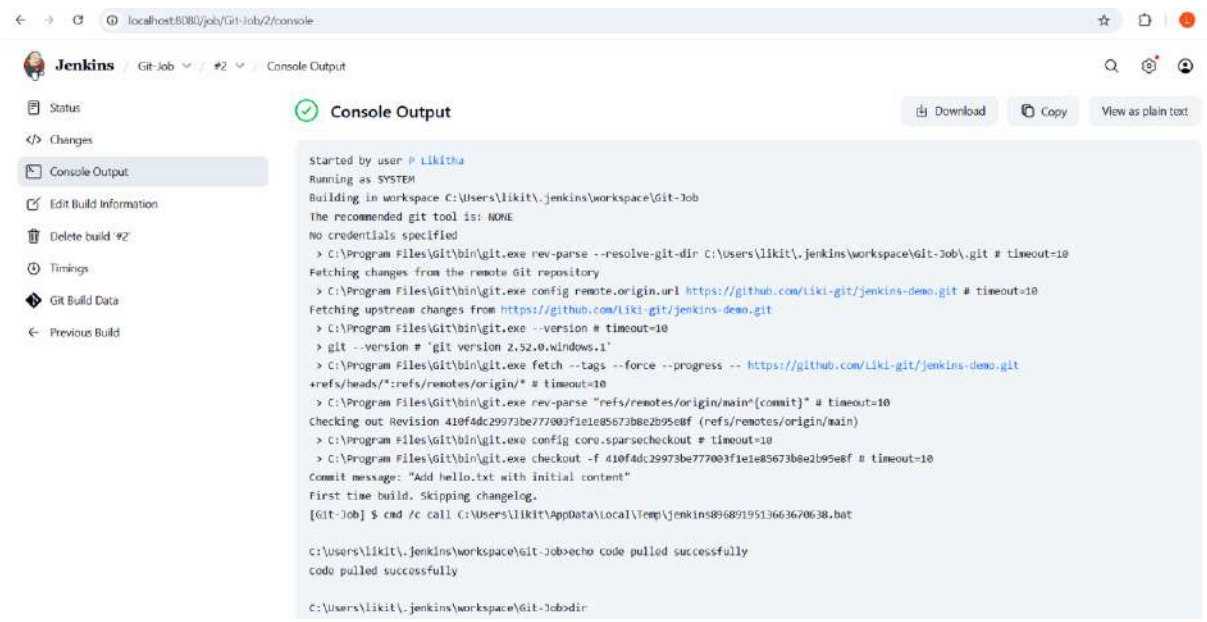

Poll SCM / Webhook trigger

Build automatically on code change

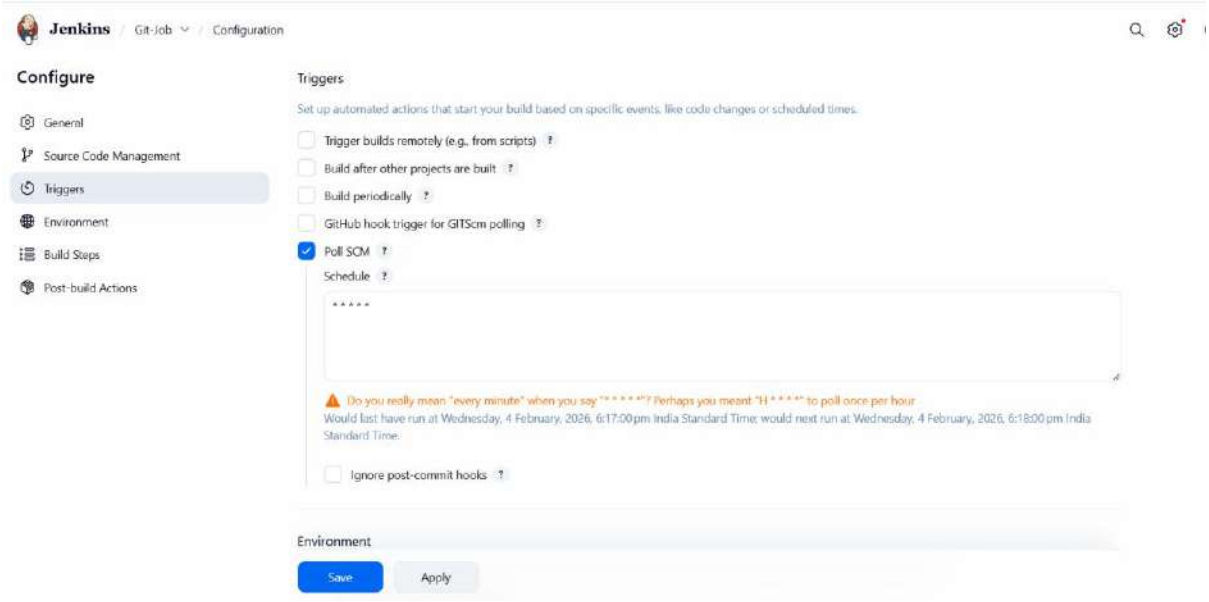

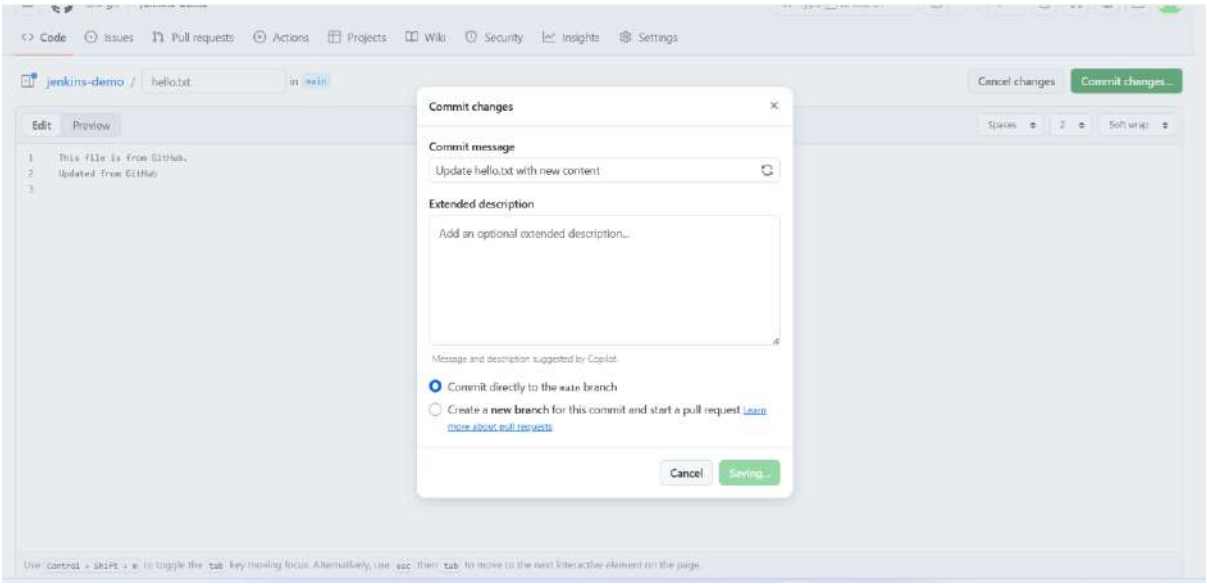

Automatic build on code change

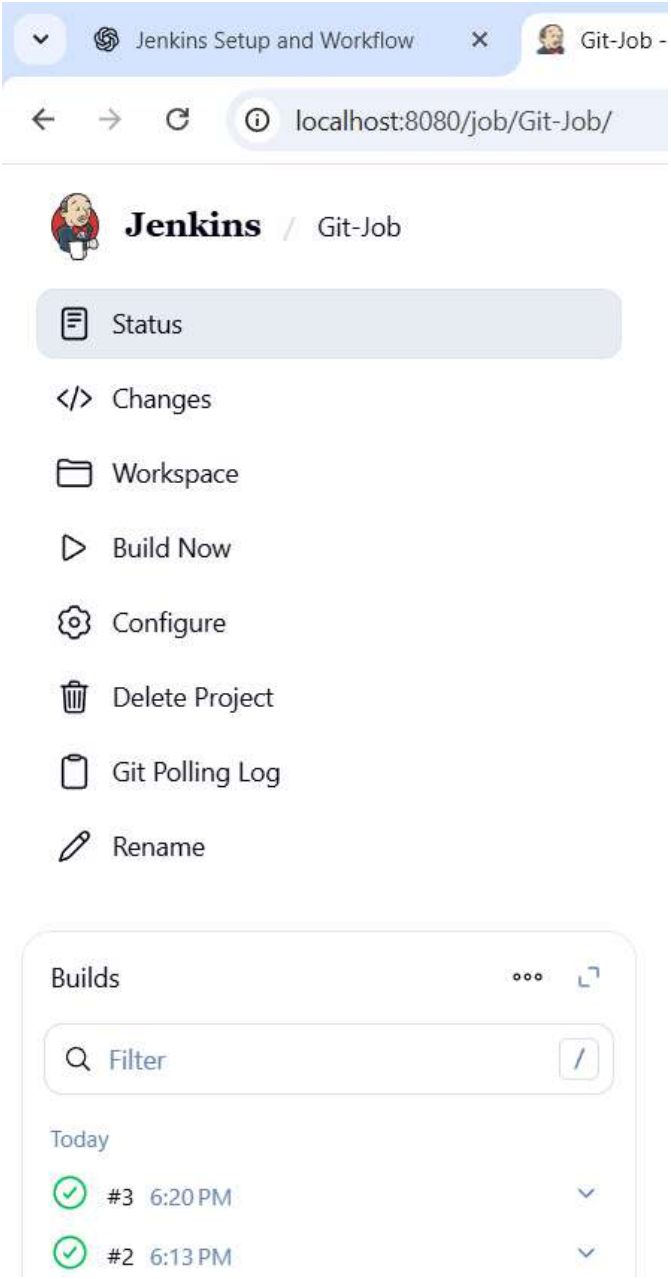
Jenkins Setup and Workflow
Git-Job -
localhost:8080/job/Git-Job/
Jenkins
Git-Job
Status
Changes
Workspace
Build Now
Configure
Delete Project
Git Polling Log
Rename
Builds
Filter
/
Today
#3 6:20 PM
#2 6:13 PM

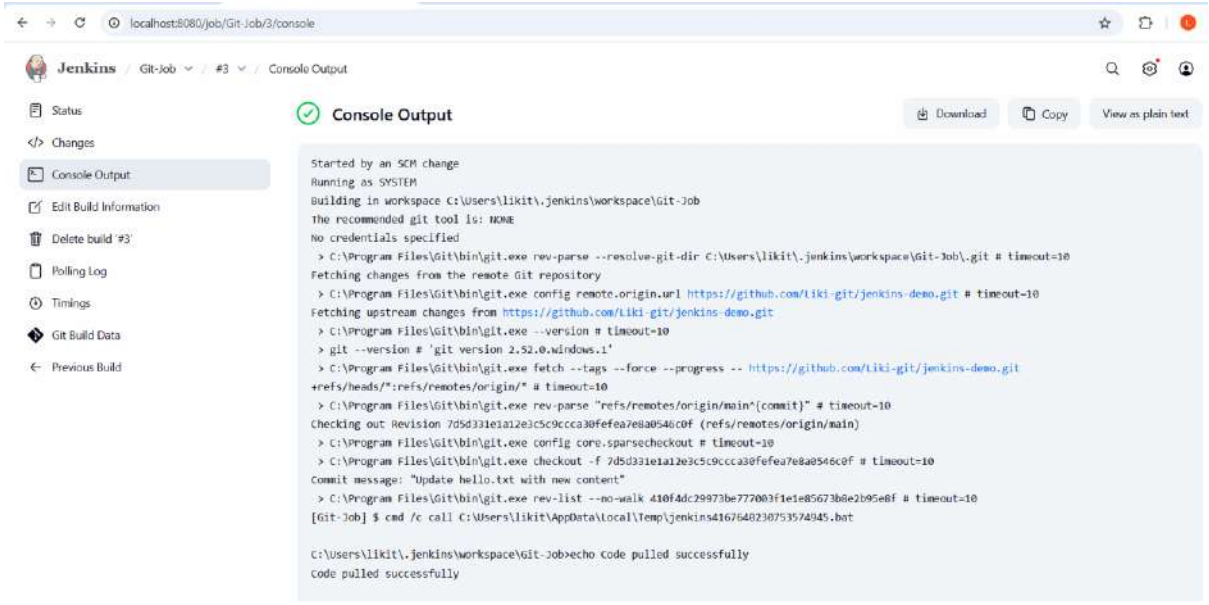

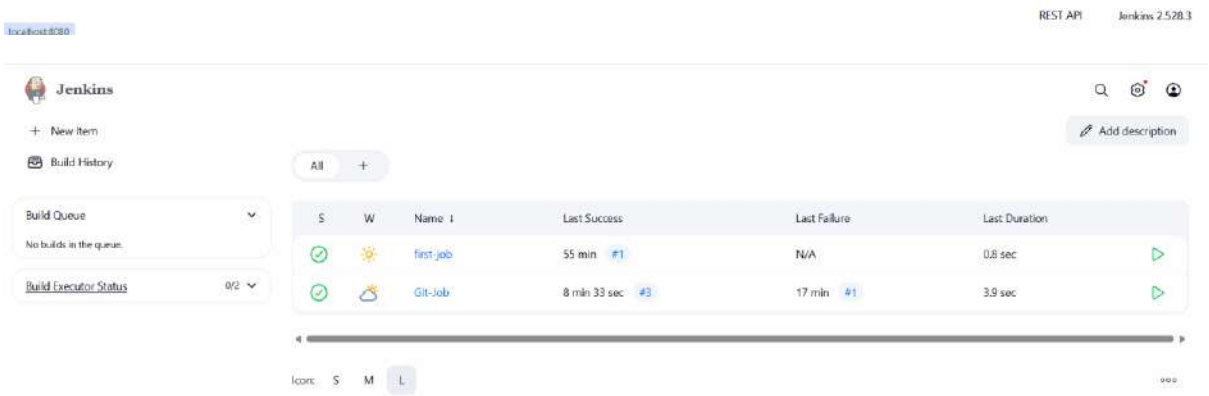

III. Learning Goal

Understand **job flow visually**

Create multiple Freestyle jobs:

- Job-A (Build)
- Job-B (Test)
- Job-C (Deploy)

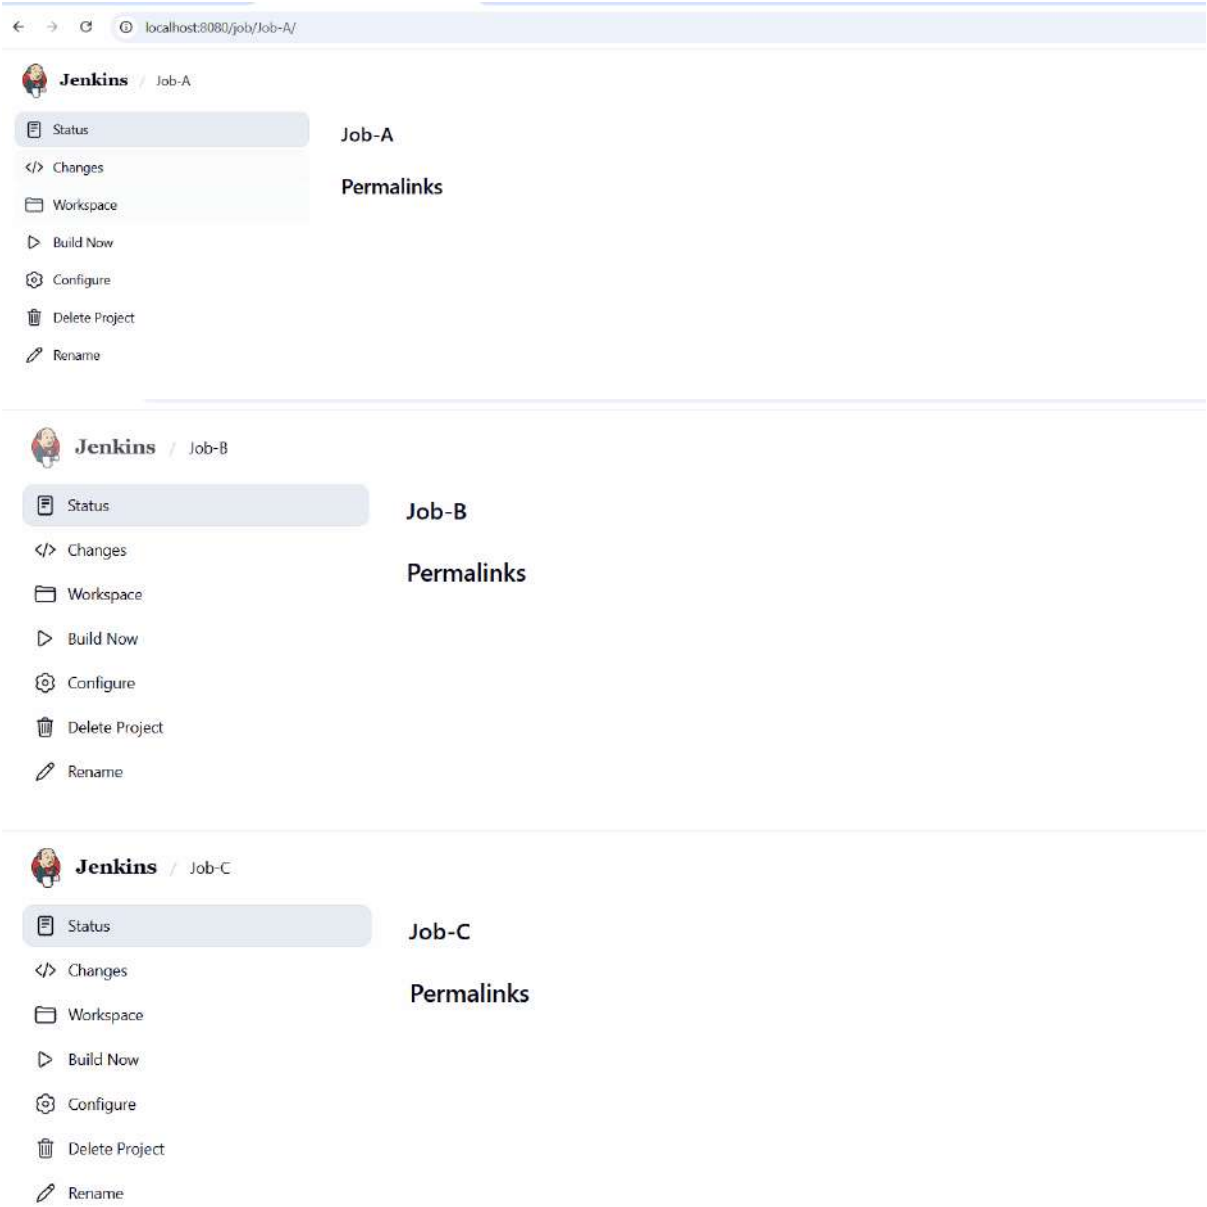

Use:

- Post-build action → Trigger other projects

Jenkins / Job-A / Configuration

Configure

General
Source Code Management
Triggers
Environment
Build Steps
Post-build Actions

+ Add build step

Post-build Actions

Define what happens after a build completes, like sending notifications, archiving artifacts, or triggering other jobs.

Build other projects

Projects to build

Job-B

Trigger only if build is stable
Trigger even if the build is unstable
Trigger even if the build fails

+ Add post-build action

Save Apply

localhost:8080/job/Job-B/

Jenkins / Job-B

Status
Changes
Workspace
Build Now
Configure
Delete Project
Rename

Builds

Job-B

Upstream Projects

Job-A

Permalinks

Jenkins / Job-B / Configuration

Configure

General
Source Code Management
Triggers
Environment
Build Steps
Post-build Actions

+ Add build step

Post-build Actions

Define what happens after a build completes, like sending notifications, archiving artifacts, or triggering other jobs.

Build other projects

Projects to build

Job-C

Trigger only if build is stable
Trigger even if the build is unstable
Trigger even if the build fails

+ Add post-build action

Save Apply

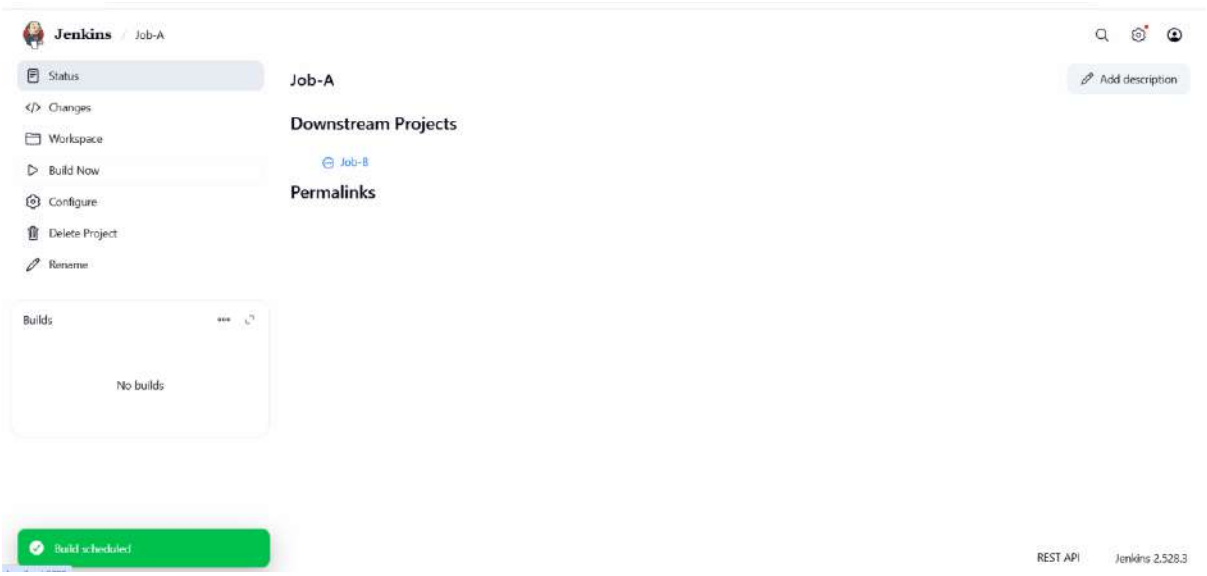

View job chaining visually

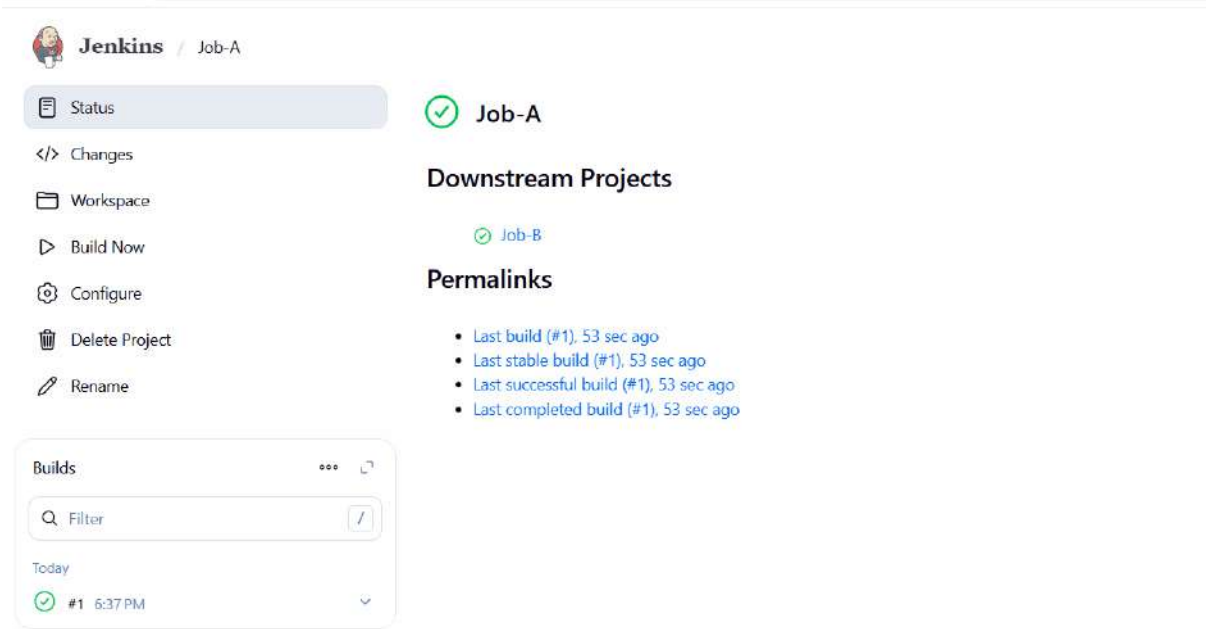

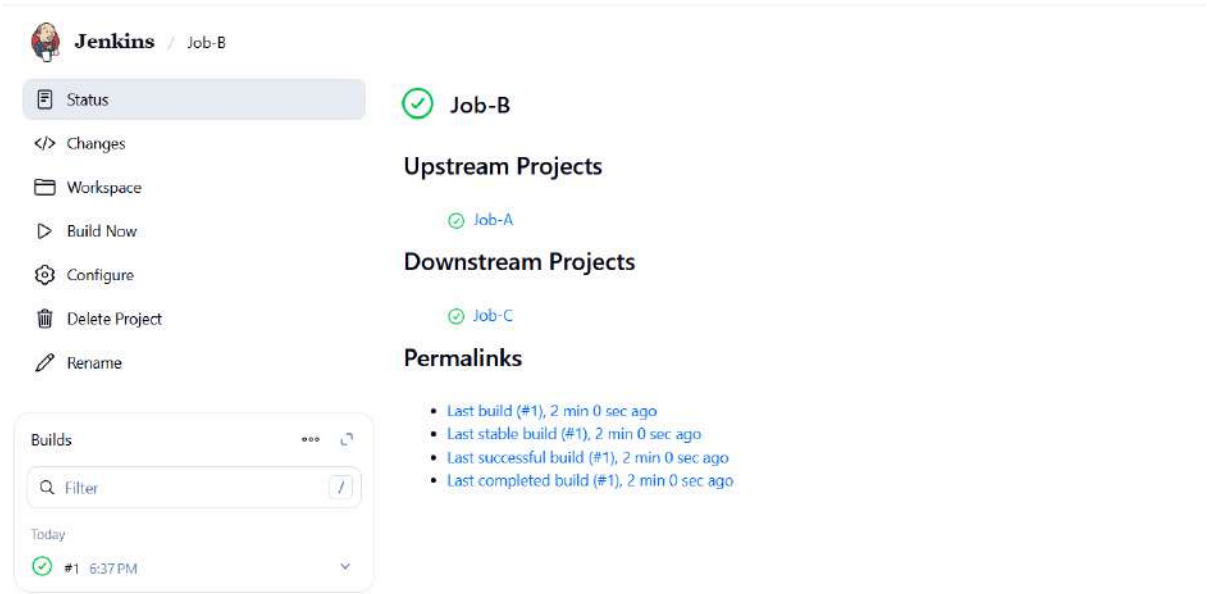

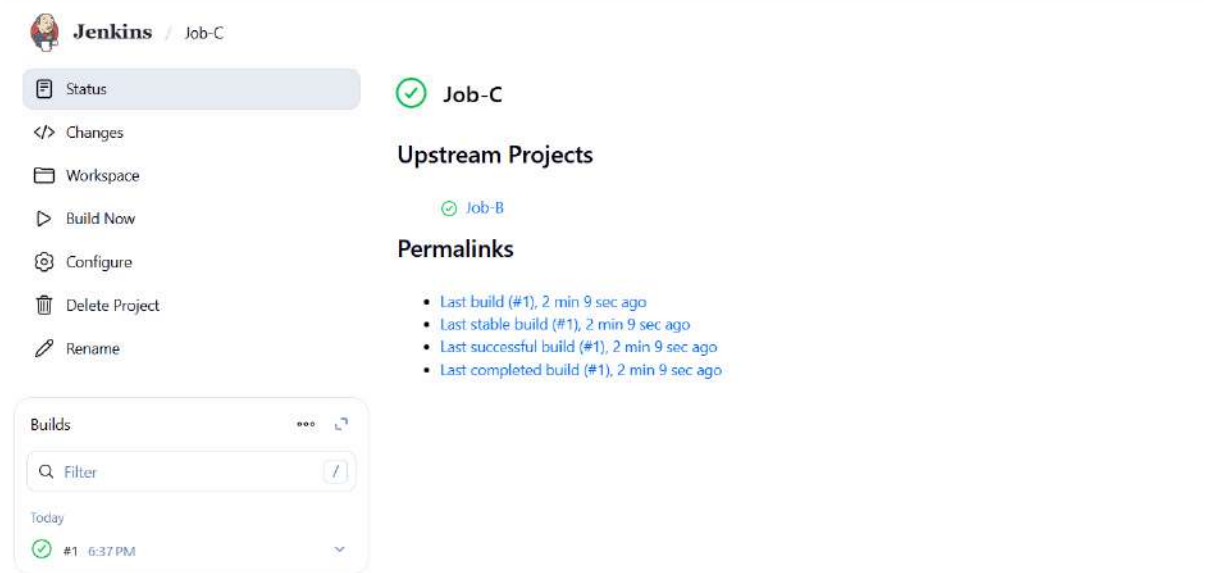

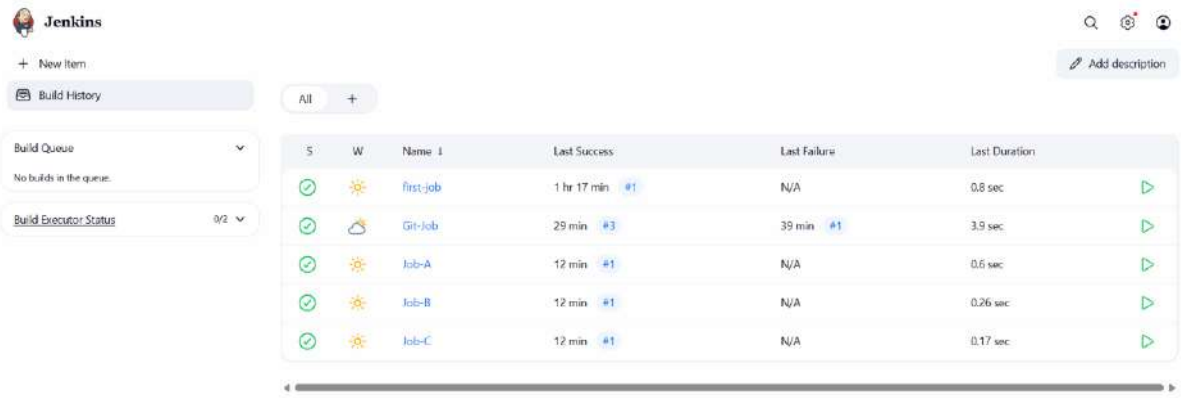

Install **Pipeline Stage View**

localhost:8080/manage/pluginManager/available

Jenkins / Manage Jenkins / Plugins

Plugins

- Updates
- Available plugins
- Installed plugins
- Advanced settings
- Download progress

Pipeline Stage View

Install

Install	Name 1	Released	Health
	Pipeline: Stage View 2.39 User interface Pipeline Stage View Plugin.	23 days ago	100

localhost:8080/manage/pluginManager/updates/

Jenkins / Manage Jenkins / Plugins

Plugins

- Updates
- Available plugins
- Installed plugins
- Advanced settings
- Download progress

Download progress

Preparation

- Checking internet connectivity
- Checking update center connectivity
- Success

commons-lang3 v3.x Jenkins API	Success
Ionicons API	Success
Folders	Success
OWASP Markup Formatter	Success
ASM API	Success
JSON Path API	Success
Structs	Success
Pipeline: Step API	Success
commons-text API	Success
Token Macro	Success
Build Timeout	Success
bouncycastle API	Success
Credentials	Success
Plain Credentials	Success
Variant	Success
SSH Credentials	Success
Credentials Binding	Success
SCM API	Success

Jenkins / Pipeline-Job / Configuration

Configure

- General
- Triggers
- Pipeline
- Advanced

Poll SCM

Trigger builds remotely (e.g., from scripts)

Pipeline

Define your Pipeline using Groovy directly or pull it from source control.

Definition

Pipeline script

Script

try sample Pipeline...

```
pipeline {
  agent any
  stages {
    stage('Build') {
      steps {
        echo 'Building project'
      }
    }
    stage('Test') {
      steps {
        echo 'Running tests'
```

Save Apply

localhost:8080

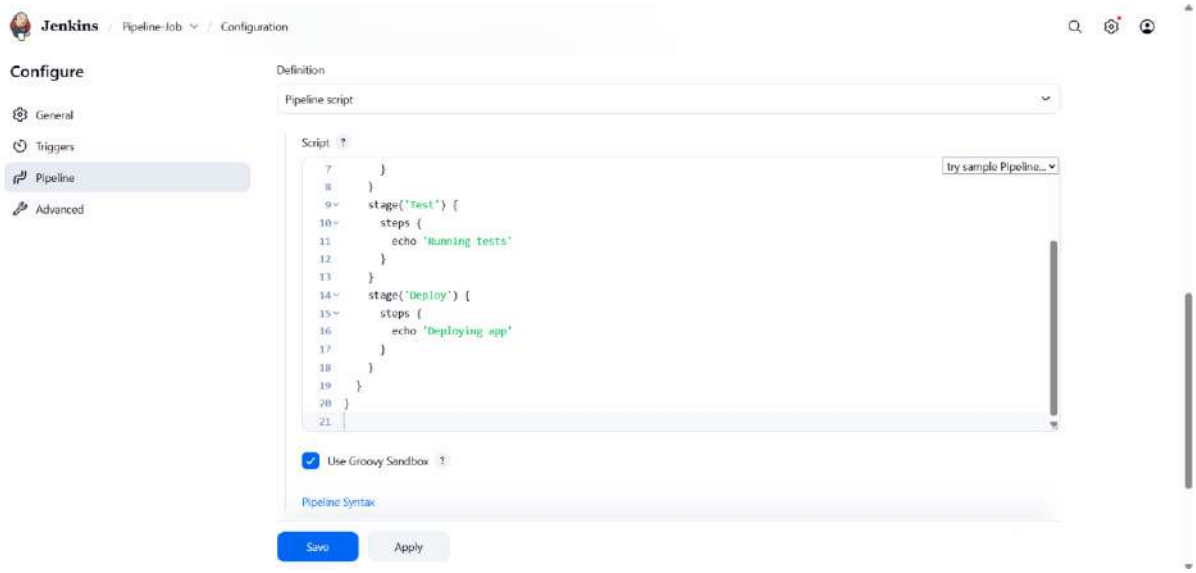

Observe stage-wise execution

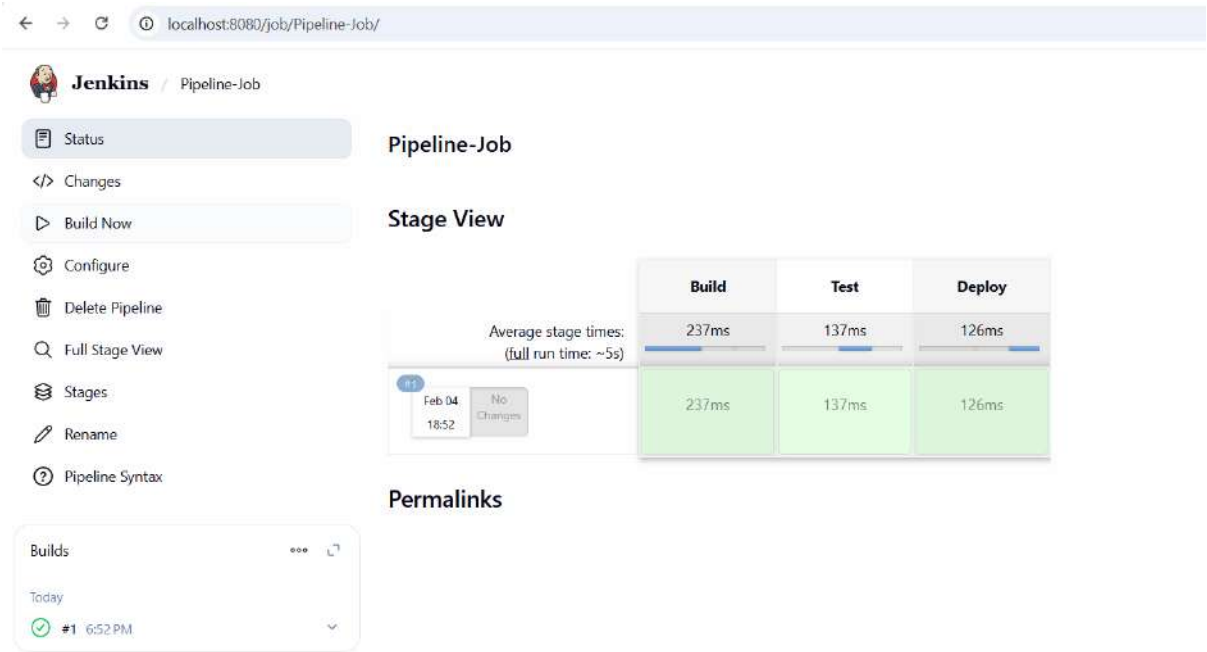

IV. Learning Goal

Use **Jenkins Pipeline & Jenkinsfile**

1.What is Jenkins Pipeline?

A **Jenkins Pipeline** is a way to define the **entire build, test, and deployment process as code**.

Instead of clicking steps manually in Jenkins UI, we write a script that tells Jenkins:

➞ how to get code
➞ how to build it
➞ how to test it
➞ how to deploy it

This script is usually stored in a file called **Jenkinsfile** inside the project repository.

Key Idea:

Pipeline = **Automation workflow written as code**

Benefits:

- Automates CI/CD process
- Version-controlled (stored in Git)
- Repeatable and reliable
- Shows stages visually (Build → Test → Deploy)

2.Scripted vs Declarative Pipeline

Feature	**Scripted Pipeline**	**Declarative Pipeline**
Style	Code-based (Groovy scripting)	Structured, simple syntax
Difficulty	Advanced	Easy to learn
Flexibility	Very flexible	Less flexible but safer
Syntax	Uses node {} and Groovy code	Uses pipeline {} block
Error chances	Higher	Lower

Feature	Scripted Pipeline	Declarative Pipeline
Used by	Experts, complex logic	Most projects

Eg:

<u>Scripted Pipeline</u>

```
node {
   stage('Build') {
      echo 'Building'
   }
   stage('Test') {
      echo 'Testing'
   }
}
```

<u>Declarative Pipeline</u>

```
pipeline {
   agent any
   stages {
      stage('Build') {
         steps {
            echo 'Building'
         }
      }
      stage('Test') {
         steps {
            echo 'Testing'
```

```
            }
        }
    }
}
```

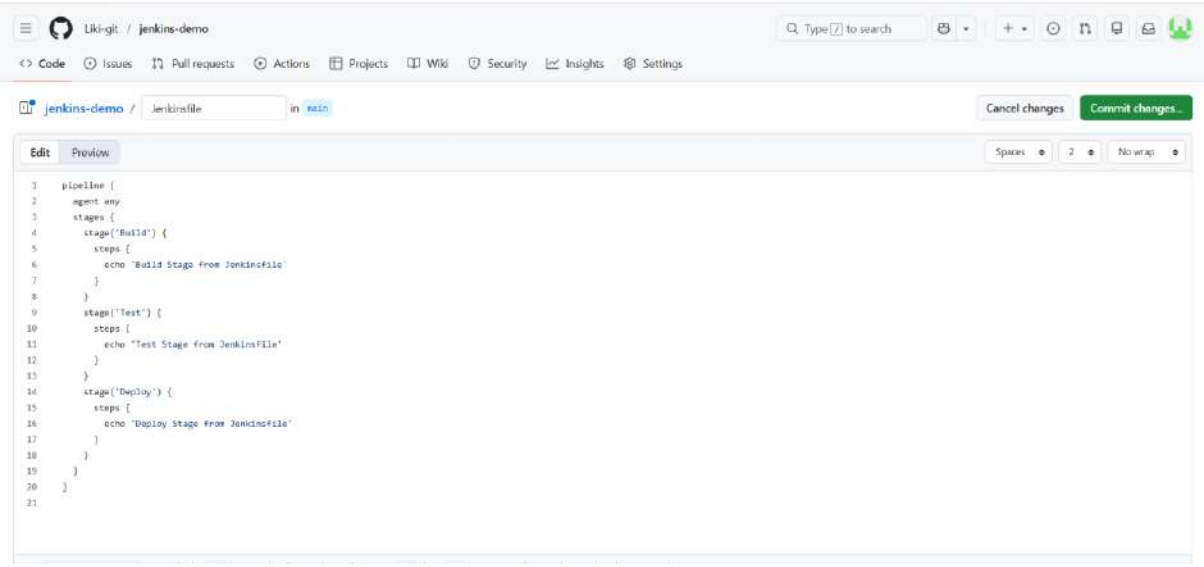

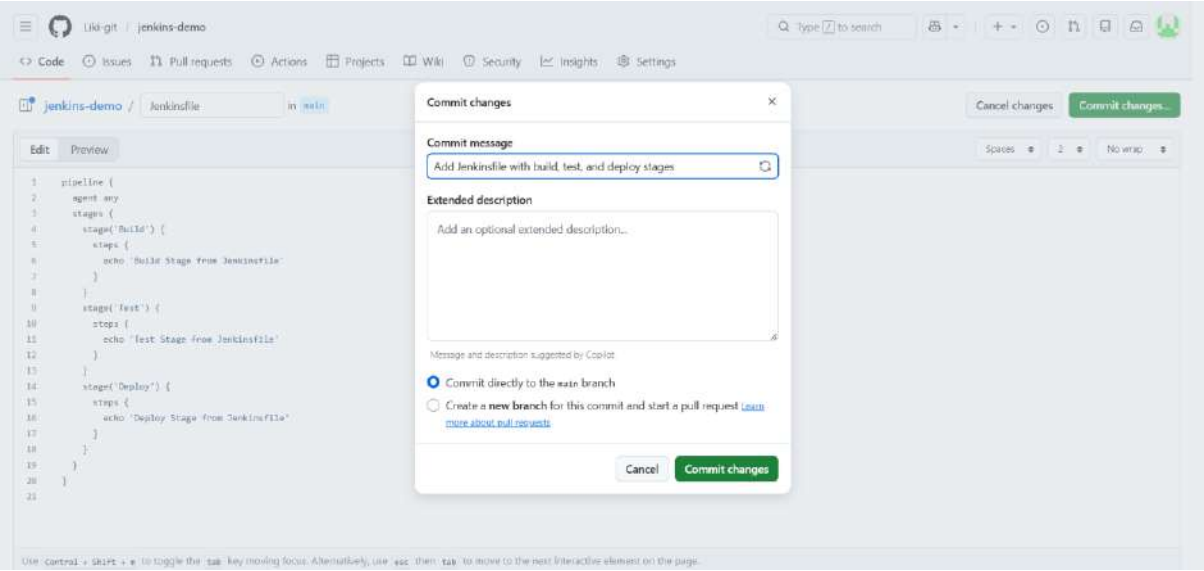

V. Learning Goal

Pipeline as code from repository

Create **Pipeline Job**

Create Jenkinsfile

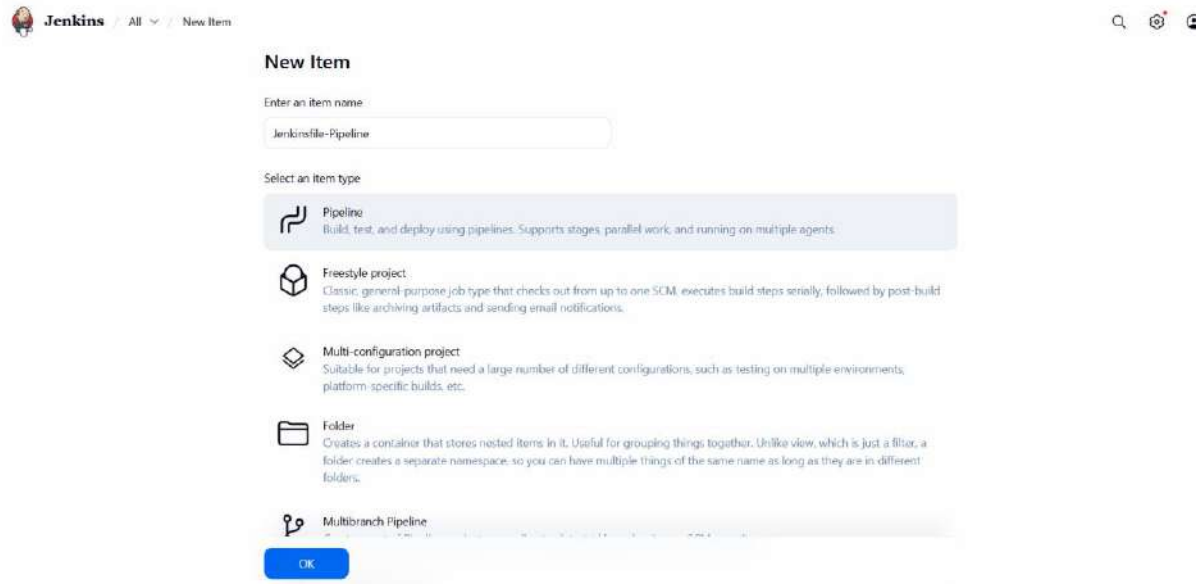

Commit Jenkinsfile to GitHub

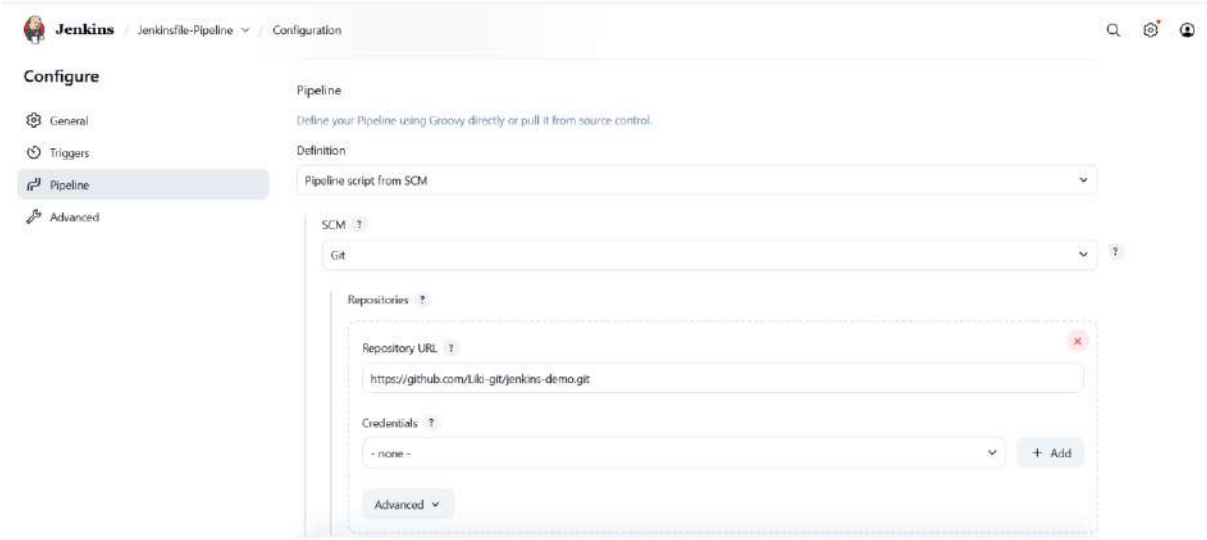

Jenkins / Jenkinsfile-Pipeline / Configuration

Configure

- General
- Triggers
- Pipeline
- Advanced

Branch Specifier (blank for 'any') ?

*/main

+ Add Branch

Repository browser ?

(Auto)

Additional Behaviours

+ Add

Script Path ?

Jenkinsfile

☑ Lightweight checkout ?

Pipeline Syntax

Save | Apply

Jenkins / Jenkinsfile-Pipeline

- Status
- Changes
- Build Now
- Configure
- Delete Pipeline
- Full Stage View
- Stages
- Rename
- Pipeline Syntax

Builds

Today

#1 6:59 PM

Jenkinsfile-Pipeline

Add description

Stage View

	Declarative: Checkout SCM	Build	Test	Deploy
Average stage times: (full run time: ~7s)	3s	185ms	149ms	152ms
#1 Feb 04 18:59 No Changes	3s	185ms	149ms	152ms

Permalinks

Jenkins / Jenkinsfile-Pipeline / #1 / Console Output

- Status
- Changes
- Console Output
- Edit Build Information
- Delete build '#1'
- Timings
- Git Build Data
- Pipeline Overview
- Restart from Stage
- Replay
- Pipeline Steps
- Workspaces

Console Output

Download | Copy | View as plain text

```
Started by user P Likitha
Obtained Jenkinsfile from git https://github.com/Liki-git/jenkins-demo.git
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in C:\Users\likit\.jenkins\workspace\Jenkinsfile-Pipeline
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Declarative: Checkout SCM)
[Pipeline] checkout
Selected Git installation does not exist. Using Default
The recommended git tool is: NONE
No credentials specified
Cloning the remote Git repository
Cloning repository https://github.com/Liki-git/jenkins-demo.git
 > C:\Program Files\Git\bin\git.exe init C:\Users\likit\.jenkins\workspace\Jenkinsfile-Pipeline # timeout=10
Fetching upstream changes from https://github.com/Liki-git/jenkins-demo.git
 > C:\Program Files\Git\bin\git.exe --version # timeout=10
 > git --version # 'git version 2.52.0.windows.1'
 > C:\Program Files\Git\bin\git.exe fetch --tags --force --progress -- https://github.com/Liki-git/jenkins-demo.git
+refs/heads/*:refs/remotes/origin/* # timeout=10
 > C:\Program Files\Git\bin\git.exe config remote.origin.url https://github.com/Liki-git/jenkins-demo.git # timeout=10
 > C:\Program Files\Git\bin\git.exe config --add remote.origin.fetch +refs/heads/*:refs/remotes/origin/* # timeout=10
Avoid second fetch
 > C:\Program Files\Git\bin\git.exe rev-parse "refs/remotes/origin/main^{commit}" # timeout=10
Checking out Revision 949ac521e5da2db62fdcf5fc236c9498c6c51421 (refs/remotes/origin/main)
```

localhost:8080

Jenkins / Jenkinsfile-Pipeline / #1 / Console Output

```
Avoid second fetch
 > C:\Program Files\Git\bin\git.exe rev-parse "refs/remotes/origin/main^{commit}" # timeout=10
Checking out Revision 949ac521e5da2db62fdcf5fc236c9498c6c51421 (refs/remotes/origin/main)
 > C:\Program Files\Git\bin\git.exe config core.sparsecheckout # timeout=10
 > C:\Program Files\Git\bin\git.exe checkout -f 949ac521e5da2db62fdcf5fc236c9498c6c51421 # timeout=10
Commit message: "Add Jenkinsfile with build, test, and deploy stages"
First time build. Skipping changelog.
[Pipeline] }
[Pipeline] // stage
[Pipeline] withEnv
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Build)
[Pipeline] echo
Build Stage from Jenkinsfile
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Test)
[Pipeline] echo
Test Stage from Jenkinsfile
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Deploy)
[Pipeline] echo
Deploy Stage from Jenkinsfile
[Pipeline] }
```

Jenkins / Jenkinsfile-Pipeline / #1 / Console Output

```
[Pipeline] { (Build)
[Pipeline] echo
Build Stage from Jenkinsfile
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Test)
[Pipeline] echo
Test Stage from Jenkinsfile
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Deploy)
[Pipeline] echo
Deploy Stage from Jenkinsfile
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

REST API Jenkins 2.528.3

Jenkins

+ New Item

Build History

Build Queue

No builds in the queue.

Build Executor Status 0/2

Add description

All +

S	W	Name ↓	Last Success	Last Failure	Last Duration
✓	☼	first-job	1 hr 29 min #1	N/A	0.8 sec
✓	☁	Git-Job	4 min 52 sec #4	51 min #1	3.5 sec
✓	☼	Jenkinsfile-Pipeline	2 min 20 sec #1	N/A	7.7 sec
✓	☼	Job-A	24 min #1	N/A	0.6 sec
✓	☼	Job-B	24 min #1	N/A	0.26 sec
✓	☼	Job-C	24 min #1	N/A	0.17 sec
✓	☼	Pipeline-Job	9 min 25 sec #1	N/A	5.9 sec

Icon: S M L

VI. Learning Goal

Build **real CI/CD pipelines**

Stepwise Tasks

1. Integrate build tools:
    - Maven / Gradle / Node

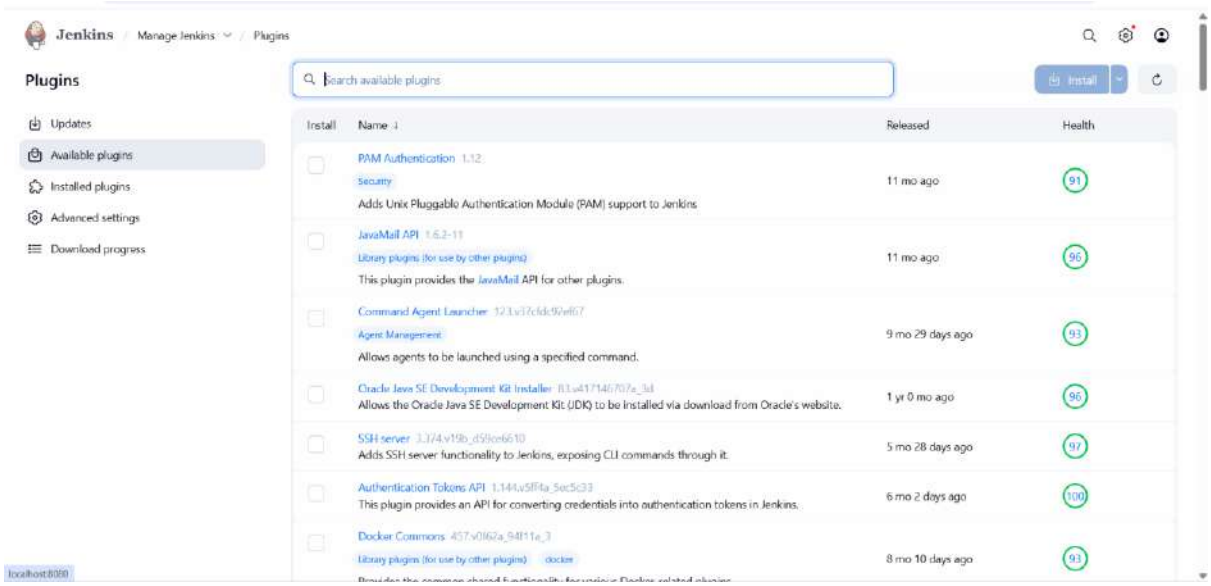

Modifying jenkinsfile in github

jenkins-demo / Jenkinsfile in main

Edit Preview

```
pipeline {
  agent any

  tools {
    maven 'Maven-3'
  }

  environment {
    APP_NAME = "DemoApp"
  }

  stages {

    stage('Checkout') {
      steps {
        git 'https://github.com/Liki-git/jenkins-demo.git'
      }
    }

    stage('Build') {
      steps {
        bat 'mvn clean compile'
      }
    }
```

Edit Preview

Spaces 2 No wrap

```
      always {
        junit '**/target/surefire-reports/*.xml'
      }
    }
  }

  stage('Package') {
    steps {
      bat 'mvn package'
    }
  }

  stage('Deploy') {
    steps {
      echo "Deploying ${APP_NAME}"
    }
  }
}

post {
  success {
    echo 'Pipeline Succeeded'
  }
  failure {
    echo 'Pipeline Failed'
  }
}
}
```

jenkins-demo Public

Pin Watch 0 Fork 0

main 1 Branch 0 Tags Go to file t Add file Code

Liki-git Enhance Jenkinsfile with tools and environment settings ec0f4c5 · now 5 Commits

Jenkinsfile	Enhance Jenkinsfile with tools and environment settings	now
README.md	Initial commit	1 hour ago
hello.txt	Update hello.txt with new content	1 hour ago

README

About

No description, webs

Readme

Activity

0 stars

0 watching

0 forks

Releases

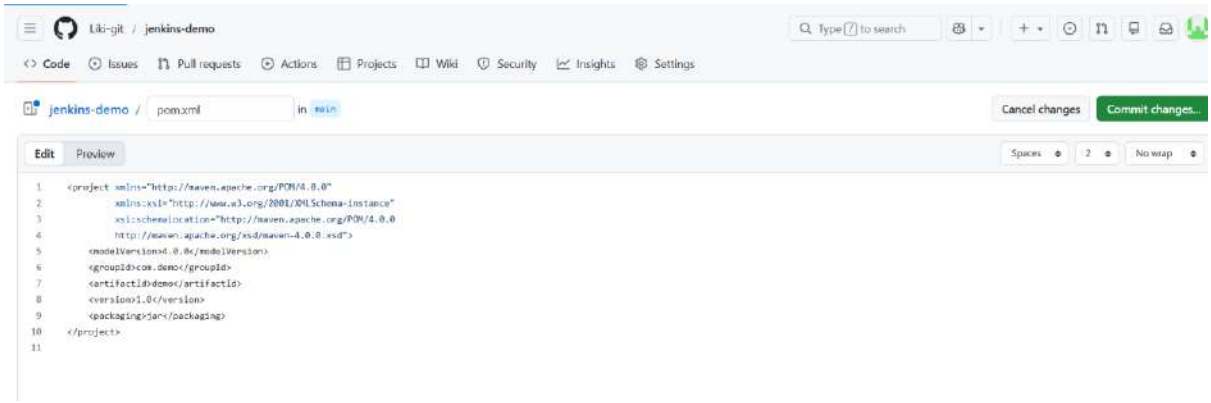

Building until all stages become success(Error handling)

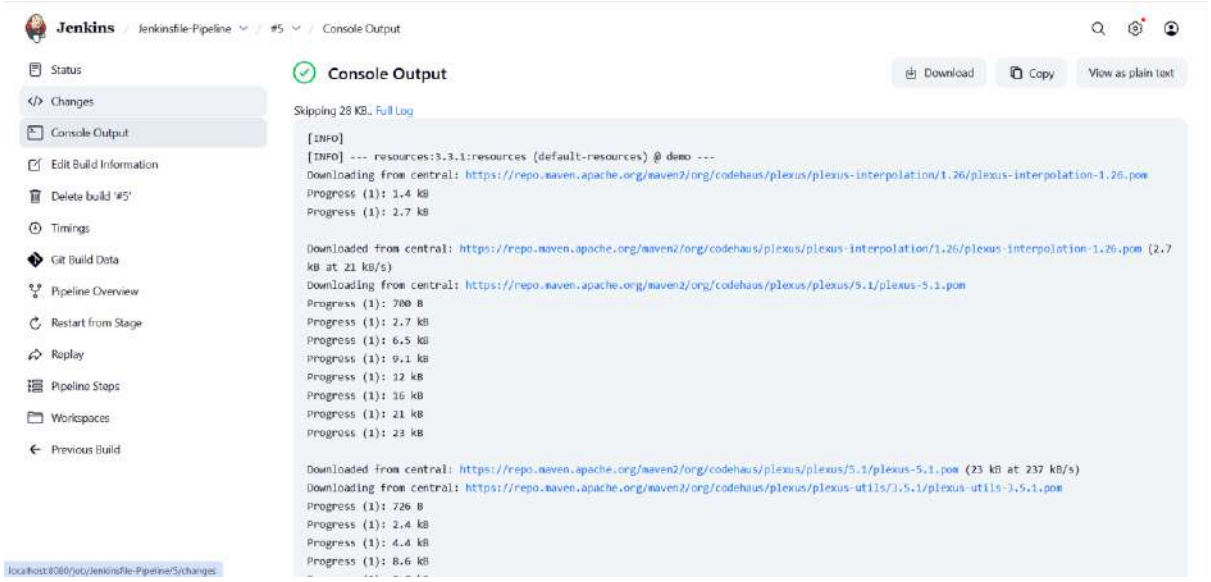

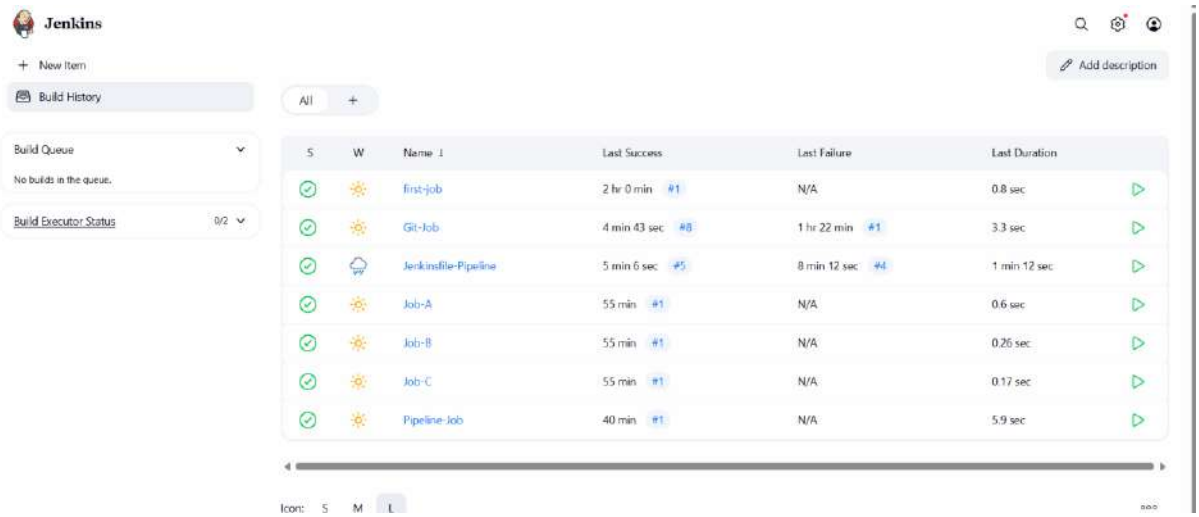

VII. Learning Goal

Manage Jenkins infrastructure

1. User & Role management
2. Node (Agent) configuration
3. Backup & Restore
4. Plugin management
5. Security best practices

6. Jenkins upgrade process

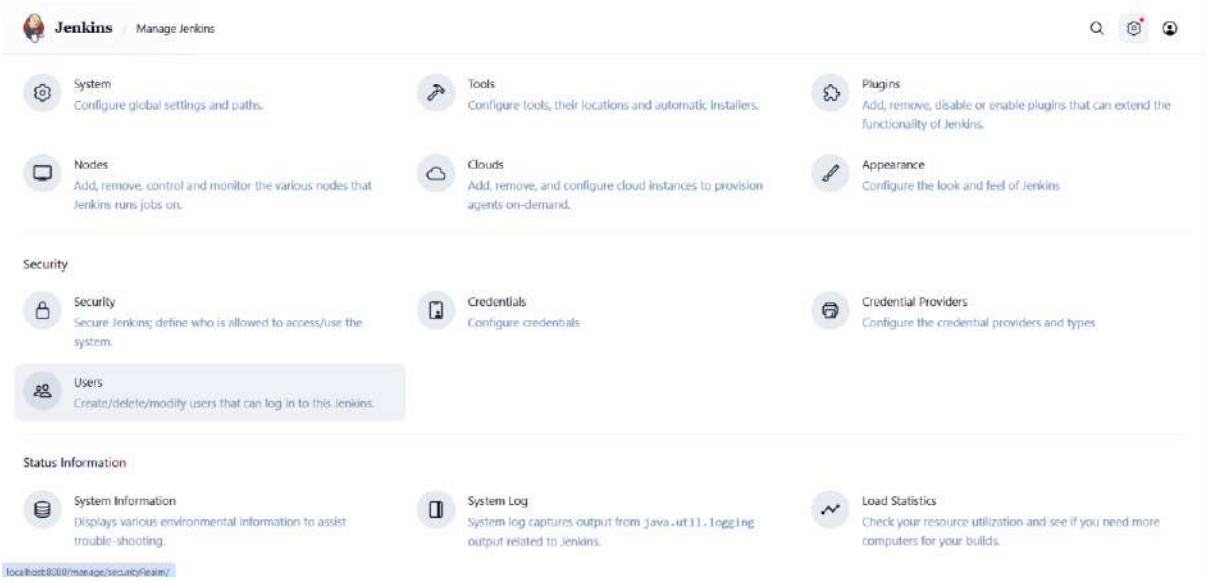

Jenkins / Jenkins' own user database / ABcdefg

ABcdefg

Add description

- Profile
- Builds
- My Views
- Account
- Appearance
- Preferences
- Security
- Experiments
- Credentials
- Delete

Jenkins User ID: ABcd123

localhost:8080

REST API Jenkins 2.528.3

Jenkins / Manage Jenkins / Nodes

Nodes

+ New Node | Configure Monitors

S	Name ↓	Architecture	Clock Difference	Free Disk Space	Free Swap Space	Free Temp Space	Response Time
	Built-In Node	Windows 11 (amd64)	In sync	62.09 GiB	2.36 GiB	62.09 GiB	0ms
	Data obtained	**16 min**	**16 min**	**16 min**	**16 min**	**16 min**	**16 min**

Icon: S M L

Legend

Jenkins / Manage Jenkins / Nodes / Built-In Node / Configure

- Status
- Configure
- Build History
- Load Statistics
- Script Console

Build Executor Status 0/2

Number of executors ?

2

Labels ?

Usage ?

Use this node as much as possible

Node Properties

- Disable deferred wipeout on this node ?
- Disk Space Monitoring Thresholds
- Environment variables

Save Apply

REST API Jenkins 2.528.3

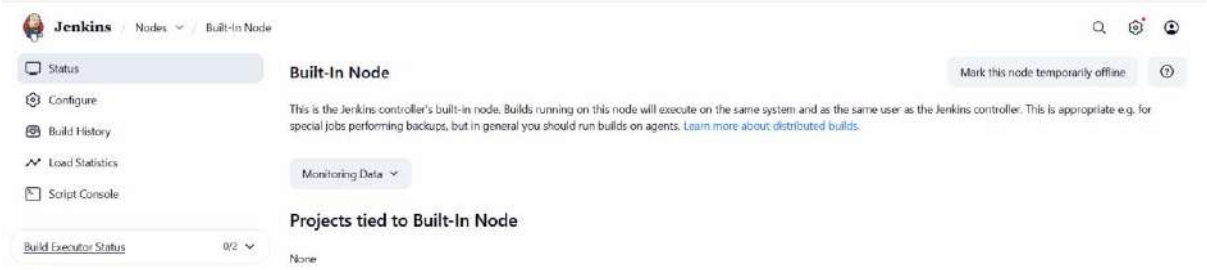

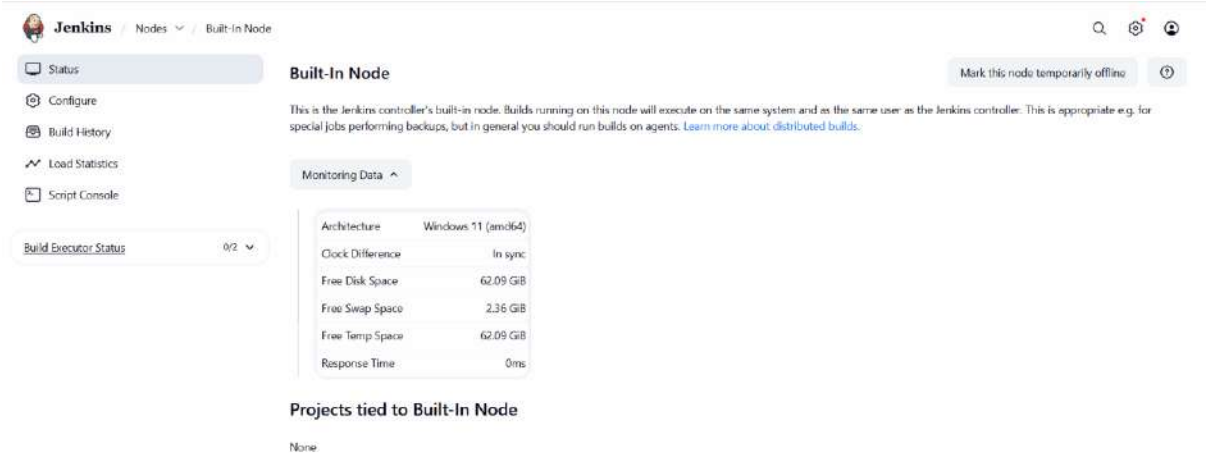

Stopping Jenkins

```
2026-02-04 16:46:50.793+0000 [id=43]    INFO    winstone.Logger#logInternal: JVM is terminating. Shutting down Jetty
2026-02-04 16:46:50.814+0000 [id=43]    INFO    org.eclipse.jetty.server.Server#doStop: Stopped oejs.Server@1ab3a8c8{STOPPING}[12.0.25,sto=0]
2026-02-04 16:46:50.891+0000 [id=43]    INFO    o.e.j.server.AbstractConnector#doStop: Stopped ServerConnector@5b69fd74{HTTP/1.1, (http/1.1)}{0.0.0.0:8080}
2026-02-04 16:46:50.994+0000 [id=43]    INFO    hudson.lifecycle.Lifecycle#onStatusUpdate: Stopping Jenkins
2026-02-04 16:46:51.199+0000 [id=43]    INFO    jenkins.model.Jenkins$17#onAttained: Started termination
2026-02-04 16:46:51.334+0000 [id=43]    INFO    h.p.b.global.Lifecycle#shutdown: Shutdown complete - Global TimeOut ScheduledExecutorService had 0 tasks pen
ding
2026-02-04 16:46:51.334+0000 [id=43]    INFO    jenkins.model.Jenkins$17#onAttained: Completed termination
2026-02-04 16:46:51.336+0000 [id=43]    INFO    jenkins.model.Jenkins#_cleanUpDisconnectComputers: Starting node disconnection
2026-02-04 16:46:51.369+0000 [id=43]    INFO    jenkins.model.Jenkins#_cleanUpShutdownPluginManager: Stopping plugin manager
2026-02-04 16:46:51.699+0000 [id=43]    INFO    jenkins.model.Jenkins#_cleanUpPersistQueue: Persisting build queue
2026-02-04 16:46:51.709+0000 [id=43]    INFO    jenkins.model.Jenkins#_cleanUpAwaitDisconnects: Waiting for node disconnection completion
2026-02-04 16:46:51.711+0000 [id=43]    INFO    hudson.lifecycle.Lifecycle#onStatusUpdate: Jenkins stopped
```

Storing in D: drive for backup and restoring

*Used when system crashes or Jenkins breaks.

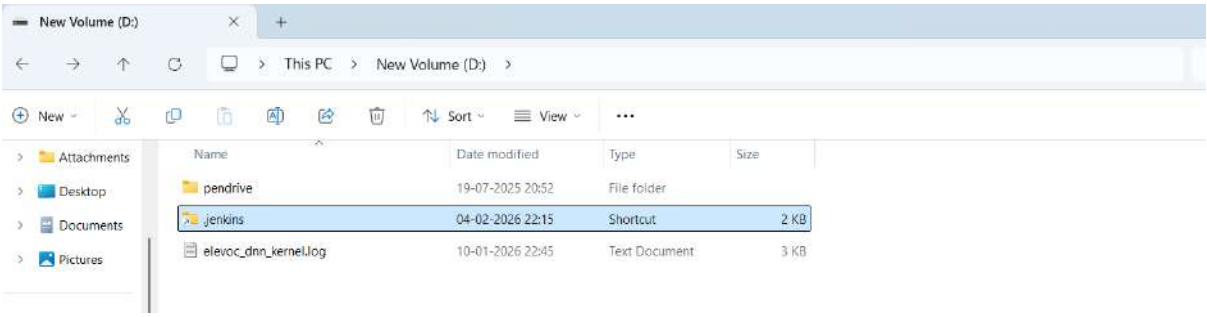

Deleting the existing one from C:Drive

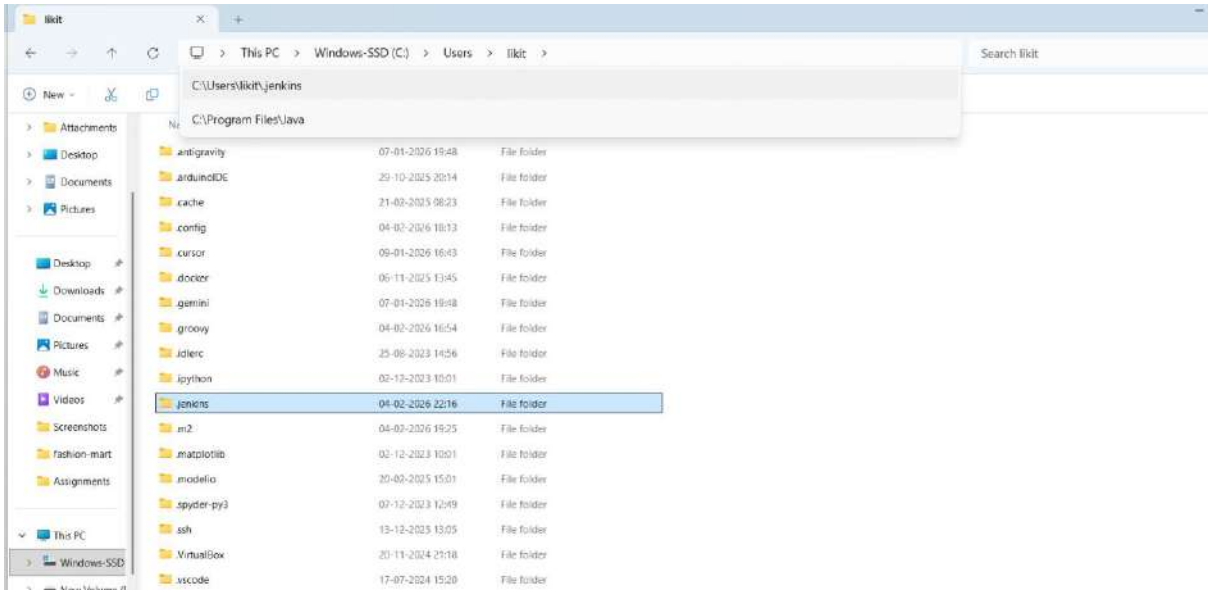

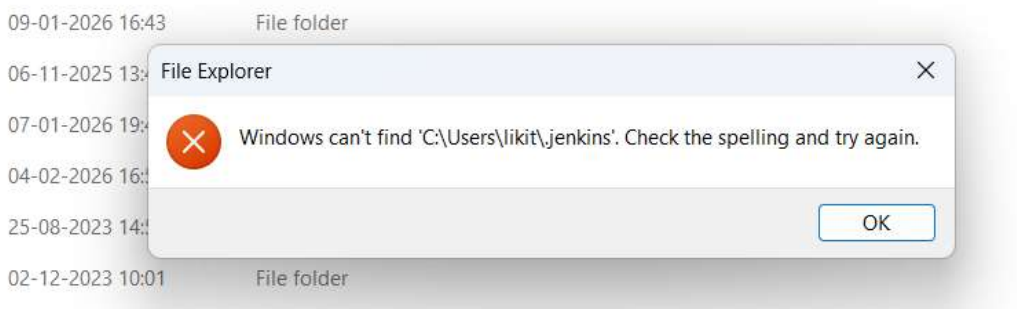

Copy from backup location:

Restoring from D:drive to C:drive

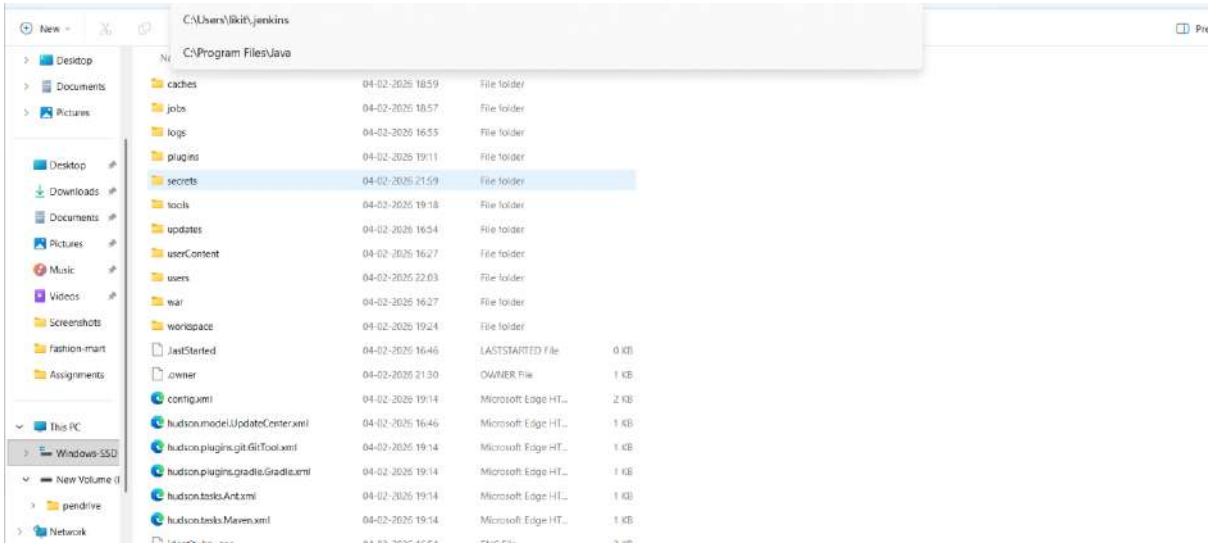

Starting Jenkins again from cmd (from C:Drive)

```
C:\Users\likit\Downloads>java -jar jenkins.war
Running from: C:\Users\likit\Downloads\jenkins.war
webroot: C:\Users\likit\.jenkins\war
2026-02-04 17:00:26.834+0000 [id=1]     INFO    winstone.Logger#logInternal: Beginning extraction from war file
2026-02-04 17:00:27.027+0000 [id=1]     WARNING o.e.j.ee9.nested.ContextHandler#setContextPath: Empty contextPath
2026-02-04 17:00:27.233+0000 [id=1]     INFO    org.eclipse.jetty.server.Server#doStart: jetty-12.8.25; built: 2025-08-11T23:52:37.219Z; git: a862b76d8372e2
4285765182d9ae1d1d333ce2ea; jvm 21.0.10+8-LTS-217
2026-02-04 17:00:29.248+0000 [id=1]     INFO    o.e.j.e.w.StandardDescriptorProcessor#visitServlet: NO JSP Support for /, did not find org.eclipse.jetty.ee9
.jsp.JettyJspServlet
2026-02-04 17:00:29.364+0000 [id=1]     INFO    o.e.j.s.DefaultSessionIdManager#doStart: Session workerName=node0
2026-02-04 17:00:30.391+0000 [id=1]     INFO    hudson.WebAppMain#contextInitialized: Jenkins home directory: C:\Users\likit\.jenkins found at: $user.home/.
jenkins
2026-02-04 17:00:30.666+0000 [id=1]     INFO    o.e.j.s.handler.ContextHandler#doStart: Started oeje9n.ContextHandler$CoreContextHandler@6f6a7463{Jenkins v2
.528.3,/,b=file:///C:/Users/likit/.jenkins/war/,a=AVAILABLE,h=oeje9n.ContextHandler$CoreContextHandler$CoreToNestedHandler@1bdaa23d{STARTED}}
2026-02-04 17:00:30.733+0000 [id=1]     INFO    o.e.j.server.AbstractConnector#doStart: Started ServerConnector@5b69fd74{HTTP/1.1, (http/1.1)}{0.0.0.0:8080}
2026-02-04 17:00:30.772+0000 [id=1]     INFO    org.eclipse.jetty.server.Server#doStart: Started oejs.Server@1ab3a8c8{STARTING}[12.0.25,sto=0] @5248ms
2026-02-04 17:00:30.775+0000 [id=42]    INFO    winstone.Logger#logInternal: Winstone Servlet Engine running: controlPort=disabled
2026-02-04 17:00:31.073+0000 [id=41]    INFO    jenkins.model.Jenkins#<init>: Starting version 2.528.3
2026-02-04 17:00:31.294+0000 [id=50]    INFO    jenkins.InitReactorRunner$1#onAttained: Started initialization
2026-02-04 17:00:31.896+0000 [id=71]    INFO    jenkins.InitReactorRunner$1#onAttained: Listed all plugins
2026-02-04 17:00:39.363+0000 [id=62]    INFO    jenkins.InitReactorRunner$1#onAttained: Prepared all plugins
2026-02-04 17:00:39.401+0000 [id=49]    INFO    jenkins.InitReactorRunner$1#onAttained: Started all plugins
2026-02-04 17:00:39.408+0000 [id=63]    INFO    jenkins.InitReactorRunner$1#onAttained: Augmented all extensions
2026-02-04 17:00:39.796+0000 [id=49]    INFO    h.p.b.g.GlobalTimeOutConfiguration#load: global timeout not set
2026-02-04 17:00:41.408+0000 [id=55]    INFO    jenkins.InitReactorRunner$1#onAttained: System config loaded
2026-02-04 17:00:41.409+0000 [id=53]    INFO    jenkins.InitReactorRunner$1#onAttained: System config adapted
2026-02-04 17:00:41.573+0000 [id=65]    INFO    jenkins.InitReactorRunner$1#onAttained: Loaded all jobs
2026-02-04 17:00:41.589+0000 [id=62]    INFO    jenkins.InitReactorRunner$1#onAttained: Configuration for all jobs updated
2026-02-04 17:00:41.652+0000 [id=55]    INFO    jenkins.InitReactorRunner$1#onAttained: Completed initialization
2026-02-04 17:00:41.702+0000 [id=41]    INFO    hudson.lifecycle.Lifecycle#onReady: Jenkins is fully up and running
```