

VISVESVARAYA TECHNOLOGICAL UNIVERSITY

“JnanaSangama”, Belgaum -590014, Karnataka.



LAB REPORT
on

COURSE TITLE

Submitted by

Likith R(1BM21CS151)

in partial fulfillment for the award of the degree of
BACHELOR OF ENGINEERING
in
COMPUTER SCIENCE AND ENGINEERING



B.M.S. COLLEGE OF ENGINEERING
(Autonomous Institution under VTU)
BENGALURU-560019
October-2023 to Feb-2024

B. M. S. College of Engineering,
Bull Temple Road, Bangalore 560019
(Affiliated To Visvesvaraya Technological University, Belgaum)
Department of Computer Science and Engineering



CERTIFICATE

This is to certify that the Lab work entitled “Compiler Design” carried out by **Likith R (1BM21CS151)**, who is bonafide student of **B. M. S. College of Engineering**. It is in partial fulfillment for the award of **Bachelor of Engineering in Computer Science and Engineering** of the Visvesvaraya Technological University, Belgaum during the year 2023. The Lab report has been approved as it satisfies the academic requirements in respect of a **Compiler Design course (21CS5PCCPD)**work prescribed for the said degree.

Lohith JJ

Assistant Professor
Department of CSE
BMSCE, Bengaluru

Dr. Jyothi S Nayak

Professor and Head
Department of CSE
BMSCE, Bengaluru

Index

Sl. No.	Date	Experiment Title	Page No.
01		Write a program to design Lexical Analyzer in (to recognize any five keywords, identifiers, numbers, operators, and punctuations)	
02		Write a program in LEX to recognize Floating Point Numbers.	
03		Write a program in LEX to recognize different tokens: Keywords, Identifiers, Constants, Operators and Punctuation symbols.	
04		Write a LEX program that copies a file, replacing each nonempty sequence of white spaces by a single blank.	
05		<p>Write a LEX program to recognize the following tokens over the alphabets {0,1,...,9}</p> <ul style="list-style-type: none"> A. The set of all string ending in 00. B. The set of all strings with three consecutive 222's. C. The set of all string such that every block of five consecutive symbols contains at least two 5's. D. The set of all strings beginning with a 1 which, interpreted as the binary representation of an integer, is congruent to zero modulo 5. E. The set of all strings such that the 10th symbol from the right end is 1. F. The set of all four digits numbers whose sum is 9 G. The set of all four digital numbers, whose H. individual digits are in ascending order from left to right. 	
06		<p>Write a program to implement</p> <ul style="list-style-type: none"> A. Recursive Descent Parsing with back tracking (Brute Force Method). $S \rightarrow cAd$, $A \rightarrow ab/a$ B. Recursive Descent Parsing with back tracking (Brute Force Method). $S \rightarrow cAd$, $A \rightarrow a/ab$ 	
07		<p>Write a program to implement: Recursive Descent Parsing with back tracking (Brute Force Method).</p> <ul style="list-style-type: none"> A. $S \rightarrow aaSaa \mid aa$ B. $S \rightarrow aaaSaaa \mid aa$ C. $S \rightarrow aaaaSaaaa \mid aa$ D. $S \rightarrow aaaSaaa \mid aSa \mid aa$ 	
08		Write a program to design LALR parsing using YACC	
09		Use YACC to Convert Binary to Decimal (including fractional numbers)	
10		Use YACC to implement, evaluator for arithmetic expressions (Desktop calculator)	
11		Use YACC to convert: Infix expression to Postfix expression.	
12		Use YACC to generate Syntax tree for a given expression	

13		Use YACC to generate 3-Address code for a given expression	
14		Use YACC to generate the 3-Address code which contains Arrays.	

Experiment No :01

Aim of the program

Write a program to design Lexical Analyzer in C/C++/Java/Python Language (to recognize any five keywords, identifiers, numbers, operators and punctuations)

Program

```
def analyze_input(input_text):  
    keywords = ["char", "float", "bool", "int", "for", "break", "continue"]  
    punctuation = [".", "!", ";", "?"]  
    operators = ["+", "-", "*", "/", "%", "="]  
  
    keys, ids, nums, ops, punct = 0, 0, 0, 0, 0  
  
    for i in input_text.split():  
        if i in keywords:  
            if keys < 5:  
                print(f'{i} is a keyword!\n')  
                keys += 1  
        elif i in punctuation:  
            if punct < 5:  
                print(f'{i} is a punctuation!\n')  
                punct += 1  
        elif i in operators:  
            if ops < 5:  
                print(f'{i} is an operator!\n')  
                ops += 1  
        elif i.isnumeric():  
            if nums < 5:  
                print(f'{i} is a number!\n')
```

```
        nums += 1
else:
    if ids < 5:
        flag = False
        if i[0].isalpha() or i[0] == '_':
            flag = True
        for j in i[1:]:
            if j in operators or j in punctuation:
                print(f'{i} is an invalid token!\n')
                flag = False
                break
        if flag:
            print(f'{i} is an identifier!\n')
            ids += 1
    else:
        print(f'{i} is an invalid token!\n')
```

```
while True:
    user_input = input("Enter your input! Enter blank next line to end: ")
    if not user_input.strip():
        break
    analyze_input(user_input)
```

Output – Screen shot

```
likith303@Likiths-MacBook-Pro ~ % Enter Input:int l303 3 -  
int is an keyword  
  
l303 is a identifier  
  
3 is a number  
  
- Is operator
```

Experiment No :02

Aim of the program


Write a program in LEX to recognize Floating Point Numbers.

Program

```
%{
#include<stdio.h>
int flag=0;
%}
alpha[a-zA-Z]
digit[0-9]
decimal[.]
%%
[+|-]?({digit})*{decimal}({digit})* { flag=1;}
{alpha}({alpha}){digit}* {printf("invalid number ");}
\n return 0;
%%
int yywrap(){
int main()
{ printf("enter :")
); yylex();
if(flag==1){ printf("floating point number");}
else{printf(" not a floating point number");}
}

}
```

Output – Screen shot



```
likith303@Likiths-MacBook-Pro ~ % Enter:303.03
Floating Number
```


Experiment No :03

Aim of the program

Write a program in LEX to recognize different tokens: Keywords, Identifiers, Constants, Operators and Punctuation symbols.

Program

```
%{  
#include<stdio.h>  
  
int x1=0,x2=0,x3=0,x4=0;  
  
%}  
  
alpha[a-zA-Z]  
  
digit[0-9]  
  
d[.]  
  
%%  
  
int|float|char { x1++;}  
  
{digit}+ {x2++;} [<|>|=|  
<=|>|=|=] {x3++;}  
  
{alpha}({digit}|{alpha})* {x4++;}  
  
\n { printf("\nkey:  
%d",x1); printf("\nconst:  
%d",x2);  
  
printf("\noperator:%d",x3);  
printf("\nidentifier:%d",x4);  
  
}  
  
%%  
  
int yywrap(){} int main(){ printf("enter:");  
yylex();  
  
}
```

Output – Screen shot

```
likith303@Likiths-MacBook-Pro ~ % Enter: 303 int lra3 < float>  
Key:2  
Const:1  
Operator:2  
Indentifier:15
```

Experiment No :04

Aim of the program

Write a LEX program that copies a file, replacing each nonempty sequence of white spaces by a single blank.

Program

```
%{  
#include<stdio.h>  
%}  
%%  
  
[ ]([ ])* {fprintf(yyout," ");}  
([ ])*(\n)([ ])* {fprintf(yyout," ");}  
%%  
  
int yywrap(){}  
int main()  
{ printf("running"  
);  
yyin=fopen("txt","r");  
yyout=fopen("txto","w");  
yylex();  
}
```

Output – Screen shot



```
likith303@Likiths-MacBook-Pro ~ % likith from bmsce 303
```

Experiment No :05

Aim of the program

Write a LEX program to recognize the following tokens over the alphabets {0,1,...,9}

- a) The set of all string ending in 00.
- b) The set of all strings with three consecutive 222's.
- c) The set of all string such that every block of five consecutive symbols contains at least two 5's.
- d) The set of all strings beginning with a 1 which, interpreted as the binary representation of an integer, is congruent to zero modulo 5.
- e) The set of all strings such that the 10th symbol from the right end is 1.
- f) The set of all four digits numbers whose sum is 9
- g) The set of all four digital numbers, whose individual digits are in ascending order from left to right.

Program

```
%{  
#include<stdio.h>  
  
int x1=0,x2=0,x3=0,x4=0;  
  
%}  
  
alpha[a-zA-Z]  
  
digit[0-9]  
  
d[.]  
  
%%  
  
( {digit} ) * 00 {printf("\n%s rule A",yytext);}   
  
( {digit} ) * 222 ( {digit} ) * {printf("\n%s rule B",yytext);}   
  
( 1 ( 0 ) * ( 11 | 01 ) ( 01 * 01 | 00 * 10 ( 0 ) * ( 11 | 1 ) ) * 0 ) ( 1 | 10 ( 0 ) * ( 11 | 01 ) ( 01 * 01 | 00 * 10 ( 0 ) * ( 11 | 1 ) ) * 10 ) *  
{printf("\n%s rule D",yytext);} ( {digit} ) * 1 {digit}  
  
{ 9 } {printf("\n%s rule E",yytext);}   
  
{digit} {4} {  
  
int sum=0;  
  
for(int i=0;i<4;i++){
```

```

sum=sum+yytext[i]-48;
}
if(sum==9) {printf("\n%s rule F",yytext);}
sum=1;
for(int j=0;j<3;j++)
{ if(yytext[j]>yytext[j+1])
sum=0;
}
if(sum==1) {printf("\n%s rule G",yytext);}

}

{d}* {int i=0; int c=0;
if(yyleng<5) {break;}
for(i=0;i<5;i++)
{ if(yytext[i]=='5') c++;

}
if(c<2) {break;}

else{

for(;i<yyleng;i++)
{ if(yytext[i-5]=='5')
c--; if(yytext[i]=='5')
c++; if(c<2) break;

}
if(i==yyleng) {printf("\n %s rule C",yytext);}

```

```
}
```

```
}
```

```
%%
```

```
int yywrap() {}
```

```
int main()
```

```
{ printf("enter:"
```

```
); yylex();
```

```
}
```

Output – Screen shot



```
likith303@Likiths-MacBook-Pro ~ % Input:100 30303 3000000003 3030 9876 1234
100 Rule A
30303 Rule B
3000000003 Rule D
3030 Rule G
9876 Rule E
1234 Rule c
```

Part-B:

Experiment No :01

Aim of the program

1. Write a program to implement

(a) Recursive Descent Parsing with back tracking (Brute Force Method). $S \rightarrow cAd$, $A \rightarrow ab/a$

(b) Recursive Descent Parsing with back tracking (Brute Force Method). $S \rightarrow cAd$, $A \rightarrow a/ab$

Program

```
#include<stdio.h>
#include<conio.h>
#include<string.h>
int A();
char str[15];
int isave,curr_ptr=0;
int main(void)
{
    //clrscr();
    printf("1.S->cAd\n2.A->ab/a\n");
    printf("this is parser for the above grammar:\n");
    printf("Enter any string:");
    scanf("%s",str);
    while(curr_ptr<strlen(str))
    {
        //S has only one immediate derivation which is cAd
        //match with c
        if (str[curr_ptr]=='c')
        {
            curr_ptr++;
            //call function to match A
            if (A()) //checking the productions of A->ab/a
            {
                curr_ptr++;
                //match d
                if (str[curr_ptr]=='d' && str[curr_ptr+1]=='\0')
                {
                    //success
                    printf("string is accepted by the grammar");
                    getch();
                    return 1;
                }
            }
            else break;
        }
        else break;
    }
}
```

```

}
else break;
}
//incase any of them fail to match return negatively.
printf("string is not accepted by the grammar");
//getch();
return 0;
}
int A() //sub function A()
{
isave=curr_ptr;

if (str[curr_ptr]=='a')
{
curr_ptr++;
if(str[curr_ptr]=='b')
return 1;
}
curr_ptr=isave; //return to start
//check if a is matched and return accordingly.
if(str[curr_ptr]=='a')
return 1;
else
return 0;
}

```


Output – Screen shot

```
1.S->cAd
2.A->ab/a
this is parser for the above grammar:
Enter any string:cdd
string is not accepted by the grammar
```

```
1.S->cAd
2.A->ab/a
this is parser for the above grammar:
Enter any string:cabd
string is accepted by the grammar
```

Part-C:

Experiment No :02

Aim of the program

Use YACC to Convert Binary to Decimal (including fractional numbers)

Program

p.y

```
%{  
#include<stdio.h>  
#include<stdlib.h>  
#include<math.h>  
void yyerror(char *s);  
float x = 0;  
%}  
%token ZERO ONE POINT  
%%  
L: X POINT Y {printf("%f", $1+x);}   
| X {printf("%d", $$);}   
X: X B {$$=$1*2+$2;}   
| B {$$=$1;}   
Y: B Y {x=$1*0.5+x*0.5;}   
| {}   
B:ZERO {$$=$1;}   
|ONE {$$=$1;}   
%%  
  
int main()  
{  
printf("Enter the binary number : ");
```

```
while(yyparse());  
printf("\n");  
}
```

```
void yyerror(char *s)  
{  
    fprintf(stdout, "\n%s", s);  
}
```

p.l

```
%{
```

```
#include<stdio.h>
```

```
#include<stdlib.h>
```

```
#include"y.tab.h"
```

```
extern int yyval;
```

```
%}
```

```
%%
```

```
1.{yyval=0;return ZERO;}
```

```
2.{yyval=1;return ONE;}
```

```
"." {return POINT;}
```

```
[ \t] {;}
```

```
\n return 0;
```

```
%%
```

Output – Screen shot

```
likith303@Likiths-MacBook-Pro ~ % Enter Number:1111  
15
```

Experiment No :03

Aim of the program

Use YACC to implement, evaluator for arithmetic expressions (Desktop calculator)

Program

p.y

```
%{
```

```
    #include<stdio.h>
```

```
    int flag=0;
```

```
int yylex();
```

```
int yyerror();
```

```
%}
```

```
%token NUMBER
```

```
%left '+' '-'
```

```
%left '*' '/'
```

```
%left '%'
```

```
%right '^'
```

```
%left '(' ')'
```

```
%%
```

```
ArithmeticExpression: E{
```

```
    printf("\nResult=%d\n",$$);
```

```
    return 0;
```

```
}
```

```
E:E+'E' {$$=$1+$3;}
```

```
|E-'E' {$$=$1-$3;}
```

```
|E'*'E {$$=$1*$3;}
```

```
|E'E {$$=$1/$3;}
```

```
|E'%E {$$=$1%$3;}
```

```
|E'^E {$$=$1^$3;}
```

```
|('E') {$$=$2;}
```

```
| NUMBER {$$=$1;}
```

```
;
```

```
%%
```

```
void main()
```

```
{
```

```
    printf("\nEnter Any Arithmetic Expression which can have operations Addition, Subtraction,  
    Multiplication, Division, Modulus and Round brackets:\n");
```

```
    yyparse();
```

```
    if(flag==0)
```

```
        printf("\nEnter arithmetic expression is Valid\n\n");
```

```
}
```

```
int yyerror()
```

```
{
```

```
    printf("\nEnter arithmetic expression is Invalid\n\n");
```

```
    flag=1;
```

```
    return 0;
```

```
}
```

P.I

```
%{
```

```
#include<stdio.h>

#include "y.tab.h"

extern int yylval;

%}

%%

[0-9]+ {
    yylval=atoi(yytext);
    return NUMBER;
}

[\\t] ;

[\\n] return 0;

. return yytext[0];

%%

int yywrap()

{
    return 1;
}
```

Output – Screen shot

```
likith303@Likiths-MacBook-Pro ~ % Enter Expression: 2*3%4+5  
Result=7
```


Experiment No :04

Aim of the program

Use YACC to convert: Infix expression to Postfix expression.

Program

p.y

```
%{
```

```
#include <ctype.h>
```

```
#include <stdio.h>
```

```
#include <stdlib.h>
```

```
int yylex();
```

```
%}
```

```
%token digit
```

```
%%
```

```
S: E {printf("\n\n");}
```

```
;
```

```
E: E '+' T { printf ("+" );}
```

```
| E '-' T { printf ("-");}
```

```
| T
```

```
;
```

```
T: T '*' P { printf ("*");}
```

```
| T '/' P { printf ("/");}
```

```
| P
```

```
;
```

```
P: F '^' P { printf ("^");}
```

```
| F
```

;

F: '(' E ')'

| digit {printf("%d", \$1);}

;

%%

int main()

{

printf("Enter infix expression: ");

yyparse();

}

yyerror()

{

printf("NITW Error");

}

p.l

%{

#include "y.tab.h"

extern int yylval;

%}


%%

[0-9]+ {yylval=atoi(yytext); return digit;}

[\t] ;

```
[\n] return 0;  
. return yytext[0];  
%%
```

Output – Screen shot



A terminal window screenshot with a dark background. The prompt is 'likith303@Likiths-MacBook-Pro ~ %'. The command entered is 'Enter infix expression: 2+3*4*5'. The output shown is '234*5*+'.

```
likith303@Likiths-MacBook-Pro ~ % Enter infix expression: 2+3*4*5  
234*5*+
```

Experiment No :05

Aim of the program

Use YACC to generate Syntax tree for a given expression

Program

p.y

```
%{
#include<math.h>
#include<ctype.h>
#include<stdio.h>
#include<stdlib.h>
#include<string.h>
#include "y.tab.h"

struct tree_node {
    char val[10];
    int lc;
    int rc;
};

int ind;
struct tree_node syn_tree[100];

void my_print_tree(int cur_ind);
int mknnode(int lc, int rc, const char *val);

int yylex(void);
void yyerror(const char *s);
%}

%token digit
%%
/* print the tree after evaluating E */
S: E { my_print_tree($1); }
;

E: E '+' T { $$= mknnode($1, $3, "+"); }
  | E '-' T { $$= mknnode($1, $3, "-"); }
  | T { $$= $1; }
;

T: T '*' F { $$= mknnode($1, $3, "*"); }
  | T '/' F { $$= mknnode($1, $3, "/"); }
  | F { $$= $1; }
;
```

```
F: P '^' F { $$= mknnode($1, $3, "^"); }
| P { $$= $1; }
;
```

```
P: '(' E ')' { $$= $2; }
| digit { char buf[10]; sprintf(buf, "%d", yylval); $$= mknnode(-1, -1, buf); }
%%
```

```
int main() {
    ind=0;
    printf("Enter an expression\n");
    yyparse();
    return 0;
}
```

```
void yyerror(const char *s)
{ printf("NITW Error: %s\n", s);
}
```

```
int mknnode(int lc, int rc, const char *val) {
    strcpy(syn_tree[ind].val, val);
    syn_tree[ind].lc = lc;
    syn_tree[ind].rc = rc;
    ind++;
    return ind-1;
}
```

```
void my_print_tree(int cur_ind)
{ if (cur_ind == -1)
    return;

    if (syn_tree[cur_ind].lc == -1 && syn_tree[cur_ind].rc == -1)
        printf("Digit Node -> Index: %d, Value: %s\n", cur_ind, syn_tree[cur_ind].val);
    else
        printf("Operator Node -> Index: %d, Value: %s, Left Child Index: %d, Right Child Index: %d\n",
            cur_ind, syn_tree[cur_ind].val, syn_tree[cur_ind].lc, syn_tree[cur_ind].rc);

    my_print_tree(syn_tree[cur_ind].lc);
    my_print_tree(syn_tree[cur_ind].rc);
}
```

p.l

```
%{
```

```
#include "y.tab.h"
```

```
%}
```

```
%%
```

```
[0-9]+ { yylval=atoi(yytext); return digit; }
```

```
[t] ;
```

```
[n] return 0;
```

```
. return yytext[0];
```

%%

Output – Screen shot

```
likith303@Likiths-MacBook-Pro ~ % Enter expression: 8*9/3
Operator Node -> Index:4, Value: /, Left Child Index: 2, Right child index: 3
Operator Node -> Index:2, Value: *, Left Child Index: 0, Right child index: 1
Digit Node => Index: 0, Value: 8
Digit Node => Index: 1, Value: 9
Digit Node => Index: 3, Value: 3
```

Experiment No :06

Aim of the program

Use YACC to generate 3-Address code for a given expression

Program

p.y

```
%{  
#include <math.h>  
#include <ctype.h>  
#include <stdio.h>  
int var_cnt=0;  
char iden[20];  
%}  
%token digit  
%token id  
%%  
  
S:id '=' E { printf("%s = t%d\n",iden, var_cnt-1); }  
E:E '+' T { $$=var_cnt; var_cnt++; printf("t%d = t%d + t%d;\n", $$, $1, $3 );  
}  
E:E '-' T { $$=var_cnt; var_cnt++; printf("t%d = t%d - t%d;\n", $$, $1, $3 );  
}  
T { $$=$1; }  
;  
T:T '*' F { $$=var_cnt; var_cnt++; printf("t%d = t%d * t%d;\n", $$, $1, $3 ); }  
T:T '/' F { $$=var_cnt; var_cnt++; printf("t%d = t%d / t%d;\n", $$, $1, $3 ); }  
F { $$=$1 ; }  
;
```

```

F:P '^' F { $$=var_cnt; var_cnt++; printf("t%d = t%d ^ t%d;\n", $$, $1, $3 );}
| P { $$ = $1;}
;

```

```

P: '(' E ')' { $$=$2; }
|digit { $$=var_cnt; var_cnt++; printf("t%d = %d;\n",$$,$1); }
;

```

```

%%

```

```

int main()
{
var_cnt=0;
printf("Enter an expression : \n");
yyparse();
return 0;
}
yyerror()
{
printf("NITW Error\n");
}

```

p.l

```

%{

```

```

#include<stdio.h>

```

```

#include<stdlib.h>

```

```

#include"y.tab.h"

```

```

extern int yylval;

```

```


extern char iden[20];

```



```
%}  
d [0-9]+  
a [a-zA-Z]+  
%%  
{d} { yylval=atoi(yytext); return digit; }  
{a} { strcpy(iden,yytext); yylval=1; return id; }  
[ \t] {;}  
\n return 0;  
. return yytext[0];  
%%
```

Output – Screen shot

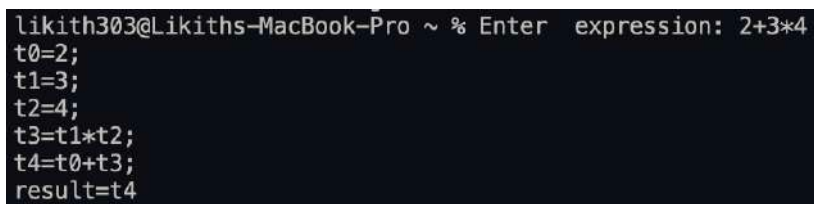

```
likith303@Likiths-MacBook-Pro ~ % Enter expression: 2+3*4  
t0=2;  
t1=3;  
t2=4;  
t3=t1*t2;  
t4=t0+t3;  
result=t4
```