KWIKFLO
PUMP STATIONS & TRADE WASTE

Kwikflo Oil Water Separator Systems

The Kwikflo coalescing plate separator is an enhanced gravity separator capable of removing oils & solids. It utilizes the difference in specific gravity between two or three imminiscible components of a liquid stream for separation.




Oily water influent is introduced into an inlet chamber by means of a pump. Heavy solids settle out and 100% oil slugs rise immediately to the surface. The remaining oily water mixture flows through a stack of closely spaced, corrugated polypropylene plates. Both the smaller oil droplets and the fine solids are progressively separated. Downstream a baffle or oil dam prevents the collected oil from entering the outlet weir.

Drains are provided in the sludge hopper for the removal of solids. Oil skimmers are provided for the manual or automatic removal of oil. Regular cleaning of the plate packs with hot water is the only maintenance requirement under normal operating conditions.




KWIKFLO
PUMP STATIONS & TRADE WASTE


Typical arrangement for Indoor/Outdoor installation

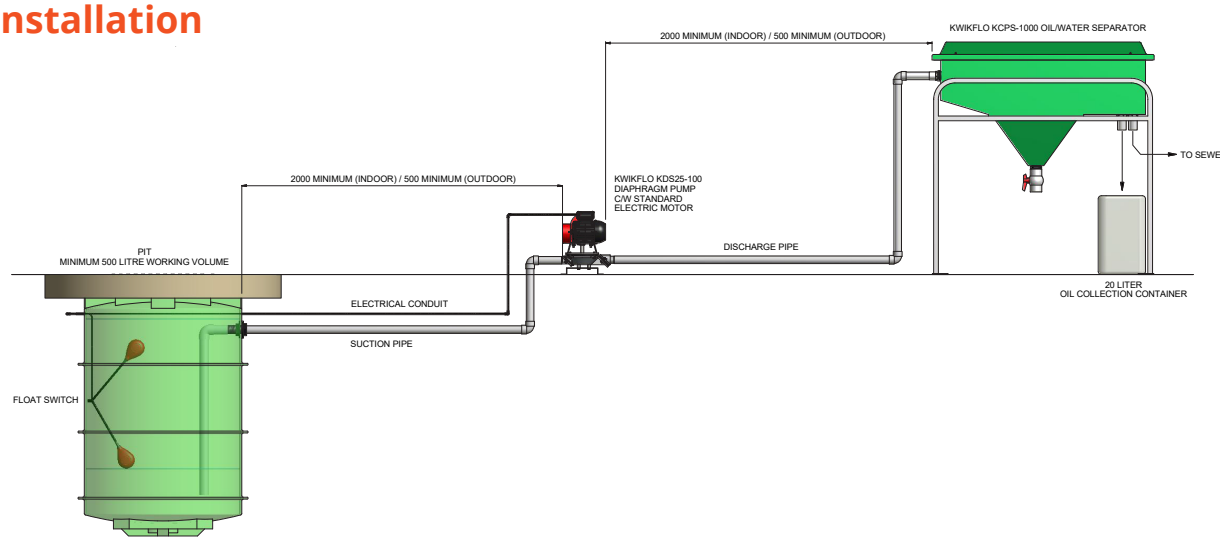

Typical arrangement for Pumping to Sewer

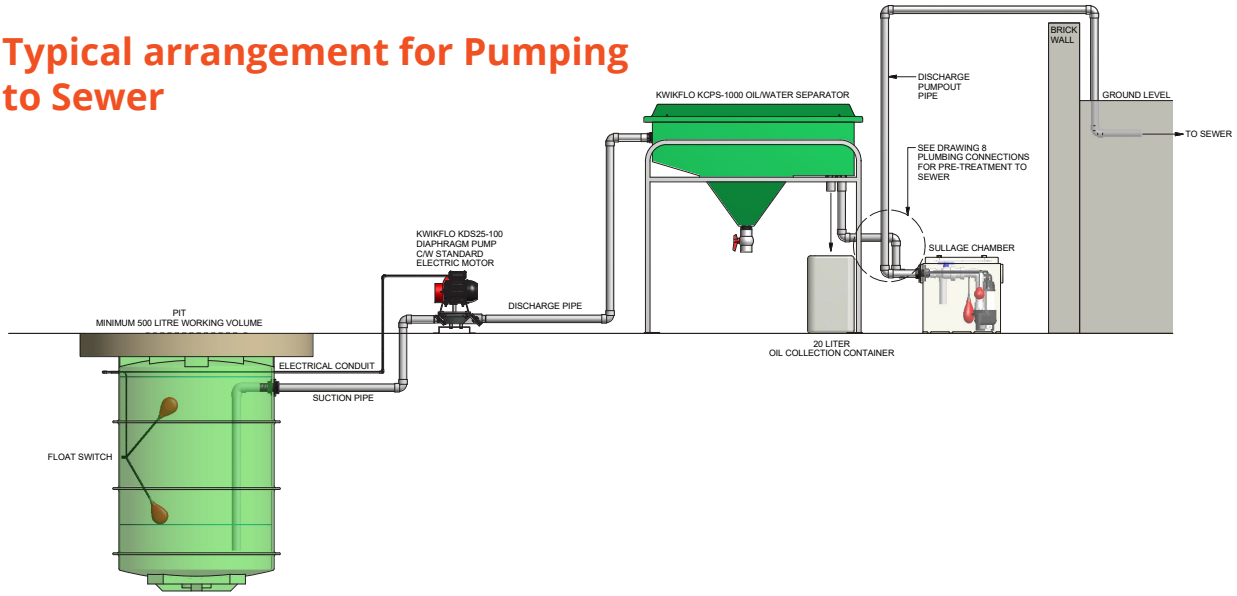

Typical arrangement for Explosion-proof Installation

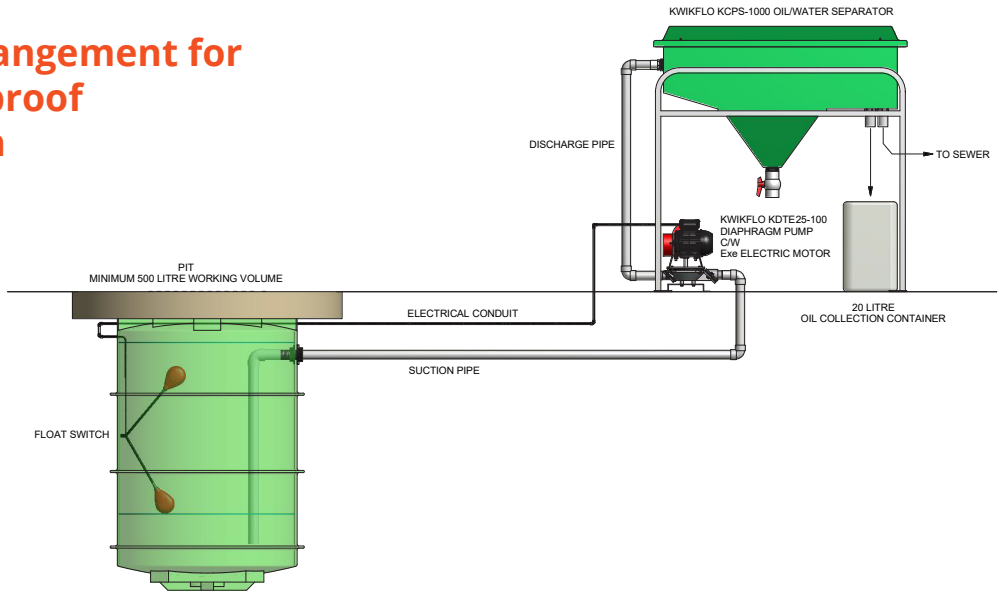

Oil Water Separator Systems 2000L / 3000L

KWIKFLO
PUMP STATIONS & TRADE WASTE

Features & Benefits



CONSTRUCTION


- Polyethylene or stainless steel tank
- Inlet Pipes - 50mm pressure UPVC BSP female
- Outlet Pipe - Water 50mm DWV UPVC V66 Socket.
- Oil 50mm DWV UPVC V66 Socket
- Sludge Hopper - 50mm UPVC incorporating 50mm PVC ball valve
- Tank Construction - Chemical resistant UV stabilised polyethylene thickness 5mm
- Lid Construction - Chemical resistant UV stabilised polyethylene thickness 5mm

STANDARD PARTS

Separator tank, Galvanised frame, Diaphragm pump, Float level switch, optional Control Panel, optional High level alarm

Specifications

Model No.	KCPS-2000 / KCPS-3000
Length	1100mm
Width	1100mm
Height	1450mm
Nominal Volume-Litres	480
Approximate Weight - Free Standing (Including in-tank fittings & standard lid) (Excluding pump)	80kg

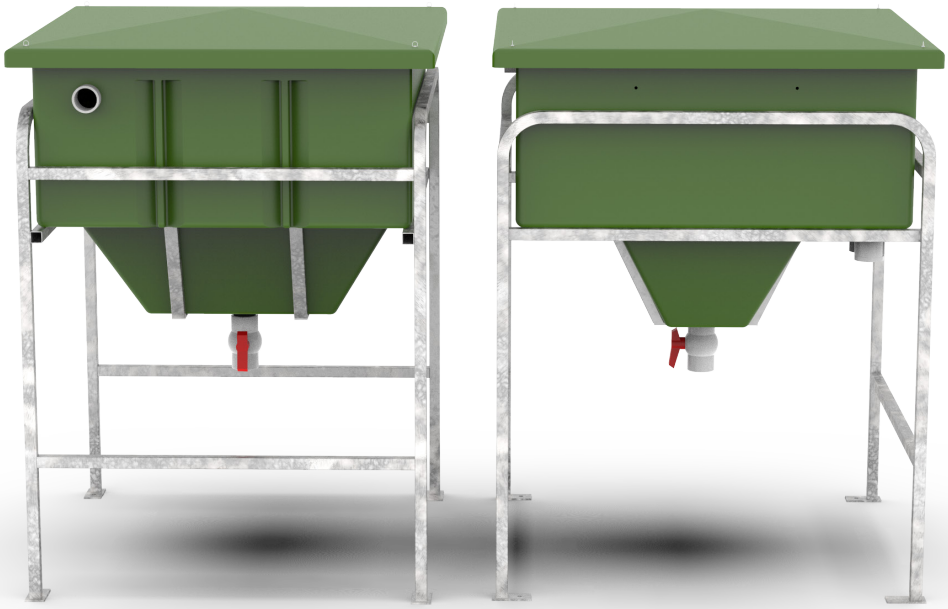

KWIKFLO PUMP STATIONS & TRADE WASTE

Dimensions

