

Chapter 2

Application

~~Layer (应用层)~~

A note on the use of these Powerpoint slides:


We're making these slides freely available to all (faculty, students, readers). They're in PowerPoint form so you see the animations; and can add, modify, and delete slides (including this one) and slide content to suit your needs. They obviously represent a *lot* of work on our part. In return for use, we only ask the following:

- If you use these slides (e.g., in a class) that you mention their source (after all, we'd like people to use our book!)
- If you post any slides on a www site, that you note that they are adapted from (or perhaps identical to) our slides, and note our copyright of this material.

Thanks and enjoy! JFK/KWR

© All material copyright 1996-2016

J.F Kurose and K.W. Ross, All Rights Reserved

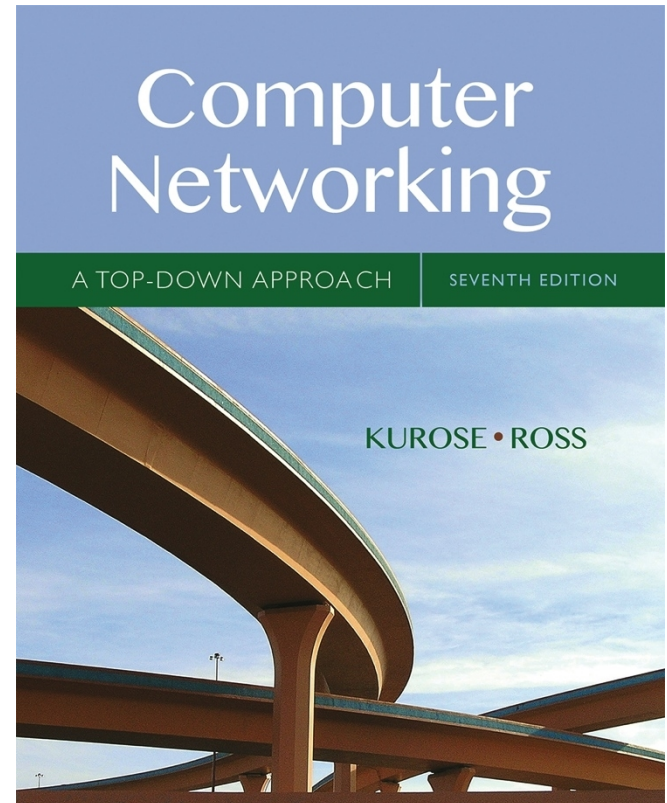

Computer Networking: A Top Down Approach

7th edition

Jim Kurose, Keith Ross

Pearson/Addison Wesley

April 2016

Chapter 2: outline

2.1 principles of network applications

2.2 Web and HTTP

2.3 electronic mail

- SMTP, POP3, IMAP

2.4 DNS

2.5 P2P applications

2.6 video streaming and content distribution networks

2.7 socket programming with UDP and TCP

Chapter 2: application layer

our goals:

- conceptual, implementation aspects of network application protocols
 - transport-layer service models
 - client-server paradigm
 - peer-to-peer paradigm
 - content distribution networks
- learn about protocols by examining popular application-level protocols
 - HTTP
 - FTP
 - SMTP / POP3 / IMAP
 - DNS
- creating network applications
 - socket API

Some network apps

- e-mail
- web
- text messaging
- remote login
- P2P file sharing
- multi-user network games
- streaming stored video (YouTube, Hulu, Netflix)
- voice over IP (e.g., Skype)
- real-time video conferencing
- social networking
- search
- ...
- ...


Creating a network app

write programs that:

- run on (different) *end systems*
- communicate over network
- e.g., web server software communicates with browser software

no need to write software
for network-core devices

- network-core devices do not run user applications
- applications on end systems allows for rapid app development, propagation

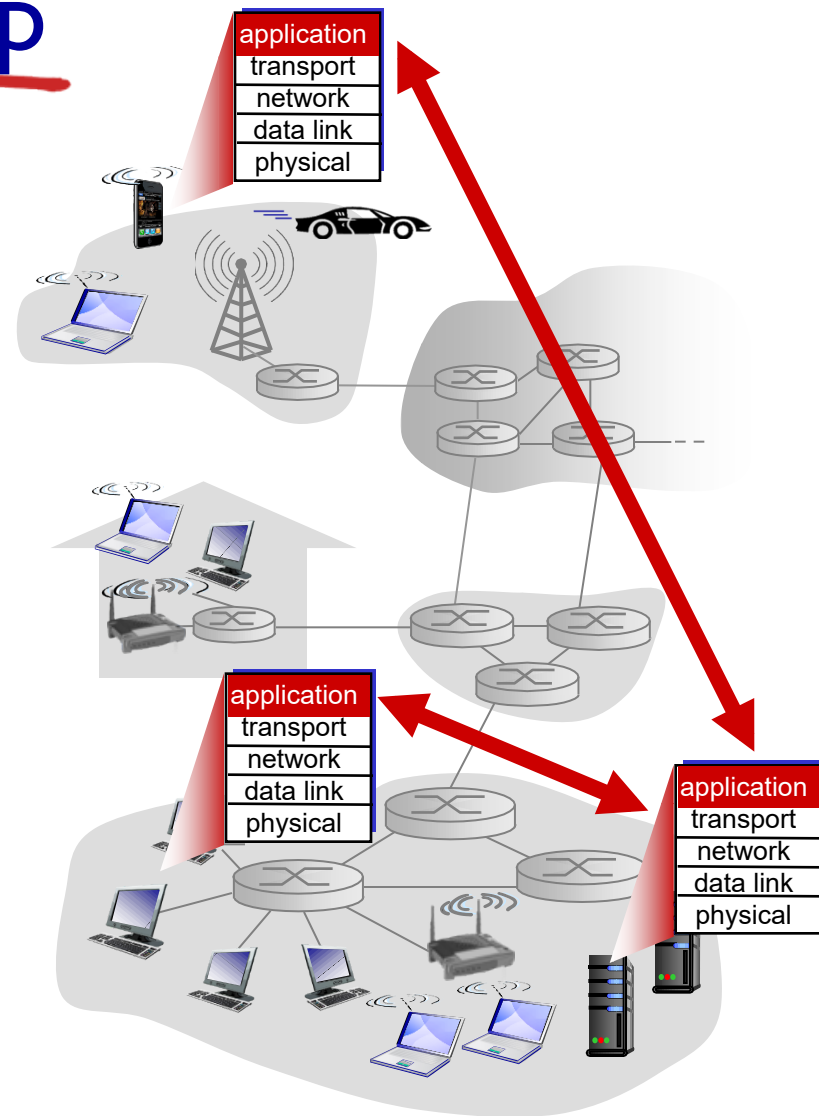


Application architectures

possible structure of applications:

- client-server (客户服务器)
- peer-to-peer (P2P) (对等)

Client-server architecture

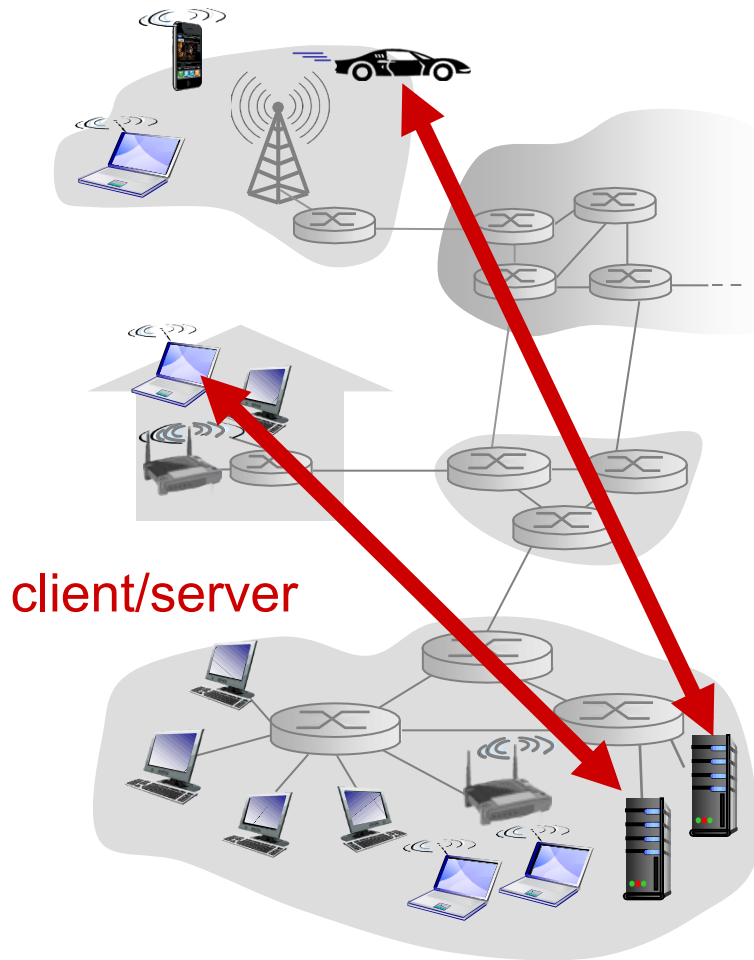

server:


- always-on host
- permanent IP address
- data centers for scaling

clients:

- communicate with server
- may be intermittently connected
- may have dynamic IP addresses
- do not communicate directly with each other

P2P architecture

- no always-on server
- arbitrary end systems directly communicate
- peers request service from other peers, provide service in return to other peers
 - *self scalability* – new peers bring new service capacity, as well as new service demands
- peers are intermittently connected and change IP addresses
 - complex management

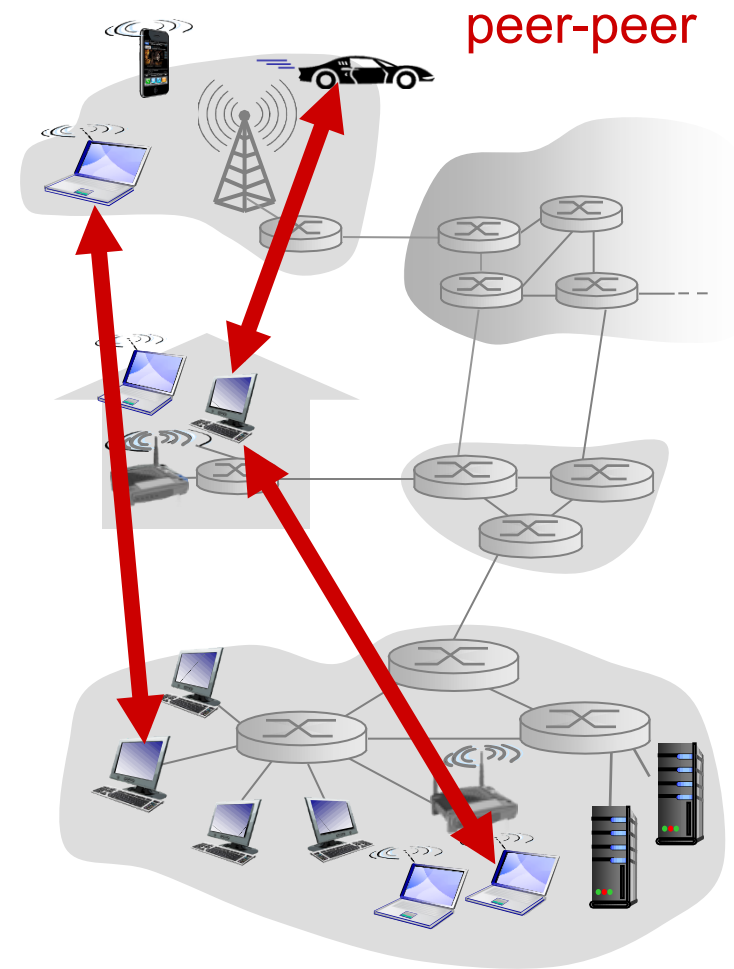

Processes communicating

process (进程):

program running within a host

- within same host, two processes communicate using **inter-process communication** (defined by OS, 进程间通信)
- processes in different hosts communicate by exchanging **messages**

clients, servers


client process: process that initiates communication

server process: process that waits to be contacted

- aside: applications with P2P architectures have client processes & server processes

Sockets (套接字)

- process sends/receives messages to/from its **socket**
- socket analogous to door
 - sending process shoves message out door
 - sending process relies on transport infrastructure on other side of door to deliver message to socket at receiving process

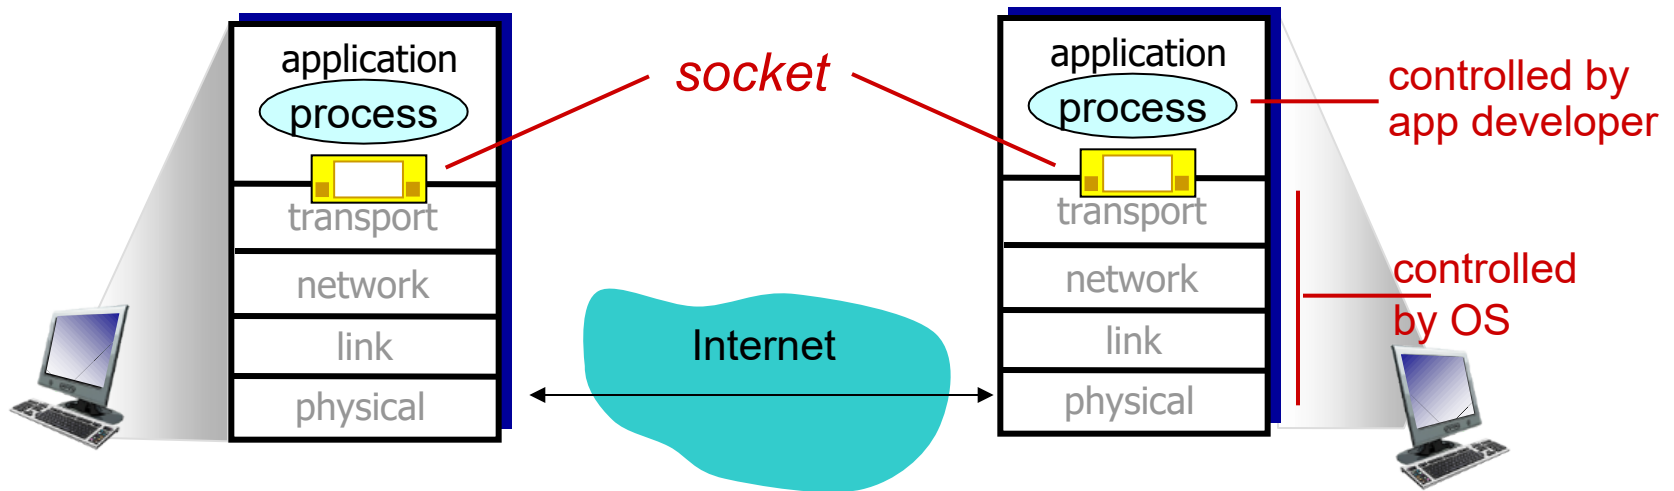

Addressing processes

- to receive messages, process must have *identifier*
- host device has unique 32-bit IP address
- Q: does IP address of host on which process runs suffice for identifying the process?
 - A: no, *many* processes can be running on same host
- *identifier* includes both **IP address** and **port numbers** associated with process on host.
- example port numbers:
 - HTTP server: 80
 - mail server: 25
- to send HTTP message to gaia.cs.umass.edu web server:
 - **IP address:** 128.119.245.12
 - **port number:** 80
- more shortly...

App-layer protocol defines

- **types of messages exchanged,**
 - e.g., request, response
- **message syntax (语法) :**
 - what fields (字段) in messages & how fields are delineated
- **message semantics 语义**
 - meaning of information in fields
- **rules** for when and how processes send & respond to messages

open protocols:

- defined in RFCs
- allows for interoperability
- e.g., HTTP, SMTP

proprietary (专有) protocols:

- e.g., Skype

What transport service does an app need?

data integrity (数据完整)

- some apps (e.g., file transfer, web transactions) require 100% reliable data transfer
- other apps (e.g., audio) can tolerate some loss

timing 定时

- some apps (e.g., Internet telephony, interactive games) require low delay to be “effective”

throughput 吞吐

- some apps (e.g., multimedia) require minimum amount of throughput to be “effective”
- other apps (“elastic 弹性 apps”) make use of whatever throughput they get

security

- encryption, data integrity, ...

Transport service requirements: common apps

application	data loss	throughput	time sensitive
file transfer	no loss	elastic	no
e-mail	no loss	elastic	no
Web documents	no loss	elastic	no
real-time audio/video	loss-tolerant	audio: 5kbps-1Mbps	yes, 100's msec
视\音频会议		video: 10kbps-5Mbps	yes, few secs
stored audio/video	loss-tolerant	same as above	yes, 100's msec
interactive games	loss-tolerant	few kbps up	yes and no
text messaging	no loss	elastic	

Internet transport protocols services

TCP service:

- *reliable transport* between sending and receiving process
- *flow control* (流量) : sender won't overwhelm receiver
- *congestion control* (拥塞) : throttle sender when network overloaded
- *does not provide*: timing, minimum throughput guarantee, security
- *connection-oriented*: setup required between client and server processes

UDP service:

- *unreliable data transfer* between sending and receiving process
- *does not provide*: reliability, flow control, congestion control, timing, throughput guarantee, security, or connection setup,

Q: why both? Why is there a UDP?

Internet apps: application, transport protocols

	application	application layer protocol	underlying transport protocol
	e-mail	SMTP [RFC 2821]	TCP
remote terminal access		Telnet [RFC 854]	TCP
	Web	HTTP [RFC 2616]	TCP
	file transfer	FTP [RFC 959]	TCP
streaming multimedia		HTTP (e.g., YouTube), RTP [RFC 1889]	TCP or UDP
Internet telephony		SIP, RTP, proprietary (e.g., Skype)	TCP or UDP

Securing TCP

TCP & UDP

- no encryption
- cleartext passwds sent into socket traverse Internet in cleartext

SSL (Secure Socket Layer)

- provides encrypted TCP connection
- data integrity
- end-point authentication

SSL is at app layer

- apps use SSL libraries, that “talk” to TCP

SSL socket API

- cleartext passwords sent into socket traverse Internet encrypted
- see Chapter 8

Chapter 2: outline

2.1 principles of network applications

2.2 Web and HTTP

2.3 electronic mail

- SMTP, POP3, IMAP

2.4 DNS

2.5 P2P applications

2.6 video streaming and content distribution networks

2.7 socket programming with UDP and TCP

Web and HTTP

First, a review...

- *web page* consists of *objects*
- object can be HTML file, JPEG image, Java applet, audio file,...
- web page consists of *base HTML-file* which includes *several referenced objects*
- each object is addressable by a *URL*, e.g.,

`www.someschool.edu/someDept/pic.gif`


host name

path name

HTTP overview (RFC 1945, RFC 2616, RFC 7540)

HTTP: hypertext (超文本) transfer protocol

- Web's application layer protocol
- client/server model
 - **client**: browser that requests, receives, (using HTTP protocol) and “displays” Web objects
 - **server**: Web server sends (using HTTP protocol) objects in response to requests

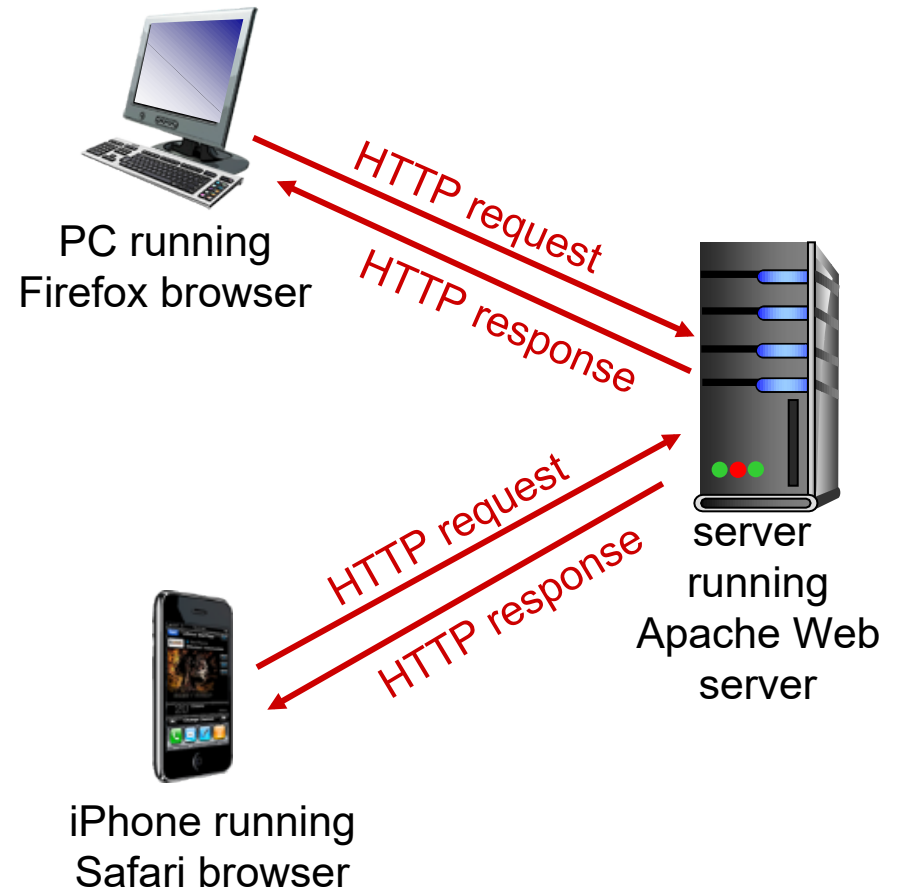

HTTP overview (continued)

uses TCP:

- client initiates TCP connection (creates socket) to server, port 80
- server accepts TCP connection from client
- HTTP messages (application-layer protocol messages) exchanged between browser (HTTP client) and Web server (HTTP server)
- TCP connection closed

HTTP is “stateless (无状态)”

- server maintains no information about past client requests

aside

protocols that maintain “state” are complex!

- past history (state) must be maintained
- if server/client crashes, their views of “state” may be inconsistent, must be reconciled

HTTP connections

non-persistent HTTP

- at most one object sent over TCP connection
 - connection then closed
- downloading multiple objects required multiple connections

persistent HTTP (持续连接)

- multiple objects can be sent over single TCP connection between client, server

Non-persistent HTTP (非持续连接)

suppose user enters URL:

`www.someSchool.edu/someDepartment/home.index`

(contains text,
references to 10
jpeg images)

1a. HTTP client initiates TCP connection to HTTP server (process) at `www.someSchool.edu` on port 80


1b. HTTP server at host `www.someSchool.edu` waiting for TCP connection at port 80. “accepts” connection, notifying client

2. HTTP client sends HTTP *request message* (containing URL) into TCP connection socket. Message indicates that client wants object `someDepartment/home.index`

3. HTTP server receives request message, forms *response message* containing requested object, and sends message into its socket

time
↓

Non-persistent HTTP (cont.)

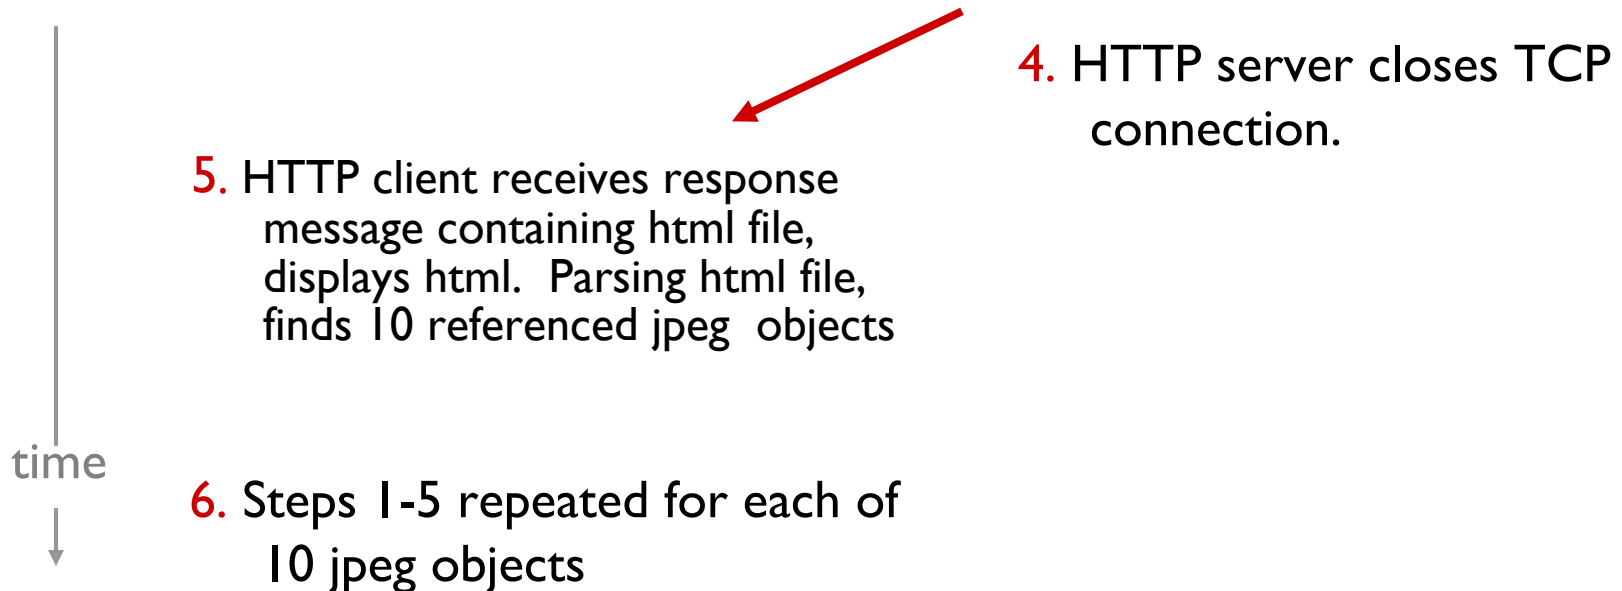


Non-persistent HTTP: response time

RTT (definition): time for a small packet to travel from client to server and back

HTTP response time:

- one RTT to initiate TCP connection
- one RTT for HTTP request and first few bytes of HTTP response to return
- file transmission time
- non-persistent HTTP response time =
 $2\text{RTT} + \text{file transmission time}$

RTT: round trip time 往返时间

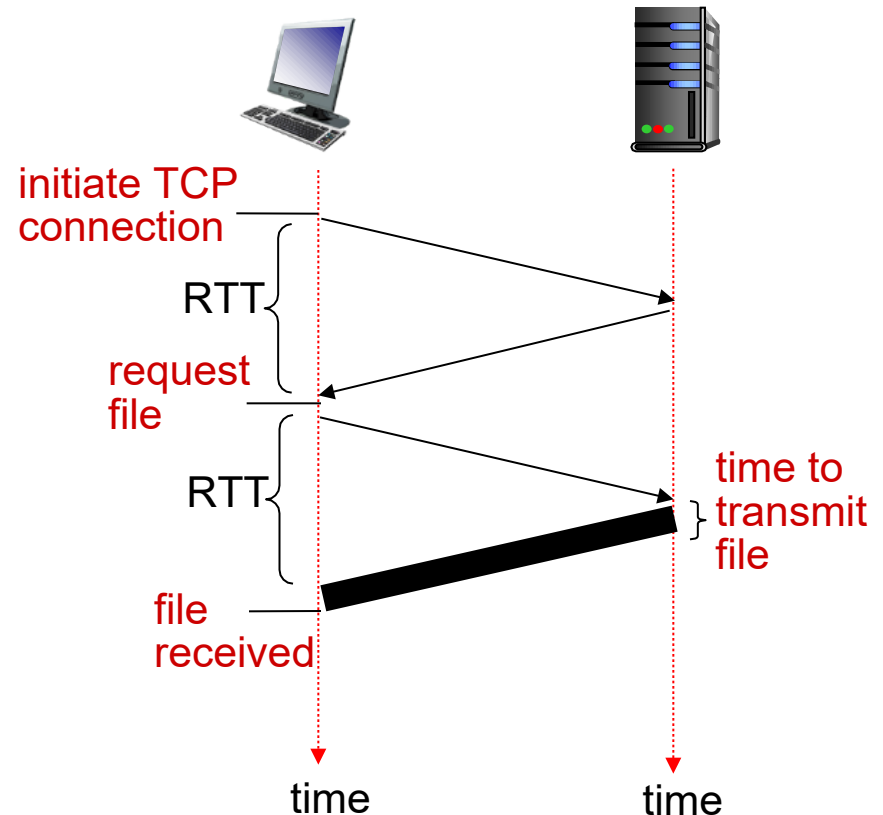

Persistent HTTP

non-persistent HTTP issues:

- requires 2 RTTs per object
- OS overhead for *each* TCP connection
- browsers often open parallel TCP connections to fetch referenced objects

persistent HTTP:

- server leaves connection open after sending response
- subsequent HTTP messages between same client/server sent over open connection
- client sends requests as soon as it encounters a referenced object
- as little as one RTT for all the referenced objects

HTTP request message

- two types of HTTP messages: *request, response*
- **HTTP request message:**
 - ASCII (human-readable format)

request line (请求行)
(GET, POST, HEAD commands)

首部行header lines


carriage return回车,
line feed at start
of line indicates
end of header lines

```
GET /index.html HTTP/1.1\r\n
Host: www-net.cs.umass.edu\r\n
User-Agent: Firefox/3.6.10\r\n
Accept: text/html,application/xhtml+xml\r\n
Accept-Language: en-us,en;q=0.5\r\n
Accept-Encoding: gzip,deflate\r\n
Accept-Charset: ISO-8859-1,utf-8;q=0.7\r\n
Keep-Alive: 115\r\n
Connection: keep-alive\r\n
\r\n
```

carriage return character
line-feed character 换行

* Check out the online interactive exercises for more
examples: http://gaia.cs.umass.edu/kurose_ross/interactive/

HTTP request message: general format

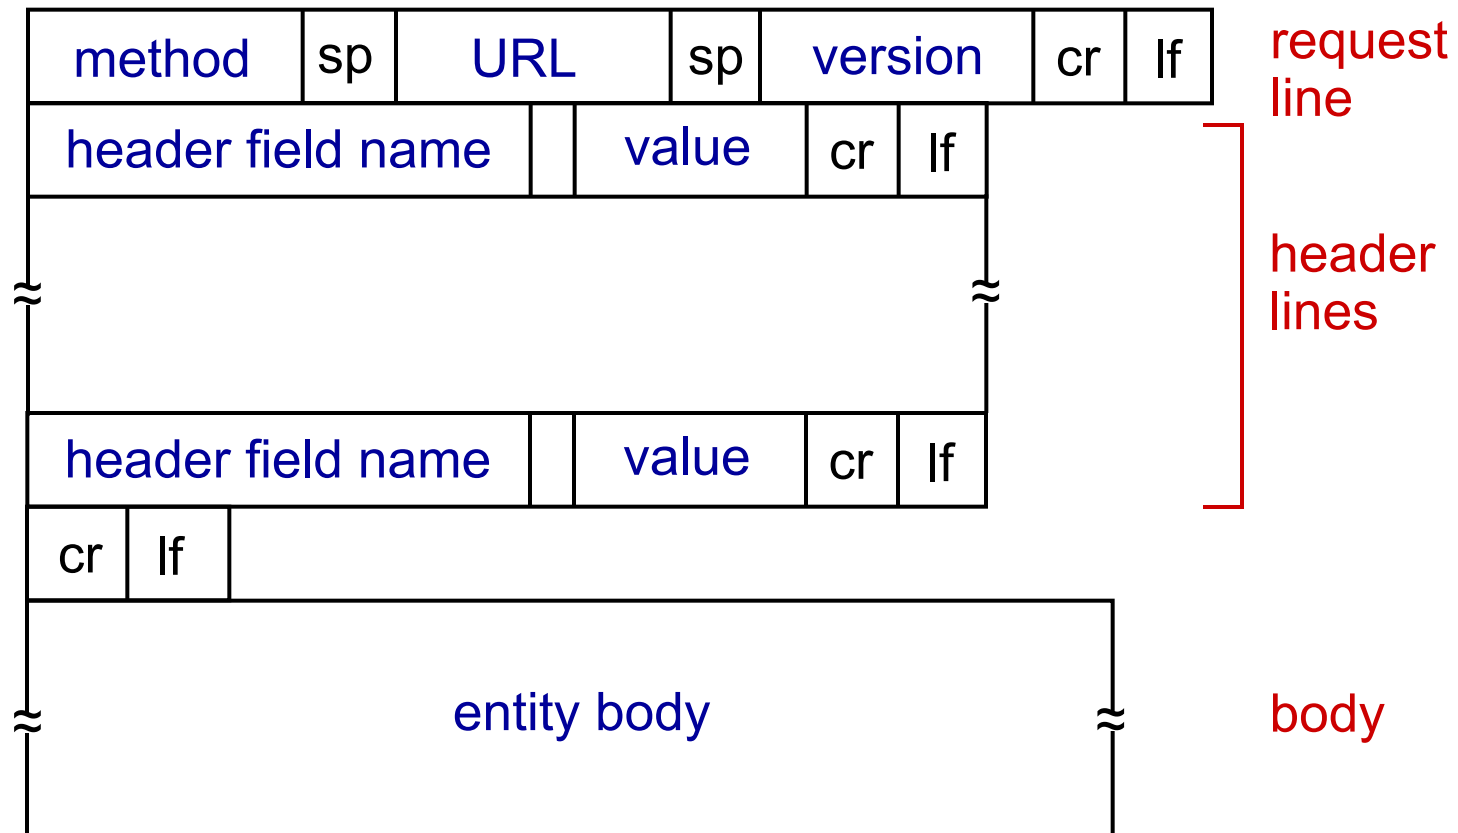

Uploading form input

POST method:

- web page often includes form input （提交表单）
- input is uploaded to server in entity body

URL method:

- uses GET method
- input is uploaded in URL field of request line:
在URL中添加输入数据

`www.somesite.com/animalsearch?monkeys&banana`

Head: 类似于GET，用一条http报文响应，但不返回请求对象，一般用于调试。

Method types

HTTP/1.0:

- GET
- POST
- HEAD
 - asks server to leave requested object out of response

HTTP/1.1:

- GET, POST, HEAD
- PUT
 - uploads file in entity body to path specified in URL field
- DELETE
 - deletes file specified in the URL field

HTTP response message

status line

(protocol

status code

status phrase)

header
lines

data, e.g.,
requested
HTML file

```
HTTP/1.1 200 OK\r\n
Date: Sun, 26 Sep 2010 20:09:20 GMT\r\n
Server: Apache/2.0.52 (CentOS)\r\n
Last-Modified: Tue, 30 Oct 2007 17:00:02
GMT\r\n
ETag: "17dc6-a5c-bf716880"\r\n
Accept-Ranges: bytes\r\n
Content-Length: 2652\r\n
Keep-Alive: timeout=10, max=100\r\n
Connection: Keep-Alive\r\n
Content-Type: text/html; charset=ISO-8859-
1\r\n
\r\n
data data data data data ...
```

* Check out the online interactive exercises for more
examples: http://gaia.cs.umass.edu/kurose_ross/interactive/

HTTP response status codes

- status code appears in 1st line in server-to-client response message.
- some sample codes:

200 OK

- request succeeded, requested object later in this msg

301 Moved Permanently

- requested object moved, new location specified later in this msg (Location:)

400 Bad Request

- request msg not understood by server

404 Not Found

- requested document not found on this server

505 HTTP Version Not Supported

Trying out HTTP (client side) for yourself

1. Telnet to your favorite Web server:

`telnet gaia.cs.umass.edu 80` { opens TCP connection to port 80
(default HTTP server port)
at gaia.cs.umass.edu.
anything typed in will be sent
to port 80 at gaia.cs.umass.edu

2. type in a GET HTTP request:

`GET /kurose_ross/interactive/index.php HTTP/1.1`
`Host: gaia.cs.umass.edu` { by typing this in (hit carriage
return twice), you send
this minimal (but complete)
GET request to HTTP server

3. look at response message sent by HTTP server!

(or use Wireshark to look at captured HTTP request/response)

User-server state: cookies

many Web sites use cookies

four components:

- 1) cookie header line of HTTP *response* message 响应报文首部
- 2) cookie header line in next HTTP *request* message 请求报文首部
- 3) cookie file kept on user's host, managed by user's browser
- 4) back-end database at Web site

example:

- Susan always access Internet from PC
- visits specific e-commerce site for first time
- when initial HTTP requests arrives at site, site creates:
 - unique ID
 - entry in backend database for ID

Cookies: keeping “state” (cont.)

client



server



cookie file



ebay 8734
amazon 1678


usual http request msg

Amazon server
creates ID
1678 for user

usual http response
set-cookie: 1678

create
entry

backend
database



usual http request msg
cookie: 1678

cookie-
specific
action

access

usual http response msg

access

cookie-
specific
action

one week later:



ebay 8734
amazon 1678

usual http request msg
cookie: 1678

usual http response msg

Cookies (continued)

what cookies can be used for:

- authorization
- shopping carts
- recommendations
- user session state (Web e-mail)

aside

cookies and privacy:

- cookies permit sites to learn a lot about you
- you may supply name and e-mail to sites


how to keep “state”:

- protocol endpoints: maintain state at sender/receiver over multiple transactions
- cookies: http messages carry state

Web caches (proxy server 代理服务器)

goal: satisfy client request without involving origin server

- user sets browser: Web accesses via cache
- browser sends all HTTP requests to cache
 - object in cache: cache returns object
 - else cache requests object from origin server, then returns object to client

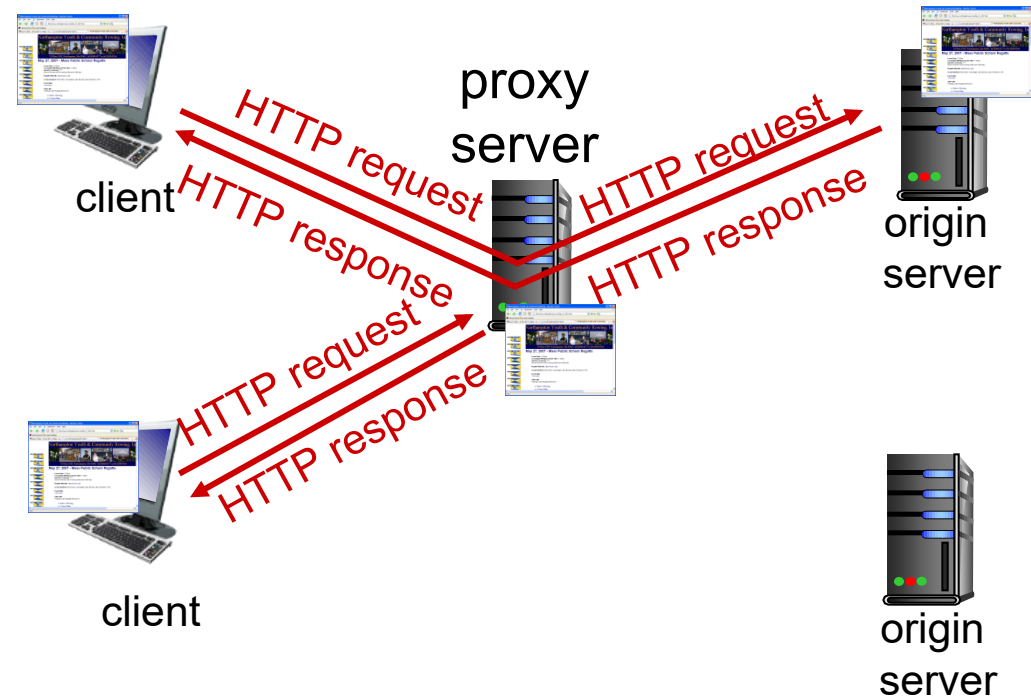

More about Web caching

- cache acts as both client and server
 - server for original requesting client
 - client to origin server
- typically cache is installed by ISP (university, company, residential ISP)

why Web caching?

- reduce response time for client request
- reduce traffic on an institution's access link
- Internet dense with caches: enables “poor” content providers to effectively deliver content (so too does P2P file sharing)


Caching example:

assumptions:

- avg object size: 100K bits
- avg request rate from browsers to origin servers: 15/sec
- avg data rate to browsers: 1.50 Mbps
- RTT from institutional router to any origin server: 2 sec
- access link rate: 1.54 Mbps

consequences:

- LAN utilization: 15%
- access link utilization = 99% *problem!*
- total delay = Internet delay + access delay + LAN delay
= 2 sec + minutes + usecs

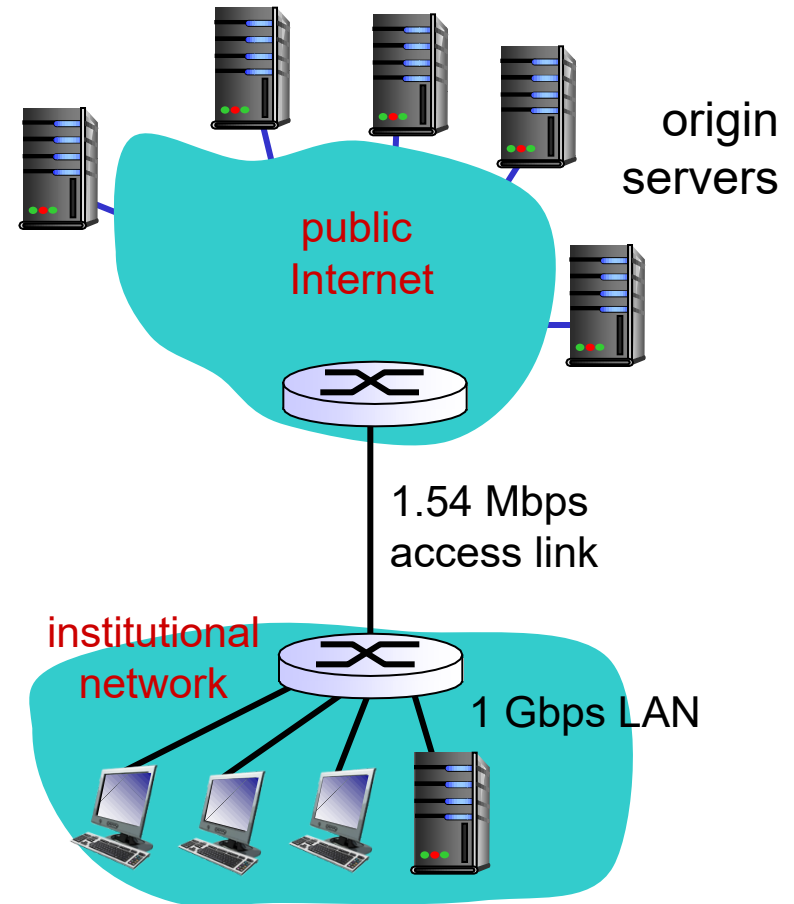


Caching example: fatter access link

assumptions:

- avg object size: 100K bits
- avg request rate from browsers to origin servers: 15/sec
- avg data rate to browsers: 1.50 Mbps
- RTT from institutional router to any origin server: 2 sec
- access link rate: ~~1.54 Mbps~~ → 154 Mbps

consequences:

- LAN utilization: 15%
- access link utilization = ~~99%~~ → 9.9%
- total delay = Internet delay + access delay + LAN delay
= 2 sec + ~~minutes~~ → usecs
 msecs

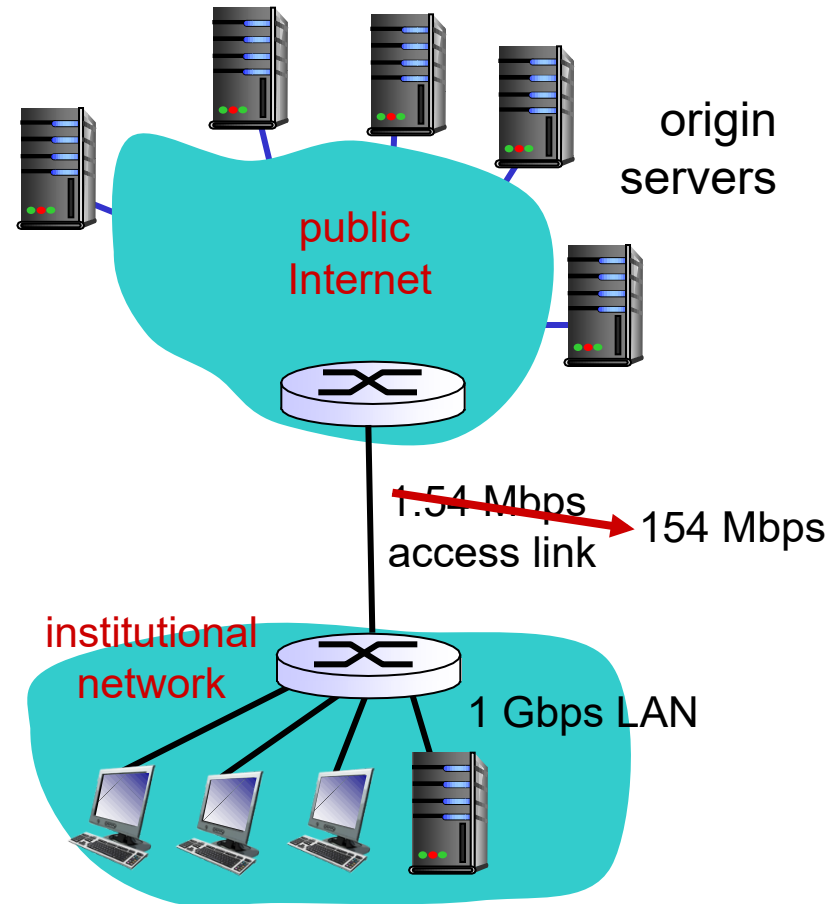

Cost: increased access link speed (not cheap!)

Caching example: install local cache

assumptions:


- avg object size: 100K bits
- avg request rate from browsers to origin servers: 15/sec
- avg data rate to browsers: 1.50 Mbps
- RTT from institutional router to any origin server: 2 sec
- access link rate: 1.54 Mbps

consequences:

- LAN utilization: 15%
- access link utilization = ?
- total delay = ?

How to compute link utilization, delay?


Cost: web cache (cheap!)

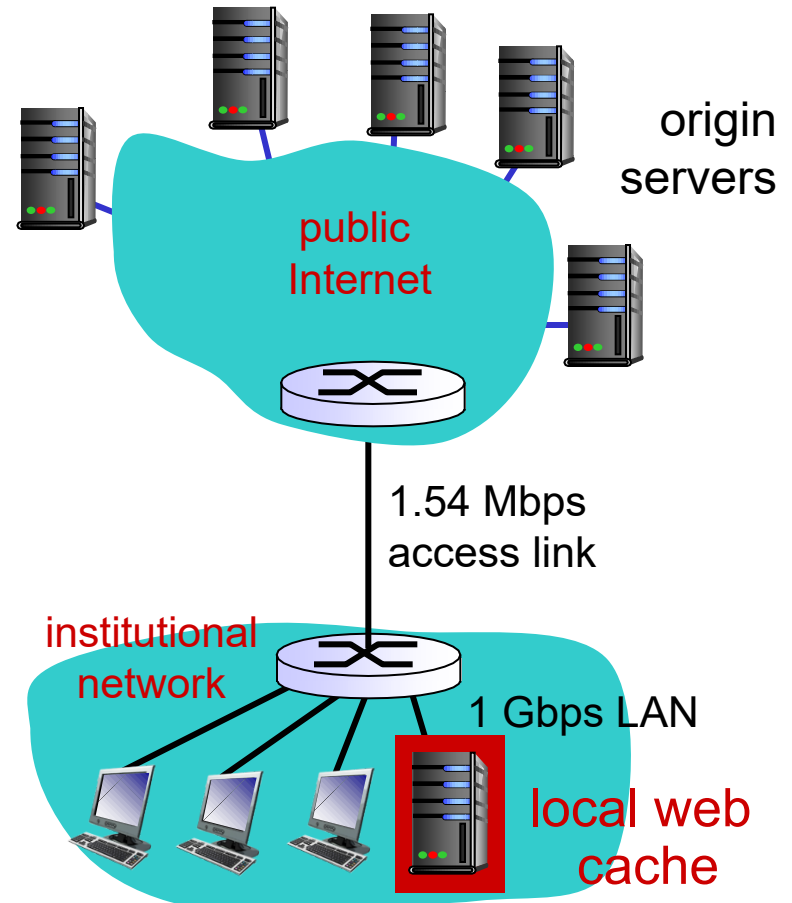

Caching example: install local cache

Calculating access link utilization, delay with cache:

- suppose cache hit rate is 0.4
 - 40% requests satisfied at cache, 60% requests satisfied at origin
- access link utilization:
 - 60% of requests use access link
- data rate to browsers over access link
 $= 0.6 * 1.50 \text{ Mbps} = .9 \text{ Mbps}$
 - utilization = $0.9 / 1.54 = .58$
- total delay
 - $= 0.6 * (\text{delay from origin servers}) + 0.4 * (\text{delay when satisfied at cache})$
 - $= 0.6 (2.01) + 0.4 (\sim \text{msecs}) = \sim 1.2 \text{ secs}$
 - less than with 154 Mbps link (and cheaper too!)

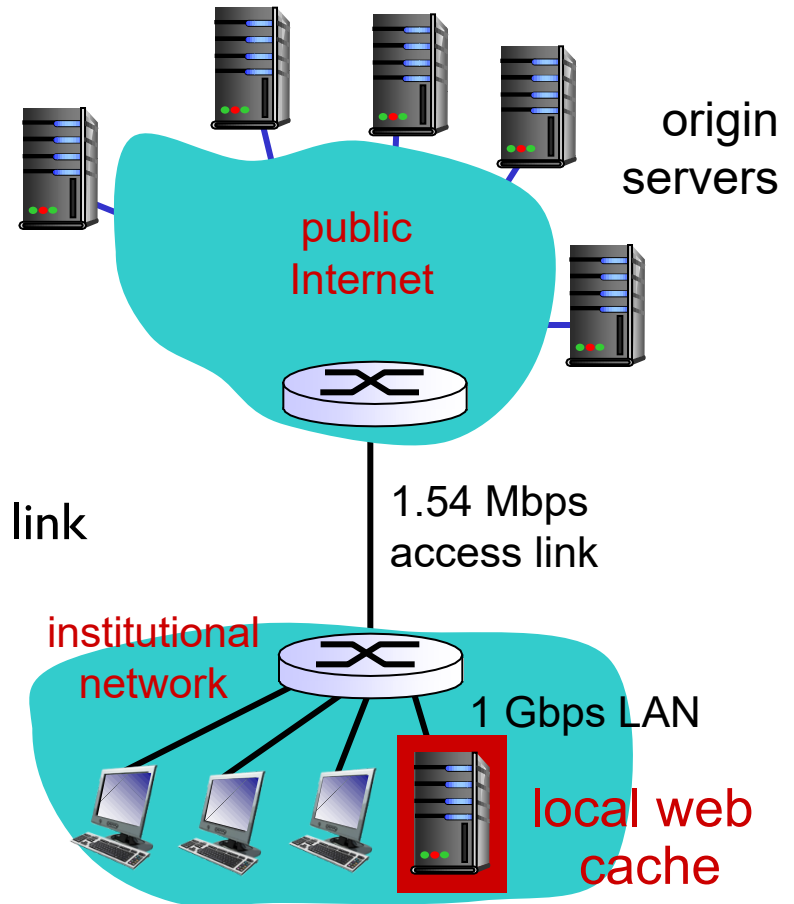


Conditional GET


- **Goal:** don't send object if cache has up-to-date cached version
 - no object transmission delay
 - lower link utilization
- **cache:** specify date of cached copy in HTTP request
If-modified-since: <date>
- **server:** response contains no object if cached copy is up-to-date:
HTTP/1.0 304 Not Modified

client



server

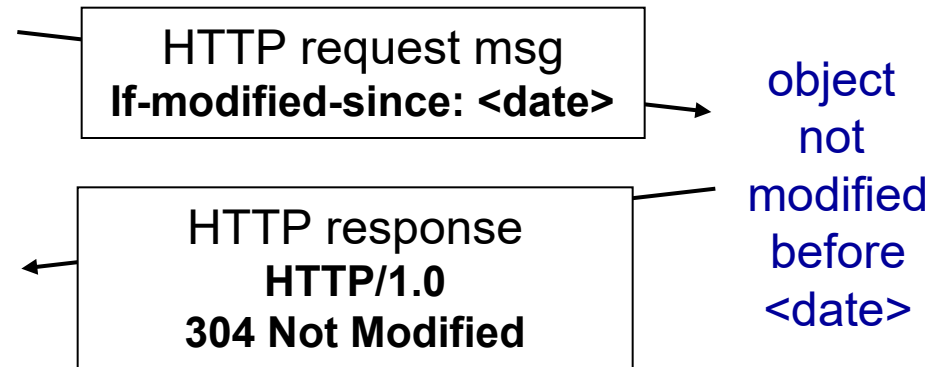

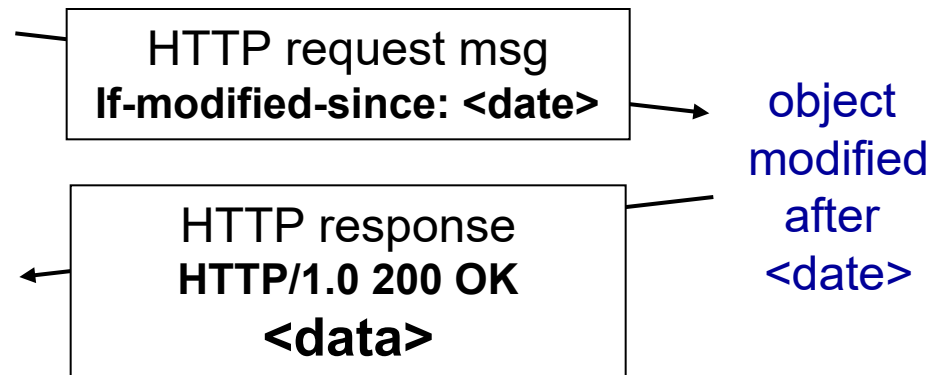

作业

- 找一台能telnet上去的服务器，实验Http协议中的get方法
- cookie
删掉。
- 拿出以前写过的网站的代码，分析其使用了http协议中的使用
- http版本
- post

http 持续，非持续

Chapter 2: outline

2.1 principles of network applications

2.2 Web and HTTP

2.3 electronic mail

- SMTP, POP3, IMAP

2.4 DNS

2.5 P2P applications

2.6 video streaming and content distribution networks

2.7 socket programming with UDP and TCP


Electronic mail

Three major components:

- user agents (outlook)
- mail servers
- simple mail transfer protocol: SMTP

User Agent (用户代理)


- a.k.a. “mail reader”
- composing, editing, reading mail messages
- e.g., Outlook, Thunderbird, iPhone mail client
- outgoing, incoming messages stored on server

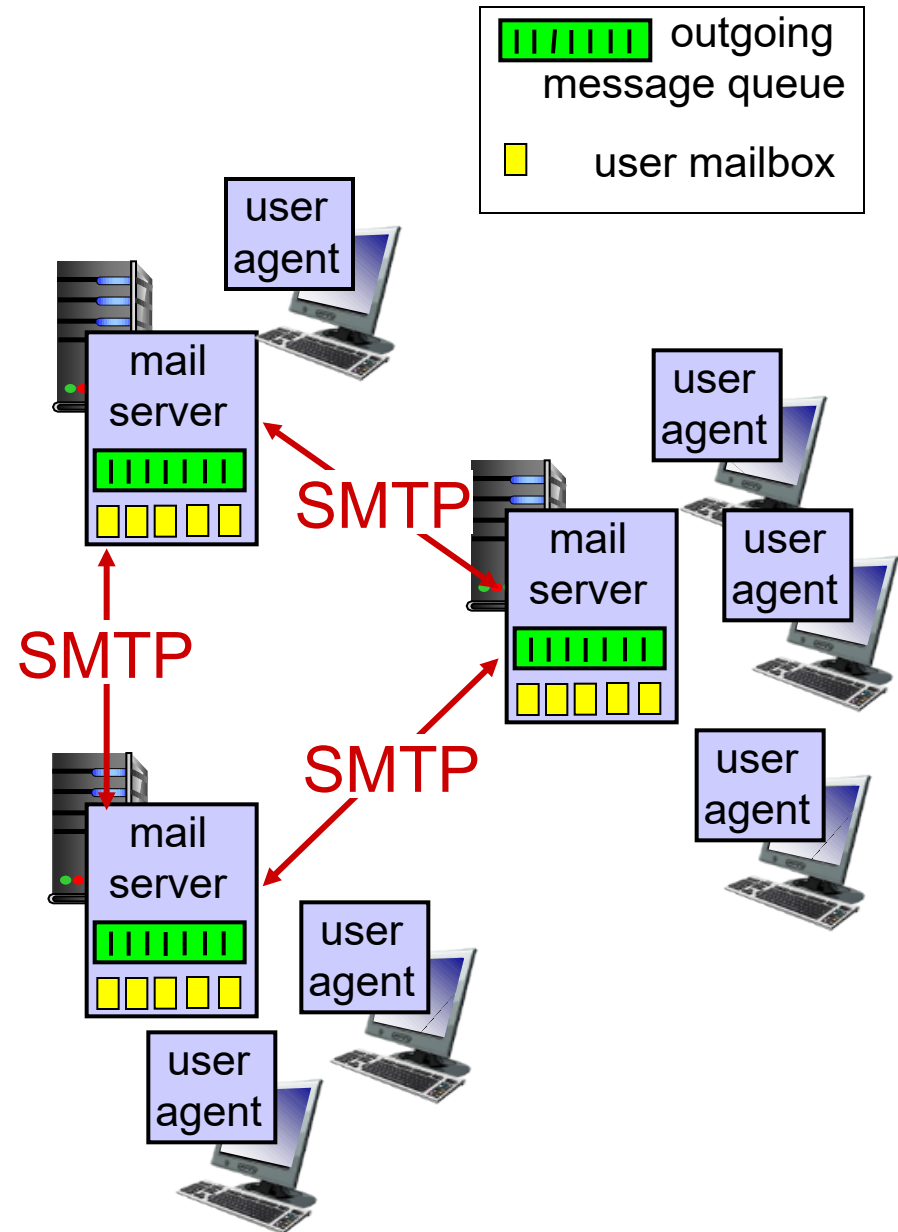

Electronic mail: mail servers

mail servers:

- *mailbox* contains incoming messages for user
- *message queue* of outgoing (to be sent) mail messages
- *SMTP protocol* between mail servers to send email messages
 - client: sending mail server
 - “server”: receiving mail server

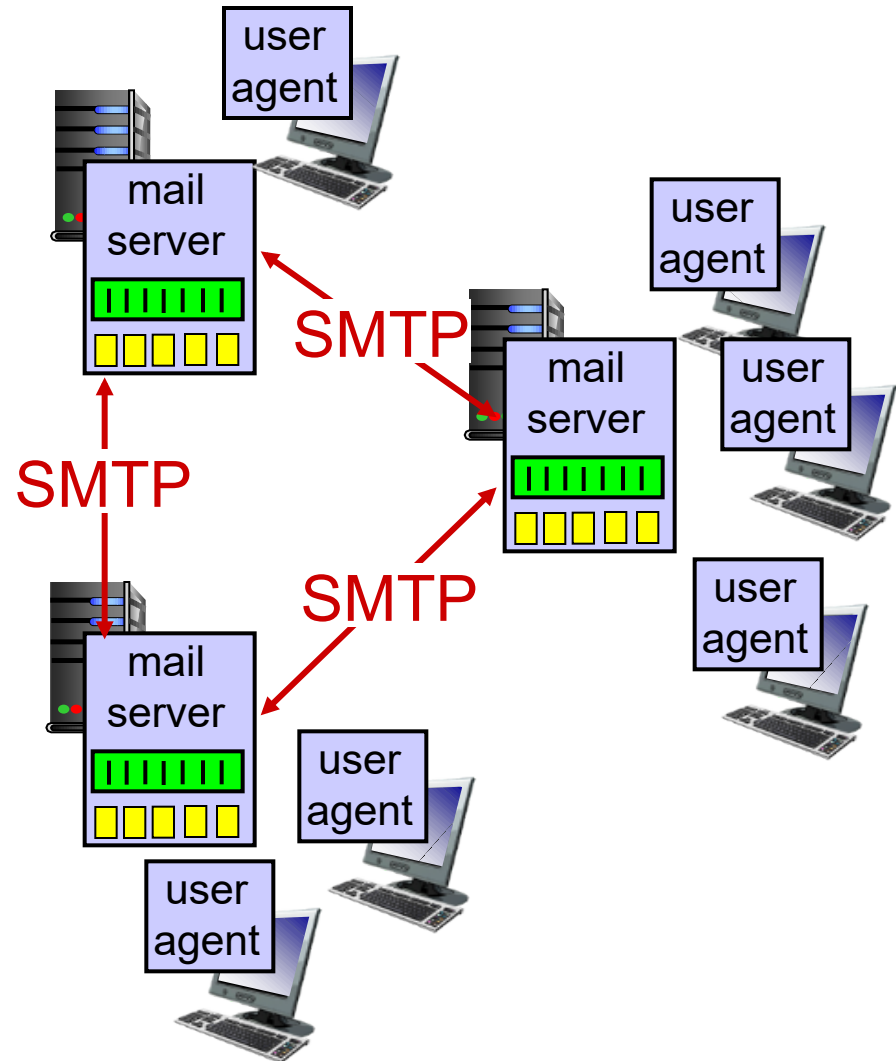


Electronic Mail: SMTP [RFC 2821]

- uses TCP to reliably transfer email message from client to server, port 25
- direct transfer: sending server to receiving server
- three phases of transfer
 - handshaking (greeting)
 - transfer of messages
 - closure
- command/response interaction (like HTTP)
 - **commands:** ASCII text
 - **response:** status code and phrase
- messages must be in 7-bit ASCII

Scenario: Alice sends message to Bob

- 1) Alice uses UA(user agent) to compose message “to” bob@someschool.edu
- 2) Alice’s UA sends message to her mail server; message placed in message queue
- 3) client side of SMTP opens TCP connection with Bob’s mail server
- 4) SMTP client sends Alice’s message over the TCP connection
- 5) Bob’s mail server places the message in Bob’s mailbox
- 6) Bob invokes his user agent to read message

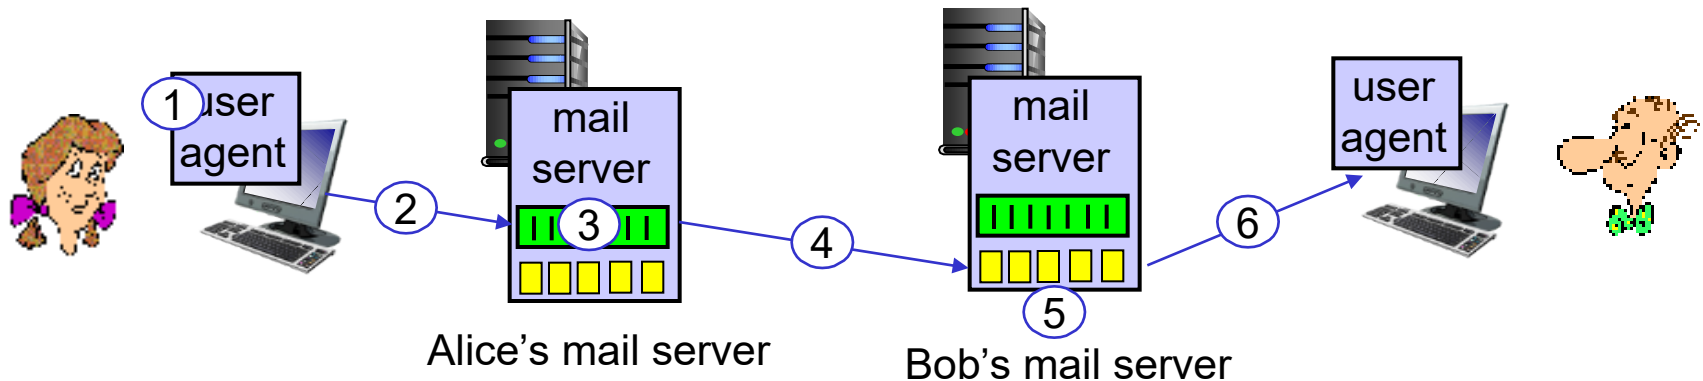

Sample SMTP interaction

```
c:crepes.fr
S: 220 hamburger.edu
C: HELO crepes.fr
S: 250 Hello crepes.fr, pleased to meet you
C: MAIL FROM: <alice@crepes.fr>
S: 250 alice@crepes.fr... Sender ok
C: RCPT TO: <bob@hamburger.edu>
S: 250 bob@hamburger.edu ... Recipient ok
C: DATA
S: 354 Enter mail, end with "." on a line by itself
C: Do you like ketchup?
C: How about pickles?
C: .
S: 250 Message accepted for delivery
C: QUIT
S: 221 hamburger.edu closing connection
```

状态码: 220,250,.....

状态码的含义

- 220: 服务就绪。
- 250: 请求动作正确完成(HELO、MAIL FROM、RCPT TO、QUIT指令执行成功会返回此信息)。
- 235: 认证通过。
- 221: 正在处理。
- 354: 开始发送邮件内容, 提示以特殊行.结束邮件内容。
- 500: 语法错误, 命令不能识别。
- 552: 中断处理。

Try SMTP interaction for yourself:

- `telnet servername 25`
- see 220 reply from server
- enter HELO, MAIL FROM, RCPT TO, DATA, QUIT commands

above lets you send email without using email client (reader)

SMTP: final words

- SMTP uses persistent connections
- SMTP requires message (header & body) to be in 7-bit ASCII
- SMTP server uses CRLF.CRLF to determine end of message

message: 报文

comparison with HTTP:

- HTTP: pull(拉)
- SMTP: push (推)
- both have ASCII command/response interaction, status codes
- HTTP: each object encapsulated in its own response message
- SMTP: multiple objects sent in multipart message

Mail message format

SMTP: protocol for exchanging email messages

RFC 822: standard for text message format:


- header lines, e.g.,

- To:
- From:
- Subject:


different from SMTP MAIL FROM, RCPT TO: commands!

- Body: the “message”

- ASCII characters only

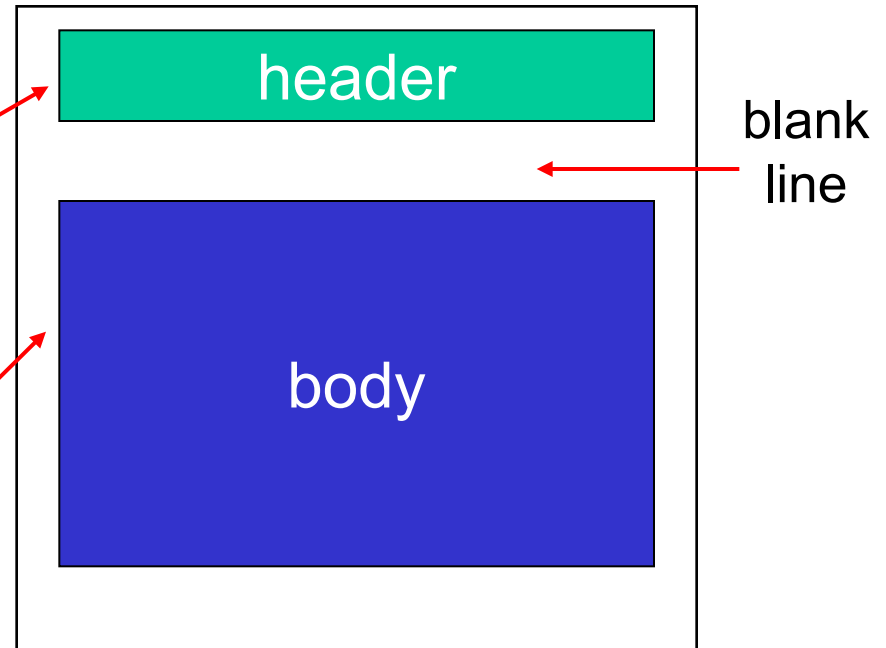

Mail access protocols

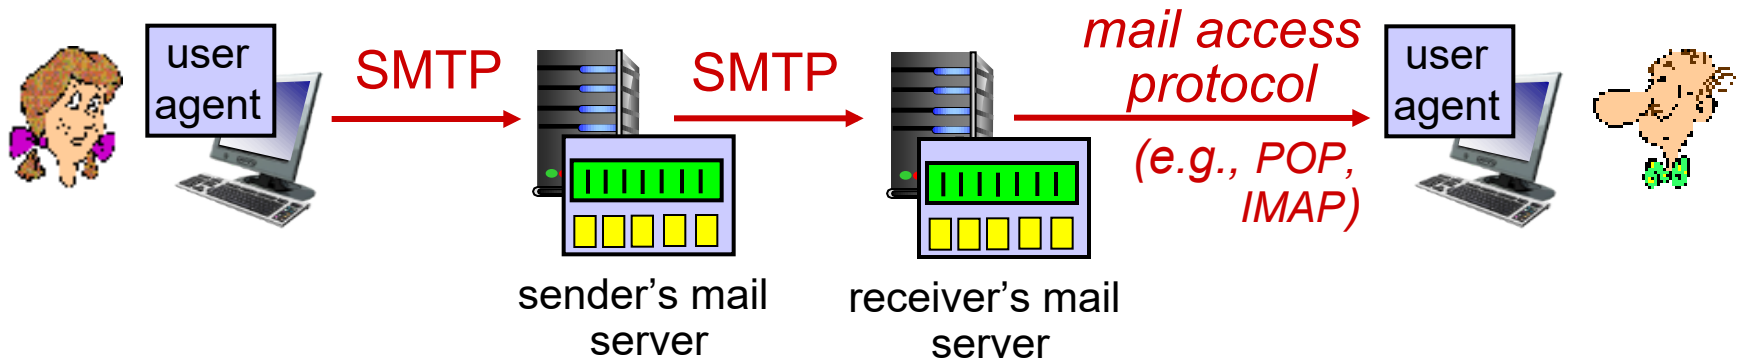

- **SMTP**: delivery/storage to receiver's server
- mail access protocol: retrieval from server
 - **POP**: Post Office Protocol [RFC 1939]: authorization, download
 - **IMAP**: Internet Mail Access Protocol [RFC 1730]: more features, including manipulation of stored messages on server
 - **HTTP**: gmail, Hotmail, Yahoo! Mail, etc.

POP3 protocol (邮件访问协议)

authorization phase

- client commands:
 - **user**: declare username
 - **pass**: password
- server responses
 - **+OK**
 - **-ERR**

```
S: +OK POP3 server ready
C: user bob
S: +OK
C: pass hungry
S: +OK user successfully logged on
```

transaction phase, client:

- **list**: list message numbers
- **retr**: retrieve message by number
- **dele**: delete
- **quit**

```
C: list
S: 1 498
S: 2 912
S: .
C: retr 1
S: <message 1 contents>
S: .
C: dele 1
C: retr 2
S: <message 1 contents>
S: .
C: dele 2
C: quit
S: +OK POP3 server signing off
```


POP3 (more) and IMAP

more about POP3

- previous example uses POP3 “download and delete” mode
 - Bob cannot re-read e-mail if he changes client
- POP3 “download-and-keep”: copies of messages on different clients
- POP3 is stateless across sessions

IMAP

- keeps all messages in one place: at server
- allows user to organize messages in folders
- keeps user state across sessions:
 - names of folders and mappings between message IDs and folder name
- IMAP可以允许用户只读取报文的某些部分

Chapter 2: outline

2.1 principles of network applications

2.2 Web and HTTP

2.3 electronic mail

- SMTP, POP3, IMAP

2.4 DNS

2.5 P2P applications

2.6 video streaming and content distribution networks

2.7 socket programming with UDP and TCP

作业

- **Telnet**上一台邮件服务器实验一下相应的命令
- 在浏览器端配置代理服务器，并用**wireshark**观察在与代理服务器之间的**http**请求。

DNS: domain name system

people: many identifiers:

- SSN, name, passport #

Internet hosts, routers:

- IP address (32 bit) - used for addressing datagrams
- “name”, e.g., `www.yahoo.com` - used by humans

Q: how to map between IP address and name, and vice versa ?

Domain Name System:

- *distributed database*
implemented in hierarchy of many *name servers*
- *application-layer protocol:* hosts, name servers communicate to *resolve* names (address/name translation)
 - note: core Internet function, implemented as application-layer protocol
 - complexity at network’s “edge”

DNS: services, structure

DNS services

- hostname to IP address translation
- host aliasing (别名)
 - canonical, alias names
- mail server aliasing (别名)
- load distribution
 - replicated Web servers: many IP addresses correspond to one name

why not centralize DNS?

- single point of failure
- traffic volume
- distant centralized database
- maintenance

A: doesn't scale!

DNS: a distributed, hierarchical database

根DNS服务

Root DNS Servers

...

...

顶级

com DNS servers

org DNS servers

edu DNS servers

权威

yahoo.com

amazon.com

pbs.org

poly.edu

umass.edu

DNS servers

DNS servers

DNS servers

DNS servers


DNS servers

client wants IP for www.amazon.com; 1st approximation:

- client queries root server to find com DNS server
- client queries .com DNS server to get amazon.com DNS server
- client queries amazon.com DNS server to get IP address for www.amazon.com

DNS: root name servers (根DNS)

- contacted by local name server (本地DNS服务器) that can not resolve name
- root name server:
 - contacts authoritative name server if name mapping not known
 - gets mapping
 - returns mapping to local name server

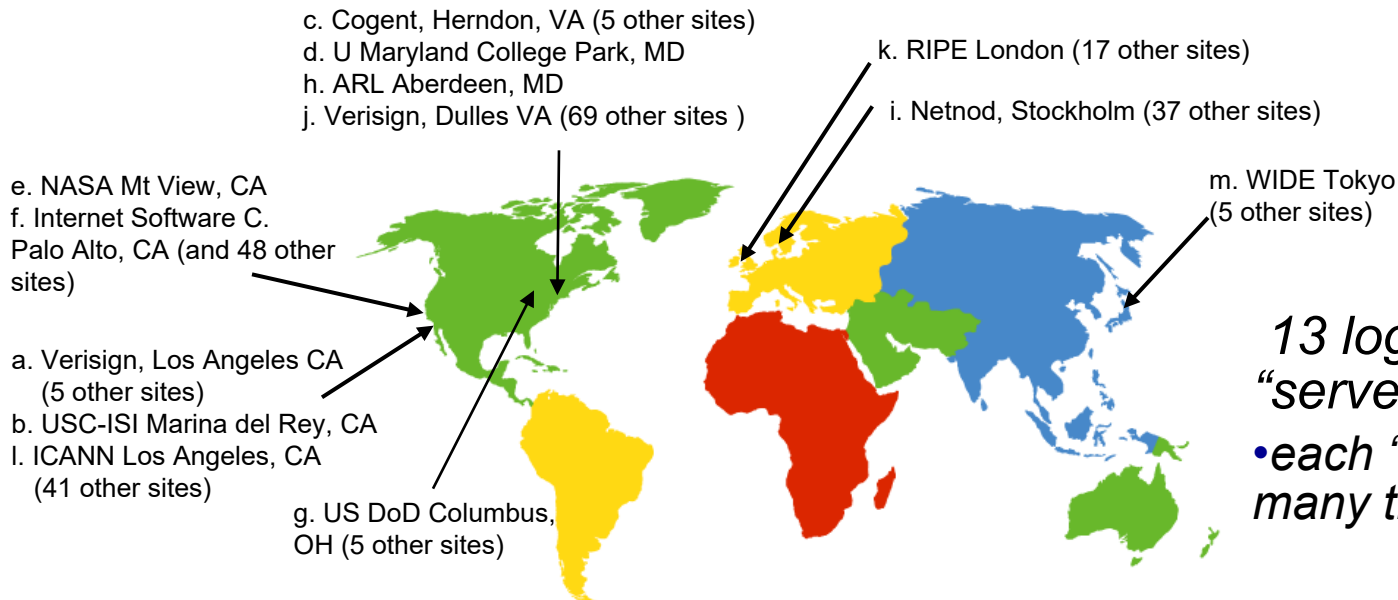

*13 logical root name
“servers” worldwide*
• each “server” replicated
many times

TLD, authoritative servers

top-level domain (TLD) servers (顶级域名服务) :

- responsible for com, org, net, edu, aero, jobs, museums, and all top-level country domains, e.g.: uk, fr, ca, jp
- Network Solutions maintains servers for .com TLD
- Educause for .edu TLD

authoritative DNS servers (权威域名服务) :

- organization's own DNS server(s), providing authoritative hostname to IP mappings for organization's named hosts
- can be maintained by organization or service provider

Local DNS name server (本地域名服务器)


- does not strictly belong to hierarchy
- each ISP (residential ISP, company, university) has one
 - also called “default name server”
- when host makes DNS query, query is sent to its local DNS server
 - has local cache of recent name-to-address translation pairs (but may be out of date!)
 - acts as proxy, forwards query into hierarchy

DNS name resolution example

- host at cis.poly.edu wants IP address for gaia.cs.umass.edu

iterated query:


- contacted server replies with name of server to contact
- “I don’t know this name, but ask this server”

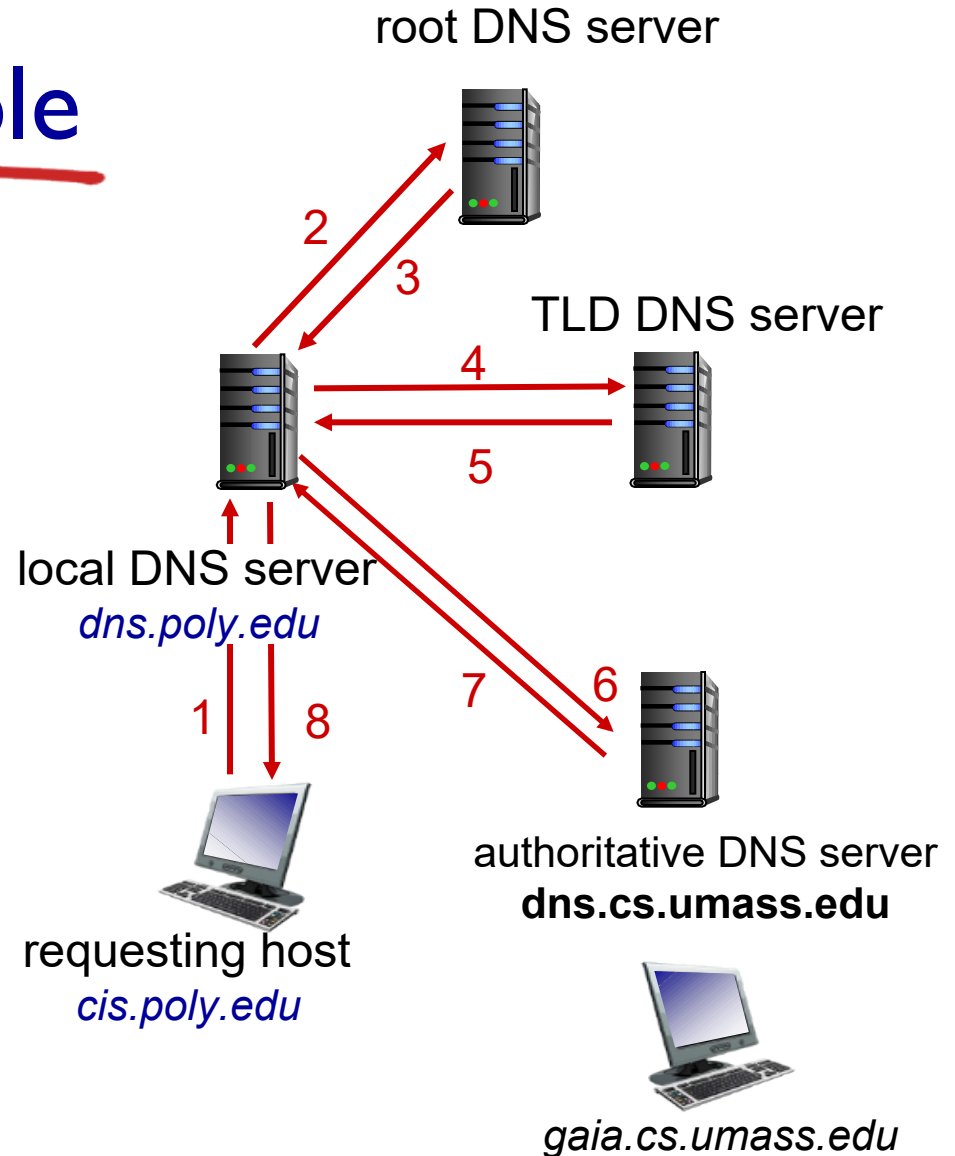

DNS name resolution example

recursive query:

- puts burden of name resolution on contacted name server
- heavy load at upper levels of hierarchy?

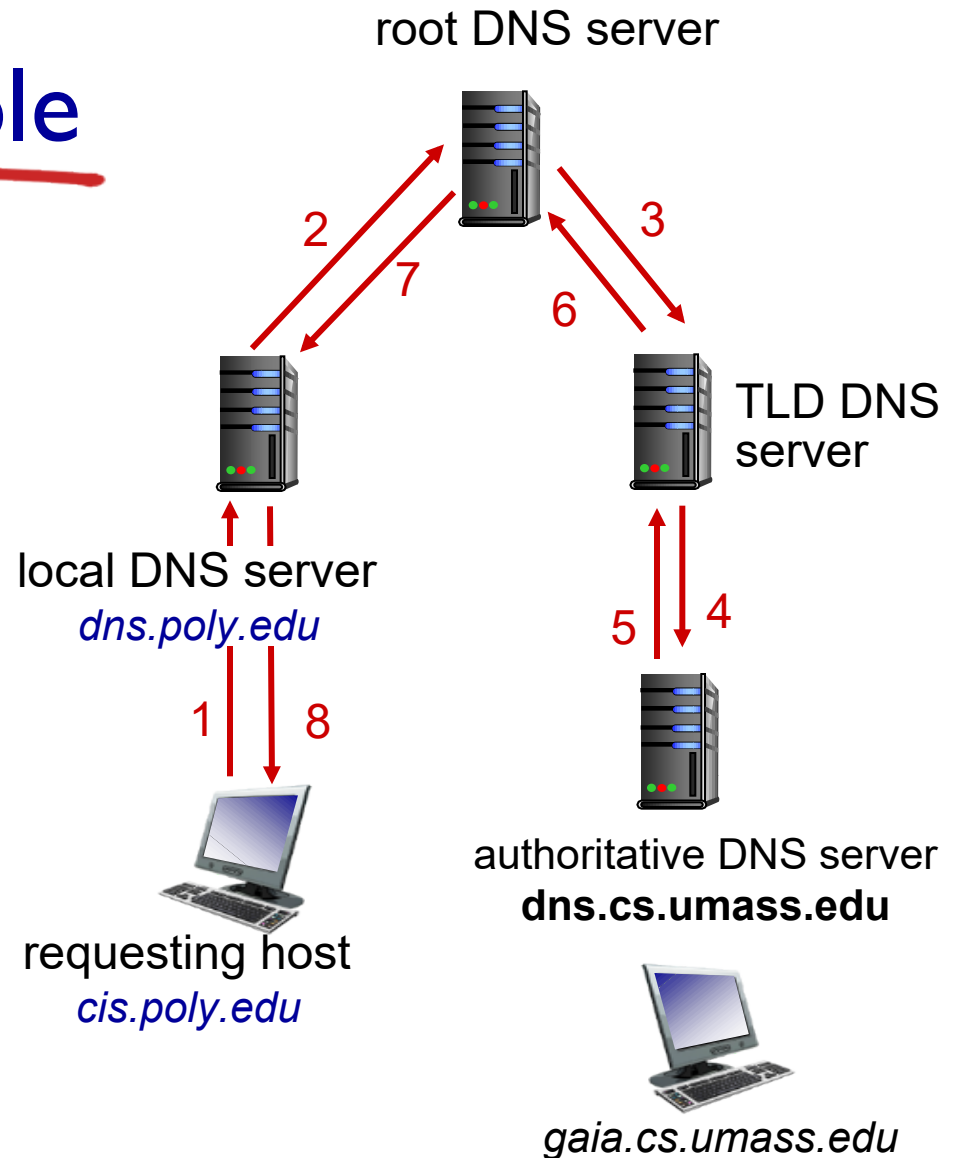

DNS: caching, updating records

- once (any) name server learns mapping, it *caches* mapping
 - cache entries timeout (disappear) after some time (TTL)
 - TLD servers typically cached in local name servers
 - thus root name servers not often visited
- cached entries may be *out-of-date* (best effort name-to-address translation!)
 - if name host changes IP address, may not be known Internet-wide until all TTLs expire
- update/notify mechanisms proposed IETF standard
 - RFC 2136

DNS records

DNS: distributed database storing resource records (RR, 资源记录)

RR format: (name, value, type, ttl)

type=A

- **name** is hostname
- **value** is IP address

type=NS

- **name** is domain (e.g., foo.com)
- **value** is hostname of authoritative name server for this domain

type=CNAME 别名记录

- **name** is alias name for some “canonical” (the real) name
- **www.ibm.com** is really **servereast.backup2.ibm.com**
- **value** is canonical name

type=MX


- **value** is name of mailserver associated with **name**

DNS protocol, messages


- *query* and *reply* messages, both with same *message format*

message header

- **identification**: 16 bit # for query, reply to query uses same #
- **flags**:
 - query or reply
 - recursion desired
 - recursion available
 - reply is authoritative

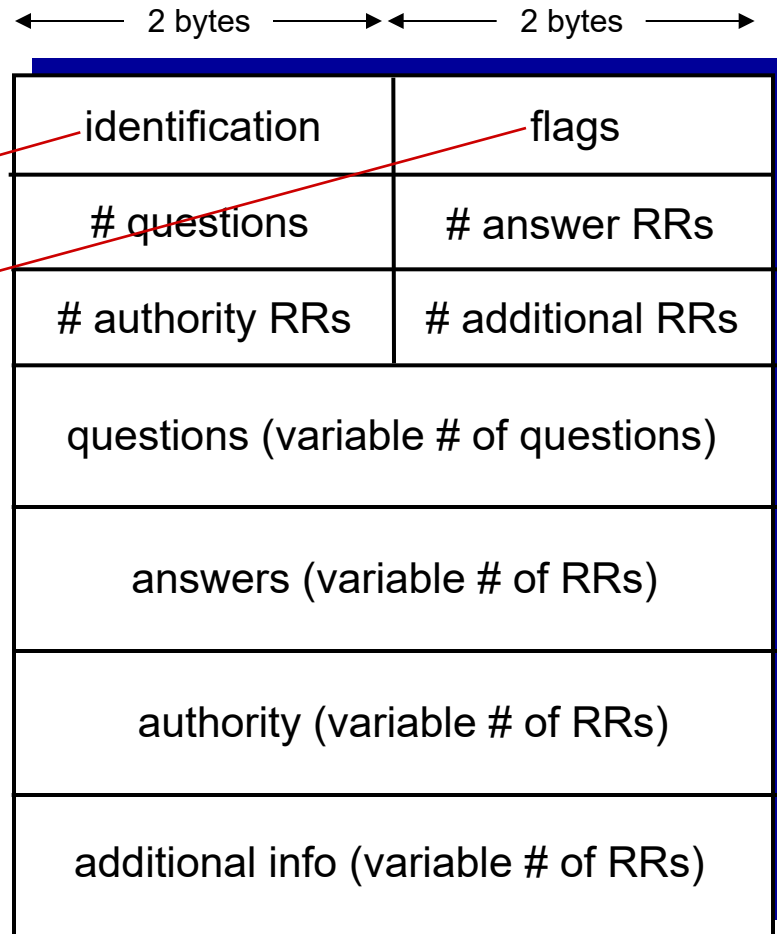

DNS protocol, messages

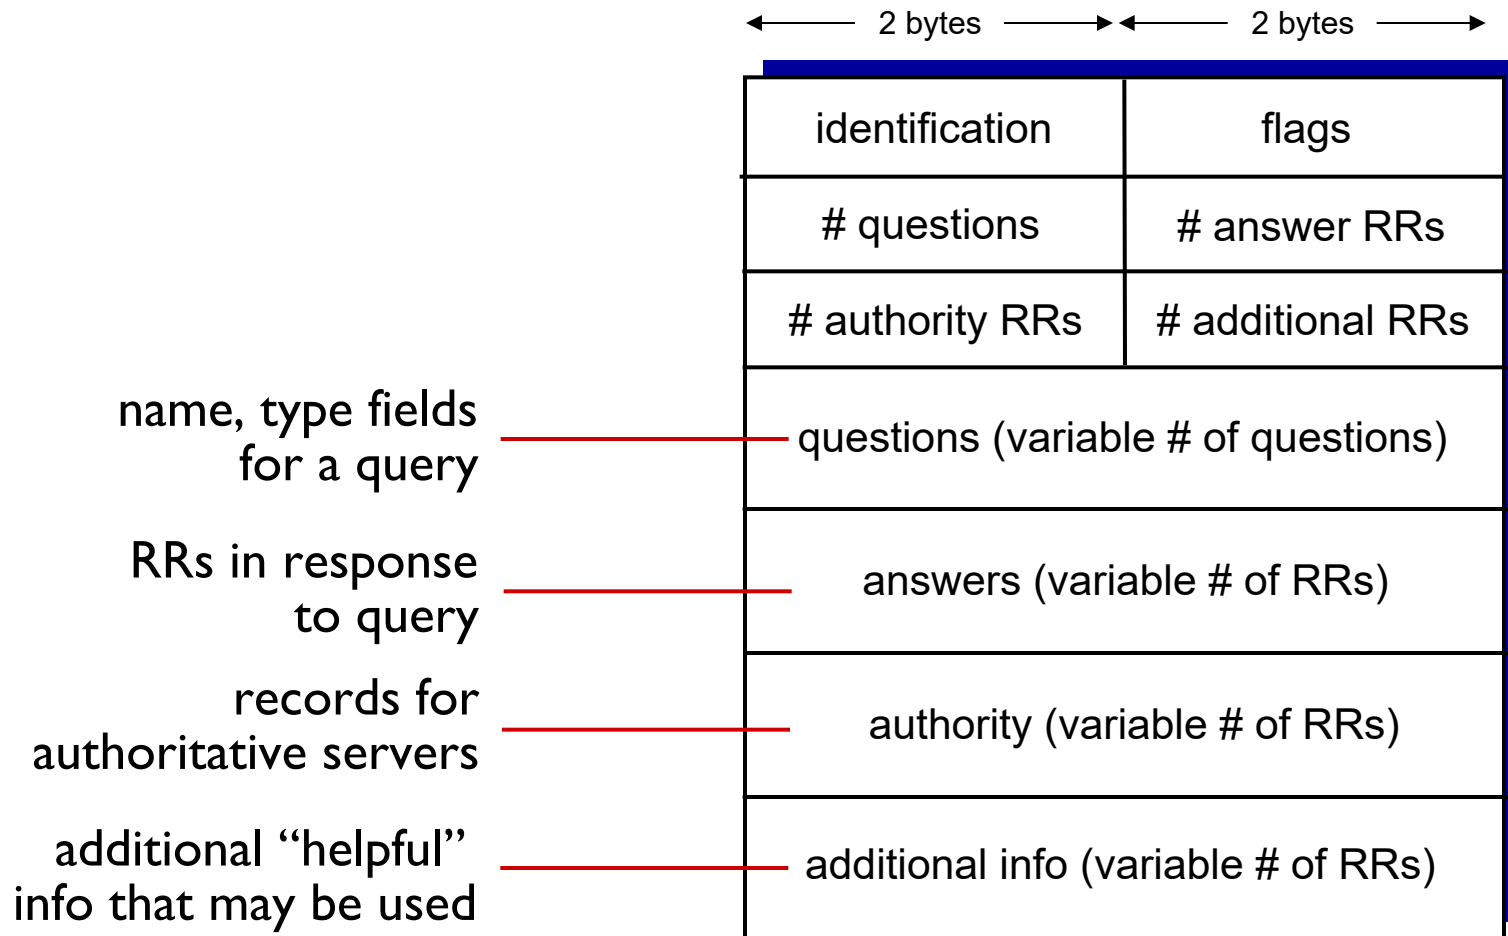

Inserting records into DNS

- example: new startup “Network Utopia, 网络乌托邦”
- register name networkutopia.com at *DNS registrar* (e.g., Network Solutions)
 - provide names, IP addresses of authoritative name server (primary and secondary)
 - registrar inserts two RRs into .com TLD server:
(networkutopia.com, dns1.networkutopia.com, NS)
(dns1.networkutopia.com, 212.212.212.1, A)
- create authoritative server type A record for www.networkutopia.com; type MX record for networkutopia.com

Attacking DNS

DDoS attacks

- bombard root servers with traffic
 - not successful to date
 - traffic filtering
 - local DNS servers cache IPs of TLD servers, allowing root server bypass
- bombard TLD servers
 - potentially more dangerous

redirect attacks

- man-in-middle
 - Intercept (拦截) queries
- DNS poisoning
 - Send bogus replies to DNS server, which caches

exploit DNS for DDoS

- send queries with spoofed source address: target IP
- requires amplification

作业

- 调查域名注册，登记过程。

Chapter 2: outline

2.1 principles of network applications

2.2 Web and HTTP

2.3 electronic mail

- SMTP, POP3, IMAP

2.4 DNS

2.5 P2P applications

2.6 video streaming and content distribution networks


2.7 socket programming with UDP and TCP

Pure P2P architecture

- no always-on server
- arbitrary end systems directly communicate
- peers are intermittently connected and change IP addresses

examples:


- file distribution (BitTorrent)
- Streaming (KanKan)
- VoIP (Skype)

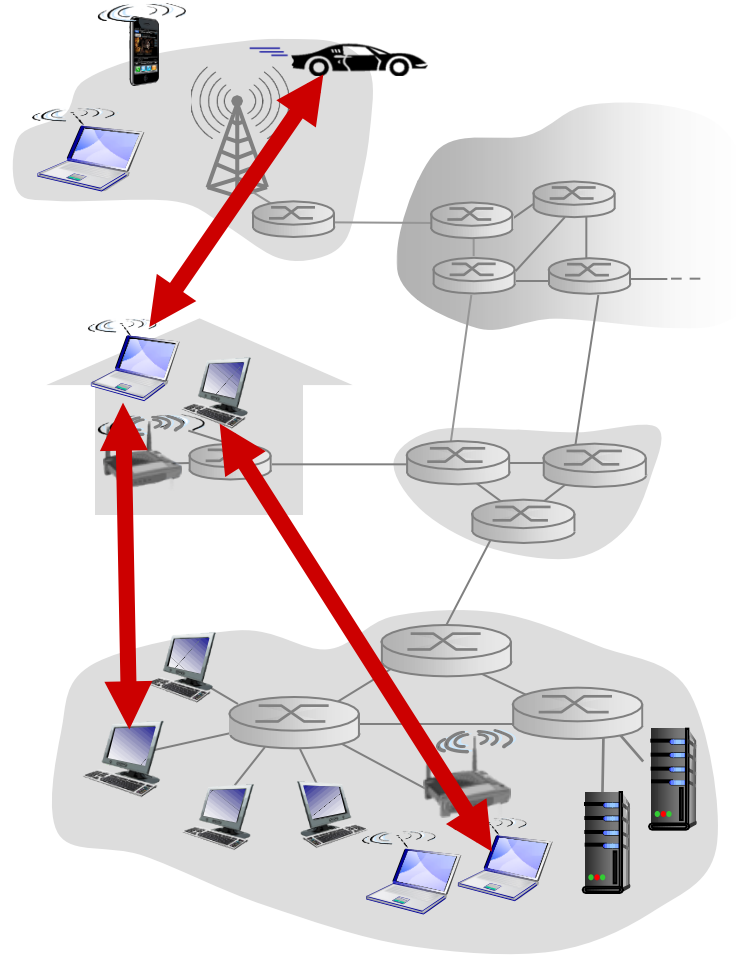

File distribution: client-server vs P2P


Question: how much time to distribute file (size F) from one server to N peers?

- peer upload/download capacity is limited resource

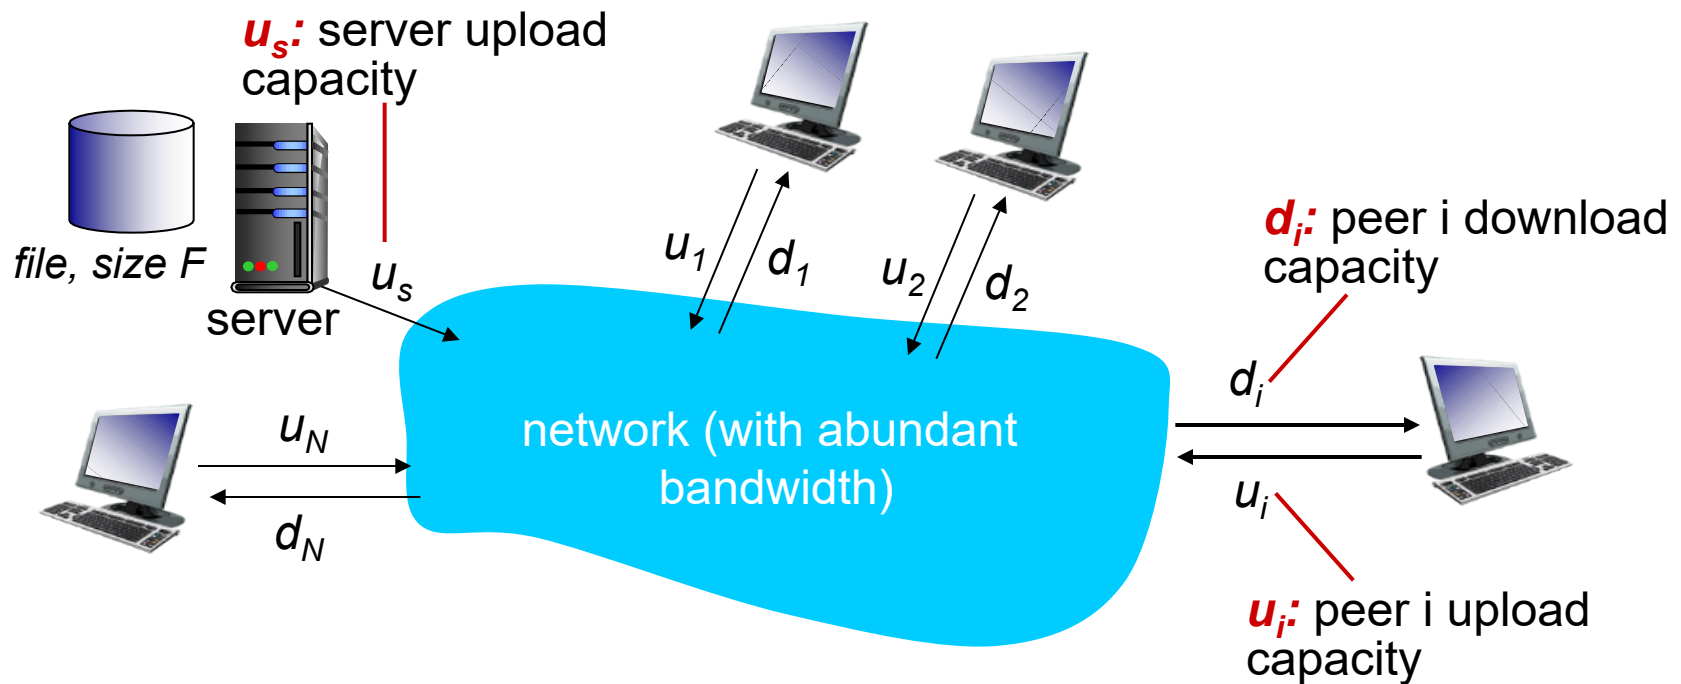

File distribution time: client-server

- **server transmission:** must sequentially send (upload) N file copies:
 - time to send one copy: F/u_s
 - time to send N copies: NF/u_s
- **client:** each client must download file copy
 - d_{\min} = min client download rate
 - min client download time: F/d_{\min}

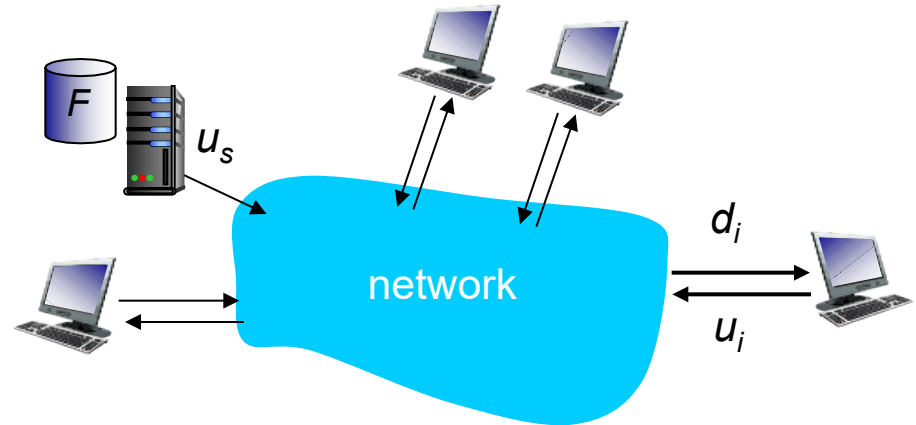


*time to distribute F
to N clients using
client-server approach*

$$D_{c-s} \geq \max\{NF/u_s, F/d_{\min}\}$$

increases linearly in N

File distribution time: P2P

- **server transmission:** must upload at least one copy
 - time to send one copy: F/u_s
- **client:** each client must download file copy
 - min client download time: F/d_{\min}
- **clients:** as aggregate must download NF bits
 - max upload rate (limiting max download rate) is $u_s + \sum u_i$

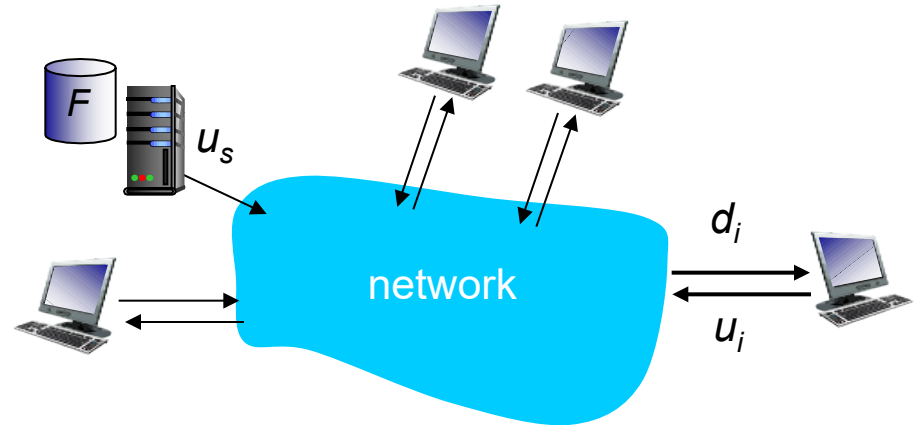

*time to distribute F
to N clients using
P2P approach*


$$D_{P2P} \geq \max\{F/u_s, F/d_{\min}, NF/(u_s + \sum u_i)\}$$

increases linearly in N ...

... but so does this, as each peer brings service capacity

Client-server vs. P2P: example

client upload rate = u , $F/u = 1$ hour, $u_s = 10u$, $d_{min} \geq u_s$

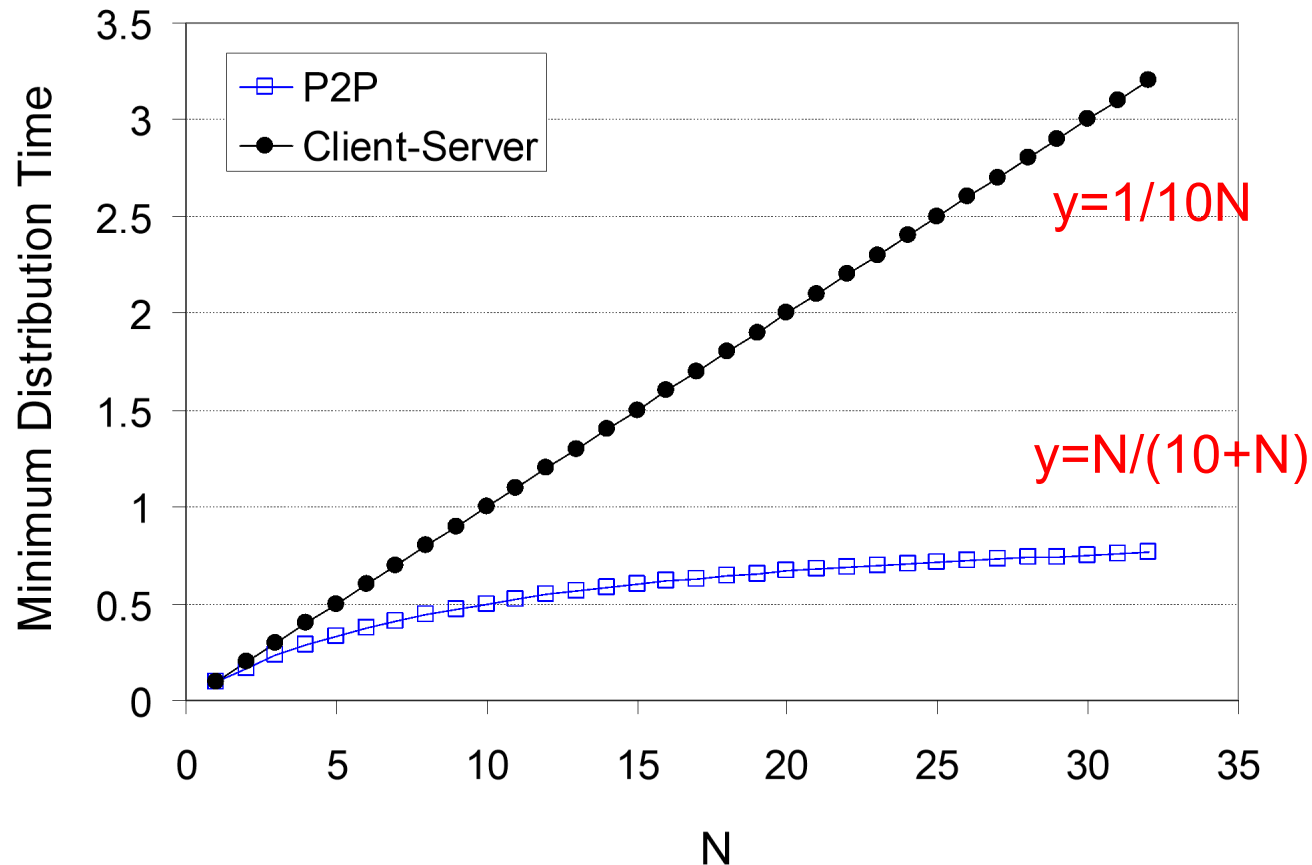


P2P file distribution: BitTorrent

- file divided into 256KB· chunks
- peers in torrent send/receive file chunks

tracker: tracks peers participating in torrent

torrent: group of peers exchanging chunks of a file


追踪器

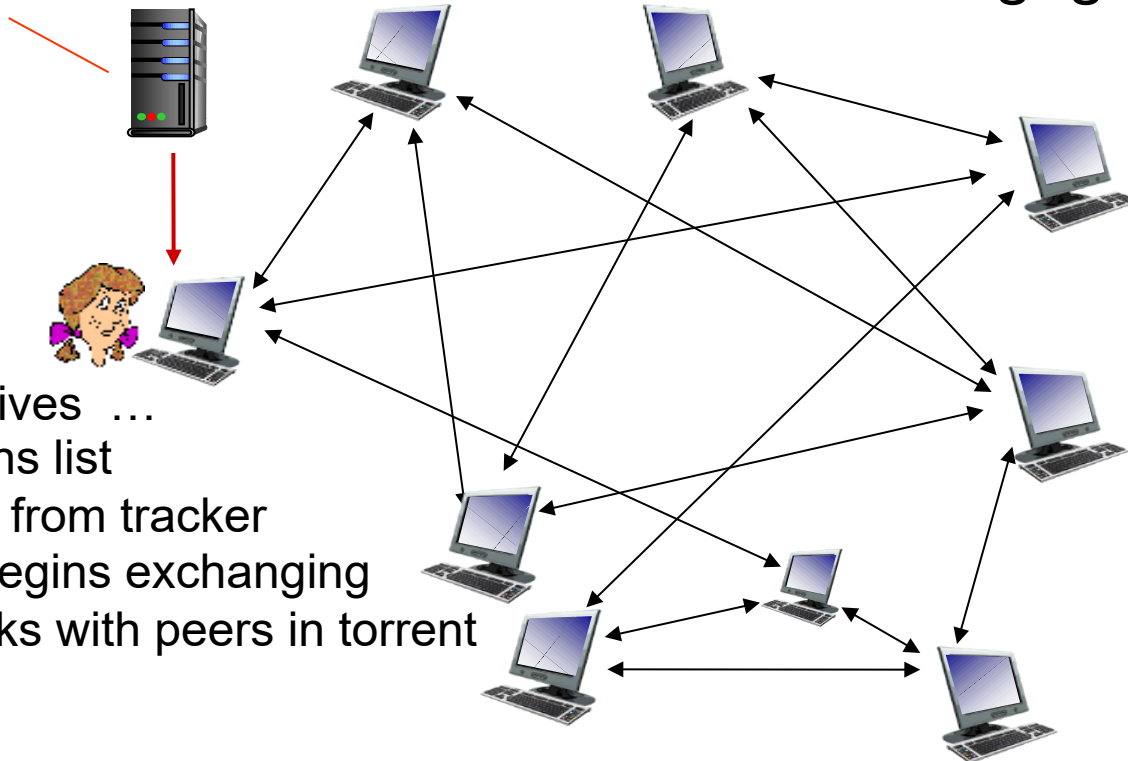

Alice arrives ...
... obtains list
of peers from tracker
... and begins exchanging
file chunks with peers in torrent

P2P file distribution: BitTorrent

- peer joining torrent:
 - has no chunks, but will accumulate them over time from other peers
 - registers with tracker to get list of peers, connects to subset of peers (“neighbors”)
- while downloading, peer uploads chunks to other peers
- peer may change peers with whom it exchanges chunks
- *churn*: peers may come and go
- once peer has entire file, it may (selfishly) leave or (altruistically) remain in torrent

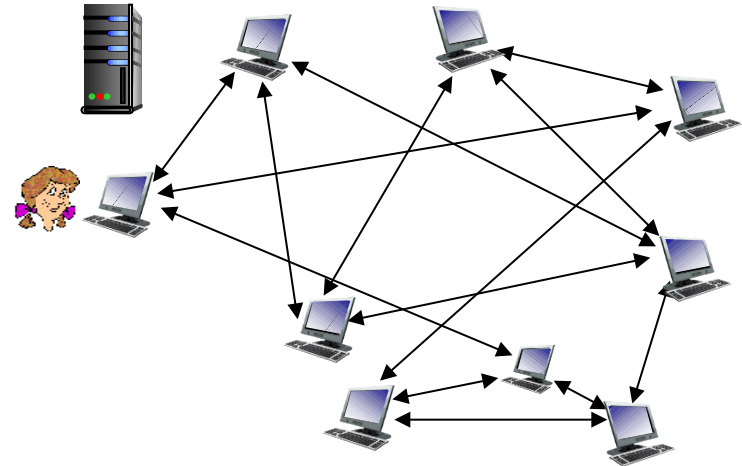

BitTorrent: requesting, sending file chunks

requesting chunks:


- at any given time, different peers have different subsets of file chunks
- periodically, Alice asks each peer for list of chunks that they have
- Alice requests missing chunks from peers, rarest first(最稀缺优先)

sending chunks: tit-for-tat (一报还一报)

- Alice sends chunks to those four peers currently sending her chunks *at highest rate*
 - other peers are choked by Alice (do not receive chunks from her)
 - re-evaluate top 4 every 10 secs
- every 30 secs: randomly select another peer, starts sending chunks
 - “optimistically unchoke” this peer
 - newly chosen peer may join top 4

BitTorrent: tit-for-tat

- (1) Alice “optimistically unchokes” Bob
- (2) Alice becomes one of Bob’s top-four providers; Bob reciprocates
- (3) Bob becomes one of Alice’s top-four providers

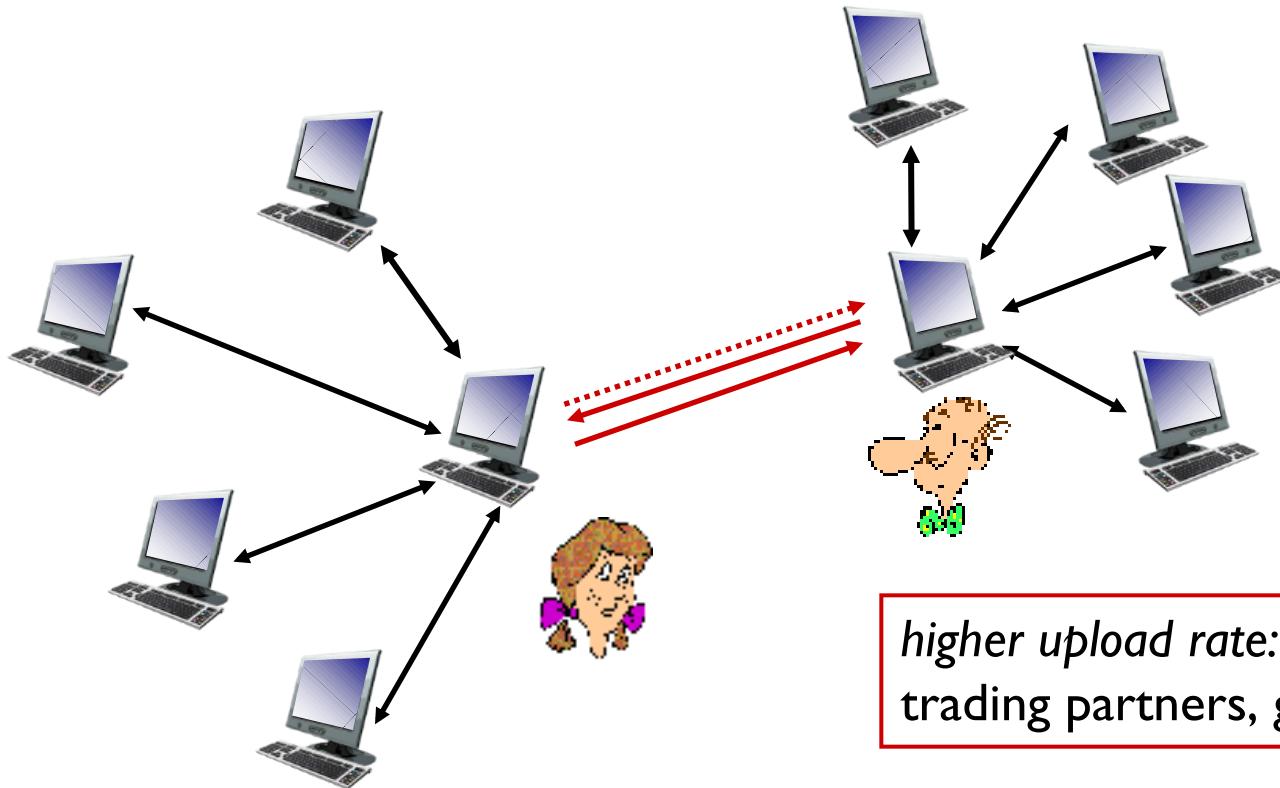

Chapter 2: outline

2.1 principles of network applications

2.2 Web and HTTP

2.3 electronic mail

- SMTP, POP3, IMAP

2.4 DNS

2.5 P2P applications

2.6 video streaming and content distribution networks (CDNs)

2.7 socket programming with UDP and TCP

Video Streaming and CDNs: context


- video traffic: major consumer of Internet bandwidth
 - Netflix, YouTube: 37%, 16% of downstream residential ISP traffic
 - ~1B YouTube users, ~75M Netflix users
- challenge: scale - how to reach ~1B users?
 - single mega-video server won't work (why?)
- challenge: heterogeneity
 - different users have different capabilities (e.g., wired versus mobile; bandwidth rich versus bandwidth poor)
- *solution*: distributed, application-level infrastructure



Multimedia: video


- video: sequence of images displayed at constant rate
 - e.g., 24 images/sec
- digital image: array of pixels
 - each pixel represented by bits
- coding: use redundancy *within* and *between* images to decrease # bits used to encode image
 - spatial (within image)
 - temporal (from one image to next)

spatial coding example: instead of sending N values of same color (all purple), send only two values: color value (*purple*) and number of repeated values (N)

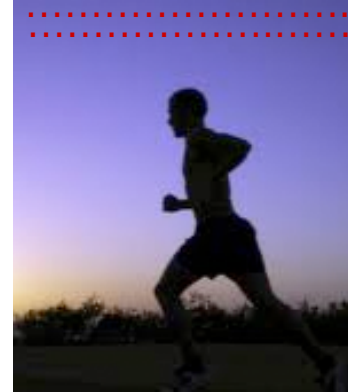

frame i

temporal coding example: instead of sending complete frame at $i+1$, send only differences from frame i

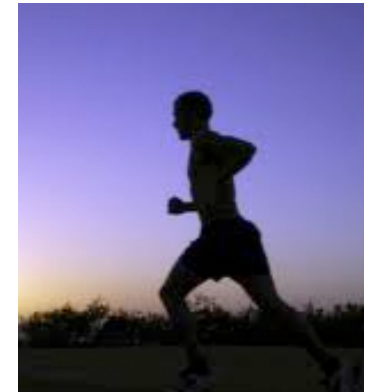


frame $i+1$

Multimedia: video


- **CBR: (constant bit rate):**
video encoding rate fixed
- **VBR: (variable bit rate):**
video encoding rate changes
as amount of spatial,
temporal coding changes
- **examples:**
 - MPEG I (CD-ROM) 1.5 Mbps
 - MPEG2 (DVD) 3-6 Mbps
 - MPEG4 (often used in Internet, < 1 Mbps)

spatial coding example: instead of sending N values of same color (all purple), send only two values: color value (*purple*) and number of repeated values (N)

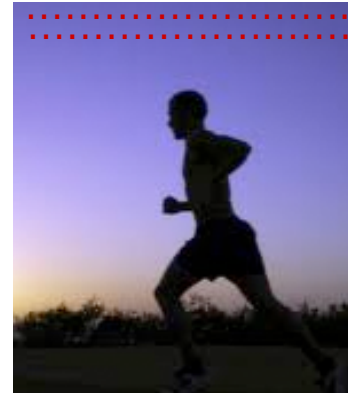

frame i


temporal coding example: instead of sending complete frame at $i+1$, send only differences from frame i

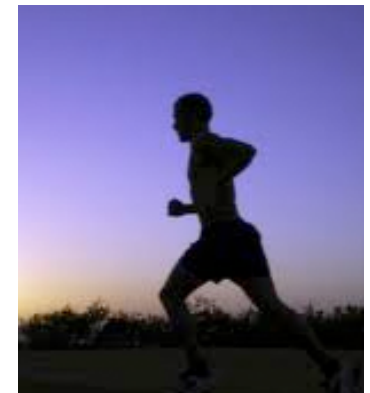

frame $i+1$

Streaming stored video:

simple scenario:

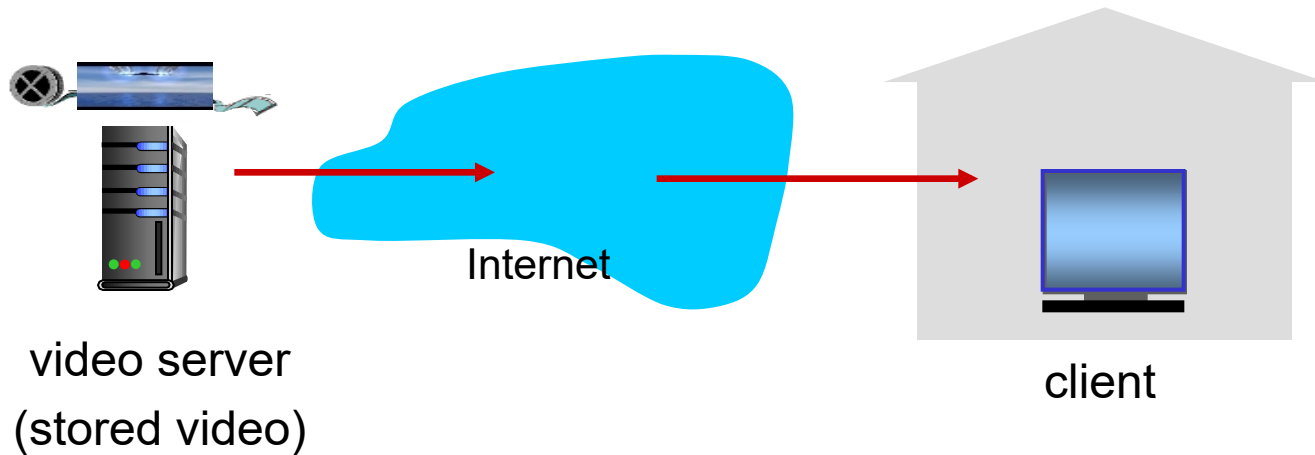

Streaming multimedia: DASH

- **DASH**: *D*ynamic, *A*daptive *S*treaming over *H*TTP
- *server*:
 - divides video file into multiple chunks
 - each chunk stored, encoded at different rates
 - *manifest file* (清单文件): provides URLs for different chunks
- *client*:
 - periodically measures server-to-client bandwidth
 - consulting manifest, requests one chunk at a time
 - chooses maximum coding rate sustainable given current bandwidth
 - can choose different coding rates at different points in time (depending on available bandwidth at time)

Streaming multimedia: DASH

- *DASH: Dynamic, Adaptive Streaming over HTTP*
- “intelligence” at client: client determines
 - *when* to request chunk (so that buffer starvation, or overflow does not occur)
 - *what encoding rate* to request (higher quality when more bandwidth available)
 - *where* to request chunk (can request from URL server that is “close” to client or has high available bandwidth)

Content distribution networks

- *challenge*: how to stream content (selected from millions of videos) to hundreds of thousands of *simultaneous* users?
- *option 1*: single, large “mega-server”
 - single point of failure
 - point of network congestion
 - long path to distant clients
 - multiple copies of video sent over outgoing link

....quite simply: this solution *doesn't scale*


Content distribution networks

内容分发网


- **challenge:** how to stream content (selected from millions of videos) to hundreds of thousands of simultaneous users?
- **option 2:** store/serve multiple copies of videos at multiple geographically distributed sites (**CDN**)
 - **enter deep** (深入) : push CDN servers deep into many access networks
 - close to users
 - used by Akamai, 1700 locations
 - **bring home** (邀请做客) : smaller number (10's) of larger clusters in POPs near (but not within) access networks
 - used by Limelight

Content Distribution Networks (CDNs)

- CDN: stores copies of content at CDN nodes
 - e.g. Netflix stores copies of MadMen
- subscriber requests content from CDN
 - directed to nearby copy, retrieves content
 - may choose different copy if network path congested

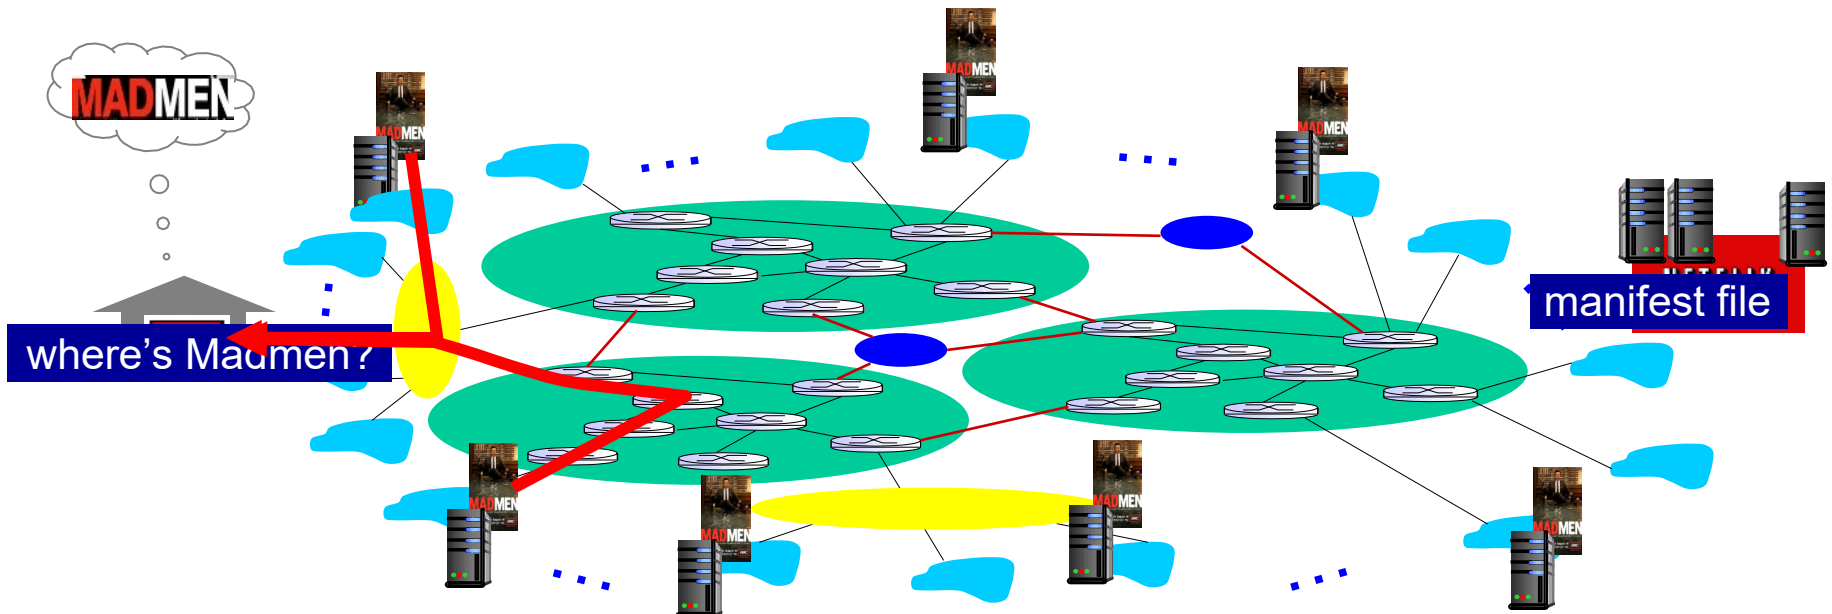

Content Distribution Networks (CDNs)

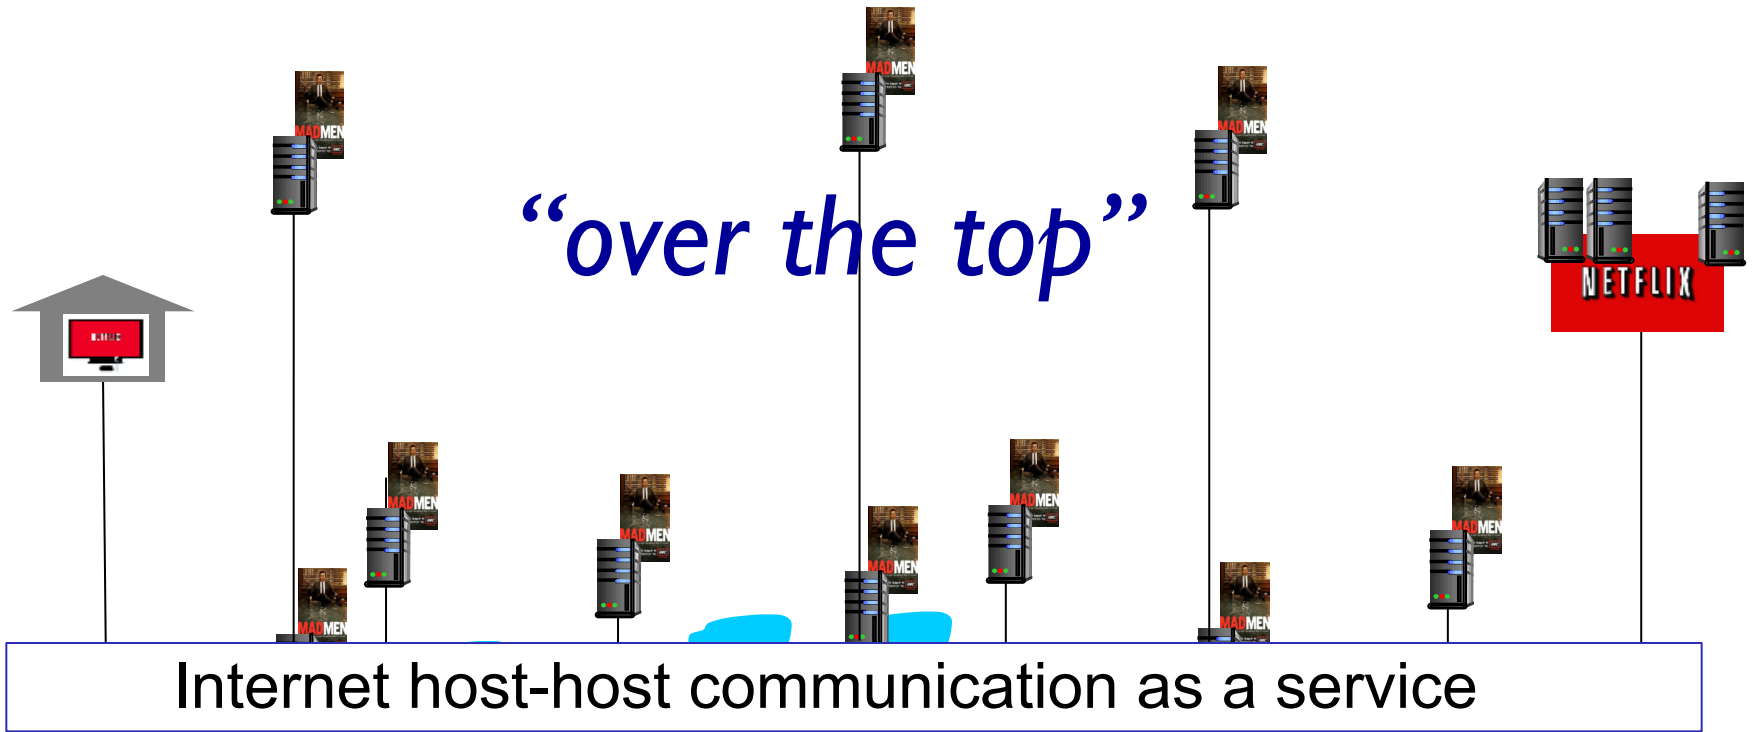

OTT (over the top) challenges: coping with a congested Internet


- from which CDN node to retrieve content?
- viewer behavior in presence of congestion?
- what content to place in which CDN node?

more .. in chapter 7


CDN content access: a closer look

Bob (client) requests video `http://netcinema.com/6Y7B23V`

- video stored in CDN at `http://KingCDN.com/NetC6y&B23V`

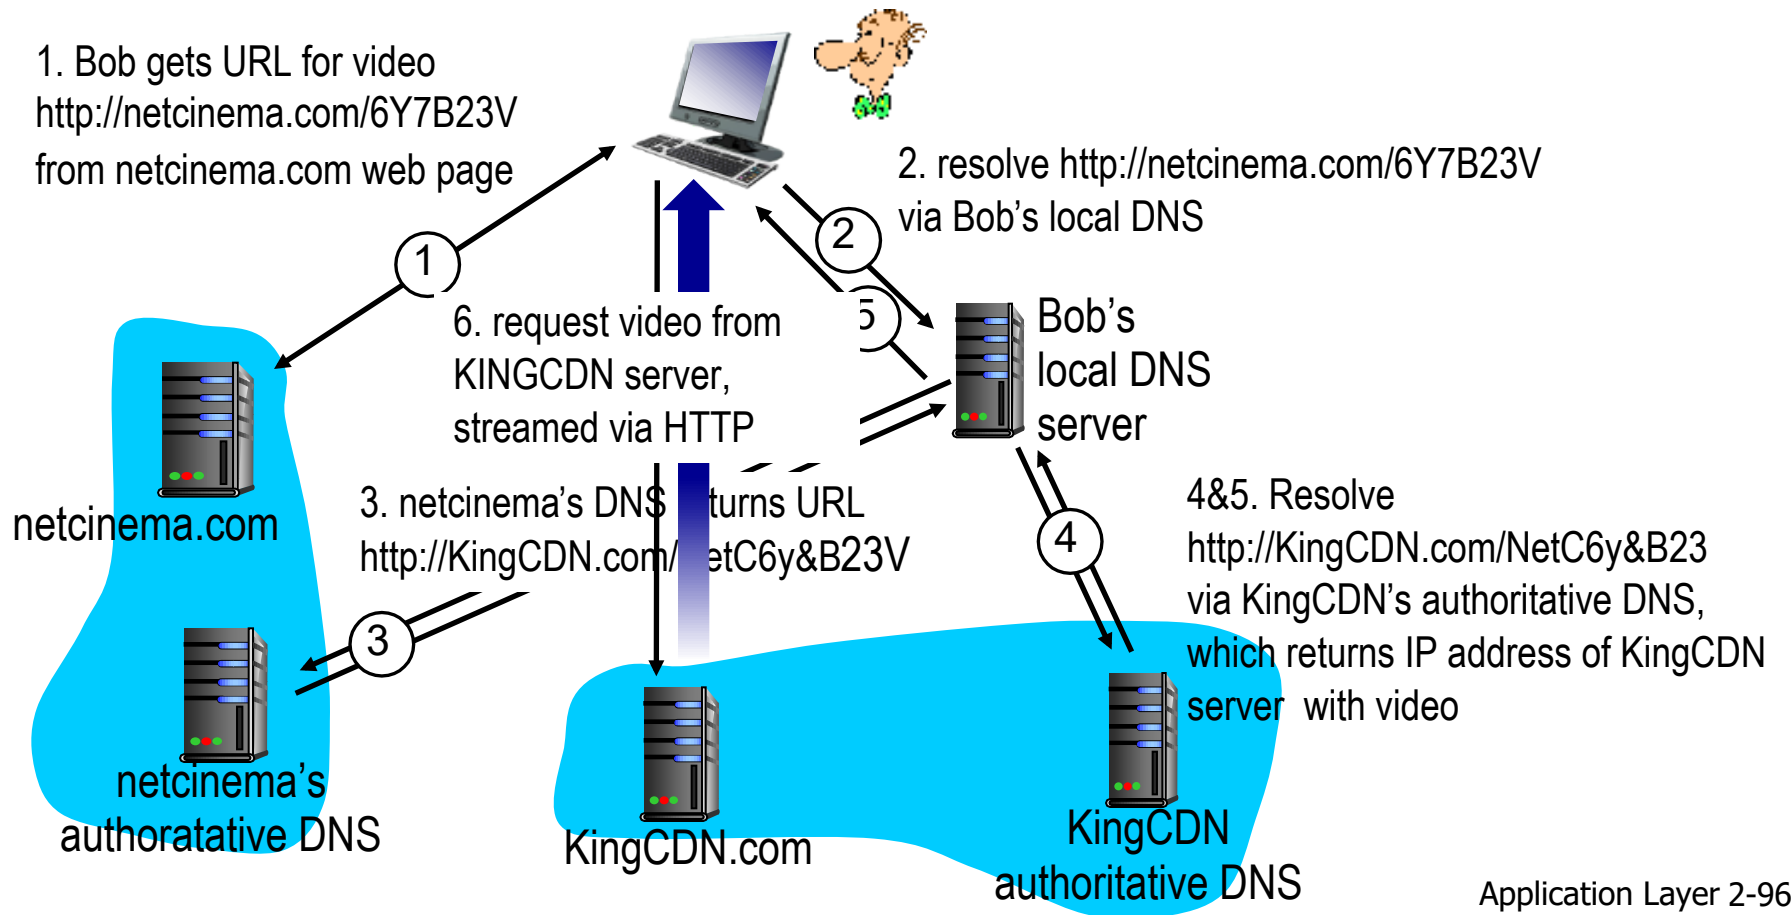

Case study: Netflix

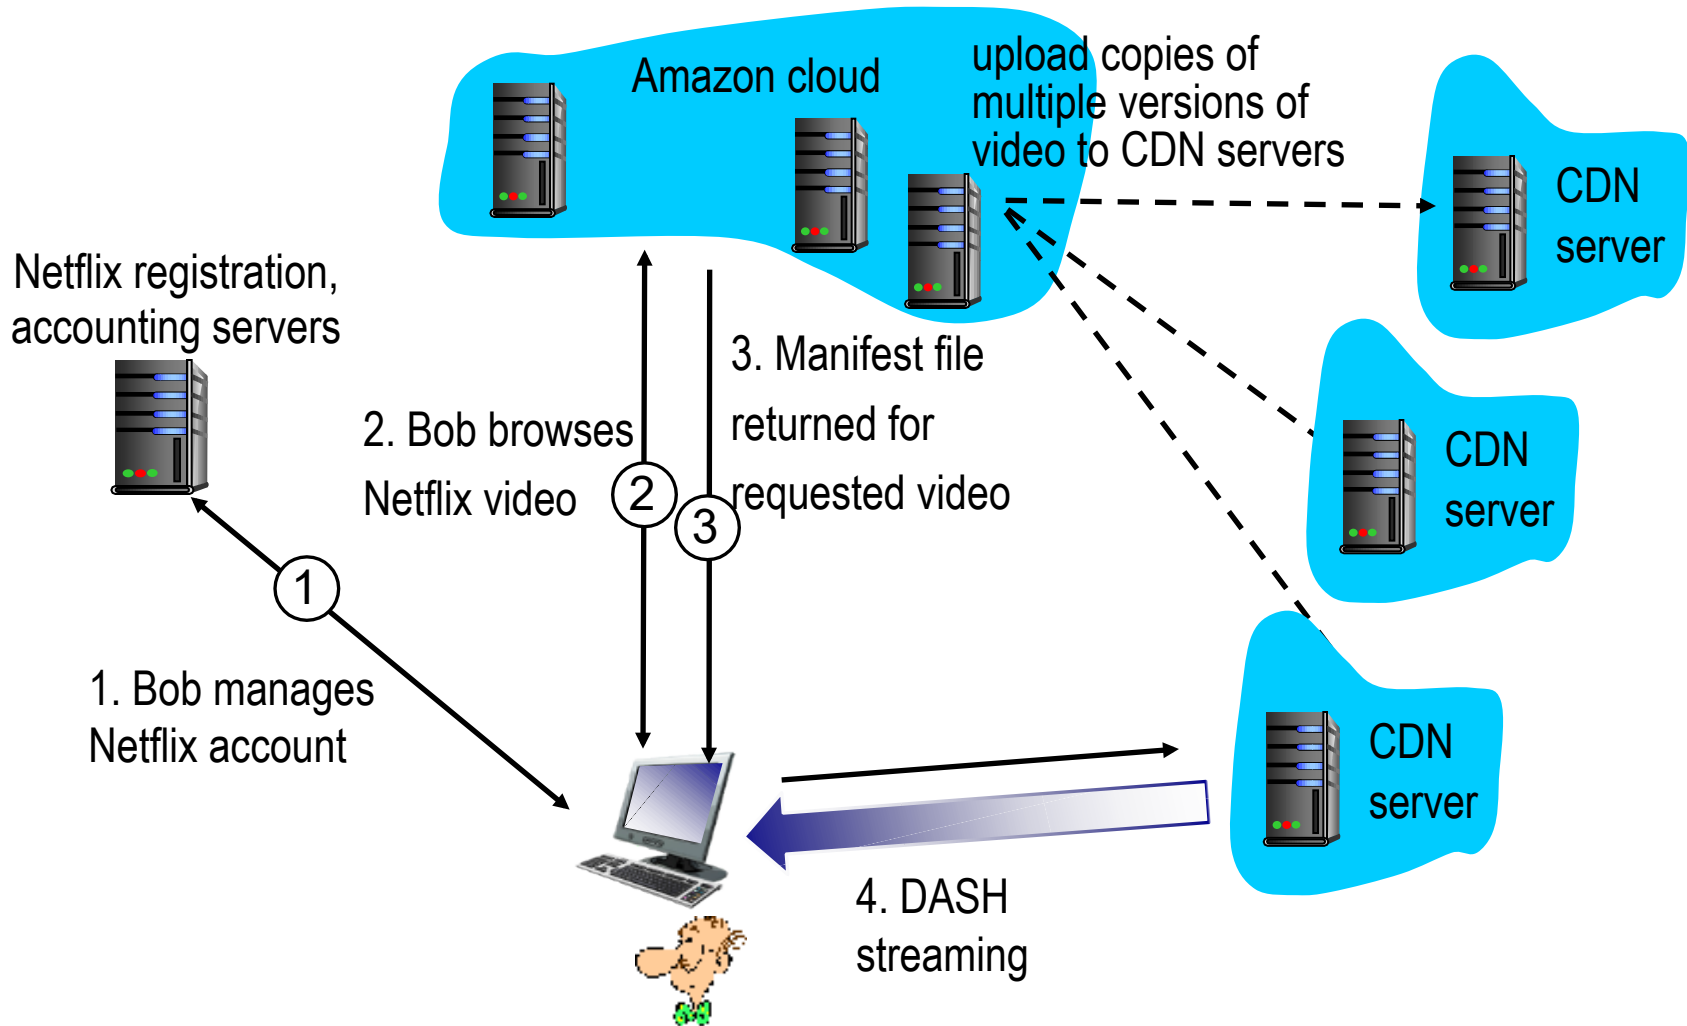

Chapter 2: outline

2.1 principles of network applications

2.2 Web and HTTP

2.3 electronic mail

- SMTP, POP3, IMAP

2.4 DNS

2.5 P2P applications


2.6 video streaming and content distribution networks

2.7 socket programming with UDP and TCP

Socket programming

goal: learn how to build client/server applications that communicate using sockets

socket: door between application process and end-end-transport protocol

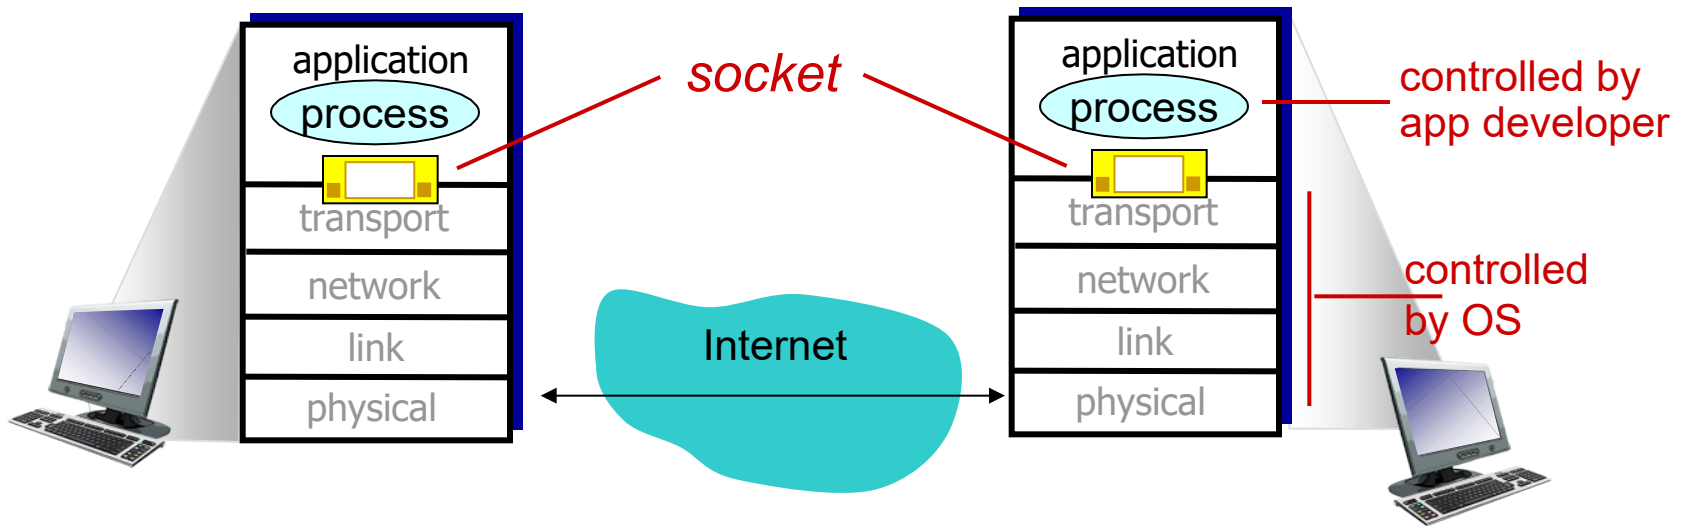

Socket programming

Two socket types for two transport services:

- **UDP:** unreliable datagram
- **TCP:** reliable, byte stream-oriented

Application Example:

1. client reads a line of characters (data) from its keyboard and sends data to server
2. server receives the data and converts characters to uppercase
3. server sends modified data to client
4. client receives modified data and displays line on its screen

Socket programming *with UDP*

UDP: no “connection” between client & server

- no handshaking before sending data
- sender explicitly attaches IP destination address and port # to each packet
- receiver extracts sender IP address and port# from received packet

UDP: transmitted data may be lost or received out-of-order

Application viewpoint:

- UDP provides *unreliable* transfer of groups of bytes (“datagrams”) between client and server

Client/server socket interaction: UDP

server (running on serverIP)

create socket, port= x:
`serverSocket =
socket(AF_INET,SOCK_DGRAM)`

↓
read datagram from
`serverSocket`

↓
write reply to
`serverSocket`
specifying
client address,
port number

client

create socket:
`clientSocket =
socket(AF_INET,SOCK_DGRAM)`

↓
Create datagram with server IP and
port=x; send datagram via
`clientSocket`

↓
read datagram from
`clientSocket`

↓
close
`clientSocket`

Example app: UDP client

Python UDPClient

include Python's socket
library

→ from socket import *

serverName = 'hostname'

serverPort = 12000 **IPV4**

create UDP socket for
server

→ clientSocket = socket(AF_INET,
SOCK_DGRAM) **UDP**

get user keyboard
input

→ message = raw_input('Input lowercase sentence:')

Attach server name, port to
message; send into socket

→ clientSocket.sendto(message.encode(),
(serverName, serverPort))

read reply characters from
socket into string

→ modifiedMessage, serverAddress =
clientSocket.recvfrom(2048)

print out received string
and close socket

→ print modifiedMessage.decode()
clientSocket.close()

Example app: UDP server

Python UDPServer

```
from socket import *  
serverPort = 12000      IPV4      UDP  
create UDP socket → serverSocket = socket(AF_INET, SOCK_DGRAM)  
bind socket to local port  
number 12000 → serverSocket.bind(('', serverPort))  
print ("The server is ready to receive")  
loop forever → while True:  
    Read from UDP socket into  
    message, getting client's  
    address (client IP and port) → message, clientAddress = serverSocket.recvfrom(2048)  
    modifiedMessage = message.decode().upper()  
    send upper case string  
    back to this client → serverSocket.sendto(modifiedMessage.encode(),  
                                              clientAddress)
```


Socket programming *with TCP*

client must contact server

- server process must first be running
- server must have created socket (door) that welcomes client's contact

client contacts server by:

- Creating TCP socket, specifying IP address, port number of server process
- *when client creates socket:* client TCP establishes connection to server TCP

- when contacted by client, *server TCP creates new socket* for server process to communicate with that particular client
 - allows server to talk with multiple clients
 - source port numbers used to distinguish clients (more in Chap 3)


application viewpoint:

TCP provides reliable, in-order byte-stream transfer (“pipe”) between client and server

Client/server socket interaction: TCP

server (running on `hostid`)

client

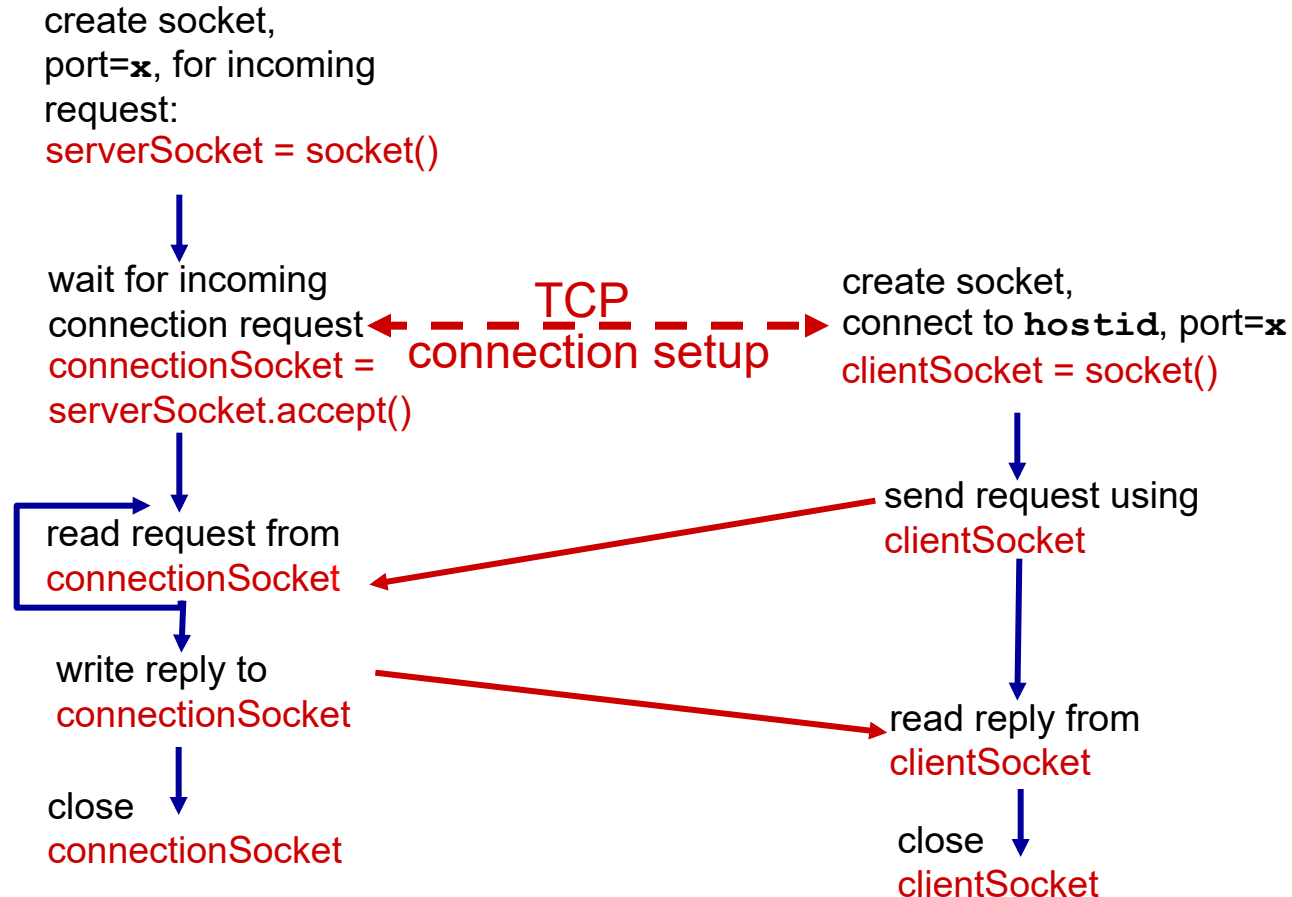

Example app: TCP client

Python TCPClient

```
from socket import *
```

```
serverName = 'servername'
```

```
serverPort = 12000
```

create TCP socket for
server, remote port 12000

```
→ clientSocket = socket(AF_INET, SOCK_STREAM)
```

```
clientSocket.connect((serverName,serverPort))
```

```
sentence = raw_input('Input lowercase sentence:')
```

No need to attach server
name, port

```
→ clientSocket.send(sentence.encode())
```

```
modifiedSentence = clientSocket.recv(1024)
```

```
print ('From Server:', modifiedSentence.decode())
```

```
clientSocket.close()
```

Example app: TCP server

Python TCPServer

create TCP welcoming
socket

server begins listening for
incoming TCP requests

loop forever

server waits on accept()
for incoming requests, new
socket created on return

read bytes from socket (but
not address as in UDP)

close connection to this
client (but *not* welcoming
socket)

```
from socket import *
serverPort = 12000
serverSocket = socket(AF_INET, SOCK_STREAM)
serverSocket.bind(('', serverPort))
serverSocket.listen(1)
print 'The server is ready to receive'

while True:
    connectionSocket, addr = serverSocket.accept()
    sentence = connectionSocket.recv(1024).decode()
    capitalizedSentence = sentence.upper()
    connectionSocket.send(capitalizedSentence.
                           encode())
    connectionSocket.close()
```

Chapter 2: summary

our study of network apps now complete!

- application architectures
 - client-server
 - P2P
- application service requirements:
 - reliability, bandwidth, delay
- Internet transport service model
 - connection-oriented, reliable: TCP
 - unreliable, datagrams: UDP
- specific protocols:
 - HTTP
 - SMTP, POP, IMAP
 - DNS
 - P2P: BitTorrent
- video streaming, CDNs
- socket programming:
TCP, UDP sockets

Chapter 2: summary

most importantly: learned about protocols!

- typical request/reply message exchange:
 - client requests info or service
 - server responds with data, status code
- message formats:
 - *headers*: fields giving info about data
 - *data*: info(payload) being communicated

important themes:

- control vs. messages
 - in-band, out-of-band
- centralized vs. decentralized
- stateless vs. stateful
- reliable vs. unreliable message transfer
- “complexity at network edge”