


Uml

Database - Car Rental

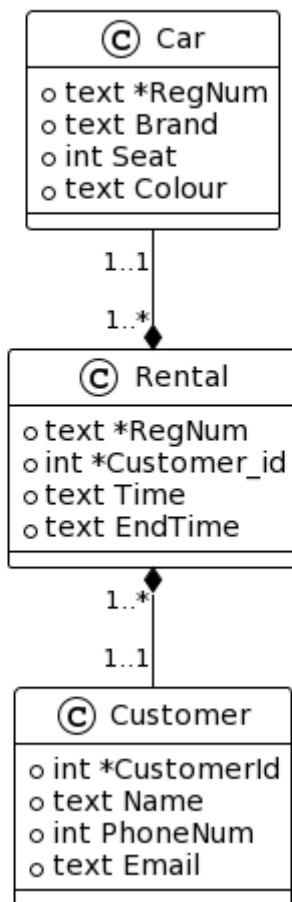

The uml code:

```
@startuml
```

```
!theme plain
```

```
title Database - Car Rental
```

```
class Customer {
    +int *CustomerId
    +text Name
    +int PhoneNum
    +text Email
}
```

```
class Rental {  
    +text *RegNum  
    +int *Customer_id  
    +text Time  
    +text EndTime  
}
```

```
Class Car {  
    +text *RegNum  
    +text Brand  
    +int Seat  
    +text Colour  
}
```

Rental "1..*" *-down- "1..1" Customer

Rental "1..*" *-up- "1..1" Car

@enduml