



TI-ARDI

Acceptor/Connector Pattern

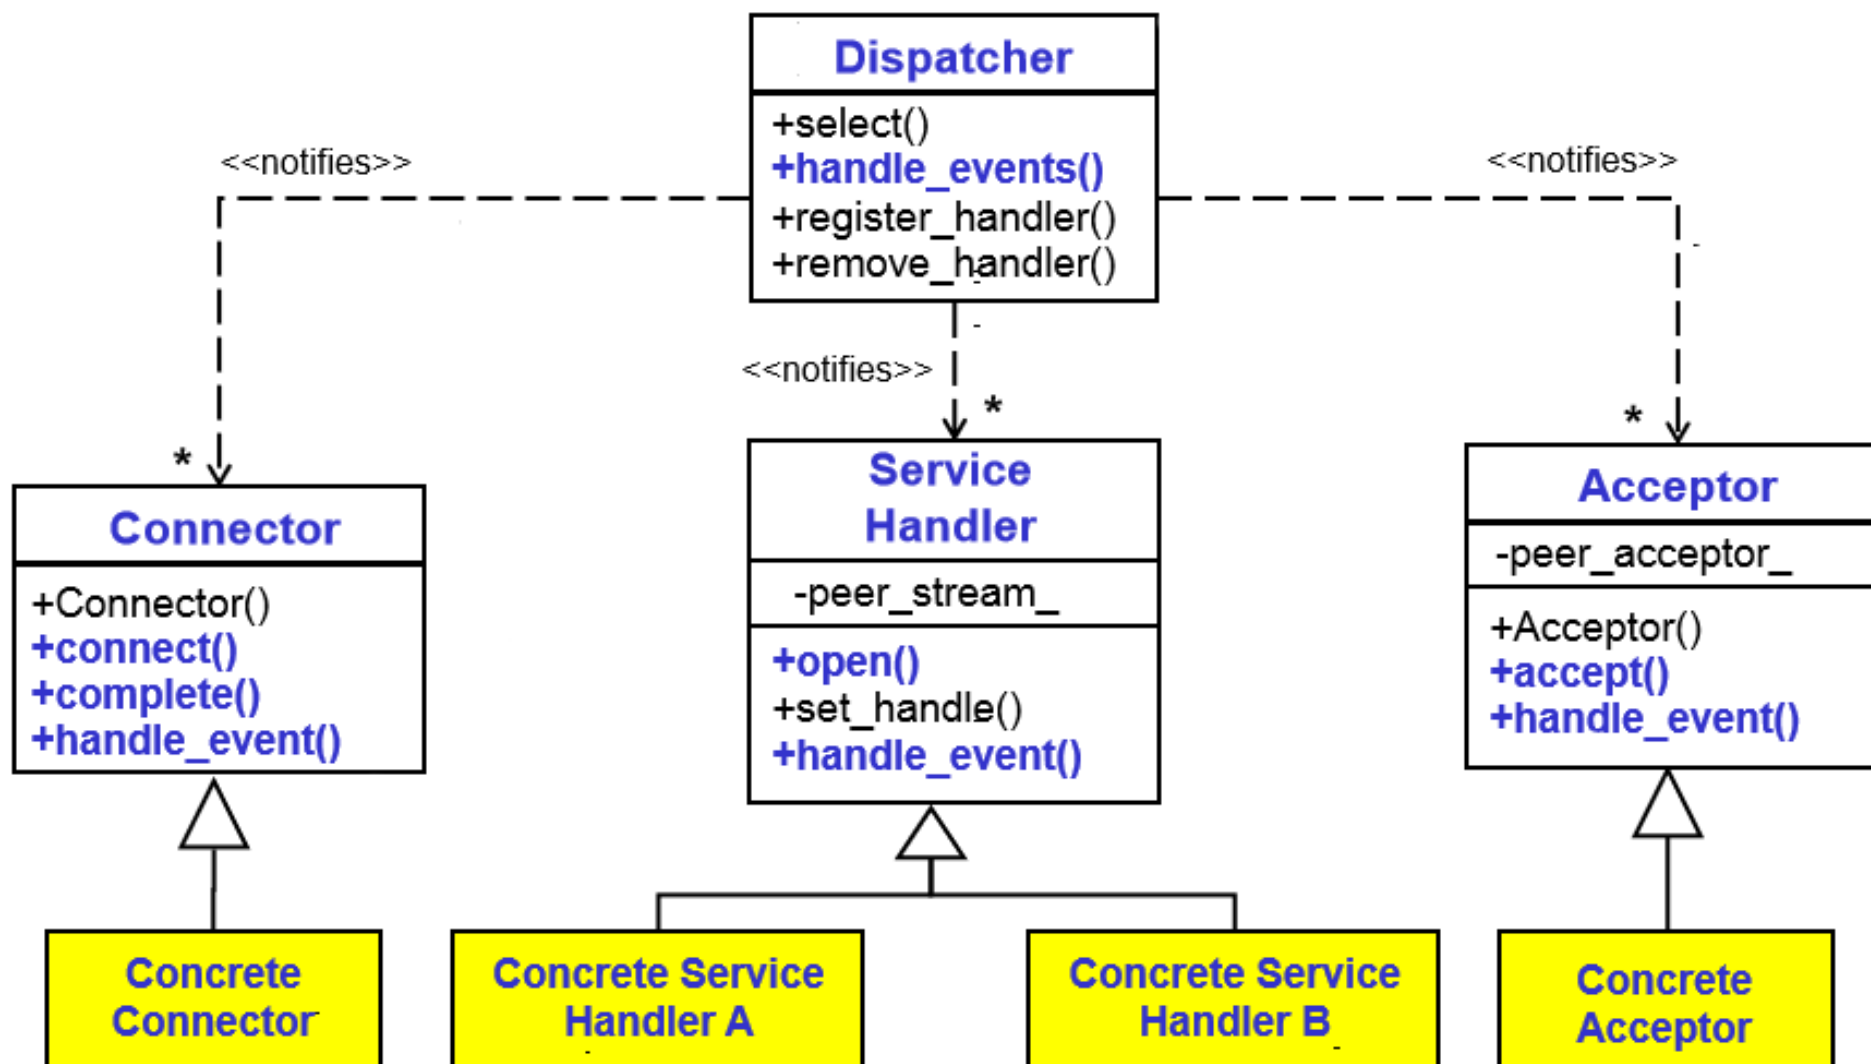

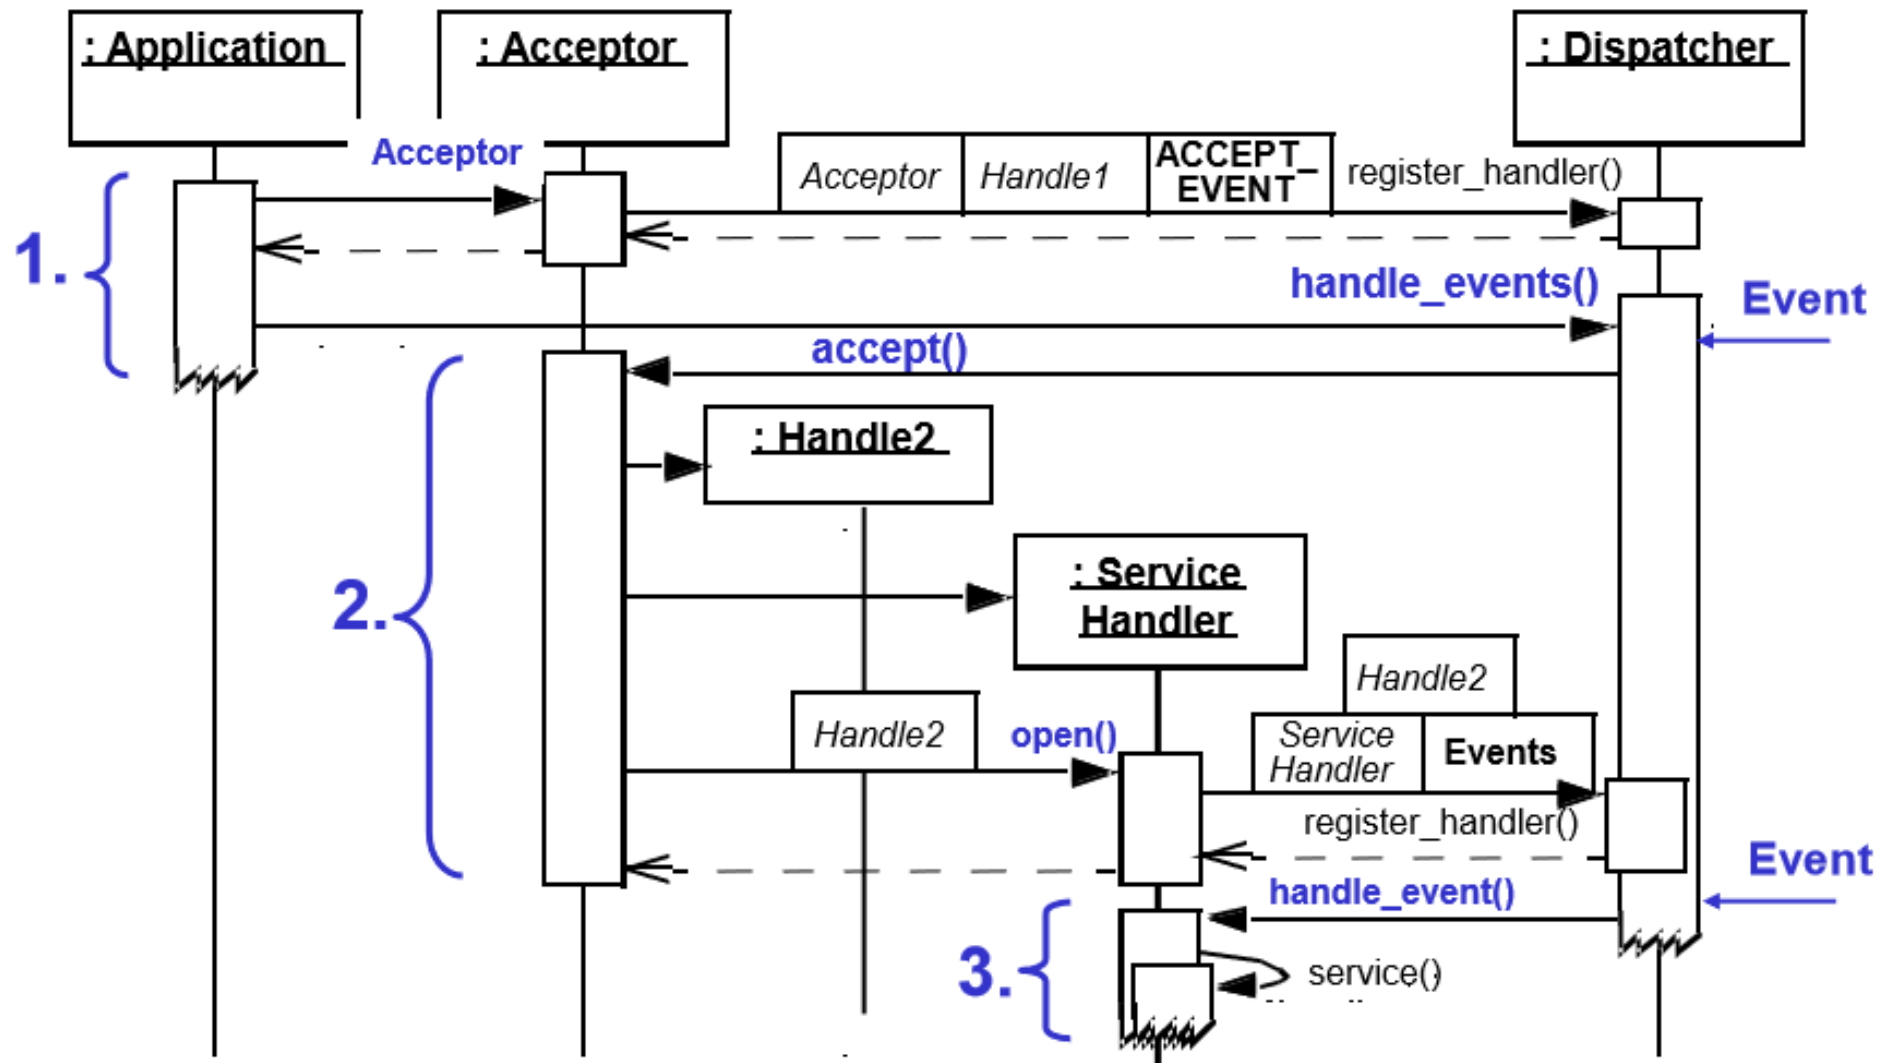

1. Passive-mode endpoint initialize phase
2. Service handler initialize phase
3. Service processing phase