

Human Cognition in Machines: A Unified Perspective of World Models

TIMOTHY RUPPRECHT^{*†}, Northeastern University, USA and EmbodyX Inc., USA
PU ZHAO^{*}, Northeastern University, USA
AMIR TAHERIN^{*}, Northeastern University, USA
ARASH AKBARI^{*}, Northeastern University, USA
ARMAN AKBARI^{*}, Northeastern University, USA
YUMEI HE^{*}, Tulane University, USA
TOOBA IMTIAZ^{*}, Northeastern University, USA
SEAN DUFFY, Northeastern University, USA
JUYI LIN, Northeastern University, USA
YIXIAO CHEN, Northeastern University, USA and EmbodyX Inc., USA
RAHUL CHOWDHURY, Northeastern University, USA
ENFU NAN, Northeastern University, USA
YIXIN SHEN, Northeastern University, USA and Cornell University, USA
YIFAN CAO, Northeastern University, USA and EmbodyX Inc., USA
HAOCHEN ZENG, EmbodyX Inc., USA
CHEN WANG, EmbodyX Inc., USA
WEIWEI CHEN, EmbodyX Inc., USA
GENG YUAN, Northeastern University, USA and University of Georgia, USA
JENNIFER DY, Northeastern University, USA
SARAH OSTADABBAS, Northeastern University, USA
XUAN ZHANG, Northeastern University, USA
DAVID KAELI, Northeastern University, USA
EDMUND YEH, Northeastern University, USA
YANZHI WANG[†], Northeastern University, USA

^{*}These authors contributed equally to this research.
[†]These authors are corresponding authors for this research.

Authors' Contact Information: Timothy Rupprecht, Northeastern University, Boston, MA, USA and EmbodyX Inc., San Mateo, CA, USA; Pu Zhao, Northeastern University, Boston, MA, USA; Amir Taherin, Northeastern University, Boston, MA, USA; Arash Akbari, Northeastern University, Boston, MA, USA; Arman Akbari, Northeastern University, Boston, MA, USA; Yumei He, Tulane University, New Orleans, LA, USA; Tooba Imtiaz, Northeastern University, Boston, MA, USA; Sean Duffy, Northeastern University, Boston, MA, USA; Juyi Lin, Northeastern University, Boston, MA, USA; Yixiao Chen, Northeastern University, Boston, MA, USA and EmbodyX Inc., San Mateo, CA, USA; Rahul Chowdhury, Northeastern University, Boston, MA, USA; Enfu Nan, Northeastern University, Boston, MA, USA; Yixin Shen, Northeastern University, Boston, MA, USA and Cornell University, Ithaca, NY, USA; Yifan Cao, Northeastern University, Boston, MA, USA and EmbodyX Inc., San Mateo, CA, USA; Haochen Zeng, EmbodyX Inc., San Mateo, CA, USA; Chen Wang, EmbodyX Inc., San Mateo, CA, USA; Weiwei Chen, EmbodyX Inc., San Mateo, CA, USA; Geng Yuan, Northeastern University, Boston, MA, USA and University of Georgia, Athens, GA, USA; Jennifer Dy, Northeastern University, Boston, MA, USA; Sarah Ostadabbas, Northeastern University, Boston, MA, USA; Xuan Zhang, Northeastern University, Boston, MA, USA; David Kaeli, Northeastern University, Boston, MA, USA; Edmund Yeh, Northeastern University, Boston, MA, USA; Yanzhi Wang, Northeastern University, Boston, MA, USA.

This report of world models distinguishes prior works by the cognitive functions they innovate. Many works claim an almost *human*-like cognitive capability in their world models. To evaluate these claims requires a proper grounding in first principles from human and machine cognition theory. In moving towards *human*-like world models we present a conceptual unified framework for world models that fully incorporates all the cognitive functions (i.e., memory, perception, language, reasoning, imagining, motivation, and metacognition) and identify gaps in existing research as a guide for future states of the art. In particular, we find that motivation (especially intrinsic motivation) and metacognition remain drastically under-researched, and we propose concrete directions to address these gaps informed by active inference and global workspace theory. We also introduce epistemic world models, a new category encompassing agent frameworks for scientific discovery that operate over structured knowledge. Our taxonomy, applied to video, embodied, and epistemic world models, suggests research directions where prior taxonomies have not.

Additional Key Words and Phrases: World Models, Vision Language Action Models, World Action Models, Machine Cognition

ACM Reference Format:

Timothy Rupprecht, Pu Zhao, Amir Taherin, Arash Akbari, Arman Akbari, Yumei He, Tooba Imtiaz, Sean Duffy, Juyi Lin, Yixiao Chen, Rahul Chowdhury, Enfu Nan, Yixin Shen, Yifan Cao, Haochen Zeng, Chen Wang, Weiwei Chen, Geng Yuan, Jennifer Dy, Sarah Ostadabbas, Xuan Zhang, David Kaeli, Edmund Yeh, and Yanzhi Wang. 2026. Human Cognition in Machines: A Unified Perspective of World Models. 1, 1 (June 2026), 54 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

1 Introduction

World models have become a central abstraction for building intelligent machines. At their core, world models learn internal representations of an external environment and use them to predict how that environment may evolve over time [43]. Contemporary world models learn an environment’s spatial and temporal characteristics for representation and generation [75]. More recently, the definition has expanded to include a model’s capability to predict how an environment will evolve under counterfactual actions [121]. Across video generation, embodied agents, and language-based reasoning systems, world models are increasingly expected not only to represent the world, but also to support imagination, decision-making, and adaptive behavior.

However, this rapid expansion has also created conceptual ambiguity. Many recent world models are described using cognitive or anthropomorphic language. They are said to understand scenes, imagine futures, reason about actions, remember past states, or behave in increasingly human-like ways [1, 95, 109, 110, 228]. Such descriptions are useful when they point to concrete computational capabilities, but they can also obscure what a model actually does. As a result, the field lacks a shared vocabulary for distinguishing which cognitive functions are present, which are absent, and which remain aspirational for world models.

This is why a human cognition perspective is necessary. When world models are evaluated, compared, or advertised in cognitive terms, the comparison should be grounded in a principled account of cognition. Cognitive Architecture Theory (CAT), especially the functional decomposition proposed by Newell, provides a foundation by identifying key components of cognition, including memory, perception, language, reasoning, imagination, motivation, and metacognition [149]. This perspective allows us to move beyond broad claims of human-like intelligence and ask more precise questions: What cognitive functions does a given world model implement? How are these functions represented computationally? Which functions are underdeveloped in current systems? And how might progress in one domain inform another?

In this survey, we use human cognition as an organizing lens for understanding contemporary world models. Rather than treating world models as a single technical category, we analyze them according to the cognitive functions they emulate, approximate, or neglect. From this synthesis, we

identify two critically under-researched cognitive components: motivation and metacognition. Current state-of-the-art world models depend on externally specified reward functions, hand-designed objectives, or task-specific prompts, rather than intrinsic mechanisms for curiosity, uncertainty reduction, or self-directed goal formation. Likewise, few of them possess metacognitive mechanisms that monitor their own uncertainty, evaluate the reliability of their internal predictions, or regulate reasoning and action based on self-assessment. These missing components limit the extent to which current world models can support autonomous, adaptive, and robust intelligence.

Our report spans three domains of contemporary world model research, including 1) video world models (Sec. 4) generate future visual states conditioned on observations and actions, where maintaining spatial consistency and long-horizon temporal coherence remain central challenges. 2) embodied world models (Sec. 5) extend these demands to physical settings, requiring perception of contact geometry, memory of persistent environments, and reasoning over force propagation to guide real-world task execution. Beyond these established domains, we propose a new category we call **epistemic world models** (Sec. 6), in which the environment is not a physical scene but a structured knowledge space interacted with by an agent framework. Epistemic world models are contrasted with what we refer to as latent world models that learn spatial and temporal dynamics over a learned latent state space, comprising most prior world model works. In the epistemic setting, agents with an VLM or LLM backbone are already world models themselves [66, 72], but when combined with an agent harness and a human-in-the-loop to provide additional reasoning and motivation, an agent updates its world state within a global workspace defined through easy-to-interpret language. Epistemic world models also provide early instantiations of the metacognitive mechanisms that latent world models currently lack, making them both a distinct research domain and a source of solutions for the gaps our taxonomy reveals.

The contributions of our report are as follows:

- (1) We are among the first to provide a comprehensive review of contemporary world models grounded in human-machine cognition.
- (2) We propose a unified world model as a conceptual road-map for incorporating all the component parts of cognitive architecture for robust world representation and generation.
- (3) We identify motivation and metacognition as critical but underexplored components of current world models and discuss research directions.
- (4) We introduce epistemic world models as a new category of world model in which agents represent, update, and reason over structured knowledge spaces.

2 Background

Our report spans these three interrelated research tracks as summarized in Figure 1. Previous world model surveys create a coarse dichotomy in their taxonomies. They classify world models as 1) world representations [10, 17, 63, 66, 79], and 2) world generators [91, 101, 210, 224, 226]. In Figure 2 our finer dichotomy of world models is shown with exemplary works that innovate on their primary cognitive function. Our taxonomy draws on lessons from the fields of human and machine cognition that we will review in this section. While our taxonomy is not explicit in prior work, it emerges naturally when aligning model capabilities with longstanding [7, 116, 118, 146, 149] and recent [61, 162, 168] cognitive architectures. We discuss the research tracks from Figure 1 now, first by reviewing world model research in Sec. 2.1, then by reviewing human and machine cognition in Sec. 2.2.

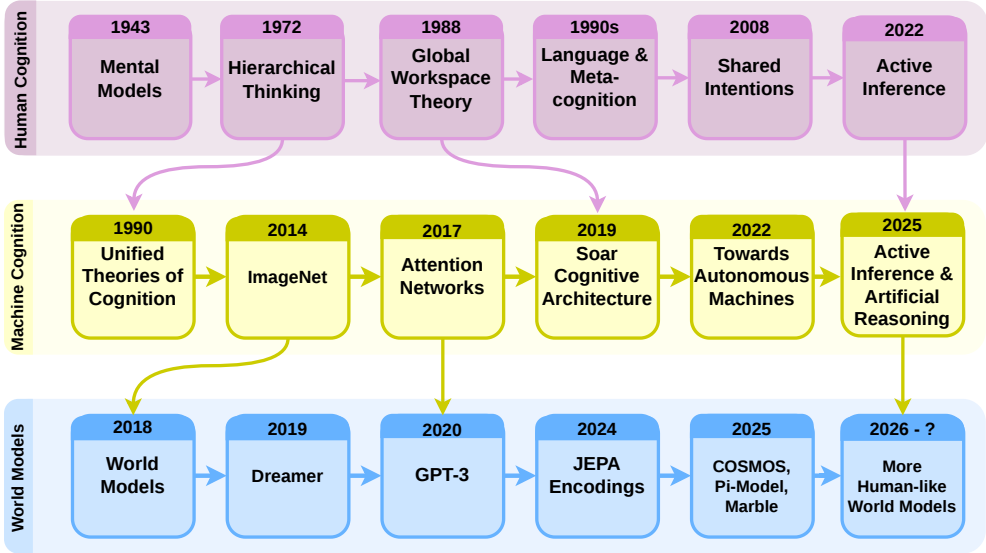


Fig. 1. Our survey studies the convergence of three different but inter-related fields: human cognition, machine cognition, and world models.

2.1 World Models

The seminal work on *contemporary* world Models is from Ha et al. (2018) [75] proposing a framework enabling dreamer architectures [75]. However, world models have been in use long before this framework solidified with antecedents in control theory [26], machine cognition [7, 118, 149, 150], and early neural network theory [151]. Early world models were trained with Reinforcement Learning (RL) to learn action policies for direct robotic motor control [75, 222]. The scope has since expanded to include multi-modal video world models capable of generating vibrant visuals [202], embodied WMs for mapping and locomotion [90, 96], and as we will argue, should also expand to world models used within agent frameworks [69, 70, 155, 179].

A review of recent surveys of state-of-the-art World Models [51, 54, 126, 135, 136, 139, 232, 245] shows that in order to support planning and decision-making, especially in embodied settings [84, 126, 139], world models consistently function as simulators that 1) represent current world structure and 2) predict future world dynamics [51]. Recent works also survey advances in video world models [245], embodiment [126], temporal-spatial modeling [136], and physical realism [135], all highlighting challenges in long-horizon consistency, computational efficiency, and alignment to real-world physics. The available surveys also focus on domain application [54, 126, 135, 139, 245], architectural or input modality distinctions [136], or abstract taxonomies [51, 232]. For a benchmark of video world models aligned with physical laws see recent work PhyGround [132] with its public leader board [133].

As demonstrated in Table 1, we are among the first to systematically distinguish recent states of the art by the cognitive functions they primarily innovate (further discussed in Sec. 2.3). Surveys near-universally discuss the foundational models and works from state-of-the-art teams at META AI with Yann LeCun [65, 80, 242], the Alibaba group [209], Cosmos from Nvidia [108], Berkeley University's Sergey Levine's group [96] and Stanford University's Fei-Fei Li's group [90, 212, 234].

Survey	Year	Video	Embodied	Simulation	Phys. Align.	Epistemic	CAT	Primary Distinction
Ding et al. [51]	2025	✓	✓					World understanding vs. prediction
Li et al. [126]	2025		✓	✓				Embodied AI and simulators
Yue et al. [245]	2025	✓		✓				Roadmap for visual world simulation
Long et al. [139]	2025		✓	✓				Simulators for embodied intelligence
Lin et al. [135]	2025	✓			✓			Physics alignment in video gen.
Liu et al. [136]	2025	✓	✓					Architectural and input distinctions
Xu et al. [232]	2026	✓	✓					Specialist-to-generalist progression
Dong et al. [54]	2026	✓	✓					Learning to model the world in AI
Ours	2026	✓	✓	✓	✓	✓	✓	Cognitive architecture theory

Table 1. Comparison of world model survey scope. A check (✓) indicates that the survey explicitly covers the corresponding domain. To the best of our knowledge, our survey is among the first to examine world models from a human-cognition perspective by relating recent advances to the cognitive functions they emulate or extend, using Cognitive Architecture Theory (CAT) as an organizing framework.

Additional states-of-the-art innovate on architecture by using Vision-Action [124] and Vision-Action-Language models [203], auto-regression models [63], and diffusion models [128, 254]. Nevertheless, a framework for a Unified World Model remains elusive to researchers. A divide remains in the designs for general-purpose and domain-specific world models [232].

2.2 Cognitive Architecture Theory

The capabilities of world models regularly draw comparisons to the abilities of their human counterparts [110, 221, 228]. This contributes to a widely held public belief that LLMs, world models, and similar generative AI approach human-like reasoning capabilities, are conscious, or herald imminent artificial general intelligence [38, 104, 173]. Without proper grounding in first-principles thinking from Cognitive Architecture Theory, these comparisons are misleading and often overstate the capabilities of our non-human counter-parts.

Any study of cognition, human or otherwise, begins with the work of Kenneth Craik who was a pioneer of cognitive sciences, and amongst the first to describe the mental models humans create of the world. In his seminal work [43], he theorized that humans use these models of the world to predict future states of the world, much like the world models we discuss in this report. Posthumously, his work compared humans to a servomechanism that performs discrete tasks from taking in sensory input, making a decision, and then following through on the decision [41, 42]. More recently, Grush argues this same sensorimotor loop in humans, identified by Craik, creates neural circuitry within the brain modeling the world and this can be emulated in motor control [71]. Sensorimotor engagement with the world confirms or rejects model expectations of the sensory feedback to enhance and process sensory information of future events. This thinking will be used in both human and machine cognitive architectures.

2.2.1 Cognitive Architecture in Humans. To say a world model achieves *Human-like* capabilities in cognition requires a first-principle investigation of Cognitive Architecture Theory in humans. Human cognition includes component parts such as motor skills, adaptive learning, perception, symbolic reasoning with language, and memory [43, 53, 71, 100, 204]. Human cognition also includes metacognition, or consciousness, and refers to a human’s ability to self-monitor on more complex tasks [11, 112, 170]. This simply put can be described as *thinking about thinking, reasoning about reasoning*. This metacognition in humans can best be visualized through Baar’s theater analogy used to describe his Global Workspace Theory as an explanation for human consciousness. In Global Workspace Theory, there exist component parts of cognition such as memory, language, and sensory processing, and these correspond to the actors, and props on stage with a director

offstage giving feedback during rehearsal. A spotlight moves from component to component as a human’s conscious thinking invokes memories and sensory processing one at a time. Despite the spotlight’s illusion, all the component parts of the theater remain present, and interact even when the spotlight moves on to focus attention on something else on the stage.

Language as symbolic reasoning is relevant to our understanding of world models because both these and humans share the input and output modality of textual language. Early and modern experts on the development of human language have argued that language is a tool in response to external factors like natural selection [45, 163], and is used to influence the external world [27, 131]. An emerging view argues that language evolved from humans’ ability to share intentions (i.e. humans’ ability to share goals, to share attention or to share common ground) [205]. Human language exists in reference to a world model shared between a party of humans.

From a review of first principles regarding how both human cognition and consciousness have evolved in humans, we assert the role of language is paramount. We look to the works of evolutionary biologist Terrance Deacon [47] and psychologists Julian Jaynes [100] and Merlin Donald [53]. Deacon succinctly asserts that in humans “symbolic thought does not come innately built in, but develops by internalizing the symbolic process that underlies language.” Similarly, Jaynes asserts that “consciousness becomes embedded in language.”

2.2.2 Cognitive Architecture in Machines. Machine cognition can be understood as a functional analogue of human cognition [41, 42, 149]. There have been a variety of machine cognitive architectures proposed over the years [7, 60, 116, 118, 146, 168]. ICARUS utilizes hierarchical skills and concepts [117, 118]. ACT-R uses Bayesian-style activation in an Adaptive Control of Thought–Rational loop [7, 168]. EPIC leverages perception–action timing, making it well-suited for human–computer interaction in embodied settings [146]. Soar is a recursive cognitive architecture that models intelligent behavior through a symbolic State–Operator–Result (or S–O–R) cycle, in which reasoning proceeds through the selection and application of operators to representations of the world [116]. Across all these cognitive loops, an agent/world model in discrete steps observes the environment, encodes and stores state information, forms symbolic or semantic abstractions, reasons over possible transitions, simulates alternative futures, and selects actions according to goals or preferences.

Cognitive Scientist Allen Newell laid the groundwork for the Soar Cognitive Architecture by first asserting a unified list of cognitive components seen in both human and machine cognition. We list Newell’s component part of the function of cognition in Table 2. Laird synthesized Newell’s taxonomy to implement with Newell the Soar machine cognitive architecture [116]. S–O–R was proposed as $R = f_{\text{Rules}}(S_t, O_t)$ where R is S_{t+1} . In our world model notation, this is respectively,

$$z_{t+1} = W_{\theta}(z_t, a_t) \quad (1)$$

The Soar system is capable of being applied in worlds that require visual and symbolic representative reasoning [22], implying compatibility with our state-of-the-art world models. Soar provides a unified framework for perception, decision-making, and learning via production rules operating over a shared working memory similar to the Global Workspace Theory proposed for human cognition [11]. Soar’s use in world models was validated empirically in recent work [241].

Recently, Yann LeCun outlined a machine cognition framework for autonomous machines [121]. A key argument LeCun makes is that “common sense” within machines can emerge as a hierarchy of low level models to high level models allowing the machine to “fill in the blanks” from incomplete world observations. This is exactly how JEPA operates, and is reminiscent of the recursive S–O–R loop from machine cognition framework Soar [116] and “levels of processing” theory of Fergus Craik [40].

Function [149]	Human & Machine Cognition	World Model Analogue
<i>Perception</i>	Senses the current world.	Encodes observations into a world state z_t .
<i>Memory</i>	Saves past experience and context.	Stores past states $z_{0:t}$ of context, maps, or external memory.
<i>Language</i>	Uses symbols to communicate abstract meaning.	Tokenizes language, goals, states, and reasoning.
<i>Reasoning</i>	Problem solving and action selection with inference	Infers z_{t+1} or a_t from other cognitive components.
<i>Imagination</i>	Simulates possible and/or hypothetical futures.	Rolls out generated, simulated, or hypothetical z_{t+1} or a_t .
<i>Motivation</i>	Behavior from extrinsic or intrinsic rewards.	Criteria for selecting z_{t+1} or a_t .
<i>Metacognition</i>	Operates over own representations, predictions, and decisions.	Self-reflection, self-evaluation, and self-control of all other cognitive components

Table 2. We select Newell’s [149] component parts of human and machine cognition to ground our framework. Alternative architectures offer different component decompositions but Newell’s are unified across both human and machine cognition with plausible world model analogues applicable to all our explored domains.

2.3 Our Taxonomy

We select Newell’s component parts of Human and Machine cognition to ground our framework. His prominence in early [150] and contemporaneous machine cognition [116, 149] makes the decision defensible, but we admit other sets of component parts found throughout machine cognition would likely also be defensible [59, 83, 115]. We unpack the core cognitive capabilities discussed in Tab. 2 and use these component parts as a framework to taxonomize world model research. We survey works since Ha et al. (2018) that are highly relevant, appearing in top conferences or surveys, or are found in repositories hosted on GitHub [87]. Newell’s original list of the functional parts of human and machine cognition were *perception*, *memory*, *language*, *reasoning*, *imagination*, and *motivation*. Newell’s assertion that *reasoning* extends to action selection [149], allows us to consider direct policy networks like Vision-Language-Action models in Sec. 5 which rely on implicit world models to transition world states through action selection alone.

Due to its paramount role in regulating cognitive functions, within our taxonomy’s component parts list we include *metacognition*, which refers to a world model’s capacity to reflect on, evaluate, and control each component part of its cognitive processes. *Metacognition* is the recursive application of the other cognitive functions to themselves, such as, reasoning about one’s own reasoning, monitoring one’s own perception, evaluating one’s own memory retrieval. In world models, this may be implemented through uncertainty estimation, self-evaluation, error detection, reflection, model selection, re-planning, or control mechanisms that decide when to revise representations, seek additional information, simulate alternatives, or defer action [11, 112, 170]. We can map these cognitive functions to the two traditional functions attributed to world models: world representation, and world generation. The first two items in Tab. 2 correspond to typical world model tasks in world representation, and the last two correspond to world prediction or generation. The middle two are found across both representation and generation tasks. This taxonomy is depicted in Figure 2.

In many previous world model works most of the components of cognition appear. For example H-JEPA as an autonomous machine [121] is proposed with capabilities to encode observations of the current world state (*perception*), to learn this encoding with a latent predictive objective (*motivation*), and stores queryable world states for later use (*memory*). In follow-up works JEPA uses text tokens as an input (*language*), and can be paired with an action policy network (*reasoning*) [120, 196]. However, this set of capabilities is not distinguishable from most other works when considering all applications of a work. Any taxonomy requires sorting decisions that are contestable at the margin. A review organized by application must decide whether a given robotics paper is ‘manipulation,’ ‘locomotion,’ or ‘mapping’ when its method plausibly serves all three. In our

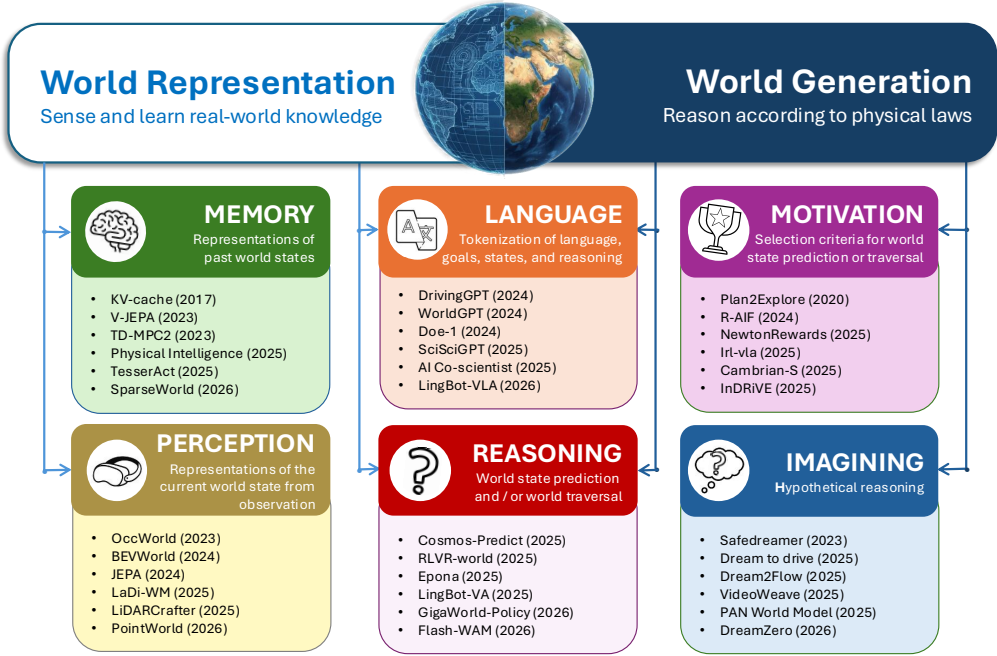


Fig. 2. The taxonomy of world models under cognitive architecture [149].

case, rather than sorting works based on a cognitive function's presence alone, our sorting criterion is explicit and applies uniformly: we judge a work as innovative on a cognitive function when the work's stated contribution operates on that function; works claiming contributions on several are placed under several. Then we sort our review by these innovations in world model cognition. This makes our assignments inspectable and, where a reader disagrees, precisely locatable.

Using I-JEPA as an example [10], the authors state three research contributions: 1) I-JEPA learns strong representations from input observations by predicting embeddings, not pixels, (we label a **perception** and **motivation** innovation) 2) by using a simpler model with less rigid inductive bias, I-JEPA is applicable to a wider set of tasks (we label a non-cognitive, evaluative consideration) and 3) JEPA is scalable and efficient (we label a non-cognitive, practical consideration). Subsequently, we would taxonomize the I-JEPA work as innovating upon **perception** and **motivation**. We also present papers we deem exemplary of the cognitive innovations we survey in Figure 2. Our comprehensive categorization of world model research can be found across Tables 3, 4 and 5.

Throughout our review, it is important to note that machine cognition functionally emulates, and does not mechanistically emulate, these component parts of human cognition. For example, when we say a world model has “memory,” we mean it maintains state representations across time steps, not that it has anything resembling episodic recall or the biological substrates of human memory. Machine cognition emulates human cognition in **memory**, **perception**, and some symbolic **reasoning** tasks through **language**, and **imagination** with sim-to-real design paradigms. It is ambiguous if machine cognition fully emulates true human-like **reasoning** and machine cognition almost universally fails to emulate intrinsic **motivation**. Machine intelligence has demonstrated little capability in emulating **metacognition**.

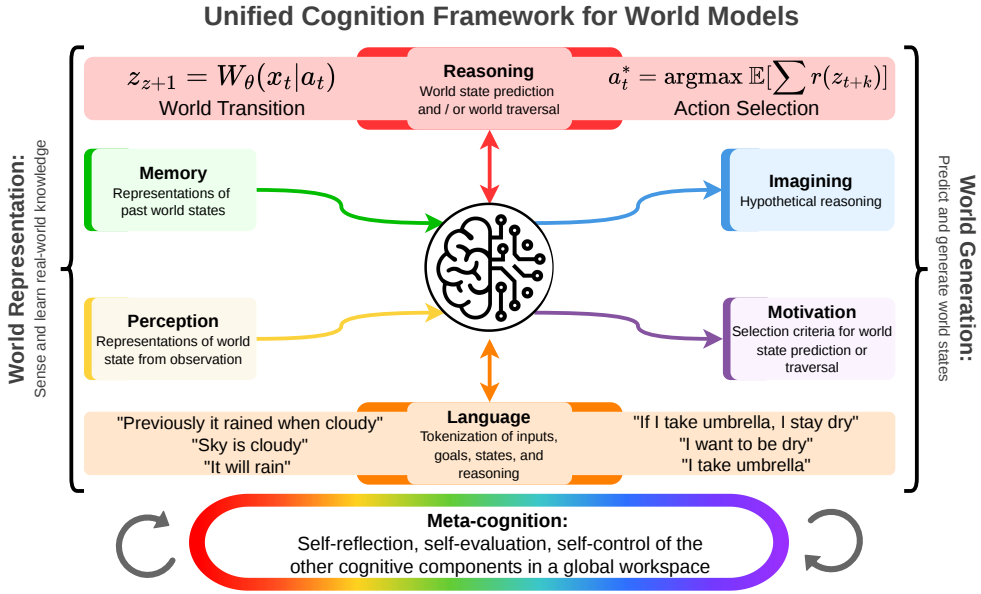


Fig. 3. Our Unified World Model derived from human-machine cognition [11, 149]. This serves as a conceptual road-map for world model research. We also want to highlight that the component of *language* mimics *metacognition* in that it can be used to operate over each other component of cognition.

3 Unified Cognition Framework for World Models

We report on world models in the context of video world models (discussed further in Sec. 4), embodied world models (discussed further in Sec. 5), and what we define as epistemic world models, or world models used by agents for scientific discovery (discussed further in Sec. 3.3 and 6). We sub-categorize each section according to the component parts of machine and human cognition listed in Sec. 2.2. We review exemplars for contemporary works that innovate on specific functions of cognition as shown in Figure 2. We continue to taxonomize works across a more comprehensive body of research available for all to see in Tables 3, 4, and 5. A trend emerges across all three tables revealing a research gap regarding innovations targeting **metacognition**. Furthermore, upon closer inspection, innovations belonging to the **motivation** column near always implement a form of *extrinsic* motivation, external to the world model itself. This differs from *intrinsic* motivation as it is reliant on hand-crafted rewards, or actor-critic models trained with reinforcement learning. As we stated in the introduction, if researchers want to claim that a world model has *human-like* cognition, then we would expect to find all the components from Sec. 2.2 of cognition unified within that world model framework.

We propose our conceptual unified world model framework that serves as a conceptual road map for this report and future world model research through the research gaps we identify. World models sense and learn from real-world knowledge, predict and generate world states, reason and control according to physical laws implicitly, and can do all of this with or without a machine agent or a human-in-the-loop. To accomplish this we propose a unified world model that holistically incorporates every component part of the CAT concepts discussed in Sec. 2.2 into one conceptual unified framework as seen in Figure 3.

As a design paradigm, our conceptual unified framework for world models calls for standardizing best practices in both world model representation, and world model generation. To fully span the functions of cognition emulated, Unified World Models encourage researchers to:

- (1) Encode **perception** of world representations from sensory observations with multi-modal state spaces (discussed further in Sec. 3.1.1),
- (2) Leverage **memory** for robust world models with state-spaces that encode multiple temporal scales, or store previous queryable states for efficient access (discussed further in Sec. 3.1.2),
- (3) Include **language** tokens as an input, intermediate reasoning space, or output to facilitate human-in-the-loop cooperation (discussed further in Sec. 3.1.3),
- (4) Enable **imagination** as hypothetical reasoning during inference and sim-to-real transfer learning during training when data is scarce (discussed further in Sec. 3.2.2),
- (5) Perform **reasoning** with domain-specific models in Figs 4 to 9 (discussed further in Sec. 3.2.1),
- (6) Provide reward signals to world models for **motivation** using state-based rewards that make salient robust measurements like active inference (discussed further in Sec. 3.3),
- (7) Utilize **metacognition** through global workspaces enabling self-reflection, self-evaluation, and self-control (discussed further in Sec. 3.3).

None of these suggestions conflict with each other, but some are setting specific or conditional. In Sec. 3.3, we will argue that our proposed research directions regarding **motivation** and **metacognition** fill a real research gap our taxonomy has revealed.

Reviewing video world models in Sec. 4 shows us the importance of creating world representations that enforce spatial consistency and meet memory constraints, using solutions like KV-cache, while still enforcing longer temporal consistency. We show state-of-the-art video world model architectures in Figures 4 to 6. When we review embodied world models in Sec. 5 we see the importance of leveraging multi-modal inputs to make precise locomotion possible. We also see in Sec. 5 that when training data is scarce, sim-to-real training can overcome this scarcity when world models learn latent representations that are traversable and remain consistent under domain shift to real-world applications (discussed more in Sec. 3.1). We show state-of-the-art embodied world model architectures in Figure 7 and 8. We propose in Sec. 3.3 a new category of world models called *epistemic world models* that we review in Sec. 6. This domain includes agent frameworks for human-in-the-loop scientific discovery which serve as inspiration for overcoming one of the research gaps that we have observed in the latent world model's **metacognition** capability. We show state-of-the-art epistemic world model architectures in Figure 9.

Latent world models learn state transition dynamics in video and embodied settings while agent frameworks are not typically framed that way. However, epistemic world models in an agent framework with a Global Workspace representation of the world (defined in Sec. 2.2) perfectly aligns with Soar's State Operation Result loop [116], and we argue, even the latent world model definition as LLMs and VLMs are already considered to be world models [66, 72]. A Global Workspace is not a learned latent encoding like JEPA [10]. Instead, a Global Workspace is a **language** based collection of all past prompts and responses including tool-call outputs. In the epistemic world model setting, the initial world is static and represents structured knowledge from prompts, and context supplied by the user. However, as the agent interacts with this world—through multimodal Retrieval-Augmented Generation (RAG) queries, analyzing existing literature, and encoding inputs and outputs of tool-calls into a global workspace (e.g., a chat history)—it creates a changing environment. This transformation leads to a dynamic state space that aligns with the traditional definition of a world model. Working within this agentic framework with a global workspace implementation allows models like Gemini Co-scientist [69, 70], an LLM and world model itself, to propose novel trajectories through an evolving state space to perform actual scientific discovery.

3.1 World Representation

World representation refers to how spatio-temporal world knowledge is sensed and encoded ideally enabling downstream world model tasks such as world prediction over time and action selection within the world. World models use spatio-temporal world representations aligning with physical laws (discussed in both Sec. 4.2 and 5.2), and can use language representations to enable self-reflection, self-evaluation, and self-control (discussed further in Sec. 6.2). In our unified framework, the functional components of world models for representation correspond to the cognitive functions of *memory*, *perception*, and *language*. Together they encode spatio-temporal representations of the world.

3.1.1 Multi-modal Perception. The state-of-the-art perception innovations in world model research are multi-modal [90, 130, 197, 257, 263, 264]. This synchronizes with human-like perception which is multi-modal due to our innate need to integrate information across at least five senses used to represent the world [24]. Additional exemplary works are shown in Figure 2, with more examples discussed in Sec. 4 to 6.

Perception is often where world model framework's begin. We will start by considering an input of multi-modal observations o_t^i for images, o_t^l for *language*, o_t^a for audio, and so on. We define $\phi_\theta(\cdot)$ as our multi-modal world model for representation, used to create z_t , our world's latent representation at step t , or in other words,

$$z_t = \phi_\theta(o_t^i, o_t^l, o_t^a, \dots) \quad \text{s.t.} \quad \dim(z_t) \leq B, \quad I(o_t; z_t) \leq C \quad (2)$$

After input encoding, we have latent variable z_t subject to the constraints for physically fitting z_t within a *memory* budget B , while also keeping mutual information below C , or a sufficient mutual information between the observations and latent space at step t . At this stage, alignment with physical laws is implicitly instilled through training data and handcrafted reward signals (the latter is discussed more later on). To achieve sufficient world representation for downstream tasks, such as action selection for state transition performed by operator $\mathbb{T}$, we must select an ideal encoder $\phi_\theta^*(\cdot)$ from among state-of-the-art world encoders $\mathcal{F}$, or in other words,

$$\phi_\theta^* = \arg \min_{\phi_\theta \in \mathcal{F}} I(o_t; \phi_\theta(o_t)) \quad \text{s.t.} \quad \mathbb{E}[R(\mathbb{T}(\phi_\theta(o_t)))] \geq \rho \quad (3)$$

The above selects an ideal encoder to compress the current observation while preserving enough information for a downstream tasks that produce a sufficient reward for training and inference. $\mathbb{T}$ may be a generative world model W_θ from Eq. (1), a direct policy network, or an MPC planner model. This sufficiency value ρ is task dependent, and selected by the researcher conditioned on expected results from competing state-of-the-art representation strategies found in $\mathcal{F}$.

Encoders for world representation often are both multi-modal and multi-scalar (spatially, or as discussed in the next section, temporally). Both features complement each other in practice, and innovative *perception* works rarely breakdown into one or the other [90, 130, 197, 257, 263, 264]. Tesseract and PointWorld utilize RGB, Depth, and Normal readings to create a point-cloud representation of the world [90, 263]. StereoWorld, much like *human*-like perception, utilizes disparity and epipolar constraints on two camera feeds to add a depth scale to 2D appearance [197]. Some embodied world models integrate encoded LiDAR measurements, o_t^{LiDAR} , into the perceptual pipeline and demonstrate that fusing complementary spatial modalities improves robustness and downstream planning performance, particularly in navigation and autonomous systems [130, 264]. Similarly, BEVworld fuses camera and LiDAR readings to create a Birds Eye View occupancy grid for world representation [257]. Across these works multi-modal *perception* serves as a mechanism for reducing ambiguity in z_t by grounding latent representations in multiple correlated spatial observation streams.

3.1.2 Multi-scalar Memory. World representation models, world generation models, and unified frameworks performing both representation and generation are meant to learn the state transition dynamics of a world; this means *temporal* as well as *spatial* characteristics. This reveals a vulnerability in Eq. (3) we left unaddressed and will correct now. Our ideal encoder from a single time step $\phi_\theta^*(o_t)$ captures no state transition dynamics to embed spatio-temporal features in our state space z_t . Furthermore, looking to our constraint, maximizing an expected scalar or low-dimensional reward from a single observed state is likely to lead to reward collapse [46] and propagate a credit assignment problem in long horizon tasks with delayed rewards [171]. We have two options for addressing this, we can create a richer reward signal by enabling *imagination* as hypothetical reasoning over a future time horizon H (discussed more in Sec. 3.2.2, or as we show now, we can add short-term memory to our observations as $o_{\leq t}$. The later adds state transition dynamics to z_t as a restating of Eq. 2 such that,

$$z_t = \phi_\theta(\mathbf{o}_{\leq t}^v, \mathbf{o}_{\leq t}^\ell, \mathbf{o}_{\leq t}^a, \dots) \quad \text{s.t.} \quad \dim(z_t) \leq B, \quad I(\mathbf{o}_{1:t}; z_t) \leq C \quad (4)$$

This updates our selection criteria for an ideal encoder for world representation re-expressed through Eq. (3) as,

$$\phi_\theta^* = \arg \min_{\phi_\theta \in \mathcal{F}} I(\mathbf{o}_{\leq t}; \phi_\theta(\mathbf{o}_{\leq t})) \quad \text{s.t.} \quad \mathbb{E}[R(\mathbb{T}(\phi_\theta(\mathbf{o}_{\leq t}))) \geq \rho \quad (5)$$

In practical terms this is the difference between a researcher using V-JEPA [14] over I-JEPA [10] when the world is represented through video frames as a sliding window of short-term *memory*.

Short-term *memory* within world model perception makes that perception more *human-like*. Human perception at the mechanistic level in the human brain utilizes dual streams for spatial and temporal representations of the world [246]. The field of computer vision already emulates this human spatio-temporal perception by proposing dual stream architectures with one for spatial representations and a second for temporal representations implying short-term memory [58, 192]. World models use this approach now [90, 130, 263, 264]. We see this spatio-temporal perception in use by OccWorld and LiDAR crafter which use LiDAR to create an evolving map used by downstream reasoning tasks [130, 264], and in Tesseract utilizing optical flow as one of its multiple input modalities [263], as is the case in PointWorld which uses 3D point flows to perceive temporal changes in the world [90].

Long-term memory is also used by many of these works to create queryable maps of past world encodings saving compute at inference [44, 240]. Mosaicmem, a video diffusion world model, encodes 2d observations as 3d observations leveraging latent memories of previous time-steps' 2d observations to create patch-level and scene level encodings [240]. SparseWorld's perception is similarly improved due to the presence of queryable memory [44].

Using memory to instill spatio-temporal characteristics also allows downstream tasks such as sim-to-real "dreaming" during training and hypothetical reasoning during inference, which will be discussed in Sec. 3.2. This perspective aligns with prior work on traversable latent spaces [25, 28, 73, 80, 211], and suggests that long-context memory in world models is inherently tied to the capacity for spatio-temporal structured latent prediction. For instance, augmenting Dreamer-style [78] agents with traversable spatial latent representations enables improved sim-to-real transfer, highlighting the importance of jointly encoding spatial structure alongside temporal dynamics [28]. Similarly, temporal hierarchy learning introduces multiple scales of abstraction in *perception*, allowing agents to reason over both short-term transitions and long-horizon dependencies [73] again paralleling human-cognition with multiple layers and abstract thinking [40, 121]. Hierarchical world models extend *human-like* multi-layered thinking to control: Hansen et al. [80] couple a high-level world model that reasons over abstract targets with a low-level model that produces motor commands.

Finally, world model memory can also be learned through architectural enhancements to world model frameworks. Autoregressive transformers as with Large Language Models (LLMs) and Vision Language Models (VLMs) use memory in their reasoning towards output tokens corresponding to state or action tokens when adapted as Vision Language Action (VLAs) models [96, 199, 224]. Autoregressive diffusion models from Video World Models behave the same way, where every token in the output sequence is conditioned on the previous tokens in the output prompt, and tokens from the input prompt [92, 141, 269]. Additionally, works have used architectural modules to simulate *memory*, as is the case with Transformer State-Space Models (TSSMs) for bi-directional diffusion models to learn long-range memory dependencies and predict future observations more accurately, and more efficiently than their autoregressive alternatives [28]. We discuss more in Sec. 4.3 the usage of memory in architectural reasoning and the usage of memory implementations advances like KV-cache that lead to efficient and state-of-the-art world models [152, 207].

Adding memory to world models does not just make world models more *human-like*, it is what makes their practical use possible. The encoding and learning of spatio-temporal features enhances the cognitive function of all of the other component parts of cognition as we saw with *perception* and *language* but also *motivation*, *imagination* and other downstream *reasoning* tasks such as state transition prediction, or action selection. Additional examples of *memory* innovations are summarized in Fig. 2 and discussed in Sec. 4–6. Unified world models seek an encoder $\phi_\theta(\cdot)$ that produces representations supporting sufficiently long temporal context, as required by Eq. (4) and Eq. (5).

3.1.3 Language. In world model settings, language can be used to represent the world, but also be used in generative models for conditioned world prediction or action selection. Large Language Models (LLMs) [185, 187, 188, 250, 260, 261] and Vision-Language Models (VLMs) [181, 183, 186, 231, 258], are innately world models themselves [66, 72]. How robust or *human-like* LLMs or VLMs perform alone as world models requires more research. Empirically, LLMs show insensitivity to meaning in comprehension tasks when compared to human counterparts [48]. LLMs still fail to reason as humans do in the tasks we ask humans to perform [95, 158]. However, we know that latent spaces learned by language models converge to similar embeddings across differing modal inputs [94] and visual embeddings as well as activation patterns are aligned with the human brain [52, 174]. Generally, when researchers align an LLM’s *language* cognitive function to humans’ *language* cognitive function the LLM accuracy improves [122]. Leviathan et al. does so by repeating LLM prompts to emulate a human’s innate ability to hold both the beginning and end of a spoken sentence in their mind at once something an autoregressive LLM is innately unable to do.

Metacognition via Language. As discussed in Sec. 2.2 *language* plays a paramount role in human cognition [205], with some arguing it is language that is directly responsible for human metacognition [47, 100]. Empirically one can see from our Figure 3 that language allows a machine to operate over all the other components of cognition. This is a key element of metacognition, but it remains to be seen if language is the ideal operator of all other components of cognition in machines. Still when we explore epistemic world models, we repeatedly find language at the center of existing global workspaces used in agent frameworks. We discuss this more in the Section 3.3.2.

3.1.4 A Unified World Model Approach to Representation. Foundational representative world models include Cosmos-Predict [2, 4], LingBot-WM [203], GIGA-World [200], RLV-World [220], and finally JEPA [10], which all learn to represent knowledge of the world implicitly aligning with physical laws through training data. Joint-Embedding Predictive Architectures (JEPA) provides a

canonical instantiation of the representation component within our unified world model framework [9, 10, 49, 196, 208, 214]. Rather than reconstructing raw sensory inputs, JEPA learns representations by predicting target embeddings from context embeddings in a shared latent space [10], thereby directly optimizing for a more robust predictive structure. This predictive latent-space formulation naturally supports multiple cognitive functions. JEPA encoders can integrate **perception** across multiple modalities [39] in embodied settings [214], incorporate **language** as inputs [208], or to serve as intermediate representations for downstream **reasoning** [196]. Crucially, when combined with latent dynamics models, these spatio-temporal representations enable long-horizon **memory** through compact latent world-encodings, and as we will see in the next section, enable hypothetical action rollouts [9, 49]. In this sense, state-of-the-art world representation models like JEPA act as ϕ_θ^* creating spatio-temporal features z_t as is the case in our Eq. (4). These JEPA encodings are not merely compressive, but structured to support prediction over imagined futures, aligning directly with the requirements imposed by our reward-constrained information bottleneck formulation in Eq. (5). We will see how world models in Sec. 4 to 6 sense and learn world knowledge in each domain application.

3.2 World Model Prediction and Generation

While world representation defines how spatio-temporal world knowledge is sensed and encoded, world model prediction and generation refers to how the world models make predictions over time and select action traversals within the world. World models generate 3D scenes (discussed further in Sec. 4.2), generate controlled real-world scenes (discussed further in both Sec. 4.2 and 5.2), select actions for state traversal (discussed in Sec. 5.2) and can reason over Global Workspaces encoded by language (discussed further in Sec. 6.2). In our unified framework, the functional components of world models for generation correspond to the cognitive functions of **reasoning**, **imagination**, **language** and **motivation**. Together they enable structured planning, hypothetical simulation, and decision-making over future trajectories.

3.2.1 Reasoning. Within our taxonomy world model reasoning is defined both as the structured prediction of future world states and as the selection of action rollouts. The transition model W_θ governs the evolution of latent states and when appropriate is conditioned on an action as was the case in Eq. (1). From here, the reward function $R(z)$ evaluates the desirability of future latent states and trajectories. We treat $W_\theta(z_t, a_t)$ as a parameterized world transition function, though it may in practice represent a stochastic process.

In a search for the optimal action a_t^* at time step t , the reward signal is considered over the time horizon H ,

$$a_{t:t+H}^* = \arg \max_{a_{t:t+H}} \mathbb{E} \left[\sum_{k=0}^H R(z_{t+k}) \right] \quad (6)$$

Thus, action selection can be understood as inference over spatio-temporal latent trajectories, where candidate futures are simulated and evaluated under the reward functional. The predicted z_{t+1} is obtained by W_θ , our unified World Model for world model generation guided by principles from Cognitive Architecture Theory.

We identify eight recurring design paradigms for how world model reasoning occurs, shown in across Figures 4 to 9, that span the spectrum from purely discriminative action selection to full generative world simulation. At one extreme lie Vision-Language-Action models (VLAs), such as $\pi_{0.5}$ [96], LingBot-VLA [224], and other VLA methods that map observations directly to actions through a VLM backbone augmented with a flow-matching action expert [86], bypassing explicit future-state prediction entirely [49, 101, 134, 138, 196, 271]. At the other extreme, some world models

only represent the world [208], and use a separate value [49] or policy models for action or future state generation [2, 124]. These World Action Models leverage training data and are not conditioned on any action. This decoupling of representation and action generation grants maximum flexibility in imagination but introduces a two-system overhead, in which errors in world prediction and errors in action selection compound independently. World Action Models [124, 236, 237] tend to be more robust and work better with longer and noisier time horizons. Additional methods include autoregressive transformer [37, 137, 248, 250, 272] and diffusion models [92, 93, 184, 239, 249, 254, 270]. Motus claims to be a unified world model because it successfully unites generating latent action, future video states, and agent actions [18].

3.2.2 Imagination. During world model training, *imagination* manifests as dreaming [75], referring to a world model's capability to learn to represent world dynamics through unsupervised training. If these learned spatio-temporal latent representations are traversable and remain consistent under domain shift, then an action-policy model can be trained with these latent spaces and deployed in a real-world domain [57, 75, 144]. In real-world applications, training data can be prohibitively scarce and expensive to create; sim-to-real training overcomes this problem [171]. Figures 6 through 8 show architectures that support hypothetical reasoning in inference, and dreaming in training both in the video world model and embodied world model domains.

During inference, *imagination* refers to hypothetical reasoning, planning, or simulating future states of the world over a set of possible action rollouts to find an optimal action [226, 230]. This is only possible after applying lessons from Sec. 3.1, where Eq. (5) creates a traversable world-encoding latent space. The optimal action, or a_t^* , maximizes the expected reward signal over the time horizon of the possible action rollout. For action-planning we assume a decomposition of the world model into a transition function and an observable reward functional. When our unified framework for representation successfully encodes spatio-temporal representations upstream in Eq. (5) we are ensured that imagined trajectories that remain consistent over extended horizons [57, 63, 73, 221, 226].

3.3 Cognitive Architecture in Unified World Models

Our taxonomy categorizes the surveyed works according to the cognitive functions. Many works incorporate several cognitive functions in their designs and sometimes innovate along multiple cognitive axes, which is why some works appear in multiple sections or have several check marks in Tables 3, 4, and 5. Analyzing the innovation trends presented in our report through Tables 3, 4 and 5 show that a research gap exists regarding the cognitive functions of *motivation*, and *metacognition*. The utilization of our taxonomy makes this research gap clear and may not have become apparent otherwise. It is clear that machine and human cognition continue to be intertwined.

An exciting new theory of human cognition, Active Inference [59, 61], explains human cognition as a system that minimizes surprise about sensory inputs by continuously updating beliefs about the world and taking actions that make the world match those beliefs. Active Inference has been extended to machine cognition [60, 162] as a theory that novelly *motivates* learning in machines and informs our unified world model Framework (discussed further in Sec. 3.3). world model works have already begun to incorporate Active Inference [144].

Across our report on state-of-the-art world models, we have identified two significant research gaps regarding two components of our unified world models: *motivation* and *metacognition*. This issue is, in part, elucidated by evaluative benchmarks from recent studies [33, 109, 156, 165, 193, 216]. Furthermore, Tables 3, 4, and 5 clearly demonstrate the lack of innovation in the areas of *motivation* and *metacognition*. To address these gaps in *metacognition*, we observe the importance of

language in human cognition may be an indication of its importance in machine cognition, and suggest that researchers focus on the agent frameworks, as illustrated in Figure 9 as what we call epistemic world models. In terms of **motivation**, advancements in human-machine cognitive architecture theory, particularly regarding Active Inference [59–61, 144, 162], should be explored.

3.3.1 Motivation. Reinforcement Learning (RL) techniques instill external motivation into world models through reward signals, using a reward function defined external to the world model itself. Enabling **imagination** or hypothetical reasoning, as described by Eq. (6), requires an observable reward functional $R(z_t)$ [79, 81, 107, 144, 147, 220]. Multi-task learning allows the pursuit of multiple goals [144] and can help align models to the physical world when trained with an appropriate reward signal [119]. Researchers construct RL agents as a potential solution to artificial general intelligence, assuming that their reward signal is sufficient [191]. However, often RL provides training mechanisms for world models using hand-crafted reward signals that do not generalize [171] and rewards that are misaligned with the intended operational goal [6, 77]. As such, they require additional interventions such as Reinforcement Learning from Human Feedback in some applications [135, 165].

Intrinsic Motivation. Promising research directions exist, such as maximizing influence over future states [111] or minimizing energy (i.e. surprise) [60, 61, 162] to explore with training mechanisms decoupled from an externally defined and action-based reward signal. Both maximizing the influence of future states and active inference are compatible with the state-based reward function described in Eq. (6). Active Inference formalizes “minimizing surprise” as the minimization of variational free energy, a tractable upper bound on negative log model evidence, which decomposes into accuracy and complexity and extends to action selection through expected free energy that balances information gain and value. Concretely, given a latent world model with states z_t , observations o_t , and actions a_t , the generative model is defined as

$$p_\theta(o_{1:T}, z_{1:T} \mid a_{1:T}) = \prod_{t=1}^T p_\theta(o_t \mid z_t) p_\theta(z_t \mid z_{t-1}, a_{t-1}). \quad (7)$$

Inference proceeds by introducing an approximate posterior $q_\phi(z_{1:T} \mid o_{1:T})$ and minimizing the variational free energy

$$\mathcal{F} = \mathbb{E}_{q_\phi(z_{1:T})} [\log q_\phi(z_{1:T}) - \log p_\theta(o_{1:T}, z_{1:T})], \quad (8)$$

which upper bounds the surprise $-\log p_\theta(o_{1:T})$. This objective decomposes as

$$\mathcal{F} = D_{\text{KL}}(q_\phi(z_{1:T}) \parallel p_\theta(z_{1:T})) - \mathbb{E}_{q_\phi} [\log p_\theta(o_{1:T} \mid z_{1:T})], \quad (9)$$

corresponding to complexity and accuracy terms, respectively. For action selection, policies π are evaluated by minimizing the expected free energy

$$\mathcal{G}(\pi) = \mathbb{E}_{q_\phi} \left[\underbrace{D_{\text{KL}}(q_\phi(z_{t+1:T} \mid \pi) \parallel p_\theta(z_{t+1:T}))}_{\text{information gain}} - \underbrace{\log p(o_{t+1:T})}_{\text{value}} \right], \quad (10)$$

encouraging trajectories that both reduce uncertainty in latent dynamics and achieve preferred outcomes. As such, world model research has already begun to incorporate Active Inference.

Using intrinsic motivation for world models is drastically unrealized, but there are some recent works using intrinsic motivation within RL that validate this research direction [8, 16, 56, 105, 107, 159, 160, 169, 175, 182, 194, 234, 238]. Among these works, Active Inference is also being deployed in embodied settings to promote exploration during training [8, 169], and in one case,

even control swarms of unmanned autonomous vehicles [8]. Seven of these are explicit world model works [56, 107, 169, 175, 194, 234, 238]. Three explicitly use Active Inference as a reward signal for world models [56, 234, 238]. Cambrian-S explicitly references prediction error as a proxy for measuring surprise but falls short of implementing Active Inference’s full exploratory learning objective [234].

It is also worth noting that researchers are ultimately the ones selecting architectures, reward criteria, and training sets within world model research. Peer review evaluates objectively if the subsequent empirical results are novel and notable. It is researchers who breathe life into world models by aligning experiment designs with broader research trends. It is here researchers lend their human cognition in machine cognition with a single example being the selection of B , C , and ρ as thresholds found in the constraints described in Eq. (2) to (5) of our unified world model framework. This is further demonstrated in the global workspaces of epistemic world models used by agent frameworks for AI-Human Collaboration [69, 70, 179, 180] shown in Figure 9 and discussed in Sec. 6.

3.3.2 Metacognition. Soar’s usage of sub-tasks and recursive operator decomposition mimics human metacognition by breaking bigger, more abstract tasks into smaller, more discrete tasks [40, 116]. For example, if an agent with a world model is navigating a problem and not experiencing progress towards a goal, sub-tasks allow the debugging of this lack of progress by operating over memory, perception, and other components of cognition to propose alternative routes to the goal; demonstrating a minimal degree of self-reflection, self-evaluation and self-control. While world models’ capability to align with *human-like* metacognition is theoretically possible, it still represents a largely unsolved implementation problem [102, 158, 164].

Metacognition via Global Workspaces. Exploring metacognition through the use of agent systems capable of self-reflection, self-evaluation, and self-control shows some progress towards the goal of implementing truly metacognitive capabilities within world models [19, 213]. Figure 9 shows how these agent frameworks provide a world model that enables some amount of metacognition through the use of a Global Workspace [11] accessible by agents and human collaborators. Altogether, the central limitation identified in world models is the absence of explicit metacognitive mechanisms in latent world models, particularly in embodied and video domains seen in Sec. 4 and 5. While these systems learn latent state representations z_t and transition dynamics $z_{t+1} = W_\theta(z_t, a_t)$, they lack a mechanism for monitoring, evaluating, or controlling the routing internal computations.

For latent world models in settings that cannot fully replicate a truly Global Workspace due to context size constraints, we see research begin to approximate it using a mixture-of-experts (MoE) paradigm with a world-aware router function. A router function selecting an expert exhibits some behavior indicative of metacognition as self-control. The MoE implementation functions similarly to specialists within multi-agent frameworks and is a growing trend in world models [98, 198, 223]. A world-aware router could be extended to select the amount of loops to be perform in a looped transformer LLM [233] indicating self-control over an amount of reasoning performed (i.e. reasoning about reasoning). Similarly, to improve self-reflection, increasing input modalities (i.e., increasing the amount of specialists) to augment *perception* from “first person” video alone to include an additional “third person” video source. For a fully self-evaluating metacognitive process, using imagination over an MoE implementation, or integrating a router function that can decide to re-reason through a problem, would function similarly to an evaluation specialist operating in a Global Workspace, as discussed in Sec. 6.

Drawing from Cognitive Architecture Theory [149] and the Global Workspace Theory (GWT) [11], metacognition can be interpreted as the ability to self-reflect, self-evaluate, and self-control. Notably, while such mechanisms are largely missing from latent world models, they emerge naturally in

epistemic world models, where shared workspaces are instantiated through external artifacts such as documents, tool outputs, and execution traces. These systems approximate the self-reflection, self-evaluation, and self-control, albeit over distributed and externalized state representations, often as interpretable language, rather than internal latent variables. As we will discuss in Sec. 6, recent agentic systems for scientific discovery provide early instantiations of such global workspaces, suggesting a viable pathway toward incorporating metacognitive capabilities into unified world models using interpretable language. The typical architecture for such an agentic system is shown in Figure 9.

4 Video World Models

Video world models aim to learn compact representations of visual environments together with their temporal evolution. A common abstraction is a latent dynamical system:

$$z_{t+1} = f_{\theta}(z_t, a_t), \quad x_t = g_{\phi}(z_t), \quad (11)$$

where $z_t \in \mathbb{R}^d$ denotes a latent state encoding scene geometry, object configurations, physical factors, and temporal context; a_t denotes external inputs, actions or control signals; f_{θ} models state transitions; and g_{ϕ} maps latent states back to observations. Under this view, video is generated through state evolution and rendering, rather than direct frame-wise synthesis.

Recent advances have positioned video world models as powerful engines for simulating the visual world in 2D space [15, 57, 65, 73, 99, 119, 197, 225, 234, 242, 243, 256, 259], 3D space [123, 202, 240], and hybrid geometric settings [12, 28, 50, 63]. As summarized in Table 3, these models differ not only in their geometric assumptions, but also in the cognitive functions they operationalize, namely perception, memory, reasoning, imagination, motivation, and metacognition.

The defining characteristic of modern video world models is their ability to predict future visual states conditioned on current observations and, more crucially, on latent or explicit actions. Contemporary systems such as the open-source Wan [209], alongside models such as Sora [154] and Kling [201], do not merely synthesize pixels; with proper latent representations and training techniques, they can learn the underlying physical, causal, and temporal laws governing their simulated environments. Overall, a world model must go beyond visually plausible synthesis; it should support persistent state representation, causal transition modeling, controllable intervention, and physically grounded prediction. This distinction marks the transition from passive text-to-video generation toward interactive, controllable, and agent-facing environments.

In Sec. 4.1, we review how video world models construct internal representations of the world, focusing on perception and memory. In Sec. 4.2, we discuss how these representations are used for prediction and generation, emphasizing reasoning, imagination, and motivation. Sec. 4.3 summarizes key trends and limitations of epistemic world models. Figures 4 5 and 6 illustrate representative architectures encountered across 2D, 3D, and hybrid video world models.

Table 3. Comparison of recent video world models according to geometry and cognitive functions. A check (✓) indicates that the work explicitly contributes to the corresponding cognitive function in the context of video world models.

Work	Year	Geometry	Mem.	Perc.	Lang.	Reas.	Imag.	Moti.	Meta.	Description
<i>Representation: memory and/or perception</i>										
V-JEPA [15]	2024	2D	✓	✓		✓				Self-supervised video learning by predicting masked spatio-temporal regions in latent space.

continued on next page

Table 3 – continued from previous page

Work	Year	Geometry	Mem.	Perc.	Lang.	Reas.	Imag.	Moti.	Meta.	Description
Gumbsch et al. [73]	2024	2D+temporal	✓			✓	✓	✓		Learn when the world meaningfully changes via discrete latent dynamics, then build a high-level model that skips between change points.
VideoREPA [256]	2025	2D				✓		✓		Physics-aware video generation via relational distillation.
Cosmos-Predict2.5 [4]	2025	2D	✓			✓		✓		Unified flow-matching video generator trained on clips for Physical AI simulation, data augmentation, and policy evaluation.
VideoWeave [57]	2026	2D	✓							Splice short captioned videos into synthetic long videos to cheaply train better video-language models.
Helios [243]	2026	2D	✓			✓		✓		14B model running real-time on one H100 via context compression and drift-aware training.
LingBot-World [203]	2026	2D	✓		✓	✓	✓			Block-causal video generator with sub-second latent rollout for agent training
<i>Geometry-aware perception and spatial memory</i>										
LTX [76]	2024	2D		✓		✓		✓		Uses video diffusion in a real-time open-source world model.
Sparse World [44]	2025	4D	✓	✓			✓		✓	Range-Adaptive Perception module learns queries modulated by the ego vehicle with temporal-spatial associations to enable extended-range perception. Some self-control over learning during training.
MosaicMem [240]	2026	3D	✓			✓				Hybrid 3D-patch + latent memory for video world models.
StereoWorld [197]	2026	2D+depth		✓			✓			Generate stereo video natively via camera-aware RoPE and epipolar-constrained attention, grounding geometry from disparity.
ViewRope [225]	2026	2D+depth	✓	✓		✓				Replace pixel-grid positional embeddings with camera-ray-based RoPE so video world models stay 3D-consistent across viewpoints
<i>Reasoning and action-conditioned prediction</i>										
DIAMOND [5]	2024	2D		✓		✓	✓			Conditions on previous latent state and actions to produce future frames.
Dream2Flow [50]	2025	Hybrid				✓	✓	✓		Generate human-interaction videos, extract 3D object trajectories, then have robots track those trajectories to manipulate.
Garrido et al. [65]	2026	2D		✓		✓				Learn action-conditioned world models from unlabeled in-the-wild videos by inferring continuous latent actions via inverse dynamics.
EgoWM [12]	2026	Hybrid				✓	✓			Fine-tune pretrained video diffusion models with lightweight action conditioning to get cross-embodiment egocentric world models.
EMERALD [28]	2026	Hybrid	✓			✓		✓		MaskGIT-based parallel token prediction in spatial latent space for accurate yet efficient model-based RL world models.
<i>Imagination / embodied world generation</i>										
AdaWorld [63]	2025	Hybrid	✓	✓			✓			Pretrain world models with self-supervised continuous latent actions from video, then cheaply adapt to new environments by mapping real actions to latent ones.
GigaWorld-0 [200]	2025	3D		✓		✓	✓			World model data engine integrating video generation and 3DGS with physics simulation
Tesseract [263]	2025	3D		✓		✓	✓			4D embodied world model converting generated RGB-D-Normal video to point clouds for action prediction
Genie [25]	2024	2D	✓			✓	✓	✓		Unsupervised training on unlabeled internet video for conditional spatio-temporal world representations enabling simulation training with RL and downstream policy models.

continued on next page

Table 3 – continued from previous page

Work	Year	Geometry	Mem.	Perc.	Lang.	Reas.	Imag.	Moti.	Meta.	Description
<i>Motivation / reward- or surprise-guided alignment</i>										
Le et al. [119]	2025	2D		✓				✓	✓	Post-train video diffusion with verifiable Newtonian rewards to enforce physically correct motion. Self-evaluation during training.
WMReward [242]	2025	2D		✓		✓		✓	✓	Post-train an action-conditioned world model for zero-shot robot planning. Self-reflection, Self-control, self-evaluation at inference.
Cambrian-S [234]	2025	2D	✓	✓		✓		✓		Define spatial supersensing hierarchy, benchmark it, and use prediction-error as surprise to drive memory/attention in long videos.
PhyWorld [259]	2026	2D	✓					✓		Direct Policy Optimization for physically aligned video generation
<i>Metacognition / self-improvement</i>										
RLVR-World [220]	2025	2D				✓	✓	✓	✓	Trains world models with RL using verifiable rewards; enables self-improving world models
Jang et al. [99]	2026	2D		✓		✓			✓	Self-reflection through iteratively denoise-and-re-noise video latents at inference time to self-evaluate for physics/motion artifacts.

4.1 World Model Representation

Effective video world models require representations that capture both the spatial structure of a scene and its temporal evolution. In the language of Cognitive Architecture Theory (CAT), this corresponds primarily to **perception**, which encodes the state space for world interaction, and **memory**, which preserves information needed for temporal coherence, long-horizon prediction, and persistent world understanding.

4.1.1 Perception. Perception in video world models refers to the ability to encode visual observations into latent states that preserve object identity, spatial layout, motion, geometry, and physical regularities. This is especially challenging in generated video, where small perceptual errors can accumulate into temporal artifacts, geometric drift, or physically implausible motion.

Several works address perceptual consistency directly during inference time. Self-Refining Video Sampling [99] uses the video generator itself as an inference-time refiner. Rather than relying on an external verifier or additional training, it iteratively denoises and re-noises video latents to reduce artifacts and improve motion consistency. PhysicsMind [143] complements such methods by introducing a benchmark for evaluating physical perception and generation, including both visual question answering (VQA) and video generation tasks.


Other works improve perception during training, with some vision-language models showing that carefully curated multimodal data alone can help align models with physical laws. Order of Chaos [29] shows that carefully curated multimodal data can implicitly align vision-language models with physical regularities. Its PhysGame dataset uses question-answer pairs about glitches and visual anomalies in video-game footage, suggesting that simulated environments can provide scalable supervision for physical and perceptual alignment.

Geometry-aware perception has also become increasingly important for maintaining viewpoint consistency and reducing spatial drift in video world models. ViewRope [225] replaces standard pixel-grid positional encodings with camera ray-based rotary embeddings, allowing attention to reason over viewpoint geometry. Similarly, StereoWorld [197] grounds stereo video generation through disparity and epipolar constraints, while 3D and hybrid models such as MosaicMem [240] and TesserAct [263] explicitly lift visual evidence into spatial representations. Together, these works

Video World Models

TRAINING


autoregressive self-rollback - holistic DMD on the full generated video

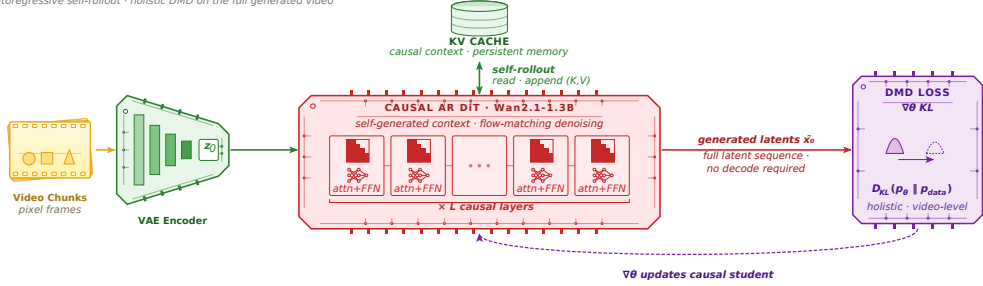

(A) Self Forcing · Huang et al. 2025

TRAINING


self-rollback - reward-weighted DMD (Re-DMD) on VLM motion-quality score

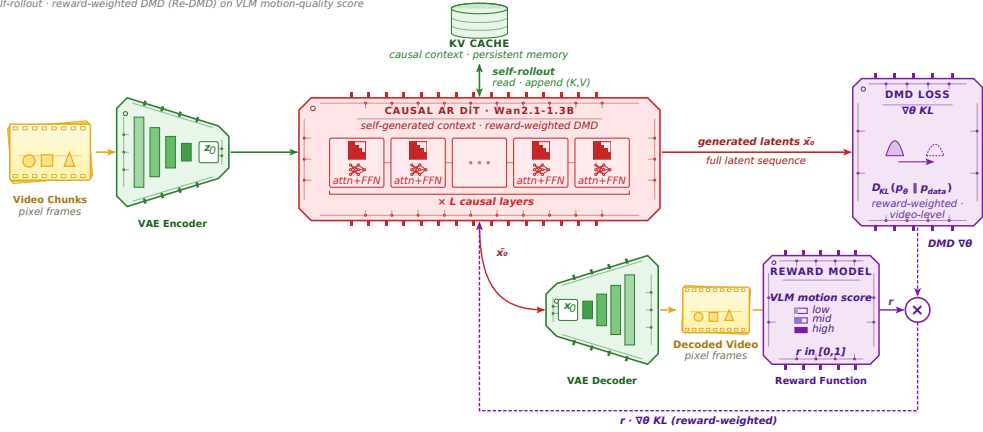

(B) Reward Forcing · Lu et al. 2025

TRAINING

three-stage distillation - AR teacher → causal ODE distillation → asymmetric DMD

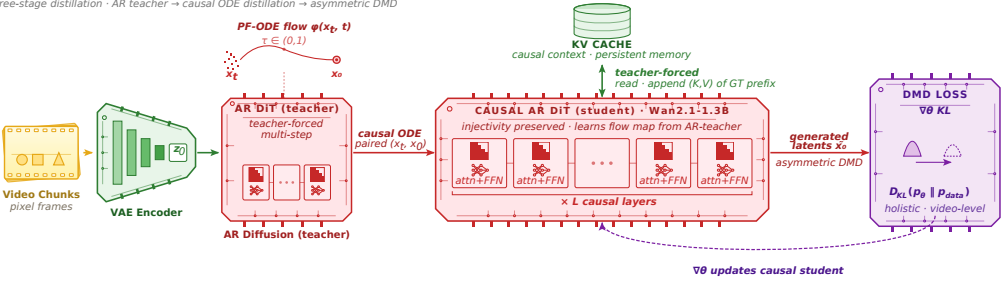

(C) Causal Forcing · Zhu, Zhao et al. 2026



Fig. 4. Representative architectural paradigms in video world models, including autoregressive causal rollout, bidirectional or masked generation, and promptable or action-conditioned prediction.

Video World Models

INFERENCE

chunk-wise causal AR diffusion · 4-step few-step denoising · ~17–23 FPS streaming output

append (K,V) of clean chunk → next iteration

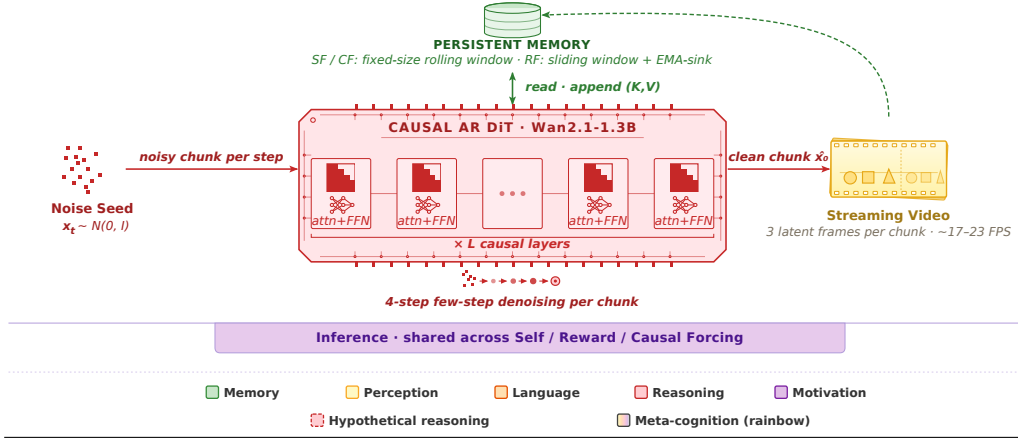


Fig. 5. Representative architectural paradigms in video world models, including autoregressive causal rollout, bidirectional or masked generation, and promptable or action-conditioned prediction.

suggest that robust perception in video world models increasingly requires not only appearance modeling, but also geometry-aware latent structure.

4.1.2 Memory. Memory enables video world models to maintain coherent latent states over time. This includes short-term memory for local temporal consistency, long-term memory for persistent objects and scene layout, and structural spatio-temporal memory for maintaining geometric or semantic continuity across viewpoints, clips, and actions.

Cosmos-Predict2.5 [4] exemplifies a unified world model representation, learning a latent world model:

$$z_{t+1} \sim p_{\theta}(z_{t+1} \mid z_t, a_t, c),$$


where the conditioning signal c may correspond to text, images, or video context. Its temporally causal tokenizer supports incremental state updates, while flow matching and post-training improve physical fidelity. This design unifies Text2World, Image2World, and Video2World generation, though its dynamics remain largely implicit and may therefore be difficult to interpret or control.

Other models introduce more explicit memory mechanisms, since encoding a consistent representation of the world for 2D and 3D scene generation requires an effective storage and retrieval strategy. To construct a 3D model of the world, MosaicMem [240] stores and retrieves image patches lifted to 3D using estimated depth and camera poses, enabling spatially consistent retrieval and view-aligned composition. Marble world model [123, 202] instead represents the world through a continuous 3D radiance-like structure, instead of patches or pixels. This large set of semitransparent particles, known as 3D gaussian splats [106], is amongst the highest-fidelity representations for scene generation. In 2-dimensional scene generation, to establish a robust state space encoding for memory, V-JEPA [15] introduces a new space encoding for world representation that is trained solely using a feature prediction objective, completely bypassing the use of pretrained image encoders or other sources of supervision. Similarly, VideoREPA [256] refines the model's internal state representations during training by aligning token-level relations across spatial and temporal

Video World Models

PROMPTABLE GENERATION

multilingual text + initial frame/video · end-to-end DiT with internal VAE & text encoders · flow-matching head · optional LLM backbone for stateful rollout

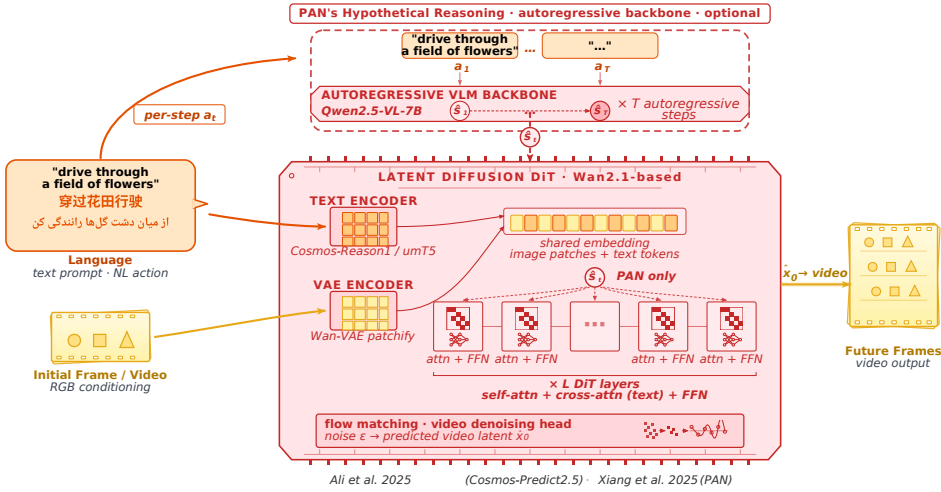


(A) Promptable Multi-Modal Video World Model


BIDIRECTIONAL DECODING

training: full self-attention over all tokens · inference: MaskGIT-style parallel decoding with cosine schedule

TRAINING

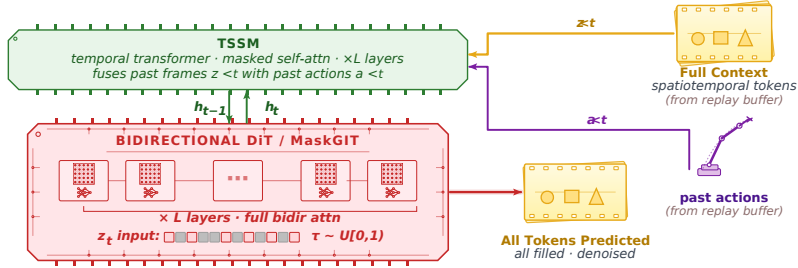

INFERENCE (parallel decoding)

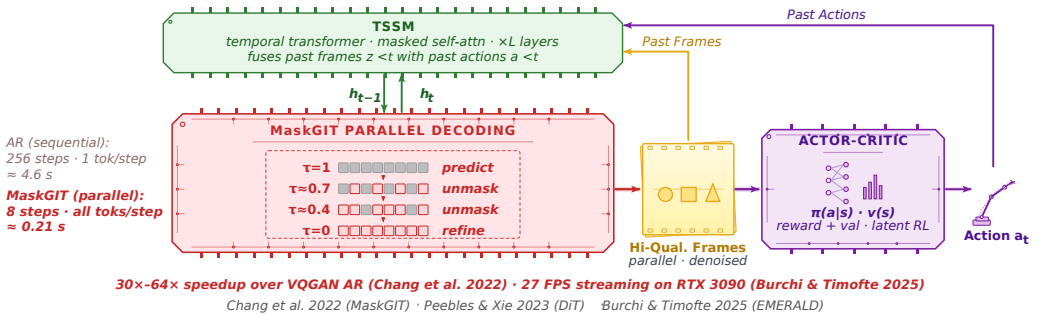

(B) Bidirectional / Masked / Parallel Generation



Fig. 6. Representative architectural paradigms in video world models, including autoregressive causal rollout, bidirectional or masked generation, and promptable or action-conditioned prediction.

dimensions with a Token Relation Distillation (TRD) loss. In doing so, VideoREPA aligns the spatial and temporal token relations of generative diffusion models with robust representations from self-supervised foundation models.

Beyond structural coherence, a major challenge for video world models is extending memory over long horizons. Gumbsch et al. [73] address this through hierarchical world models with adaptive temporal abstractions, where discrete latent dynamics identify meaningful change points and preserve stable contexts for long-horizon prediction. In this sense, memory is treated as a hierarchy of stable states and temporally abstract events, instead of simply a longer context window. VideoWeave [57] addresses long-context degradation from a data-centric perspective by splicing short captioned videos into longer synthetic sequences, forcing models to track persistent latent states across narrative transitions. Alternatively, Video-GPT [272] combines autoregressive memory with diffusion through *Next Clip Diffusion*. This enforces strict causal clip-to-clip dependence using historical clean clips to maintain exceptionally stable internal memory over long-horizon video generation.

Several works focus specifically on converting bidirectional video generators into long-horizon autoregressive world models. Self-Forcing [92] addresses the train-test exposure bias by simulating inference conditions during training, performing autoregressive rollouts with rolling KV caching to condition future frames on the model’s own self-generated past. Building on this, Causal Forcing [269] uses an autoregressive teacher for ODE distillation, encouraging strict causal history mapping. Reward Forcing [141] takes a structural approach to long-term memory via the *EMA-Sink* mechanism, which maintains fixed-size context tokens for long-term coherence. Finally, some works achieve real-time speeds due to their effective and efficient world representation [76, 243]. Helios [243] approaches long-horizon memory through a highly optimized deep compression flow. Rather than relying on standard anti-drifting memory heuristics like self-forcing, Helios heavily compresses the historical and noisy context and explicitly simulates drifting during training. Overall, these methods show that memory in video world models is not merely a matter of context length, but of designing latent states that remain stable and causal under repeated rollout.

4.2 World Model Prediction and Generation

The generation phase evaluates whether a world model can use its internal state to predict coherent future trajectories. Within the CAT framework, this phase primarily involves **reasoning**, which governs causal and temporal consistency, **imagination**, which enables hypothetical rollout and counterfactual simulation, and **motivation**, which introduces reward- or objective-driven pressure toward physically or task-relevant futures. Figures 4 5 and 6 shows the various architectures encountered in this review for 2D and 3D scene generation.

4.2.1 Reasoning. Within video world models, **reasoning** governs future-state generation under physical and temporal constraints. Architecturally, these mechanisms align with the paradigms illustrated in Figures 4 5 and 6, each corresponding to a different instantiation of the world transition function W_θ . Together, these paradigms define a spectrum, from strictly causal reasoning to globally optimized trajectory generation, with action-conditioned models bridging toward embodied control.

Autoregressive causal rollouts. Autoregressive world models (Figures 4 and 8) generate future states sequentially:

$$z_{t+1} = W_\theta(z_{\leq t}),$$

conditioning each prediction on previously generated states. This enforces causality through masked attention, recurrent state updates, or rolling context windows [57, 269, 270]. Reasoning in

this paradigm emerges as a chain of locally consistent transitions, though compounding error over long horizons remains a central challenge.

Promptable and action-conditioned world models. Action-conditioned models (Figure 6(A)) explicitly control transition dynamics:

$$z_{t+1} = W_{\theta}(z_t, a_t, c),$$

where a_t denotes actions and c may include language prompts, initial observations, goals, or other conditioning signals. These models most closely align with embodied reasoning because they simulate the visual consequences of interventions. EgoWM [12], for example, injects motor commands into pretrained video diffusion backbones for controllable egocentric prediction, while Dream2Flow [50] extracts 3D object flow from generated videos to ground predicted transitions in physically meaningful transformations.

Bidirectional and masked generation. Bidirectional or diffusion-based world models (Figure 6(B)) instead model the joint distribution over a trajectory:

$$z_{1:T} \sim p_{\theta}(z_{1:T}),$$

and iteratively refine the sequence through denoising or masked token prediction [5, 28, 161]. Here, reasoning is less strictly causal but more globally optimized, allowing the model to revise earlier and later states jointly, correcting inconsistencies across space and time during generation.

Latent actions and geometric constraints. Several works improve reasoning by structuring the latent transition space. Garrido et al. [65] jointly learn inverse and forward dynamics,

$$a_t \approx f^{-1}(z_t, z_{t+1}), \quad z_{t+1} = f(z_t, a_t),$$

allowing continuous latent actions to be discovered from uncurated video. ViewRope [225] incorporates camera-ray geometry directly into attention, augmenting the transition function W_{θ} with explicit spatial constraints to prevent geometric drift.

Hierarchical and Sim-to-Real reasoning. For embodied deployment, predicted trajectories must remain meaningful under domain shift. Hierarchical world models address this by decomposing prediction across temporal scales:

$$z_{t+1}^{(l)} = W_{\theta}^{(l)}(z_t^{(l)}, z_t^{(l+1)}),$$

where higher-level abstractions guide lower-level transitions. Gumbsch et al. [73] show that learning temporal abstractions around meaningful change points can support long-horizon consistency while preserving executability in real-world settings. Dream2Flow [50] further contributes by constraining transitions through 3D object flow, ensuring that imagined trajectories correspond to physically realizable actions.

4.2.2 Imagination. Imagination refers to the ability of a world model to generate hypothetical futures that need not have been directly observed, but remain plausible enough to support planning, exploration, or policy learning. In video world models, imagination is realized through controllable rollout, *i.e.*, the model simulates how a scene may evolve under actions, prompts, or latent interventions.

Genie [25] is an early example of this shift from passive video generation to interactive environment modeling. Trained on unlabeled internet videos, Genie demonstrates that frame-level controllability can emerge without ground-truth action labels or domain-specific robotic supervision. Expanding on this, Dream2Flow [50] extracts 3D object flow from dreamed videos to serve as a modality-agnostic intermediate representation for open-world manipulation. By translating AI-generated video rollouts into executable trajectory tracking actions without task-specific

demonstrations, it bridges the gap between hallucinated video generation and physical robotic control.

AdaWorld [63] addresses the adaptation problem by pretraining world models with self-supervised continuous latent actions extracted from unlabeled video. At deployment time, real actions can be mapped into the learned latent action space, reducing the need to retrain for each new environment. Finally, EMERALD [28] enhances DIAMOND [5] and Dreamer-style agents with MaskGIT-based [31] parallel token prediction in a spatio-temporal latent representation. This allows jointly encoding spatial structure alongside temporal dynamics to improve accuracy and efficiency in model-based RL for sim-to-real transfer. Astra [270] extends this with an autoregressive denoising framework that supports long video horizons sufficient for future prediction comparable to motor control, addressing the practical requirement of imagined rollouts for real-world environments.

4.2.3 Motivation. Motivation introduces objective-driven constraints into video world models. Rather than generating only visually plausible sequences, motivated world models are guided by rewards, prediction errors, or physical constraints that encourage useful and realistic futures.

Le et al. [119] explicitly align generated videos with physical laws by introducing verifiable, physics-grounded rewards during post-training. These rewards penalize violations of Newtonian dynamics, such as gravity and momentum, steering the model toward physically consistent rollouts. Similarly, PhyWorld [259] grounds video generation to physical laws with direct policy optimization. We also see VJEPa-2 [9] use a latent world model with strong intuitive physics as an inference-time critic, scoring candidate trajectories and favoring predictions that better satisfy physical plausibility.

In terms of spatial and temporal awareness, Cambrian-S [234] introduces a complementary form of motivation based on surprise. Its sensing mechanism uses prediction error to guide memory updates and event segmentation in long visual streams, connecting video world models to principles from active inference [59–61, 162]. Here motivation is not limited to external rewards, but can also arise from internal signals that identify when the world has changed in a meaningful way.

4.3 Trends and limitations.

In summary, video world models are shifting from passive video synthesis toward structured, controllable world simulation. The field increasingly emphasizes geometry-aware perception, persistent latent memory, long-horizon rollout, and action-conditioned generation. Approaches such as ViewRope [225], StereoWorld [197], MosaicMem [240], and TesserAct [263] illustrate this trend by lifting visual evidence into spatial representations to maintain viewpoint consistency.

Yet key limitations remain: learned dynamics are often implicit and difficult to verify; long-horizon predictions are still subject to drift and compounding error; and 3D consistency often depends on additional depth, pose, or geometric priors. It is noteworthy that, motivation and metacognition also remain weakly developed. For example, Cambrian-S [234] uses prediction error as a surprise-like signal, resembling Active Inference. Yet it does not explicitly formulate intrinsic motivation through Active Inference’s exploration reward nor optimize a loss that models intrinsic latent dynamics. Instead, Cambrian-S relies on pixel-level prediction error as a proxy for surprise, omitting the information-gain term that drives exploratory behavior. This reduction is valid if the next-latent predictive distribution is taken to be Gaussian with fixed variance, in which case the accuracy (negative log-likelihood) term of the free energy reduces to a scaled squared error between the predicted and observed means, i.e., MSE [21, 59, 82]. A predictive objective that additionally captures epistemic uncertainty would more closely realize the full active-inference objective. Addressing these gaps will require video world models that couple scalable generative priors with explicit spatial structure, physically grounded objectives, intrinsic motivation, and mechanisms for evaluating and regulating their own predictions.


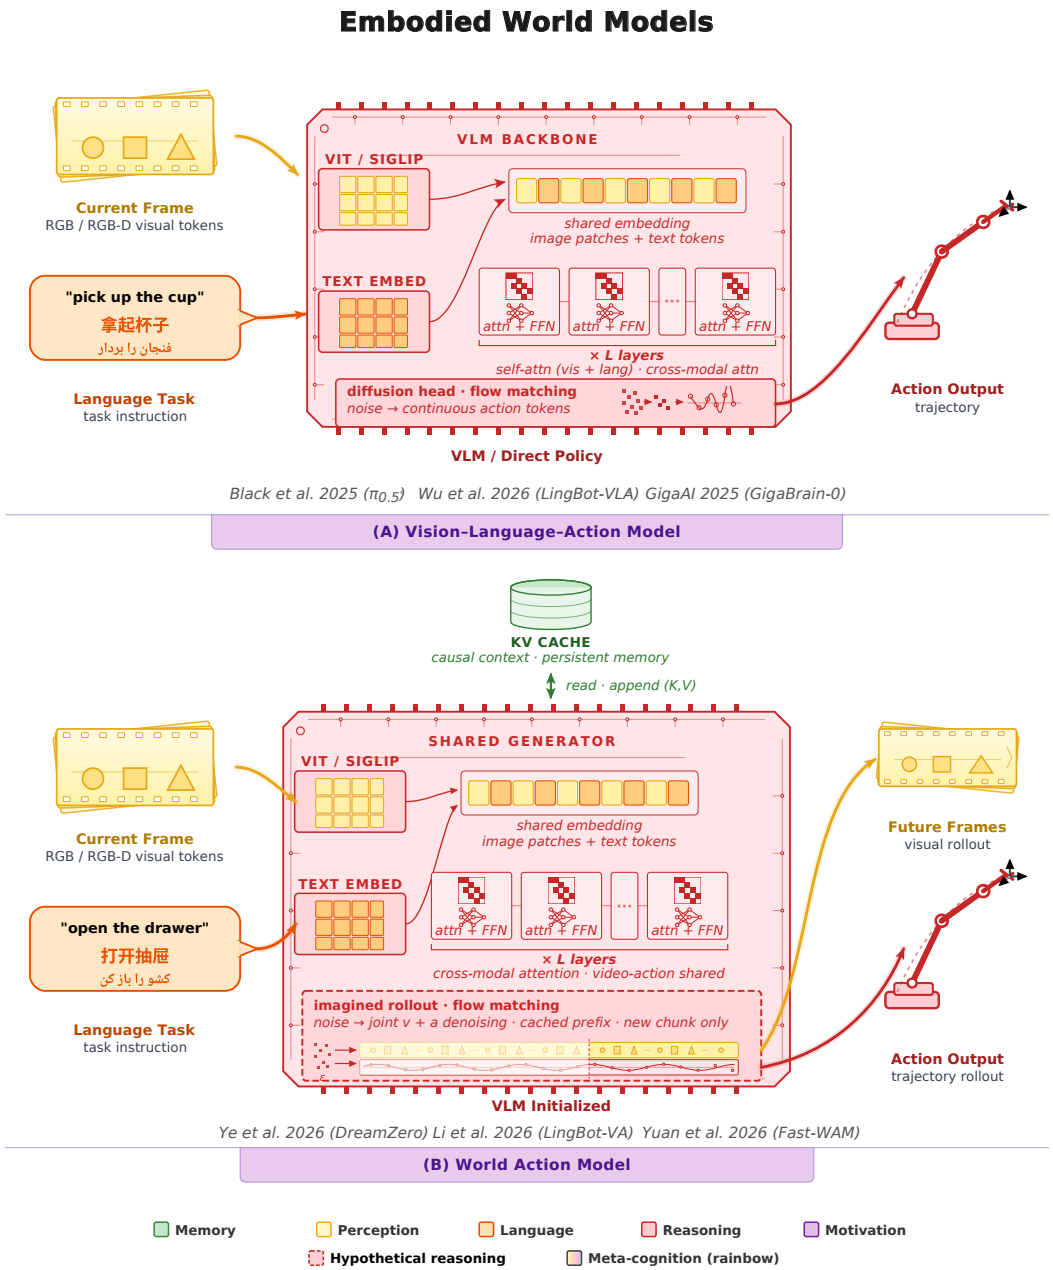



Fig. 7. Above are the typical architectures encountered when reviewing embodied world models.

Embodied World Models

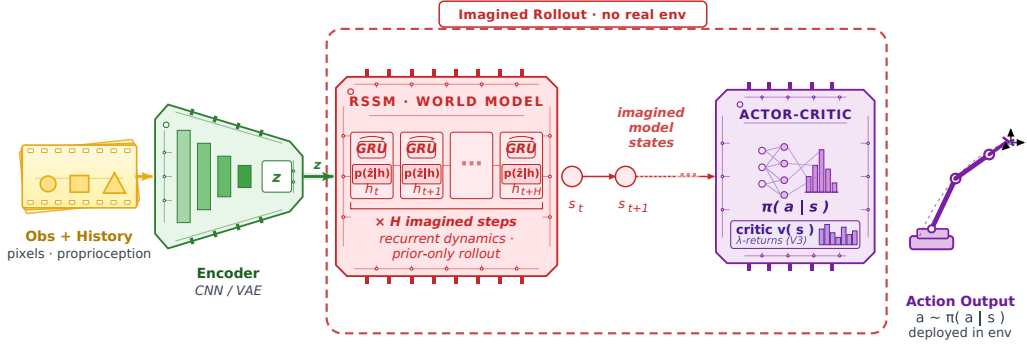

Ha & Schmidhuber 2018 (World Models) · Hafner et al. 2019 (Dreamer) · Hafner et al. 2025 (DreamerV3)

(A) Dreamer-style Latent World Model

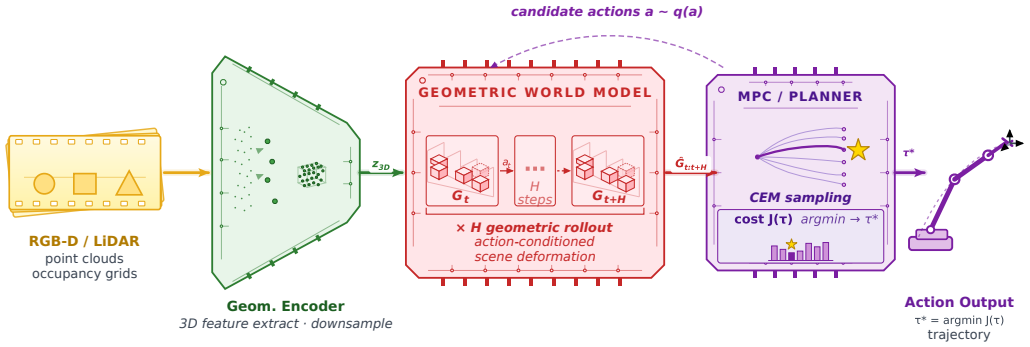

Shi et al. 2024 (RoboCraft) · Zhang et al. 2024 (AdaptiGraph) · Huang et al. 2025 (ParticleFormer) · Huang et al. 2026 (PointWorld)

(B) Planner over Structured Geometry

Memory Perception Language Reasoning Motivation
Hypothetical reasoning Meta-cognition (rainbow)

Fig. 8. Above are the typical architectures encountered when reviewing embodied world models.

5 Embodied World Models

Embodied world models not only demand visual understanding and linguistic reasoning, but also perceive, act, and anticipate how their actions reshape the physical world. This physical grounding constraint distinguishes embodied world models from their video generation counterparts (Section 4). A video world model succeeds when its generated frames are photorealistic and temporally coherent. However, an embodied world model succeeds when its predictions are physically accurate enough to guide a body with mass, kinematics, and contact surfaces toward successful task execution. These demands on embodied world models heighten the demands for a Unified World Model, as seen in Figure 3, capable of emulating a broad range of cognitive functions. We explore embodied world

models in robotics [1, 9, 13, 18, 20, 30, 34, 55, 74, 88, 90, 93, 96, 97, 103, 108, 124, 140, 142, 145, 148, 175–178, 194, 196, 199, 212, 217–219, 222, 224, 236, 237, 244, 253, 266–268], navigation with exploration [103, 177, 194], and autonomous driving [17, 23, 32, 35, 37, 44, 64, 81, 85, 91, 101, 107, 125, 127, 130, 147, 166, 172, 210, 215, 235, 247, 254, 255, 257, 262, 264, 265].

Perception must encode contact geometry and six-degree-of-freedom pose, not merely visual appearance; **Memory** may need to maintain a persistent, spatially-grounded model of the physical world across interactions, not merely temporal coherence across frames. **Reasoning** may need to capture physical causality and force propagation rather than narrative causality; and **Imagination** must generate action conditioned futures that are physically executable, not merely visually plausible. We explore these novelties following the CAT structure of our unified framework: world representation in Sec. 5.1 and world generation in Sec. 5.2. Sec. 5.3 summarizes key trends and limitations of embodied world models.

Table 4. Embodied world model works in Section 5 mapped to Cognitive Architecture Theory (CAT) functions (Memory, Perception, Language, Reasoning, Imagination, Motivation, Metacognition). A check (✓) indicates a clear contribution.

Work	Year	App.	Mem.	Perc.	Lang.	Reas.	Imag.	Moti.	Meta.	Description
<i>Foundational / Platform Models</i>										
Being-H0.7 [1]	2026	Robot	✓			✓				Action prediction occurs in an action-centric spatio-temporal latent space, not pixel-space, eliminating predictive video
Cosmos-Policy [108]	2026	Robot	✓			✓	✓	✓		Post-trains Cosmos-Predict-2 for visuomotor robot control and planning
DreamZero [237]	2026	Robot	✓			✓	✓			World Action Model jointly predicting video and actions; zero-shot policy from video pretraining
Fast-WAM [244]	2026	Robot				✓	✓			Decouples action prediction from video generation at inference for faster WAM deployment
GigaBrain-0 [199]	2025	Robot		✓		✓	✓			VLA trained on world-model-generated data with RGBD input and embodied chain-of-thought
Motus [18]	2025	Robot	✓			✓	✓			Unified latent action world model via Mixture-of-Transformers; optical flow as embodiment-agnostic action
<i>VLA / Language-Grounded Embodied Models</i>										
$\pi_{0.5}$ [96]	2025	Robot		✓	✓	✓				Flow-matching VLA decomposing language into causally grounded multi-step physical plans
LingBot-VLA [224]	2026	Robot		✓	✓	✓				Cross-morphology VLA on 20,000h bi-manual data with geometry-aware depth distillation
LingBot-VA [124]	2026	Robot	✓		✓	✓	✓			Interleaves video and action tokens for joint imagination and action decoding
VLA-JEPA [196]	2026	Robot	✓		✓	✓	✓	✓		Leakage-free JEPA grounding visual encoder in action-relevant dynamics
VAGEN [212]	2025	Robot			✓	✓		✓		RL-structured world model reasoning into state estimation and transition modeling for VLM agents
Being-H0.5 [142]	2026	Robot		✓	✓	✓		✓		A foundational VLA for robust cross-embodiment generalization across diverse robotic platforms
<i>World Models for Manipulation</i>										
Flash-WAM [3]	2026	Robot	✓	✓			✓			Step-distillation framework for achieving inference latency under 350 ms.

continued on next page

Table 4 – continued from previous page

Work	Year	App.	Mem.	Perc.	Lang.	Reas.	Imag.	Moti.	Meta.	Description
PointWorld [90]	2026	Robot	✓	✓		✓	✓			Unifies state and action as 3D point flows with MPC over imagined scene deformations
ManiGaussian [140]	2024	Robot		✓		✓	✓			Dynamic 3DGS world model predicting future Gaussian scenes under action for manipulation
RoboScape [178]	2025	Robot		✓		✓	✓			Physics-informed world model jointly learning video, depth, and keypoint dynamics
EnerVerse-AC [88]	2025	Robot	✓	✓		✓	✓			Chunk-wise autoregressive video diffusion with sparse memory and 4DGS for action-conditioned prediction
UWM [267]	2025	Robot	✓			✓	✓			Couples video and action diffusion in one transformer; pretrained on video-only and video+action data
GR-1 [219]	2024	Robot	✓	✓	✓		✓			GPT transformer pretrained on 800K Ego4D clips jointly predicting actions and future frames
GR-2 [34]	2024	Robot	✓	✓	✓	✓	✓			Scaled video-language-action model (719M) achieving 97.7% success across 100+ real tasks
UniPi [55]	2023	Robot			✓		✓			Text-conditioned video diffusion as policy; extracts actions via inverse dynamics
SuSIE [20]	2024	Robot		✓	✓		✓	✓		Image-editing diffusion synthesizing subgoal images for goal-conditioned manipulation policy
IRASim [268]	2024	Robot		✓			✓	✓		Diffusion transformer with frame-level action conditioning for manipulation simulation
LaDi-WM [93]	2025	Robot		✓		✓	✓	✓		Predicts latent state evolution via diffusion; more generalizable than pixel-level prediction
FlowDreamer [74]	2025	Robot		✓		✓	✓			RGB-D world model using optical flow as explicit physically interpretable motion supervision
MWM [176]	2023	Robot	✓	✓		✓	✓	✓		Decouples MAE visual representation from RSSM dynamics; 81.7% on Meta-World tasks
PIVOT-R [253]	2024	Robot	✓	✓	✓	✓				Waypoint-aware world model focusing prediction on task-relevant key states
Plan2Explore [175]	2020	Robot					✓	✓		world model exploration via ensemble disagreement for zero-shot task adaptation
DayDreamer [222]	2022	Robot				✓	✓	✓		Dreamer-style world model learning directly on physical robots from sparse rewards
Dream to Manipulate [13]	2024	Robot		✓			✓			Compositional 3DGS with object decomposition for imagination-based imitation learning
RoboDreamer [266]	2024	Robot		✓	✓		✓			Compositional diffusion world model factorizing language instructions into task primitives
GenRL [145]	2024	Robot		✓	✓		✓	✓		Foundation world models for generalization in embodied RL via multimodal priors
V-JEPA 2 [9]	2025	Robot		✓				✓		Representation-space prediction on 1M video hours; zero-shot planning via MPC
WorldVLA [30]	2025	Robot	✓		✓	✓	✓			Autoregressive action world model unifying video prediction and VLA action generation
AdaptiGraph [252]	2024	Robot	✓	✓		✓				Graph Neural Network for world represented as particles for general purpose manipulation
RoboCraft [190]	2024	Robot	✓	✓		✓		✓		Graph Neural Network for world represented as particles for elastic materials

continued on next page

Table 4 – continued from previous page

Work	Year	App.	Mem.	Perc.	Lang.	Reas.	Imag.	Moti.	Meta.	Description
Particle Former [89]	2025	Robot	✓	✓		✓		✓		Transformer-based reasoning from 3d point cloud scene observations
<i>Locomotion / Navigation World Models</i>										
DreamWaQ [148]	2023	Robot		✓		✓	✓	✓		Implicit terrain imagination from proprioception for quadrupeds
DreamerNav [218]	2025	Robot		✓	✓	✓	✓			DreamerV3 for quadruped navigation with depth and occupancy; zero-shot sim-to-real
BADGR [103]	2021	Robot		✓		✓				Self-supervised terrain affordance learning for outdoor navigation via MPC
ViNT [177]	2023	Robot	✓	✓			✓	✓		Visual navigation model with diffusion subgoal proposals across robot platforms
NoMaD [194]	2024	Robot		✓		✓	✓			Unifies goal navigation and exploration with diffusion policy and goal-masking
EVA [217]	2026	Robot						✓		Trains a video world model with an inverse dynamics reward signal aligns to physical constraints in world dynamics.
VLM-Safe [166]	2025	Robot					✓	✓		VLM-guided safety rewards steering imagined rollouts for constrained AV policy inspired by human cognition
GeNIE [211]	2025	AD	✓			✓				Traversable state prediction enables generalizing across a wide range of real-world environments.
<i>Autonomous Driving World Models</i>										
OccWorld [264]	2023	AD	✓	✓		✓				VQVAE tokenizer with GPT transformer for joint 3D occupancy and ego trajectory forecasting
Copilot4D [255]	2023	AD		✓		✓				Discrete diffusion over BEV LiDAR tokens; 65% Chamfer distance reduction
BEVWorld [257]	2024	AD	✓	✓		✓				Multimodal tokenizer fusing camera and LiDAR into unified BEV latent for forecasting
SparseWorld [44]	2025	AD	✓	✓		✓				Sparse dynamic queries modulated by ego-vehicle state for adaptive scene memory
Epona [254]	2025	AD	✓			✓	✓			Decouples temporal memory from spatial generation via causal transformer and twin diffusion
LiDARCrafter [130]	2025	AD	✓	✓	✓	✓				Language-conditioned tri-branch diffusion for 4D LiDAR scene generation
DrivingGPT [37]	2024	AD	✓	✓	✓	✓				Interleaved image-action tokens unifying world modeling and planning as next-token prediction
DOE-1 [265]	2024	AD	✓	✓	✓	✓				Closed-loop end-to-end AV model using free-form text as perceptual interface
LAW [127]	2024	AD		✓		✓	✓			Self-supervised latent prediction of future scene features from observations and ego trajectories
MILO [32]	2021	AD				✓		✓		Model-based imitation learning mitigating covariate shift via offline data
KG-based WM [17]	2025	AD	✓	✓						Knowledge graphs with sensor data for material-aware obstacle reasoning in AVs
PWM [262]	2025	AD				✓		✓		Collaborative state-action prediction for anticipatory planning in AVs
AdaWM [210]	2025	AD				✓				Adaptive world model planning with dynamic model selection for autonomous driving
Think2Drive [125]	2024	AD					✓	✓		Efficient RL via latent world model imagination in CARLA-v2
Raw2Drive [235]	2025	AD					✓	✓		End-to-end AV aligning RL policy with imagination from raw sensors

continued on next page

Table 4 – continued from previous page

Work	Year	App.	Mem.	Perc.	Lang.	Reas.	Imag.	Moti.	Meta.	Description
Dream to Drive [147]	2025	AD	✓			✓	✓	✓		Analytic world model for dreamer-style vehicle control without environment interaction
Dream2Drive [64]	2024	AD		✓			✓	✓		RL in predictive world model imagination with intention-aware latent states
Large Video Planner [35]	2025	AD				✓				Foundation-scale video model for zero-shot robot video plans to actions
SafeDreamer [91]	2023	AD					✓	✓		Dreamer safe RL pairing imagined trajectories with safety estimations
IRL-VLA [101]	2025	AD			✓			✓		Inverse RL reward world model for efficient closed-loop reward computation in VLA training
InDRIVE [107]	2025	AD						✓		Intrinsic disagreement reward in Dreamer MBRL for curiosity-driven vehicle exploration
RDAR [23]	2025	AD				✓		✓		Reward-driven relevance estimation for safety-critical agents in AV planning
Latent-WAM [215]	2026	AD	✓	✓		✓				Uses causal transformer to jointly learn visual and motion dynamics from geometry conditioned world representations
<i>Synthetic Training Data</i>										
GAIA-1 [85]	2023	AD	✓			✓	✓			Generative world model with discrete latent space for scalable synthetic data
GAIA-2 [172]	2025	AD	✓			✓	✓			Controllable multi-view generative world model with continuous latent space for scalable synthetic data
Dream4Drive [247]	2025	AD					✓			Repurposes world model imagination for scalable synthetic data
MoSim [81]	2025	AD				✓	✓	✓		Motion-grounded simulation generating diverse controllable traffic scenarios
DreamGen [97]	2025	Robot		✓			✓			Fine-tunes Cosmos-Predict-2.5 as synthetic data engine for policy training

5.1 World Model Representation

5.1.1 Perception. In embodied world models perception must encode the physical structure of the scene rather than visual appearance alone. This makes 3D occupancy a natural representation for world models as it is expressive, efficient, and versatile across both vision and LiDAR inputs [264]. OccWorld operationalizes this by learning in 3D semantic occupancy space, using a VQVAE-based scene tokenizer to produce discrete scene tokens that jointly forecast future occupancy and ego trajectory through a GPT-like spatial-temporal transformer, all without requiring instance or map annotations [264]. Building on the same tokenize-then-predict philosophy, Copilot4D [255] further addresses the scalability of this perceptual pipeline by applying discrete diffusion over BEV tokens derived from raw LiDAR point clouds, reducing prior state-of-the-art Chamfer distance by over 65% for one-second prediction across multiple benchmarks [255].

5.1.2 Memory. A central challenge in embodied world models is maintaining a compact yet sufficiently rich state space encoding of the scene across time. BEVWorld addresses this by compressing heterogeneous multimodal inputs including camera imagery and LiDAR point clouds into a unified Bird’s Eye View latent space through a self-supervised multimodal tokenizer, enabling temporally consistent future scene forecasting via a latent BEV sequence diffusion model conditioned on action tokens [257]. While BEVWorld [257] establishes a shared spatial memory across modalities, it relies on static grid-based representations that struggle to adapt to the dynamic and continuous nature of real driving environments. SparseWorld addresses this limitation directly by replacing fixed grid embeddings with sparse and dynamic queries modulated by the ego vehicle’s state, allowing the

memory encoding to scale its perception range with vehicle speed and adapt to foreground object dynamics rather than treating all voxels uniformly [44].

Epona [254] takes a complementary approach to the memory problem by identifying that conventional video diffusion models entangle temporal memory with spatial generation, leading to error accumulation in long-horizon rollouts. By decoupling the two through a GPT-style causal transformer that handles temporal context in compressed latent space separately from twin diffusion transformers that handle spatial rendering and trajectory generation, Epona achieves stable long-duration prediction with a 7.4% FVD improvement over prior works [254]. Further advancing perception, LaDi-WM [93] finds that predicting the evolution of the latent space is easier to learn and substantially more generalizable than directly predicting pixel-level images in diffusion models.

5.1.3 Language. In the CAT framework, language serves as a semantic and symbolic encoding that connects human intent to world state, and in embodied driving this role becomes particularly concrete. LiDARcrafter [130] demonstrates this most directly by using free-form natural language instructions as the entry point for 4D LiDAR world modeling, parsing text into ego-centric scene graphs that condition a tri-branch diffusion network to generate object structures, motion trajectories, and geometry, with an autoregressive module then extending the result into temporally coherent LiDAR sequences [130]. Where LiDARcrafter [130] uses language to control a geometric representation, DrivingGPT [37] uses it to unify the entire driving pipeline by constructing a multimodal driving language from interleaved image and action tokens, treating world modeling and trajectory planning as a single next-token prediction problem over this shared symbolic vocabulary [37]. DOE-1 [265] takes this unification further by closing the loop entirely, using free-form text scene descriptions as the perceptual interface and autoregressively generating perception, prediction, and planning tokens within one multimodal transformer, achieving the first closed-loop end-to-end autonomous driving model under this paradigm [265].

5.2 World Model Generation

5.2.1 Reasoning. Architectures for embodied world models primarily differ along the following axes (with some sampled in Fig. 7 and 8):

Geometric world models. PointWorld [90] and other geometric world models [89, 90, 130, 140, 178, 190, 252, 257, 264] represent the opposite extreme, grounding reasoning directly in 3D structure by predicting scene flow $\Delta \mathbf{x} = f_{\theta}(\mathbf{x}, a_t)$ over point clouds. This enforces physically meaningful state transitions and enables cross-embodiment generalization without task-specific heads. However, it depends on strong geometric supervision and may be less flexible for abstract or semantic tasks.

Language-conditioned planning. $\pi_{0.5}$ [96] treats reasoning as long-horizon planning conditioned on language, implicitly learning

$$a_{1:T} \sim \pi_{\theta}(a_{1:T} \mid z_0, \ell)$$

where ℓ encodes task structure. This enables coherent multi-step behavior across diverse environments, but places significant burden on the latent representation to maintain causal consistency over long horizons. Vision-Language-Action (VLAs) models [30, 96, 101, 124, 142, 196, 212, 224] excel in reactive and instruction-following settings but rely on either external planners or hybridization with World Action Models (WAMs) when long-horizon physical reasoning or counterfactual simulation is required. A central limitation of WAMs is the number of denoising steps, which can be as high as 10 in LingBot-VA, leading to higher latencies.

Autoregressive world-action models. Because VLAs are reactive and under-supervised and map action directly, with no explicit model of future researchers turn to World Action Models (WAMs) [1, 17,

18, 30, 32, 81, 124, 215, 236, 237, 244, 262]. Two such works, LingBot-VA [124] and DreamZero [237] unifies imagination and control by modeling joint sequences

$$(z_{t+1}, a_t) \sim p_\theta(z_{t+1}, a_t \mid z_{\leq t})$$

with causal or block-causal attention. These approaches improve temporal consistency and enable efficient rollout, but remain sensitive to representation quality and training stability.

Representation-driven reasoning. VLA-JEPA [196] highlights that reasoning quality depends critically on the learned state space, enforcing dynamics-consistent representations $z_t = \phi(o_t)$ that are invariant to irrelevant visual variation. This improves generalization, but shifts complexity into representation learning as recent works show [9, 93, 127, 176, 196, 210].

Planning-centric extensions. Across paradigms, there is a convergence toward explicit planning over learned dynamics [64, 90, 91, 127, 166, 175, 210] to predict actions in the form,

$$a_t^* = \arg \max_{a_{t:t+H}} \mathbb{E} \left[\sum_{k=0}^H r(z_{t+k}) \right],$$

as seen in model-predictive control (PointWorld [90]), self-supervised world models (LAW [127]), and latent RL pipelines [210]. These approaches improve controllability and robustness, but depend on accurate forward models.

Figures 7 and 8 can thus be interpreted as a spectrum: generative models offer scalability and multimodal unification; geometric models provide strong physical grounding; and planning-based approaches enable controllable long-horizon reasoning. Most recent systems hybridize these axes, suggesting that effective reasoning emerges from combining expressive latent models with structured representations and explicit planning.

5.2.2 *Imagining.* In embodied world models, imagination manifests as dreaming [64, 91, 107, 147, 148, 218, 222], as well as action-conditioned hypothetical reasoning, where agents simulate future trajectories in latent space to guide policy learning and planning [35, 85, 97, 147, 172, 247]. Works such as Think2Drive [125] and Raw2Drive [235] leverage world models to generate imagined rollouts for training driving policies, while autoregressive approaches model multiple probabilistic futures to reason under uncertainty [227]. Dream2Drive [64] further demonstrates this paradigm by operating within a learned imagination space (PIWM), using intention-aware latent states to evaluate candidate trajectories for urban navigation [64]. More recent systems integrate imagination directly into the training loop, enabling policies to be optimized through interaction with an internal simulator rather than the real environment [68].

Beyond policy learning, imagination enables safety-aware planning and scalable data generation. world models can pair imagined roll outs with safety estimates to guide actor-critic optimization under additional constraints, such as VLM-based safety signals [166]. At larger scale, foundation video models generate zero-shot trajectory plans from internet-scale data, which can be converted into executable robot actions [35], while broader dreaming pipelines [147], including Cosmos-Drive-Dreams [167], GAIA-1, GAIA-2 [85, 172], and Dream4Drive [247] use synthetic rollouts as training data. Benchmarks such as WorldLens evaluate the physical fidelity of these imagined trajectories [129], reinforcing imagination as a core mechanism for bridging perception, reasoning, and action in embodied settings.

5.2.3 *Motivation.* Motivation in embodied world models defines how agents evaluate imagined trajectories during learning and control [23, 64, 89–91, 101, 107, 127, 166, 175, 190, 210]. IRL-VLA [101] learns a lightweight reward world model via Inverse Reinforcement Learning for efficient closed-loop optimization [101], while InDRiVE [107] leverages intrinsic disagreement-based rewards

within a Dreamer-style MBRL framework to drive exploration [107]. Additional approaches refine reward signals for task relevance in autonomous driving settings [23], reflecting a shift toward learned and uncertainty-aware objectives over hand-crafted rewards. Safe-Dreamer motivates models to conform to safety criteria by incorporating Lagrangian-based methods into planning [91].

5.3 Trends and Limitations

Typical implementations of World Action Models though capable of robust reasoning lack the efficiency of direct policy networks such as VLAs. Some World Action Model works [124, 237, 244] achieve efficiency gains through the practical implementation of **memory** mechanisms such as KV-cache. KV-cache allows the reuse of previously generated transformer activations allowing the models to avoid recomputation across subsequent forward passes as depicted in Fig. 7

Another recent work combines the utility of both WAMs and VLAs in what they call a latent World Action Model or BeingH-0.7 [1]. BeingH-0.7 argues that pixel-space WAMs are inefficient (e.g. VLAs can be up to 60x cheaper in compute) and imperfectly predicted pixels can lead to bad downstream actions. The solution they argue is to combine VLAs and WAMs by bridging direct action prediction and world modeling through a shared latent space. It is this efficiency in **reasoning** that allows multiple queries of hypothetical reasoning which was previously considered unobtainable in traditional WAM settings.

Many embodied world models suffer from inefficiencies in **reasoning**, require expensive hardware for robust **perception**, or rely on training data that is costly to create. Efficiency in the Embodied setting arises in **memory**-enabled efficient WAM's and hybrid VLA-WAM models. The later innovate across all components of cognition, by introducing to VLAs a robust **memory** mechanic for conditioning action selection on latent future world states, while maintaining efficiency enabling hypothetical reasoning. These hybrid VLA-WAMs are true Unified world models as depicted in Fig. 3 only lacking intrinsic motivation and metacognition. Even more recently, World Action Models are showing future video prediction can be expendable achieving highly efficient runtime latencies [3, 244]. However, Fast-WAM removes the capability for imagining future states in its model for further performance gains with little quality drop raising the question of the importance of **imagining** in current embodied settings [244]. This achieves 190ms inference latency, or over 4x faster than measured states of the art. Flash-WAM proposes a step distillation framework deployed on Lingbot-VA reducing action denoising steps to two, and video denoising steps to one providing 348ms inference latency or 23x speedup over Lingbot-VA during inference [3]. Both works demonstrate the potential cost savings that can come from reducing reliance on computationally burdensome future state prediction.

6 Epistemic World Models

World models in agentic frameworks extend beyond latent dynamics prediction to operate over the scientific process, orchestrating multi-step workflows that integrate perception, memory, reasoning, and tool use in service of discovery. In contrast to latent world models, which encode external environments into learned state representations with explicit transition dynamics, these systems treat structured knowledge as the world itself. In such *epistemic world models*, the environment is a knowledge space defined by literature, databases, and experimental outputs, where domain expertise induces the state space and scientific artifacts act as observations. Rather than evolving an internal latent state, the agent updates this epistemic state through reasoning and tool-mediated operations, effectively controlling externalized cognitive functions.

This distinction highlights two complementary strategies for world modeling: latent compression of external environments versus explicit maintenance and updating of structured knowledge. Importantly, epistemic world models also instantiate a form of global workspace, where intermediate

Epistemic World Models

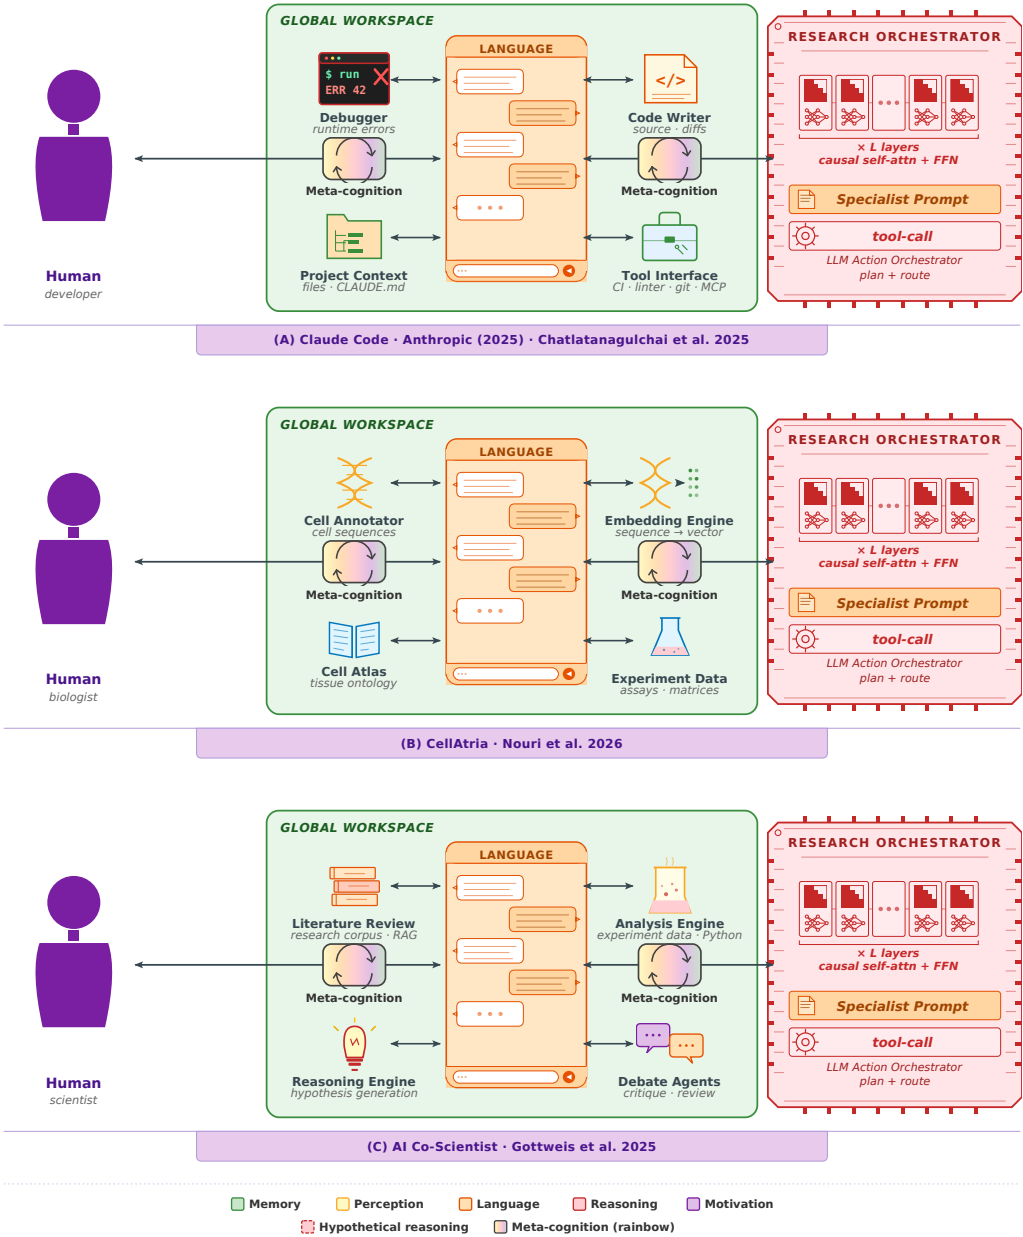


Fig. 9. Above are the typical architecture and Global Workspace frameworks encountered when reviewing world models for scientific discovery used with a human-in-the-loop subject-matter expert.

results, tool outputs, and shared context are broadcast across agents and processes. In the sense of Baars' Global Workspace Theory [11], these systems approximate metacognition by enabling self-reflection, self-evaluation, and self-control with selective routing of information across distributed components and even self-evaluation. As introduced in Sec. 3.3, such workspace-based mechanisms provide a candidate solution to the lack of metacognition in latent world models. Agentic systems therefore emphasize reasoning, tool coordination, and persistent memory, while introducing early forms of metacognitive control through execution tracing and human-in-the-loop feedback. These capabilities suggest a concrete pathway toward addressing the gaps in **metacognition** and **motivation** outlined in Sec. 3.3, by externalizing and structuring the global workspace required for self-reflection, self-evaluation and self-control.

In this section, we review world models for Scientific Discovery through the lens of Cognitive Architecture Theory (CAT), emphasizing Human-AI Collaboration within multi-agent frameworks. As in previous sections, Sec. 6.1 covers contributions to world model representation (memory, language, perception), while Sec. 6.2 examines generation and prediction. The reviewed works are further subdivided according to the cognitive functions they emulate in their designs. Figure 9(a) illustrates common multi-agent architectures, with (b) highlighting Global Workspace-like structures for shared domain knowledge. Table 5 summarizes all works within the CAT framework. Sec. 6.3 summarizes key trends and limitations of epistemic world models.

6.1 World Model Representation

6.1.1 Language. In human-AI collaboration systems, language is not only a medium for generation (e.g., code or hypotheses), but a substrate for shared world representation, coordination, and self-evaluation, consistent with notions of a global workspace [11] as discussed in Sec. 3.1. In co-science systems such as Gemini Co-scientist [69, 70], OpenAI Prism [155], SciSciGPT [180], and OmniScientist [179], language encodes hypotheses, project state, and intermediate reasoning, enabling iterative critique, revision, and verification across multi-agent interactions. Rather than serving only as input/output, language acts as a persistent interface through which agents construct, refine, and align their shared world model.

Reliable collaboration depends on maintaining explicit and evolving common ground rather than relying on opaque internal state [114]. Language enables this by making agent intentions and reasoning processes interpretable and contestable [157]. This aligns with theories of human cognition in which language emerges from the capacity to share intentions, attention, and goals [47, 100, 205]. Viewed through this lens, **language** functions as an integrative interface linking **perception**, **reasoning**, and **metacognition**, rather than as a standalone token prediction mechanism. It is through language that internal representations become shared, inspected, and coordinated, enabling collaborative intelligence over a common world model.

6.1.2 Perception. Many software co-pilots extend perception beyond plain text, treating structured artifacts, speech, and embodied signals as first-class inputs [62, 110, 113, 155, 179, 180, 189, 251]. OpenAI Prism [155] exemplifies document-centric perception by operating directly over LaTeX structure (equations, references, figures), grounding edits in the manuscript's semantics. SciSciGPT [180] reframes perception as evidence acquisition, retrieving and parsing literature and structured datasets to support downstream reasoning. Similarly, OmniScientist [179] organizes perception into structured representations of scientific knowledge. Across these systems, perception shifts from passive input processing to active construction of task-relevant representations.

In embodied and assistive settings, **perception** becomes inherently multimodal and user-centric [62, 189]. Mehri Shervedani et al. [189] integrate dialogue acts with multimodal signals to infer user intent in collaborative tasks, while Fung et al. [62] emphasize continuous, first-person sensing

Table 5. Epistemic world model works in this report mapped to Cognitive Architecture Theory (CAT) functions and subtasks. In the **Subtask** column, **T** = Trust, Human-alignment, and Interpretability, **C** = Software Co-pilots, **M** = Medical Research and Application, and **S** = Social Science. Composite labels indicate that a work contributes to multiple Human-AI collaboration subtasks. A check (✓) indicates the work makes a clear contribution to that CAT function in the context of collaboration.

Work	Year	Subtask	Mem.	Perc.	Lang.	Reas.	Imag.	Moti.	Meta.	Description
<i>Global Workspace: language, with human-in-the-loop</i>										
Gemini scientist [69, 70]	Co-2025	T+C+M	✓	✓	✓	✓		✓	✓	multi-agent AI collaborator for hypothesis generation and refinement
OpenAI Prism [155]	2026	T+C	✓	✓	✓	✓		✓	✓	LaTeX-native workspace for scientific writing and collaboration
SciSciGPT [180]	2025	T+C+S	✓	✓	✓	✓		✓	✓	agentic science-of-science analytics over literature and structured datasets
OmniScientist [179]	2025	T+C+S	✓	✓	✓	✓		✓	✓	human-AI scientist ecosystem with community evaluation (ScienceArena)
Mehri Shervedani et al. [189]	2025	T+M+S	✓	✓	✓	✓	✓	✓		multimodal RL interaction manager for assistive human-robot collaboration
CellAtria [153]	2026	M	✓	✓	✓	✓		✓	✓	Using AI for RNA sequencing and analysis
Gentile et al. [67]	2026	M	✓	✓	✓	✓		✓	✓	AI Transcriptomics with human-in-the-loop for gene expression analysis
<i>Global Workspace: language, without human-in-the-loop</i>										
Generative Agents [157]	2023	T+S	✓	✓	✓	✓			✓	LLM agents with memory, reflection, and planning for social simulation
SpeechAgents [251]	2024	S		✓	✓	✓				multi-agent spoken interaction controlled by a speech-centric LLM
Kumar et al. [113]	2025	T+S	✓	✓	✓	✓				unified speech-to-speech model claims for multilingual, emotional interaction
Kim et al. [110]	2025	S	✓	✓	✓		✓			multimodal conversational agent generating engaging speech from audio-visual cues
<i>Reviews, Benchmarks, and Position Papers</i>										
Xie et al. [229]	2025	T+C+S				✓			✓	Roadmap on AI scientists emphasizing verification and falsification
Agentic Coding Manifests [33]	2025	T+C			✓	✓				Empirical study of Claude Code’s repo manifests that externalize project context and rules for coding agents
Tsvetkova et al. [206]	2024	T+S				✓		✓	✓	framework for sociology of mixed human-machine communities
Strachan et al. [195]	2024	T+S			✓	✓				empirical theory-of-mind benchmark comparing LLMs and humans
Chen et al. [36]	2025	T+S			✓	✓			✓	survey of consciousness/metacognition theories, implementations, and risks in LLMs
Kwok et al. [114]	2026	T+S	✓	✓	✓	✓				explicit shared world models for reliable human-robot collaboration
Fung et al. [62]	2025	M+S	✓	✓	✓	✓		✓		position paper on embodied assistants with memory, world models, and goal inference

in wearable or embodied assistants. These approaches enable proactive assistance but introduce challenges in reliability, ambiguity resolution, and privacy, making perception a critical bottleneck for safe deployment.

In social interaction, *perception* expands to include communicative signals such as prosody, emotion, and contextual cues [110, 113, 114, 251]. SpeechAgents [251] treat speech as a primary interaction channel, preserving rhythm and affect rather than reducing communication to text. Kim et al. [110] further condition interaction on audio-visual signals to improve engagement, while Kwok et al. [114] highlight the importance of grounding ambiguous social cues in shared context for

reliable collaboration. Other systems approximate perception through dialogue-history encodings or structured observations (e.g., pose or environment state), trading richness for tractability.

Across domains, improvements in trust are less about increasing perceptual bandwidth and more about structuring and grounding perceptual inputs. Systems that expose intermediate representations (e.g., retrieved evidence, structured documents, or shared context) make *perception* more interpretable, whereas purely latent encodings of multimodal input remain difficult to audit. As a result, effective co-pilots treat perception not as raw sensing, but as the construction of verifiable, task-aligned state.

6.1.3 Memory. Many co-pilots improve memory by externalizing long-horizon context into persistent artifacts such as project state, corpora, or structured workspaces [33, 62, 110, 113, 155, 179, 180]. OpenAI Prism [155] treats the LaTeX project itself as working memory, enabling consistent revision across documents, while OmniScientist [179] extends memory into a research ecosystem via knowledge graphs and evolving “idea stacks.” In contrast, Agentic Coding Manifests [33] provide a lightweight approach, storing repository conventions and constraints as human-authored memory. Across these systems, a central trade-off emerges between simple explicit memory (manifests), structured external memory (graphs, databases), and conversational state.

In medical research settings, explicit long-term *memory* remains underdeveloped despite its importance. Two works in particular however, provide novel world encoding strategies for their RNA transcription setting [67, 153]. In both, using agentic reasoning for RNA sequence analysis requires representing sequence annotations or researcher meta-data as written language. Also in both works, they can utilize the sequence of RNA (itself semantically and symbolically salient) as embeddings that LLMs can use to reason with the RNA-text-like representation itself. This representation of RNA for a global workspace framework is observable in Figure 9.

Social and interactive systems place stronger demands on *memory* for continuity and shared understanding [62, 113, 114, 157, 189]. Generative Agents [157] exemplify this by storing episodic experiences and synthesizing higher-level reflections that guide future behavior. Similarly, Kwok et al. [114] and Mehri Shervedani et al. [189] model memory as shared state (common ground) that must be continuously updated during interaction. In speech systems, longer-term personalization is often approximated through dialogue history or user-specific embeddings [113], while embodied assistants require episodic memory to sustain coherent assistance over time [62]. A key distinction is between interpretable shared-memory representations (e.g., common ground) and implicit history encodings that are harder to audit.

Across domains, improvements in trust are closely tied to making *memory* explicit, structured, and inspectable [33, 69, 70, 114, 155, 157, 179, 189]. Generative Agents [157] provide a clear example by exposing both raw episodic memories and derived reflections, enabling users to trace behavior back to stored experience. Similarly, manifests [33] and shared-state representations [114] externalize assumptions and context into artifacts that can be inspected and revised. Larger systems such as Prism [155] and OmniScientist [179] extend this idea to document- and ecosystem-level memory. Overall, the dominant pattern is a shift away from opaque latent state toward persistent artifacts that users can inspect, version, and contest.

6.2 World Model Prediction and Generation

6.2.1 Imagination. Co-pilots employ imagination to generate candidate hypotheses, plans, or expressive outputs that a human or downstream process can select, refine, or test [69, 70, 110, 179, 189, 251]. In scientific collaboration, Gemini Co-scientist [69, 70] produces research hypotheses and experimental proposals, while OmniScientist [179] treats ideation as a first-class module, evolving

candidate ideas within a structured knowledge graph. In these settings, imagination functions as controlled hypothesis expansion rather than unconstrained generation.

In medical and scientific domains, **imagination** most directly appears as hypothesis generation under experimental constraints [69, 70]. Systems such as Gemini Co-scientist propose candidate mechanisms, repurposing strategies subsequently filtered by feasibility and empirical validation, reflecting a generate-then-triage workflow aligned with the scientific method.

In interactive and social systems, **imagination** often takes the form of one-to-many generation. For example, Kim et al. [110] generate expressive paralinguistic speech, while Mehri Shervedani et al. [189] employ simulated rollouts via user models to support policy learning. Generative Agents [157] extend this paradigm to multi-agent settings, where imagined actions at the individual level produce emergent group behaviors over time. Across these domains, imagination supports diverse objectives, including expressive communication, social simulation, and action planning.

Imagination is not used in isolation. Its utility depends on coupling downstream selection mechanisms, such as ranking, constraint satisfaction, or evaluation. In practice, trust is not derived from the generative step itself, but from the processes that filter, verify, and prioritize candidates.

6.2.2 Reasoning. Reasoning in world models and co-pilots is typically framed as multi-step problem solving under constraints, and mediated by tool use, workflows, or multi-agent protocols [33, 62, 69, 70, 113, 155, 179, 180, 189, 229]. Systems span a spectrum from structured, tool-grounded reasoning to deliberative, multi-agent reasoning. OpenAI Prism [155] constrains reasoning over structured artifacts (e.g., LaTeX projects), while SciSciGPT [180] operationalizes reasoning as an end-to-end empirical pipeline (decomposition, retrieval, computation, and visualization). In contrast, Gemini Co-scientist [69, 70] and OmniScientist [179] deliberates through multi-agent protocols such as debate, reflection, and workflow orchestration. At the policy level, Gemini Co-scientist [69, 70] use agents to recognize novel research trajectories by debating hypotheses, ranking ideas with an Elo-style system, filtering out redundant ideas, while Mehri Shervedani et al. [189] frame reasoning as action selection under uncertainty, learning dialogue and intervention policies for assistive tasks.

In medical and assistive settings, **reasoning** bifurcates into *scientific reasoning* and *decision-making under uncertainty*. Gemini Co-scientist [69, 70] focuses on evidence-backed hypothesis generation and refinement via multi-agent deliberation, while Mehri Shervedani et al. [189] optimize real-time interaction policies for successful task completion. This contrast highlights reasoning as either hypothesis validation or policy optimization. In RNA transcription medical research, models reason from representations of RNA to profile genetic sequences for personalized medicine [67, 153].

In social and collaborative contexts, **reasoning** extends beyond individual cognition to include theory-of-mind inference, experimental methodology, and system-level dynamics [36, 62, 114, 157, 180, 189, 195, 206, 229]. SciSciGPT [180] exemplifies reasoning as transparent scientific workflows, while Kwok et al. [114] emphasize explicit shared models for reasoning about human goals. Strachan et al. [195] evaluates theory-of-mind capabilities, exposing systematic failure modes in social reasoning tasks. At a broader scale, Tsvetkova et al. [206] model mixed human-machine systems as dynamical processes, and Xie et al. [229] identifies verification and falsification as central bottlenecks for scalable scientific reasoning. Together, these works position reasoning as both an individual capability and an emergent property of socio-technical systems.

Across these domains, **reasoning** is tightly coupled to trust through auditability and verification [36, 69, 70, 113, 114, 155, 179, 180, 189, 195, 206, 229]. Multi-agent deliberation surfaces alternatives and justifications (e.g., Gemini Co-scientist), while procedural pipelines enable reproducibility and inspection (e.g., SciSciGPT). Evaluation frameworks, such as those by Strachan et al. [195], test whether reasoning capabilities generalize across conditions. More broadly, Xie et al. [229] argues that trustworthiness requires explicit verification loops, and Tsvetkova et al. [206] situates trust

within ecosystem-level dynamics. Reasoning in current systems spans deliberative (multi-agent critique), procedural (tool-grounded workflows), and evaluative (verification and benchmarking) paradigms, which together form the basis for reliable and interpretable decision-making.

6.2.3 Motivation. Motivation remains underdeveloped in epistemic world models, with most works relying on externally specified objectives rather than intrinsic drives. Existing work primarily operationalizes motivation through rewards, goals, or intent inference [62, 179, 189, 206, 229].

A key distinction emerges between *optimization-driven* and *inference-driven motivation*. In RL settings, motivation is encoded implicitly as an optimization signal via reward shaping and penalties, as in assistive human–robot interaction systems that incentivize efficient and valid behavior [189]. In contrast, embodied assistants increasingly model motivation as the inference of user goals or intent, enabling proactive assistance without explicit commands [62]. This reframes motivation as alignment to latent human objectives rather than adherence to predefined reward functions.

As discussed in Sec. 3.3, in practice, motivation is predominantly *extrinsic* and often safety- or task-driven, particularly in medical and assistive domains [62, 189]. Systems are designed to optimize externally defined criteria such as correctness, efficiency, or user satisfaction, with little evidence of intrinsic or self-directed objective formation. At a broader scale, motivation is shaped by the surrounding socio-technical system. Incentives, credit assignment, and selection pressures govern agent behavior in collaborative and scientific settings [179, 206, 229]. Tsvetkova et al. [206] demonstrate how incentive structures drive emergent phenomena such as cascades and manipulation, while OmniScientist [179] embeds motivation in mechanisms such as attribution and peer review to regulate collaboration quality. Xie et al. [229] further argues that automation reshapes which problems are pursued, effectively altering the motivational landscape of the research ecosystem. Motivation in current world models is not intrinsic but arises from externally imposed objectives, highlighting a key gap between machine systems and human-like cognition.

6.2.4 Metacognition. Metacognition is introduced as a reliability scaffold in epistemic world models, through self-reflection, self-evaluation, uncertainty management, and error checking [33, 36, 69, 70, 155, 157, 179, 180, 206, 229]. Many designs separate generation from judgment, forming propose–evaluate loops. OpenAI Prism [155] introduces an always-on reviewer layer for proofreading and consistency checking, while Gemini Co-scientist [69, 70] and OmniScientist [179] operationalize critique through dedicated self-reflection roles and ranking mechanisms. SciSciGPT [180] further emphasizes reproducibility and output validation within empirical pipelines.

Metacognitive mechanisms operate at two levels. At the *individual level*, systems employ internal self-reflection to refine outputs or update beliefs, as seen in Generative Agents [157], where reflection transforms experience into higher-level behavioral. At the *system or community level*, metacognition is externalized through evaluation platforms, auditability, and feedback loops, enabling reproducibility and collective validation [179, 180]. This distinction highlights a key design axis: internal self-reflection, self-evaluation, and self-control versus external governance.

These safeguards are particularly critical in high-stakes settings, where unchecked generation can propagate errors or overconfident hypotheses. For instance, Gemini Co-scientist [69, 70] uses critique and reflection loops to down-select hypotheses prior to wet-lab validation, reducing experimental cost and risk. More broadly, Chen et al. [36] and Xie et al. [229] argue that without explicit self-evaluation and external oversight, iterative self-improvement can amplify errors. Overall, effective metacognition in world models emerges from coupling strong generative capabilities with explicit, testable judgment layers, often combining internal self-reflection, self-evaluation, and self-control with external evaluation and governance.

6.3 Trends and Limitations

Epistemic world models are emerging as a shift from implicit latent-state modeling toward explicit, externalized knowledge-state modeling. Rather than compressing observations into an opaque latent state, these systems maintain the “world” as a shared epistemic *language*-based global workspace consisting of literature, code, documents, tool outputs, retrieved evidence, hypotheses, experimental data, and human feedback. This makes scientific discovery more interpretable than in many video or embodied world models. A recurring trend is therefore the use of global workspaces in which agents coordinate tool use, propose hypotheses, revise artifacts, and expose partial reasoning to humans [33, 69, 70, 155, 179, 180]. In this sense, epistemic world models provide one of the clearest current pathways toward metacognitive scaffolding: generation is separated from judgment through reviewer agents, critique loops, debate, ranking, execution traces, and human oversight.

However, these systems remain limited in ways that are easy to obscure behind fluent language and multi-agent workflows. First, their epistemic state transitions are rarely formalized as clearly as latent world models; the state is often distributed across prompts, documents, databases, retrieved passages, logs, and human edits, making reproducibility and causal attribution difficult. Second, motivation remains mostly extrinsic, inherited from user instructions, benchmarks, reward functions, institutional incentives, or peer-review mechanisms rather than intrinsic objective formation. Third, metacognition is still scaffolded rather than autonomous: self-evaluation usually depends on additional agents, external tools, or human validators that may share the same blind spots as the generator. As a result, the central challenge for epistemic world models is not merely adding more agents, but developing reliable mechanisms for provenance tracking, uncertainty-aware verification, and accountable human-AI governance over the evolving knowledge state [36, 206, 229].

7 Conclusion

We identify in video, embodied, and newly named epistemic world model literature trends for overcoming common problems with common solutions. We are the first to propose a taxonomy of recent world models rooted in cognitive architecture theory. Our taxonomy reveals a research gap regarding the cognitive functions of motivation (especially intrinsic), and metacognition that may not have been identified otherwise. Additionally, our taxonomy inspires us to rethink agent frameworks for scientific discovery as epistemic world models with strong metacognitive capabilities from language-based Global Workspaces. Adding a human in the loop to promptable video, embodied and epistemic world models, for them to lend their own motivation and metacognitive ability, remains one of the clearest observances of human cognition in machines.

In answer to what a *human*-like world model would look like, we propose a unified world model framework that holistically incorporates all of the component parts of cognition: memory, perception, language, reasoning, imagining, motivation, and metacognition. This framework acts as a conceptual roadmap for researchers. Unified world models encourage researchers to 1) use multi-modal inputs, 2) encode multi-scalar spatio-temporal representations, 3) include tokenized language as an input, intermediate reasoning space, or output to enable human-in-the-loop cooperation, 4) utilize sim-to-real training when data is scarce and hypothetical reasoning at inference, 5) reason with domain-specific state-of-the-art architectures, 6) provide intrinsic reward signals to world models and lastly 7) utilize a global workspace enabling self-reflection, self-evaluation, and self-control. Our report provides researchers a vocabulary to debate the merits of equating human and machine cognition. Our review shows that to begin to fully equate machine and human cognition in function, let alone in any philosophical level, requires a world model that holistically emulates all component parts of cognition, including the under-researched cognitive functions of motivation, and metacognition.

References

- [1] 2026. Being-H0.7: A Latent World-Action Model from Egocentric Videos. *preprint* (2026). <https://research.beingbeyond.com/projects/being-h07/being-h07.pdf>
- [2] Niket Agarwal, Arslan Ali, Maciej Bala, Yogesh Balaji, Erik Barker, Tiffany Cai, Prithvijit Chattopadhyay, Yongxin Chen, Yin Cui, Yifan Ding, et al. 2025. Cosmos world foundation model platform for physical ai. *arXiv preprint arXiv:2501.03575* (2025).
- [3] Arman Akbari, Ci Zhang, Arash Akbari, Lin Zhao, Yixiao Chen, Weiwei Chen, Xuan Zhang, Geng Yuan, and Yanzhi Wang. 2026. Flash-WAM: Modality-Aware Distillation for World Action Models. *arXiv preprint arXiv:2606.05254* (2026).
- [4] Arslan Ali, Junjie Bai, Maciej Bala, Yogesh Balaji, Aaron Blakeman, Tiffany Cai, Jiaxin Cao, Tianshi Cao, Elizabeth Cha, Yu-Wei Chao, et al. 2025. World simulation with video foundation models for physical ai. *arXiv preprint arXiv:2511.00062* (2025).
- [5] Eloi Alonso, Adam Jelley, Vincent Micheli, Anssi Kanervisto, Amos Storkey, Tim Pearce, and François Fleuret. 2024. Diffusion for world modeling: Visual details matter in atari. *Advances in Neural Information Processing Systems* 37 (2024), 58757–58791.
- [6] Dario Amodei, Chris Olah, Jacob Steinhardt, Paul Christiano, John Schulman, and Dan Mané. 2016. Concrete problems in AI safety. *arXiv preprint arXiv:1606.06565* (2016).
- [7] John R Anderson, Michael Matessa, and Christian Lebiere. 1997. ACT-R: A theory of higher level cognition and its relation to visual attention. *Human-Computer Interaction* 12, 4 (1997), 439–462.
- [8] Kaleem Arshid, Ali Krayani, Lucio Marcenaro, David Martin Gomez, and Carlo Regazzoni. 2025. Toward autonomous UAV swarm navigation: a review of trajectory design paradigms. *Sensors (Basel, Switzerland)* 25, 18 (2025), 5877.
- [9] Mido Assran, Adrien Bardes, David Fan, Quentin Garrido, Russell Howes, Matthew Muckley, Ammar Rizvi, Claire Roberts, Koustuv Sinha, Artem Zhohus, et al. 2025. V-jepa 2: Self-supervised video models enable understanding, prediction and planning. *arXiv preprint arXiv:2506.09985* (2025).
- [10] Mahmoud Assran, Quentin Duval, Ishan Misra, Piotr Bojanowski, Pascal Vincent, Michael Rabbat, Yann LeCun, and Nicolas Ballas. 2023. Self-supervised learning from images with a joint-embedding predictive architecture. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 15619–15629.
- [11] Bernard J Baars. 1993. *A cognitive theory of consciousness*. Cambridge University Press.
- [12] Anurag Bagchi, Zhipeng Bao, Homanga Bharadhwaj, Yu-Xiong Wang, Pavel Tokmakov, and Martial Hebert. 2026. Walk through Paintings: Egocentric World Models from Internet Priors. *arXiv preprint arXiv:2601.15284* (2026).
- [13] Leonardo Barcellona, Andrii Zadaianchuk, Davide Allegro, Samuele Papa, Stefano Ghidoni, and Efstratios Gavves. 2025. Dream to manipulate: Compositional world models empowering robot imitation learning with imagination. In *International Conference on Learning Representations*, Vol. 2025. 56729–56763.
- [14] Adrien Bardes, Quentin Garrido, Jean Ponce, Xinlei Chen, Michael Rabbat, Yann LeCun, Mido Assran, and Nicolas Ballas. 2023. V-jepa: Latent video prediction for visual representation learning. (2023).
- [15] Adrien Bardes, Quentin Garrido, Jean Ponce, Xinlei Chen, Michael Rabbat, Yann LeCun, Mahmoud Assran, and Nicolas Ballas. 2024. Revisiting feature prediction for learning visual representations from video. *arXiv preprint arXiv:2404.08471* (2024).
- [16] Glen Berseth, Daniel Geng, Coline Devin, Nicholas Rhinehart, Chelsea Finn, Dinesh Jayaraman, and Sergey Levine. 2019. Smirl: Surprise minimizing reinforcement learning in unstable environments. *arXiv preprint arXiv:1912.05510* (2019).
- [17] Ayush Bheemaiah and Seungyong Yang. 2025. Knowledge Graphs as World Models for Semantic Material-Aware Obstacle Handling in Autonomous Vehicles. *arXiv preprint arXiv:2503.21232* (2025).
- [18] Hongzhe Bi, Hengkai Tan, Shenghao Xie, Zeyuan Wang, Shuhe Huang, Haitian Liu, Ruowen Zhao, Yao Feng, Chendong Xiang, Yinze Rong, et al. 2026. Motus: A unified latent action world model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 35101–35113.
- [19] Ahsan Bilal, Muhammad Ahmed Mohsin, Muhammad Umer, Muhammad Awais Khan Bangash, and Muhammad Ali Jamshed. 2025. Meta-thinking in llms via multi-agent reinforcement learning: A survey. *arXiv preprint arXiv:2504.14520* (2025).
- [20] Kevin Black, Mitsuhiko Nakamoto, Pranav Atreya, Homer Walke, Chelsea Finn, Aviral Kumar, and Sergey Levine. 2024. Zero-shot robotic manipulation with pre-trained image-editing diffusion models. In *International Conference on Learning Representations*, Vol. 2024. 33431–33452.
- [21] Rafal Bogacz. 2017. A tutorial on the free-energy framework for modelling perception and learning. *Journal of mathematical psychology* 76 (2017), 198–211.
- [22] James Boggs. 2025. Towards visual-symbolic integration in the Soar cognitive architecture. *Cognitive Systems Research* 91 (2025), 101353.

- [23] Carlo Bosio, Greg Woelki, Noureldin Hendy, Nicholas Roy, and Byungsoo Kim. 2025. RDAR: Reward-Driven Agent Relevance Estimation for Autonomous Driving. *arXiv preprint arXiv:2509.19789* (2025).
- [24] Thomas Brandt, Marianne Dieterich, and Doreen Huppert. 2024. Human senses and sensors from Aristotle to the present. *Frontiers in Neurology* 15 (2024), 1404720.
- [25] Jake Bruce, Michael D Dennis, Ashley Edwards, Jack Parker-Holder, Yuge Shi, Edward Hughes, Matthew Lai, Aditi Mavalankar, Richie Steigerwald, Chris Apps, et al. 2024. Genie: Generative interactive environments. In *Forty-first International Conference on Machine Learning*.
- [26] Arthur Earl Bryson. 2018. *Applied optimal control: optimization, estimation and control*. Routledge.
- [27] Karl Bühler. 1934. *Sprachtheorie*. Vol. 2. Jena Fischer.
- [28] Maxime Burchi and Radu Timofte. 2025. Accurate and efficient world modeling with masked latent transformers. *arXiv preprint arXiv:2507.04075* (2025).
- [29] Meng Cao, Haoran Tang, Haoze Zhao, Mingfei Han, Ruyang Liu, Qiang Sun, Xiaojun Chang, Ian Reid, and Xiaodan Liang. 2026. Order from Chaos: Physical World Understanding from Glitchy Gameplay Videos. *arXiv preprint arXiv:2601.16471* (2026).
- [30] Jun Cen, Chaohui Yu, Hangjie Yuan, Yuming Jiang, Siteng Huang, Jiayan Guo, Xin Li, Yibing Song, Hao Luo, Fan Wang, et al. 2025. Worldvla: Towards autoregressive action world model. *arXiv preprint arXiv:2506.21539* (2025).
- [31] Huiwen Chang, Han Zhang, Lu Jiang, Ce Liu, and William T Freeman. 2022. Maskgit: Masked generative image transformer. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 11315–11325.
- [32] Jonathan Chang, Masatoshi Uehara, Dhruv Sreenivas, Rahul Kidambi, and Wen Sun. 2021. Mitigating covariate shift in imitation learning via offline data with partial coverage. *Advances in Neural Information Processing Systems* 34 (2021), 965–979.
- [33] Worawalan Chatlatanagulchai, Kundjanasith Thonglek, Brittany Reid, Yutaro Kashiwa, Pattara Leelaprute, Arnon Rungsawang, Bundit Manaskasemsak, and Hajimu Iida. 2025. On the use of agentic coding manifests: An empirical study of claude code. In *International Conference on Product-Focused Software Process Improvement*. Springer, 543–551.
- [34] Chi-Lam Cheang, Guangzeng Chen, Ya Jing, Tao Kong, Hang Li, Yifeng Li, Yuxiao Liu, Hongtao Wu, Jiafeng Xu, Yichu Yang, et al. 2024. Gr-2: A generative video-language-action model with web-scale knowledge for robot manipulation. *arXiv preprint arXiv:2410.06158* (2024).
- [35] Boyuan Chen, Tianyuan Zhang, Haoran Geng, Kiwhan Song, Caiyi Zhang, Peihao Li, William T Freeman, Jitendra Malik, Pieter Abbeel, Russ Tedrake, et al. 2025. Large video planner enables generalizable robot control. *arXiv preprint arXiv:2512.15840* (2025).
- [36] Sirui Chen, Shuqin Ma, Shu Yu, Hanwang Zhang, Shengjie Zhao, and Chaochao Lu. 2025. Exploring Consciousness in LLMs: A Systematic Survey of Theories, Implementations, and Frontier Risks. *arXiv:2505.19806 [cs.CL]* <https://arxiv.org/abs/2505.19806>
- [37] Yuntao Chen, Yuqi Wang, and Zhaoxiang Zhang. 2025. Drivinggpt: Unifying driving world modeling and planning with multi-modal autoregressive transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 26890–26900.
- [38] Clara Colombaro and Stephen M Fleming. 2024. Folk psychological attributions of consciousness to large language models. *Neuroscience of Consciousness* 2024, 1 (2024), niae013.
- [39] Ciem Cornelissen, Sam Leroux, and Pieter Simoens. 2026. Le MuMo JEPa: Multi-Modal Self-Supervised Representation Learning with Learnable Fusion Tokens. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 8238–8247.
- [40] Fergus IM Craik and Robert S Lockhart. 1972. Levels of processing: A framework for memory research. *Journal of verbal learning and verbal behavior* 11, 6 (1972), 671–684.
- [41] Kenneth JW Craik. 1947. Theory of the human operator in control systems 1: I. The operator as an engineering system. *British Journal of Psychology. General Section* 38, 2 (1947), 56–61.
- [42] Kenneth JW Craik. 1948. Theory of the human operator in control systems. II. Man as an element in a control system. *British journal of psychology* 38, 3 (1948), 142.
- [43] Kenneth James Williams Craik. 1967. *The nature of explanation*. Vol. 445. CUP Archive.
- [44] Chenxu Dang, Haiyan Liu, Jason Bao, Pei An, Xinyue Tang, An Pan, Jie Ma, Bingchuan Sun, and Yan Wang. 2026. Sparseworld: A flexible, adaptive, and efficient 4d occupancy world model powered by sparse and dynamic queries. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 40. 3497–3505.
- [45] Charles Darwin. 1872. *The descent of man, and selection in relation to sex*. Vol. 2. D. Appleton.
- [46] Kristopher De Asis, J Hernandez-Garcia, G Holland, and Richard Sutton. 2018. Multi-step reinforcement learning: A unifying algorithm. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 32.
- [47] Terrence W Deacon. 1998. *The symbolic species: The co-evolution of language and the brain*. WW Norton & Company.
- [48] Vittoria Dentella, Fritz Günther, Elliot Murphy, Gary Marcus, and Evelina Leivada. 2024. Testing AI on language comprehension tasks reveals insensitivity to underlying meaning. *Scientific Reports* 14, 1 (2024), 28083.

- [49] Matthieu Destrade, Oumayma Bounou, Quentin Le Lidec, Jean Ponce, and Yann LeCun. 2025. Value-guided action planning with JEPA world models. *arXiv preprint arXiv:2601.00844* (2025).
- [50] Karthik Dharmarajan, Wenlong Huang, Jiajun Wu, Li Fei-Fei, and Ruohan Zhang. 2025. Dream2Flow: Bridging Video Generation and Open-World Manipulation with 3D Object Flow. *arXiv preprint arXiv:2512.24766* (2025).
- [51] Jingtao Ding, Yunke Zhang, Yu Shang, Yuheng Zhang, Zefang Zong, Jie Feng, Yuan Yuan, Hongyuan Su, Nian Li, Nicholas Sukiennik, et al. 2025. Understanding world or predicting future? a comprehensive survey of world models. *Comput. Surveys* 58, 3 (2025), 1–38.
- [52] Adrien Doerig, Tim C Kietzmann, Emily Allen, Yihan Wu, Thomas Naselaris, Kendrick Kay, and Ian Charest. 2025. High-level visual representations in the human brain are aligned with large language models. *Nature Machine Intelligence* (2025), 1–15.
- [53] Merlin Donald. 1993. *Origins of the modern mind: Three stages in the evolution of culture and cognition*. Harvard university press.
- [54] Jiahua Dong, Qi Lyu, Baichen Liu, Xudong Wang, Wenqi Liang, Duzhen Zhang, Jiahang Tu, Hongliu Li, Hanbin Zhao, Henghui Ding, et al. 2026. Learning to Model the World: A Survey of World Models in Artificial Intelligence. *Authorea Preprints* (2026).
- [55] Yilun Du, Sherry Yang, Bo Dai, Hanjun Dai, Ofir Nachum, Josh Tenenbaum, Dale Schuurmans, and Pieter Abbeel. 2023. Learning universal policies via text-guided video generation. *Advances in neural information processing systems* 36 (2023), 9156–9172.
- [56] Viet Dung Nguyen, Zhizhuo Yang, Christopher L Buckley, and Alexander Ororbia. 2024. R-AIF: Solving Sparse-Reward Robotic Tasks from Pixels with Active Inference and World Models. *arXiv e-prints* (2024), arXiv–2409.
- [57] Zane Durante, Silky Singh, Arpandeeep Khatua, Shobhit Agarwal, Reuben Tan, Yong Jae Lee, Jianfeng Gao, Ehsan Adeli, and Li Fei-Fei. 2026. VideoWeave: A Data-Centric Approach for Efficient Video Understanding. *arXiv preprint arXiv:2601.06309* (2026).
- [58] Mohammad K Ebrahimpour, Jiayun Li, Yen-Yun Yu, Jackson Reese, Azadeh Moghtaderi, Ming-Hsuan Yang, and David C Noelle. 2019. Ventral-dorsal neural networks: object detection via selective attention. In *2019 IEEE Winter Conference on Applications of Computer Vision (WACV)*. IEEE, 986–994.
- [59] Karl Friston. 2010. The free-energy principle: a unified brain theory? *Nature reviews neuroscience* 11, 2 (2010), 127–138.
- [60] Karl Friston, Lancelot Da Costa, Alexander Tschantz, Conor Heins, Christopher Buckley, Tim Verbelen, and Thomas Parr. 2025. Active inference and artificial reasoning. *arXiv preprint arXiv:2512.21129* (2025).
- [61] Karl Friston, Thomas FitzGerald, Francesco Rigoli, Philipp Schwartenbeck, Giovanni Pezzulo, et al. 2016. Active inference and learning. *Neuroscience & Biobehavioral Reviews* 68 (2016), 862–879.
- [62] Pascale Fung, Yoram Bachrach, Asli Celikyilmaz, Kamalika Chaudhuri, Delong Chen, Willy Chung, Emmanuel Dupoux, Hongyu Gong, et al. 2025. Embodied AI Agents: Modeling the World. *arXiv:2506.22355*
- [63] Shenyuan Gao, Siyuan Zhou, Yilun Du, Jun Zhang, and Chuang Gan. 2025. Adaworld: Learning adaptable world models with latent actions. *arXiv preprint arXiv:2503.18938* (2025).
- [64] Yinfeng Gao, Qichao Zhang, Da-Wei Ding, and Dongbin Zhao. 2024. Dream to drive with predictive individual world model. *IEEE Transactions on Intelligent Vehicles* (2024).
- [65] Quentin Garrido, Tushar Nagarajan, Basile Terver, Nicolas Ballas, Yann LeCun, and Michael Rabbat. 2026. Learning Latent Action World Models In The Wild. *arXiv preprint arXiv:2601.05230* (2026).
- [66] Zhiqi Ge, Hongzhe Huang, Mingze Zhou, Juncheng Li, Guoming Wang, Siliang Tang, and Yueting Zhuang. 2024. Worldgpt: Empowering llm as multimodal world model. In *Proceedings of the 32nd ACM International Conference on Multimedia*. 7346–7355.
- [67] Giulia Gentile, Giovanna Morello, Valentina La Cognata, Maria Guarnaccia, and Sebastiano Cavallaro. 2026. Artificial Intelligence in Transcriptomics: From Human-in-the-Loop to Agentic AI. *Journal of Personalized Medicine* 16, 4 (2026), 181.
- [68] Mitchell Goff, Greg Hogan, George Hotz, Armand du Parc Locmaria, Kacper Raczy, Harald Schäfer, Adeeb Shihadeh, Weixing Zhang, and Yassine Yousfi. 2025. Learning to drive from a world model. In *Proceedings of the Computer Vision and Pattern Recognition Conference*. 1964–1973.
- [69] Juraj Gottweis, Wei-Hung Weng, Alexander Daryin, Tao Tu, Anil Palepu, Petar Sirkovic, Artiom Myaskovsky, Felix Weissenberger, Keran Rong, Ryutaro Tanno, et al. 2025. Towards an AI co-scientist. *arXiv preprint arXiv:2502.18864* (2025).
- [70] Juraj Gottweis, Wei-Hung Weng, Alexander Daryin, Tao Tu, Petar Sirkovic, Artiom Myaskovsky, Grzegorz Glowaty, Felix Weissenberger, Alessio Orlandi, Dan Popovici, et al. 2026. Accelerating scientific discovery with Co-Scientist. *Nature* (2026), 1–3.
- [71] Rick Grush. 2004. The emulation theory of representation: Motor control, imagery, and perception. *Behavioral and brain sciences* 27, 3 (2004), 377–396.

- [72] Yu Gu, Kai Zhang, Yuting Ning, Boyuan Zheng, Boyu Gou, Tianci Xue, Cheng Chang, Sanjari Srivastava, Yanan Xie, Peng Qi, et al. 2024. Is your llm secretly a world model of the internet? model-based planning for web agents. *arXiv preprint arXiv:2411.06559* (2024).
- [73] Christian Gumbsch, Noor Sajid, Georg Martius, and Martin V Butz. 2023. Learning hierarchical world models with adaptive temporal abstractions from discrete latent dynamics. In *The Twelfth International Conference on Learning Representations*.
- [74] Jun Guo, Xiaojian Ma, Yikai Wang, Min Yang, Huaping Liu, and Qing Li. 2026. Flowdreamer: A rgb-d world model with flow-based motion representations for robot manipulation. *IEEE Robotics and Automation Letters* 11, 3 (2026), 2466–2473.
- [75] David Ha and Jürgen Schmidhuber. 2018. World models. *arXiv preprint arXiv:1803.10122* 2, 3 (2018).
- [76] Yoav HaCohen, Nisan Chiprut, Benny Brazowski, Daniel Shalem, Dudu Moshe, Eitan Richardson, Eran Levin, Guy Shiran, Nir Zabari, Ori Gordon, et al. 2024. Ltx-video: Realtime video latent diffusion. *arXiv preprint arXiv:2501.00103* (2024).
- [77] Dylan Hadfield-Menell, Anca D Dragan, Pieter Abbeel, and Stuart Russell. 2017. The off-switch game.. In *AAAI Workshops*.
- [78] Danijar Hafner, Timothy Lillicrap, Jimmy Ba, and Mohammad Norouzi. 2019. Dream to control: Learning behaviors by latent imagination. *arXiv preprint arXiv:1912.01603* (2019).
- [79] Nick Hansen, Hao Su, and Xiaolong Wang. 2024. Td-mpc2: Scalable, robust world models for continuous control. In *International Conference on Learning Representations*, Vol. 2024. 47376–47405.
- [80] Nick Hansen, Jyothir SV, Vlad Sobal, Yann LeCun, Xiaolong Wang, and Hao Su. 2025. Hierarchical world models as visual whole-body humanoid controllers. In *International Conference on Learning Representations*, Vol. 2025. 62175–62195.
- [81] Chenjie Hao, Weyl Lu, Yifan Xu, and Yubei Chen. 2025. Neural motion simulator pushing the limit of world models in reinforcement learning. In *Proceedings of the Computer Vision and Pattern Recognition Conference*. 27608–27617.
- [82] Jonathan Ho, Ajay Jain, and Pieter Abbeel. 2020. Denoising diffusion probabilistic models. *Advances in neural information processing systems* 33 (2020), 6840–6851.
- [83] James Hollan, Edwin Hutchins, and David Kirsh. 2000. Distributed cognition: toward a new foundation for human-computer interaction research. *ACM Transactions on Computer-Human Interaction (TOCHI)* 7, 2 (2000), 174–196.
- [84] Bohan Hou, Gen Li, Jindou Jia, Tuo An, Xinying Guo, Sicong Leng, Haoran Geng, Yanjie Ze, Tatsuya Harada, Philip Torr, et al. 2026. World Model for Robot Learning: A Comprehensive Survey. *arXiv preprint arXiv:2605.00080* (2026).
- [85] Anthony Hu, Lloyd Russell, Hudson Yeo, Zak Murez, George Fedoseev, Alex Kendall, Jamie Shotton, and Gianluca Corrado. 2023. Gaia-1: A generative world model for autonomous driving. *arXiv preprint arXiv:2309.17080* (2023).
- [86] Yutong Hu, Jan-Nico Zaech, Nikolay Nikolov, Yuanqi Yao, Sombit Dey, Giuliano Albanese, Renaud Detry, Luc Van Gool, and Danda Paudel. 2026. AR-VLA: True Autoregressive Action Expert for Vision-Language-Action Models. *arXiv preprint arXiv:2603.10126* (2026).
- [87] Siqiao Huang. 2025. Awesome-World-Models. <https://github.com/knightnemo/Awesome-World-Models>. GitHub repository, accessed 2026-05-26.
- [88] Siyuan Huang, Liliang Chen, Pengfei Zhou, Shengcong Chen, Yue Liao, Zhengkai Jiang, Yue Hu, Peng Gao, Hongsheng Li, Maoqing Yao, et al. 2026. Enerverse: Envisioning embodied future space for robotics manipulation. *Advances in Neural Information Processing Systems* 38 (2026), 37693–37720.
- [89] Suning Huang, Qianzhong Chen, Xiaohan Zhang, Jiankai Sun, and Mac Schwager. 2025. Particleformer: A 3d point cloud world model for multi-object, multi-material robotic manipulation. *arXiv preprint arXiv:2506.23126* (2025).
- [90] Wenlong Huang, Yu-Wei Chao, Arsalan Mousavian, Ming-Yu Liu, Dieter Fox, Kaichun Mo, and Li Fei-Fei. 2026. PointWorld: Scaling 3D World Models for In-The-Wild Robotic Manipulation. *arXiv preprint arXiv:2601.03782* (2026).
- [91] Weidong Huang, Jiaming Ji, Chunhe Xia, Borong Zhang, and Yaodong Yang. 2024. Safedreamer: Safe reinforcement learning with world models. In *International Conference on Learning Representations*, Vol. 2024. 53839–53869.
- [92] Xun Huang, Zhengqi Li, Guande He, Mingyuan Zhou, and Eli Shechtman. 2025. Self Forcing: Bridging the Train-Test Gap in Autoregressive Video Diffusion. *arXiv:2506.08009 [cs.CV]* <https://arxiv.org/abs/2506.08009>
- [93] Yuhang Huang, Jiazhaoh Zhang, Shilong Zou, Xinwang Liu, Ruizhen Hu, and Kai Xu. 2025. LaDi-WM: A Latent Diffusion-based World Model for Predictive Manipulation. *arXiv preprint arXiv:2505.11528* (2025).
- [94] Minyoung Huh, Brian Cheung, Tongzhou Wang, and Phillip Isola. 2024. The platonic representation hypothesis. *arXiv preprint arXiv:2405.07987* (2024).
- [95] Lujain Ibrahim and Myra Cheng. 2025. Thinking beyond the anthropomorphic paradigm benefits LLM research. *arXiv preprint arXiv:2502.09192* (2025).
- [96] Physical Intelligence, Kevin Black, Noah Brown, James Darpinian, Karan Dhabalia, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, Manuel Y. Galliker, et al. 2025. $\pi_{0.5}$: a Vision-Language-Action Model with Open-World Generalization. *arXiv:2504.16054*

- [97] Joel Jang, Seonghyeon Ye, Zongyu Lin, Jiannan Xiang, Johan Bjorck, Yu Fang, Fengyuan Hu, Spencer Huang, Kaushil Kundalia, Yen-Chen Lin, et al. 2025. Dreamgen: Unlocking generalization in robot learning through video world models. *arXiv preprint arXiv:2505.12705* (2025).
- [98] Jinwoo Jang, Minjong Yoo, Sihyung Yoon, and Honguk Woo. 2026. Test-Time Mixture of World Models for Embodied Agents in Dynamic Environments. *arXiv preprint arXiv:2601.22647* (2026).
- [99] Sangwon Jang, Taekyung Ki, Jaehyeong Jo, Saining Xie, Jaehong Yoon, and Sung Ju Hwang. 2026. Self-Refining Video Sampling. *arXiv preprint arXiv:2601.18577* (2026).
- [100] Julian Jaynes. 2013. from The Origin of Consciousness in the Breakdown of the Bicameral Mind. In *Creative Writing*. Routledge, 541–543.
- [101] Anqing Jiang, Yu Gao, Yiru Wang, Zhigang Sun, Shuo Wang, Yuwen Heng, Hao Sun, Shichen Tang, Lijuan Zhu, Jinhao Chai, et al. 2025. Irl-vla: Training an vision-language-action policy via reward world model. *arXiv preprint arXiv:2508.06571* (2025).
- [102] Samuel GB Johnson, Amir-Hossein Karimi, Yoshua Bengio, Nick Chater, Tobias Gerstenberg, Kate Larson, Sydney Levine, Melanie Mitchell, Iyad Rahwan, Bernhard Schölkopf, et al. 2025. Imagining and building wise machines: The centrality of AI metacognition. *Trends in Cognitive Sciences* (2025).
- [103] Gregory Kahn, Pieter Abbeel, and Sergey Levine. 2021. Badgr: An autonomous self-supervised learning-based navigation system. *IEEE Robotics and Automation Letters* 6, 2 (2021), 1312–1319.
- [104] Bongsu Kang, Jundong Kim, Taerim Yun, Hyojin Bae, and Chang-Eop Kim. 2025. Identifying Features that Shape Perceived Consciousness in LLM-based AI: A Quantitative Study of Human Responses. *Computers in Human Behavior Reports* (2025), 100901.
- [105] Mark Kashirskiy and Ilya Makarov. 2026. SuS: Strategy-aware Surprise for Intrinsic Exploration. *arXiv preprint arXiv:2601.10349* (2026).
- [106] Bernhard Kerbl, Georgios Kopanas, Thomas Leimkühler, George Drettakis, et al. 2023. 3d gaussian splatting for real-time radiance field rendering. *ACM Trans. Graph.* 42, 4 (2023), 139–1.
- [107] Feeza Khan Khazada and Jaerock Kwon. 2025. InDRIVE: Intrinsic Disagreement based Reinforcement for Vehicle Exploration through Curiosity Driven Generalized World Model. *arXiv preprint arXiv:2503.05573* (2025).
- [108] Moo Jin Kim, Yihuai Gao, Tsung-Yi Lin, Yen-Chen Lin, Yunhao Ge, Grace Lam, Percy Liang, Shuran Song, Ming-Yu Liu, Chelsea Finn, et al. 2026. Cosmos policy: Fine-tuning video models for visuomotor control and planning. *arXiv preprint arXiv:2601.16163* (2026).
- [109] Sang Hun Kim, Dongkyu Park, Jongmin Lee, So Young Lee, and Yosep Chong. 2025. Humanoid artificial consciousness designed with Large Language Model based on psychoanalysis and personality theory. *Cognitive Systems Research* (2025), 101392.
- [110] Taesoo Kim, Yongsik Jo, Hyunmin Song, and Taehwan Kim. 2025. Towards Human-like Multimodal Conversational Agent by Generating Engaging Speech. In *Interspeech 2025 (interspeech_2025)*. ISCA, 4828–4832.
- [111] Alexander S Klyubin, Daniel Polani, and Chrystopher L Nehaniv. 2005. Empowerment: A universal agent-centric measure of control. In *2005 IEEE congress on evolutionary computation*, Vol. 1. IEEE, 128–135.
- [112] Asher Koriati et al. 2006. *Metacognition and consciousness*. Institute of Information Processing and Decision Making, University of Haifa
- [113] Vansh Kumar and M. Tanusri. 2025. Unified Speech-To-Speech Models for Real-Time, Multilingual, and Emotionally Aware AI. *Journal of Current Trends in Computer Science Research* 4, 6 (2025), 01–06. doi:10.33140/JCTCSR.04.06.02
- [114] Kenneth Kwok, Basura Fernando, Qianli Xu, Vigneshwaran Subbaraju, Dongkyu Choi, and Boon Kiat Quek. 2026. Explicit World Models for Reliable Human-Robot Collaboration. arXiv:2601.01705 [cs.RO] <https://arxiv.org/abs/2601.01705>
- [115] John Laird, Christian Lebiere, Paul Rosenbloom, and Andrea Stocco. 2025. A proposal to extend the common model of cognition with metacognition. *arXiv preprint arXiv:2506.07807* (2025).
- [116] John E Laird. 2019. *The Soar cognitive architecture*. MIT press.
- [117] Pat Langley and Dongkyu Choi. 2006. A unified cognitive architecture for physical agents. In *Proceedings of the National Conference on Artificial Intelligence*, Vol. 21. Menlo Park, CA; Cambridge, MA; London; AAAI Press; MIT Press; 1999, 1469.
- [118] Pat Langley, Kathleen B McKusick, John A Allen, Wayne F Iba, and Kevin Thompson. 1991. A design for the icarus architecture. *ACM Sigart Bulletin* 2, 4 (1991), 104–109.
- [119] Minh-Quan Le, Yuanzhi Zhu, Vicky Kalogeiton, and Dimitris Samaras. 2025. What about gravity in video generation? Post-Training Newton’s Laws with Verifiable Rewards. *arXiv preprint arXiv:2512.00425* (2025).
- [120] Trong Le, Phat Thai, Sang Nguyen, Minh Hua, Ngan Pham, Thang Bui, Tho Quan, and Tuan Bui. 2025. Text-JEPA: A Joint Embedding Predictive Architecture for the Conversion of Natural Language into First-Order Logic. In *International Conference on Computational Collective Intelligence*. Springer, 200–214.

- [121] Yann LeCun et al. 2022. A path towards autonomous machine intelligence version 0.9. 2, 2022-06-27. *Open Review* 62, 1 (2022), 1–62.
- [122] Yaniv Leviathan, Matan Kalman, and Yossi Matias. 2025. Prompt Repetition Improves Non-Reasoning LLMs. *arXiv preprint arXiv:2512.14982* (2025).
- [123] Fei-fei Li. 2025. From Words to Worlds: Spatial Intelligence is AI's Next Frontier. <https://drfeifei.substack.com/p/from-words-to-worlds-spatial-intelligence> Published on Dr. Li's SubStack.
- [124] Lin Li, Qihang Zhang, Yiming Luo, Shuai Yang, Ruilin Wang, Fei Han, Mingrui Yu, Zelin Gao, Nan Xue, Xing Zhu, et al. 2026. Causal World Modeling for Robot Control. *arXiv preprint arXiv:2601.21998* (2026).
- [125] Qifeng Li, Xiaosong Jia, Shaobo Wang, and Junchi Yan. 2024. Think2drive: Efficient reinforcement learning by thinking with latent world model for autonomous driving (in carla-v2). In *European conference on computer vision*. Springer, 142–158.
- [126] Xinqing Li, Xin He, Le Zhang, Min Wu, Xiaoli Li, and Yun Liu. 2025. A comprehensive survey on world models for embodied ai. *arXiv preprint arXiv:2510.16732* (2025).
- [127] Yingyan Li, Lue Fan, Jiawei He, Yuqi Wang, Yuntao Chen, Zhaoxiang Zhang, and Tieniu Tan. 2025. Enhancing end-to-end autonomous driving with latent world model. In *International Conference on Learning Representations*, Vol. 2025. 42942–42959.
- [128] Zongyue Li, Xiao Han, Yusong Li, Niklas Strauss, and Matthias Schubert. 2025. DAWM: Diffusion Action World Models for Offline Reinforcement Learning via Action-Inferred Transitions. *arXiv preprint arXiv:2509.19538* (2025).
- [129] Ao Liang, Lingdong Kong, Tianyi Yan, Hongsi Liu, Yu Yang, Ziqi Huang, Wei Yin, Jialong Zuo, Yixuan Hu, Dekai Zhu, et al. 2026. WorldLens: Full-spectrum evaluations of driving world models in real world. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 36385–36399.
- [130] Alan Liang, Youquan Liu, Yu Yang, Dongyue Lu, Linfeng Li, Lingdong Kong, Huaici Zhao, and Wei Tsang Ooi. 2026. LiDARcrafter: Dynamic 4D world modeling from LiDAR sequences. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 40. 18406–18414.
- [131] Philip Lieberman. 2006. *Toward an evolutionary biology of language*. Harvard University Press.
- [132] Juyi Lin, Arash Akbari, Yumei He, Lin Zhao, Haichao Zhang, Arman Akbari, Xingchen Xu, Zoe Y Lu, Enfu Nan, Hokin Deng, et al. 2026. PhyGround: Benchmarking Physical Reasoning in Generative World Models. *arXiv preprint arXiv:2605.10806* (2026).
- [133] Juyi Lin, Arash Akbari, Yumei He, Lin Zhao, Haichao Zhang, Arman Akbari, Xingchen Xu, Zoe Y. Lu, Enfu Nan, Hokin Deng, Edmund Yeh, Sarah Ostadabbas, Yun Fu, Jennifer Dy, Pu Zhao, and Yanzhi Wang. 2026. PhyGround: Benchmarking Physical Reasoning in Generative World Models. <https://phyground.github.io/>. arXiv:2605.10806 [cs.CV] Project website and benchmark resources, accessed 2026-05-26.
- [134] Juyi Lin, Amir Taherin, Arash Akbari, Arman Akbari, Lei Lu, Guangyu Chen, Taskin Padir, Xiaomeng Yang, Weiwei Chen, Yiqian Li, et al. 2025. Vote: vision-language-action optimization with trajectory ensemble voting. *arXiv preprint arXiv:2507.05116* (2025).
- [135] Minghui Lin, Xiang Wang, Yishan Wang, Shu Wang, Fengqi Dai, Pengxiang Ding, Cunxiang Wang, Zhengrong Zuo, Nong Sang, Siteng Huang, et al. 2025. Exploring the evolution of physics cognition in video generation: A survey. *arXiv preprint arXiv:2503.21765* (2025).
- [136] Daochang Liu, Junyu Zhang, Anh-Dung Dinh, Eunbyung Park, Shichao Zhang, Ajmal Mian, Mubarak Shah, and Chang Xu. 2025. Generative physical ai in vision: A survey. *arXiv preprint arXiv:2501.10928* (2025).
- [137] Jun Liu, Zhenglun Kong, Pu Zhao, Changdi Yang, Xuan Shen, Hao Tang, Geng Yuan, Wei Niu, Wenbin Zhang, Xue Lin, et al. 2025. Toward adaptive large language models structured pruning via hybrid-grained weight importance assessment. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 39. 18879–18887.
- [138] Yang Liu, Pengxiang Ding, Tengyue Jiang, Xudong Wang, Wenxuan Song, Minghui Lin, Han Zhao, Hongyin Zhang, Zifeng Zhuang, Wei Zhao, et al. 2026. MMaDA-VLA: Large Diffusion Vision-Language-Action Model with Unified Multi-Modal Instruction and Generation. *arXiv preprint arXiv:2603.25406* (2026).
- [139] Xiaoxiao Long, Qingrui Zhao, Kaiwen Zhang, Zihao Zhang, Dingrui Wang, Yumeng Liu, Zhengjie Shu, Yi Lu, Shouzheng Wang, Xinzhe Wei, et al. 2025. A Survey: Learning Embodied Intelligence from Physical Simulators and World Models. *arXiv preprint arXiv:2507.00917* (2025).
- [140] Guanxing Lu, Shiyi Zhang, Ziwei Wang, Changliu Liu, Jiwen Lu, and Yansong Tang. 2024. Manigaussian: Dynamic gaussian splatting for multi-task robotic manipulation. In *European Conference on Computer Vision*. Springer, 349–366.
- [141] Yunhong Lu, Yanhong Zeng, Haobo Li, Hao Ouyang, Qiuyu Wang, Ka Leong Cheng, Jiapeng Zhu, Hengyuan Cao, Zhipeng Zhang, Xing Zhu, Yujun Shen, and Min Zhang. 2025. Reward Forcing: Efficient Streaming Video Generation with Rewarded Distribution Matching Distillation. arXiv:2512.04678 [cs.CV] <https://arxiv.org/abs/2512.04678>
- [142] Hao Luo, Ye Wang, Wanpeng Zhang, Sipeng Zheng, Ziheng Xi, Chaoyi Xu, Haiweng Xu, Haoqi Yuan, Chi Zhang, Yiqing Wang, et al. 2026. Being-H0. 5: Scaling Human-Centric Robot Learning for Cross-Embodiment Generalization. *arXiv preprint arXiv:2601.12993* (2026).

- [143] Chak-Wing Mak, Guanyu Zhu, Boyi Zhang, Hongji Li, Xiaowei Chi, Kevin Zhang, Yichen Wu, Yangfan He, Chun-Kai Fan, Wentao Lu, et al. 2026. PhysicsMind: Sim and Real Mechanics Benchmarking for Physical Reasoning and Prediction in Foundational VLMs and World Models. *arXiv preprint arXiv:2601.16007* (2026).
- [144] Léopold Maytié, Roland Bertin Johannet, and Rufin VanRullen. 2025. Multimodal Dreaming: A Global Workspace Approach to World Model-Based Reinforcement Learning. *arXiv preprint arXiv:2502.21142* (2025).
- [145] Pietro Mazzaglia, Tim Verbelen, Bart Dhoedt, Aaron Courville, and Sai Rajeswar. 2024. Genrl: Multimodal-foundation world models for generalization in embodied agents. *Advances in neural information processing systems* 37 (2024), 27529–27555.
- [146] David E Meyer, Jennifer M Glass, Shane T Mueller, Travis L Seymour, and David E Kieras. 2001. Executive-process interactive control: A unified computational theory for answering 20 questions (and more) about cognitive ageing. *European Journal of Cognitive Psychology* 13, 1-2 (2001), 123–164.
- [147] Asen Nachkov, Danda Pani Paudel, Jan-Nico Zaech, Davide Scaramuzza, and Luc Van Gool. 2025. Dream to drive: Model-based vehicle control using analytic world models. *arXiv e-prints* (2025), arXiv–2502.
- [148] I Made Aswin Nahrendra, Byeongho Yu, and Hyun Myung. 2023. Dreamwaq: Learning robust quadrupedal locomotion with implicit terrain imagination via deep reinforcement learning. In *2023 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 5078–5084.
- [149] Allen Newell. 1994. *Unified theories of cognition*. Harvard University Press.
- [150] Allen Newell and Herbert A Simon. 1995. GPS, a program that simulates human thought. In *Computation & Intelligence: collected readings*. 415–428.
- [151] Derrick H Nguyen and Bernard Widrow. 1990. Neural networks for self-learning control systems. *IEEE Control systems magazine* 10, 3 (1990), 18–23.
- [152] Quan Nguyen-Tri, Mukul Ranjan, and Zhiqiang Shen. 2025. Attention is all you need for kv cache in diffusion llms. *arXiv preprint arXiv:2510.14973* (2025).
- [153] Nima Nouri, Ronen Artzi, and Virginia Savova. 2026. An agentic AI framework for ingestion and standardization of single-cell RNA-seq data analysis. *npj Artificial Intelligence* 2, 1 (2026), 8.
- [154] OpenAI. 2024. Video Generation Models as World Simulators. <https://openai.com/research/video-generation-models-as-world-simulators>.
- [155] OpenAI. 2026. Introducing Prism: A Free LaTeX-Native Workspace for Scientific Writing and Collaboration. <https://openai.com/index/introducing-prism/>. Accessed: 2026-02-16.
- [156] Nicolò Pagan, Petter Törnberg, Christopher A Bail, Anikó Hannák, and Christopher Barrie. 2025. Computational Turing Test Reveals Systematic Differences Between Human and AI Language. *arXiv preprint arXiv:2511.04195* (2025).
- [157] Joon Sung Park, Joseph C. O'Brien, Carrie J. Cai, Meredith Ringel Morris, Percy Liang, and Michael S. Bernstein. 2023. Generative Agents: Interactive Simulacra of Human Behavior. *arXiv:2304.03442 [cs.HC]* <https://arxiv.org/abs/2304.03442>
- [158] Neeley Pate, Adiba Mahbub Proma, Hangfeng He, James N Druckman, Daniel Molden, Gourab Ghoshal, and Ehsan Hoque. 2026. Replicating Human Motivated Reasoning Studies with LLMs. *arXiv preprint arXiv:2601.16130* (2026).
- [159] Deepak Pathak, Pulkit Agrawal, Alexei A Efros, and Trevor Darrell. 2017. Curiosity-driven exploration by self-supervised prediction. In *International conference on machine learning*. PMLR, 2778–2787.
- [160] Joséphine Pazem, Marius Krumm, Alexander Q Vining, Lukas J Fiderer, and Hans J Briegel. 2025. Free Energy Projective Simulation (FEPS): Active inference with interpretability. *PLoS One* 20, 9 (2025), e0331047.
- [161] William Peebles and Saining Xie. 2023. Scalable diffusion models with transformers. In *Proceedings of the IEEE/CVF international conference on computer vision*. 4195–4205.
- [162] Giovanni Pezzulo, Thomas Parr, and Karl Friston. 2024. Active inference as a theory of sentient behavior. *Biological Psychology* 186 (2024), 108741.
- [163] Steven Pinker and Paul Bloom. 1990. Natural language and natural selection. *Behavioral and brain sciences* 13, 4 (1990), 707–727.
- [164] Andrzej Porębski and Jakub Figura. 2025. There is no such thing as conscious artificial intelligence. *Humanities and Social Sciences Communications* 12, 1 (2025), 1–12.
- [165] Li Puyin, Tiange Xiang, Ella Mao, Shirley Wei, Xinye Chen, Adnan Masood, Li Fei-Fei, and Ehsan Adeli. 2026. Quantiphy: A quantitative benchmark evaluating physical reasoning abilities of vision-language models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 33174–33184.
- [166] Yansong Qu, Zilin Huang, Zihao Sheng, Jiancong Chen, Sikai Chen, and Samuel Labi. 2025. VI-safe: Vision-language guided safety-aware reinforcement learning with world models for autonomous driving. *arXiv preprint arXiv:2505.16377* (2025).
- [167] Xuanchi Ren et al. 2025. Cosmos-Drive-Dreams: Scalable Synthetic Driving Data Generation with World Foundation Models. *arXiv preprint arXiv:2506.09042* (2025).

- [168] Frank E Ritter, Farnaz Tehranchi, and Jacob D Oury. 2019. ACT-R: A cognitive architecture for modeling cognition. *Wiley Interdisciplinary Reviews: Cognitive Science* 10, 3 (2019), e1488.
- [169] Jack Rome, Stephen James, and Subramanian Ramamoorthy. 2026. Learning to unfold cloth: Scaling up world models to deformable object manipulation. *arXiv preprint arXiv:2602.16675* (2026).
- [170] David M Rosenthal. 2000. Consciousness, content, and metacognitive judgments. *Consciousness and cognition* 9, 2 (2000), 203–214.
- [171] Timothy Rupprecht and Yanzhi Wang. 2022. A survey for deep reinforcement learning in markovian cyber–physical systems: Common problems and solutions. *Neural Networks* 153 (2022), 13–36.
- [172] Lloyd Russell et al. 2025. GAIA-2: A Controllable Multi-View Generative World Model for Autonomous Driving. *arXiv preprint arXiv:2503.20523* (2025).
- [173] Ruhi Sarikaya. 2025. Path to Artificial General Intelligence: Past, present, and future. *Annual Reviews in Control* 60 (2025), 101021.
- [174] Martin Schrimpf, Idan Asher Blank, Greta Tuckute, Carina Kauf, Eghbal A. Hosseini, Nancy Kanwisher, Joshua B. Tenenbaum, and Evelina Fedorenko. 2021. The neural architecture of language: Integrative modeling converges on predictive processing. *Proceedings of the National Academy of Sciences* 118, 45 (2021), e2105646118. [arXiv:https://www.pnas.org/doi/pdf/10.1073/pnas.2105646118](https://www.pnas.org/doi/pdf/10.1073/pnas.2105646118) doi:10.1073/pnas.2105646118
- [175] Ramanan Sekar, Oleh Rybkin, Kostas Daniilidis, Pieter Abbeel, Danijar Hafner, and Deepak Pathak. 2020. Planning to explore via self-supervised world models. In *International conference on machine learning*. PMLR, 8583–8592.
- [176] Younggyo Seo, Danijar Hafner, Hao Liu, Fangchen Liu, Stephen James, Kimin Lee, and Pieter Abbeel. 2023. Masked world models for visual control. In *Conference on Robot Learning*. PMLR, 1332–1344.
- [177] Dhruv Shah, Ajay Sridhar, Nitish Dashora, Kyle Stachowicz, Kevin Black, Noriaki Hirose, and Sergey Levine. 2023. ViNT: A foundation model for visual navigation. *arXiv preprint arXiv:2306.14846* (2023).
- [178] Yu Shang, Xin Zhang, Yinzhou Tang, Lei Jin, Chen Gao, Wei Wu, and Yong Li. 2026. Roboscape: Physics-informed embodied world model. *Advances in Neural Information Processing Systems* 38 (2026), 63674–63698.
- [179] Chenyang Shao, Dehao Huang, Yu Li, Keyu Zhao, Weiquan Lin, Yining Zhang, Qingbin Zeng, et al. 2025. OmniScientist: Toward a Co-evolving Ecosystem of Human and AI Scientists. [arXiv:2511.16931 \[cs.CY\]](https://arxiv.org/abs/2511.16931) <https://arxiv.org/abs/2511.16931>
- [180] Erzhua Shao, Yifang Wang, Yifan Qian, Zhenyu Pan, Han Liu, and Dashun Wang. 2025. SciSciGPT: advancing human–AI collaboration in the science of science. *Nature Computational Science* (2025), 1–15.
- [181] Xuan Shen, Chenxia Han, Yufa Zhou, Yanyue Xie, Yifan Gong, Quanyi Wang, Yiwei Wang, Yanzhi Wang, Pu Zhao, and Jiuxiang Gu. 2025. Draftattention: Fast video diffusion via low-resolution attention guidance. *arXiv preprint arXiv:2505.14708* (2025).
- [182] Xuan Shen, Weize Ma, Jing Liu, et al. 2025. QuartDepth: Post-Training Quantization for Real-Time Depth Estimation on the Edge. In *CVPR*.
- [183] Xuan Shen, Weize Ma, Yufa Zhou, Enhao Tang, Yanyue Xie, Zhengang Li, Yifan Gong, Quanyi Wang, Henghui Ding, Yiwei Wang, et al. 2025. Fastcar: Cache attentive replay for fast auto-regressive video generation on the edge. *arXiv preprint arXiv:2505.14709* (2025).
- [184] Xuan Shen, Zhao Song, Yufa Zhou, et al. 2025. Lazydit: Lazy learning for the acceleration of diffusion transformers. In *AAAI*.
- [185] Xuan Shen, Zhao Song, Yufa Zhou, et al. 2025. Numerical pruning for efficient autoregressive models. In *AAAI*.
- [186] Xuan Shen, Yizhou Wang, Xiangxi Shi, Yanzhi Wang, Pu Zhao, and Jiuxiang Gu. 2025. Efficient reasoning with hidden thinking. *arXiv preprint arXiv:2501.19201* (2025).
- [187] Xuan Shen, Pu Zhao, Yifan Gong, Zhenglun Kong, Zheng Zhan, Yushu Wu, Ming Lin, Chao Wu, Xue Lin, and Yanzhi Wang. 2024. Search for Efficient Large Language Models. In *NeurIPS*.
- [188] Xuan Shen, Hangyu Zheng, Yifan Gong, et al. 2025. Sparse Learning for State Space Models on Mobile. In *ICLR*.
- [189] Afagh Mehri Sherfedani, Siyu Li, Natawut Monaiikul, Bahareh Abbasi, Miloš Žefran, and Barbara Di Eugenio. 2025. Multimodal Reinforcement Learning for Robots Collaborating with Humans. *International Journal of Social Robotics* 17, 12 (2025), 3003–3025. doi:10.1007/s12369-025-01287-6
- [190] Haochen Shi, Huazhe Xu, Zhiao Huang, Yunzhu Li, and Jiajun Wu. 2024. Robocraft: Learning to see, simulate, and shape elasto-plastic objects in 3d with graph networks. *The International Journal of Robotics Research* 43, 4 (2024), 533–549.
- [191] David Silver, Satinder Singh, Doina Precup, and Richard S Sutton. 2021. Reward is enough. *Artificial intelligence* 299 (2021), 103535.
- [192] Karen Simonyan and Andrew Zisserman. 2014. Two-stream convolutional networks for action recognition in videos. *Advances in neural information processing systems* 27 (2014).
- [193] Zhangde Song, Jieyu Lu, Yuanqi Du, Botao Yu, Thomas M Pruijn, Yue Huang, Kehan Guo, Xiuzhe Luo, Yuanhao Qu, Yi Qu, et al. 2025. Evaluating large language models in scientific discovery. *arXiv preprint arXiv:2512.15567* (2025).

- [194] Ajay Sridhar, Dhruv Shah, Catherine Glossop, and Sergey Levine. 2024. Nomad: Goal masked diffusion policies for navigation and exploration. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 63–70.
- [195] James W. A. Strachan, Dalila Albergo, Giulia Borghini, Oriana Pansardi, Eugenio Scaliti, et al. 2024. Testing theory of mind in large language models and humans. *Nature Human Behaviour* 8, 7 (2024), 1285–1295. doi:10.1038/s41562-024-01882-z
- [196] Jingwen Sun, Wenyao Zhang, Zekun Qi, Shaojie Ren, Zezhi Liu, Hanxin Zhu, Guangzhong Sun, Xin Jin, and Zhibo Chen. 2026. VLA-JEPA: Enhancing Vision-Language-Action Model with Latent World Model. *arXiv preprint arXiv:2602.10098* (2026).
- [197] Yang-Tian Sun, Zehuan Huang, Yifan Niu, Lin Ma, Yan-Pei Cao, Yuewen Ma, and Xiaojuan Qi. 2026. Stereo World Model: Camera-Guided Stereo Video Generation. arXiv:2603.17375 [cs.CV] <https://arxiv.org/abs/2603.17375>
- [198] Cong Tang, Yuang Liu, Yueling Wu, Wence Han, Qian Yin, Xin Zheng, Wenyi Zeng, and Qiuli Zhang. 2025. MoE-World: A Mixture-of-Experts Architecture for Multi-Task World Models. *Electronics* 14, 24 (2025), 4884.
- [199] GigaBrain Team, Angen Ye, Boyuan Wang, Chaojun Ni, Guan Huang, Guosheng Zhao, Haoyun Li, Jie Li, Jiagang Zhu, Lv Feng, et al. 2025. Gigabrain-0: A world model-powered vision-language-action model. *arXiv preprint arXiv:2510.19430* (2025).
- [200] GigaWorld Team, Angen Ye, Boyuan Wang, Chaojun Ni, Guan Huang, Guosheng Zhao, Haoyun Li, Jiagang Zhu, Kerui Li, Mengyuan Xu, et al. 2025. Gigaworld-0: World models as data engine to empower embodied ai. *arXiv preprint arXiv:2511.19861* (2025).
- [201] Kling Team, Jialu Chen, Yuanzheng Ci, Xiangyu Du, Zipeng Feng, Kun Gai, Sainan Guo, Feng Han, Jingbin He, Kang He, et al. 2025. Kling-Omni Technical Report. *arXiv preprint arXiv:2512.16776* (2025).
- [202] Marble World Team. 2025. Marble: A Multimodal World Model. <https://www.worldlabs.ai/blog/marble-world-model> Published on Marble World's Blog.
- [203] Robbyant Team, Zelin Gao, Qiuyu Wang, Yanhong Zeng, Jiapeng Zhu, Ka Leong Cheng, Yixuan Li, Hanlin Wang, Yinghao Xu, Shuailei Ma, et al. 2026. Advancing Open-source World Models. *arXiv preprint arXiv:2601.20540* (2026).
- [204] Michael Tomasello. 2000. *Two Hypotheses About Primate Cognition*. MIT Press.
- [205] Michael Tomasello, Malinda Carpenter, Josep Call, Tanya Behne, and Henrike Moll. 2005. Understanding and sharing intentions: The origins of cultural cognition. *Behavioral and brain sciences* 28, 5 (2005), 675–691.
- [206] Milena Tsvetkova, Taha Yasseri, Niccolo Pescetelli, and Tobias Werner. 2024. A new sociology of humans and machines. *Nature Human Behaviour* 8, 10 (Oct. 2024), 1864–1876. doi:10.1038/s41562-024-02001-8
- [207] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. *Advances in neural information processing systems* 30 (2017).
- [208] Khang HN Vo, Duc PT Nguyen, Thong T Nguyen, and Tho T Quan. 2024. TI-JEPA: An innovative energy-based joint embedding strategy for text-image multimodal systems. In *International Symposium on Information and Communication Technology*. Springer, 141–154.
- [209] Team Wan, Ang Wang, Baole Ai, Bin Wen, Chaojie Mao, Chen-Wei Xie, Di Chen, Fei Wu Yu, Haiming Zhao, Jianxiao Yang, et al. 2025. Wan: Open and advanced large-scale video generative models. *arXiv preprint arXiv:2503.20314* (2025).
- [210] Hang Wang, Xin Ye, Feng Tao, Chenbin Pan, Abhirup Mallik, Burhan Yaman, Liu Ren, and Junshan Zhang. 2025. Adawm: Adaptive world model based planning for autonomous driving. In *International Conference on Learning Representations*, Vol. 2025. 85591–85615.
- [211] Jiaming Wang, Diwen Liu, Jizhuo Chen, Jiaxuan Da, Nuowen Qian, Minh Man Tram, and Harold Soh. 2025. Genie: A generalizable navigation system for in-the-wild environments. *IEEE Robotics and Automation Letters* (2025).
- [212] Kangrui Wang, Pingyue Zhang, Zihan Wang, Yaning Gao, Linjie Li, Qineng Wang, Hanyang Chen, Yiping Lu, Zhengyuan Yang, Lijuan Wang, et al. 2026. Vagen: Reinforcing world model reasoning for multi-turn vlm agents. *Advances in Neural Information Processing Systems* 38 (2026), 172871–172933.
- [213] Lingyi Wang, Rashed Shelim, Walid Saad, and Naren Ramakrishna. 2026. MetaMind: General and Cognitive World Models in Multi-Agent Systems by Meta-Theory of Mind. *arXiv preprint arXiv:2603.00808* (2026).
- [214] Linhan Wang, Zichong Yang, Chen Bai, Guoxiang Zhang, Xiaotong Liu, Xiaoyin Zheng, Xiao-Xiao Long, Chang-Tien Lu, and Cheng Lu. 2026. Drive-JEPA: Video JEPA Meets Multimodal Trajectory Distillation for End-to-End Driving. *arXiv preprint arXiv:2601.22032* (2026).
- [215] Linbo Wang, Yupeng Zheng, Qiang Chen, Shiwei Li, Yichen Zhang, Zebin Xing, Qichao Zhang, Xiang Li, Deheng Qian, Pengxuan Yang, et al. 2026. Latent-WAM: Latent World Action Modeling for End-to-End Autonomous Driving. *arXiv preprint arXiv:2603.24581* (2026).
- [216] Qineng Wang, Wenlong Huang, Yu Zhou, Hang Yin, Tianwei Bao, Jianwen Lyu, Wei Yu Liu, Ruohan Zhang, Jiajun Wu, Li Fei-Fei, and Manling Li. 2025. ENACT: Evaluating Embodied Cognition with World Modeling of Egocentric Interaction. arXiv:2511.20937 [cs.AI] <https://arxiv.org/abs/2511.20937>

- [217] Ruixiang Wang, Qingming Liu, Yueci Deng, Guiliang Liu, Zhen Liu, and Kui Jia. 2026. EVA: Aligning Video World Models with Executable Robot Actions via Inverse Dynamics Rewards. *arXiv preprint arXiv:2603.17808* (2026).
- [218] Yunheng Wang, Yuetong Fang, Taowen Wang, Yixiao Feng, Yawen Tan, Shuning Zhang, Peiran Liu, Yiding Ji, and Renjing Xu. 2025. Dreamnav: A trajectory-based imaginative framework for zero-shot vision-and-language navigation. *arXiv preprint arXiv:2509.11197* (2025).
- [219] Hongtao Wu, Ya Jing, Chilam Cheang, Guangzeng Chen, Jiafeng Xu, Xinghang Li, Minghuan Liu, Hang Li, and Tao Kong. 2024. Unleashing large-scale video generative pre-training for visual robot manipulation. In *International Conference on Learning Representations*, Vol. 2024. 10641–10662.
- [220] Jialong Wu, Shaofeng Yin, Ningya Feng, and Mingsheng Long. 2026. Rlvr-world: Training world models with reinforcement learning. *Advances in Neural Information Processing Systems* 38 (2026), 125312–125350.
- [221] Jialong Wu, Xiaoying Zhang, Hongyi Yuan, Xiangcheng Zhang, Tianhao Huang, Changjing He, Chaoyi Deng, Renrui Zhang, Youbin Wu, and Mingsheng Long. 2026. Visual Generation Unlocks Human-Like Reasoning through Multimodal World Models. *arXiv preprint arXiv:2601.19834* (2026).
- [222] Philipp Wu, Alejandro Escontrela, Danijar Hafner, Pieter Abbeel, and Ken Goldberg. 2023. Daydreamer: World models for physical robot learning. In *Conference on robot learning*. PMLR, 2226–2240.
- [223] Wenhao Wu, Fuhong Liu, Haoru Li, Zican Hu, Daoyi Dong, Chunlin Chen, and Zhi Wang. 2026. Mixture-of-experts meets in-context reinforcement learning. *Advances in Neural Information Processing Systems* 38 (2026), 24751–24785.
- [224] Wei Wu, Fan Lu, Yunnan Wang, Shuai Yang, Shi Liu, Fangjing Wang, Qian Zhu, He Sun, Yong Wang, Shuailei Ma, et al. 2026. A Pragmatic VLA Foundation Model. *arXiv preprint arXiv:2601.18692* (2026).
- [225] Chendong Xiang, Jiajun Liu, Jintao Zhang, Xiao Yang, Zhengwei Fang, Shizun Wang, Zijun Wang, Yingtian Zou, Hang Su, and Jun Zhu. 2026. Geometry-Aware Rotary Position Embedding for Consistent Video World Model. *arXiv preprint arXiv:2602.07854* (2026).
- [226] Jiannan Xiang, Yi Gu, Zihan Liu, Zeyu Feng, Qiyue Gao, Yiyan Hu, Benhao Huang, Guangyi Liu, Yichi Yang, Kun Zhou, et al. 2025. Pan: A world model for general, interactable, and long-horizon world simulation. *arXiv preprint arXiv:2511.09057* (2025).
- [227] Lingyu Xiao, Jiang-Jiang Liu, Sen Yang, Xiaofan Li, Xiaoqing Ye, Wankou Yang, and Jingdong Wang. 2025. Learning multiple probabilistic decisions from latent world model in autonomous driving. In *2025 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 1279–1285.
- [228] Yunze Xiao, Lynnette Hui Xian Ng, Jiarui Liu, and Mona Diab. 2025. Humanizing machines: Rethinking llm anthropomorphism through a multi-level framework of design. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*. 3331–3350.
- [229] Qiujie Xie, Yixuan Weng, Minjun Zhu, Fuchen Shen, Shulin Huang, Zhen Lin, Jiahui Zhou, Zilan Mao, Zijie Yang, Linyi Yang, Jian Wu, and Yue Zhang. 2025. How Far Are AI Scientists from Changing the World? *arXiv:2507.23276 [cs.AI]* <https://arxiv.org/abs/2507.23276>
- [230] Eric Xing, Mingkai Deng, Jinyu Hou, and Zhiting Hu. 2025. Critiques of world models. *arXiv preprint arXiv:2507.05169* (2025).
- [231] Hu Xu, Gargi Ghosh, Po-Yao Huang, Prahal Arora, Masoumeh Aminzadeh, Christoph Feichtenhofer, Florian Metze, and Luke Zettlemoyer. 2021. Vlm: Task-agnostic video-language model pre-training for video understanding. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*. 4227–4239.
- [232] Kai Xu, Hang Zhao, Ruizhen Hu, Yuhang Huang, Ziqiao Zhou, Wancheng Feng, Yi Li, Sida Peng, Xing Liu, Zihao Liu, et al. 2026. From Specialist to Generalist: A Comprehensive Survey on World Models. *Authorea Preprints* (2026).
- [233] Liu Yang, Kangwook Lee, Robert Nowak, and Dimitris Papailiopoulos. 2024. Looped transformers are better at learning learning algorithms. In *International conference on learning representations*, Vol. 2024. 42195–42214.
- [234] Shusheng Yang, Jihan Yang, Pinzhi Huang, Ellis L Brown II, Zihao Yang, Yue Yu, Shengbang Tong, Zihan Zheng, Yifan Xu, Muhan Wang, et al. 2025. Cambrian-s: Towards spatial supersensing in video. In *The Fourteenth International Conference on Learning Representations*.
- [235] Zhenjie Yang, Xiaosong Jia, Qifeng Li, Xue Yang, Maoqing Yao, and Junchi Yan. 2026. Raw2drive: Reinforcement learning with aligned world models for end-to-end autonomous driving (in carla v2). *Advances in Neural Information Processing Systems* 38 (2026), 134122–134147.
- [236] Angen Ye, Boyuan Wang, Chaojun Ni, Guan Huang, Guosheng Zhao, Hao Li, Hengtao Li, Jie Li, Jindi Lv, Jingyu Liu, et al. 2026. GigaWorld-Policy: An Efficient Action-Centered World–Action Model. *arXiv preprint arXiv:2603.17240* (2026).
- [237] Seonghyeon Ye, Yunhao Ge, Kaiyuan Zheng, Shenyan Gao, Sihyun Yu, George Kurian, Suneel Indupuru, You Liang Tan, Chuning Zhu, Jiannan Xiang, et al. 2026. World action models are zero-shot policies. *arXiv preprint arXiv:2602.15922* (2026).
- [238] Yavar Taheri Yeganeh, Mohsen Jafari, and Andrea Matta. 2025. Deep Active Inference Agents for Delayed and Long-Horizon Environments. *arXiv preprint arXiv:2505.19867* (2025).

- [239] Pinrui Yu, Dan Luo, Timothy Rupprecht, Lei Lu, et al. 2024. FasterVD: On Acceleration of Video Diffusion Models.. In *IJCAI* 8838–8842.
- [240] Wei Yu, Runjia Qian, Yumeng Li, Liquan Wang, Songheng Yin, Sri Siddarth Chakaravarthy P, Dennis Anthony, Yang Ye, Yidi Li, Weiwei Wan, and Animesh Garg. 2026. MosaicMem: Hybrid Spatial Memory for Controllable Video World Models. *arXiv:2603.17117 [cs.CV]* <https://arxiv.org/abs/2603.17117>
- [241] Fang Yuan, Junjie Zeng, Yue Hu, Zhengqiu Zhu, Qunjun Yin, and Yuxiang Xie. 2025. NL2GenSym: Natural Language to Generative Symbolic Rules for SOAR Cognitive Architecture via Large Language Models. *arXiv preprint arXiv:2510.09355* (2025).
- [242] Jianhao Yuan, Xiaofeng Zhang, Felix Friedrich, Nicolas Beltran-Velez, Melissa Hall, Reyhane Askari-Hemmat, Xiaochuang Han, Nicolas Ballas, Michal Drozdal, and Adriana Romero-Soriano. 2026. Inference-time Physics Alignment of Video Generative Models with Latent World Models. *arXiv preprint arXiv:2601.10553* (2026).
- [243] Shenghai Yuan, Yuanyang Yin, Zongjian Li, Xinwei Huang, Xiao Yang, and Li Yuan. 2026. Helios: Real Real-Time Long Video Generation Model. *arXiv:2603.04379 [cs.CV]* <https://arxiv.org/abs/2603.04379>
- [244] Tianyuan Yuan, Zibin Dong, Yicheng Liu, and Hang Zhao. 2026. Fast-WAM: Do World Action Models Need Test-time Future Imagination? *arXiv:2603.16666 [cs.CV]* <https://arxiv.org/abs/2603.16666>
- [245] Jingtong Yue, Ziqi Huang, Zhaoxi Chen, Xintao Wang, Pengfei Wan, and Ziwei Liu. 2025. Simulating the Visual World with Artificial Intelligence: A Roadmap. *arXiv preprint arXiv:2511.08585* (2025).
- [246] Valentinos Zachariou, Roberta Klatzky, and Marlene Behrmann. 2014. Ventral and dorsal visual stream contributions to the perception of object shape and object location. *Journal of Cognitive Neuroscience* 26, 1 (2014), 189–209.
- [247] Kai Zeng, Zhanqian Wu, Kaixin Xiong, Xiaobao Wei, Xiangyu Guo, Zhenxin Zhu, Kalok Ho, Lijun Zhou, Bohan Zeng, Ming Lu, et al. 2025. Rethinking Driving World Model as Synthetic Data Generator for Perception Tasks. *arXiv preprint arXiv:2510.19195* (2025).
- [248] Zheng Zhan, Zhenglun Kong, Yifan Gong, et al. 2024. Exploring Token Pruning in Vision State Space Models. In *NeurIPS*.
- [249] Zheng Zhan, Yushu Wu, Yifan Gong, et al. 2024. Fast and Memory-Efficient Video Diffusion Using Streamlined Inference. In *NeurIPS*.
- [250] Zheng Zhan, Yushu Wu, Zhenglun Kong, Changdi Yang, Yifan Gong, Xuan Shen, Xue Lin, Pu Zhao, and Yanzhi Wang. 2024. Rethinking token reduction for state space models. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*. 1686–1697.
- [251] Dong Zhang, ZhaoWei Li, Pengyu Wang, Xin Zhang, Yaqian Zhou, and Xipeng Qiu. 2024. SpeechAgents: Human-Communication Simulation with Multi-Modal Multi-Agent Systems. *arXiv:2401.03945 [cs.CL]* <https://arxiv.org/abs/2401.03945>
- [252] Kaifeng Zhang, Baoyu Li, Kris Hauser, and Yunzhu Li. 2024. Adaptigraph: Material-adaptive graph-based neural dynamics for robotic manipulation. *arXiv preprint arXiv:2407.07889* (2024).
- [253] Kaidong Zhang, Pengzhen Ren, Bingqian Lin, Junfan Lin, Shikui Ma, Hang Xu, and Xiaodan Liang. 2024. Pivot-r: Primitive-driven waypoint-aware world model for robotic manipulation. *Advances in Neural Information Processing Systems* 37 (2024), 54105–54136.
- [254] Kaiwen Zhang, Zhenyu Tang, Xiaotao Hu, Xingang Pan, Xiaoyang Guo, Yuan Liu, Jingwei Huang, Li Yuan, Qian Zhang, Xiao-Xiao Long, et al. 2025. Epona: Autoregressive diffusion world model for autonomous driving. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 27220–27230.
- [255] Lunjun Zhang, Yuwen Xiong, Ze Yang, Sergio Casas, Rui Hu, and Raquel Urtasun. 2024. Copilot4d: Learning unsupervised world models for autonomous driving via discrete diffusion. In *International Conference on Learning Representations*, Vol. 2024. 7269–7299.
- [256] Xiangdong Zhang, Jiaqi Liao, Shaofeng Zhang, Fanqing Meng, Xiangpeng Wan, Junchi Yan, and Yu Cheng. 2026. Videorepa: Learning physics for video generation through relational alignment with foundation models. *Advances in Neural Information Processing Systems* 38 (2026), 122647–122676.
- [257] Yumeng Zhang, Shi Gong, Kaixin Xiong, Xiaoqing Ye, Xiao Tan, Fan Wang, Jizhou Huang, Hua Wu, and Haifeng Wang. 2024. BevworlD: A multimodal world model for autonomous driving via unified bev latent space. *arXiv preprint arXiv:2407.05679* (2024).
- [258] Pu Zhao, Arash Akbari, Xuan Shen, Zhenglun Kong, Yixin Shen, Sung-En Chang, Timothy Rupprecht, Lei Lu, Enfu Nan, Changdi Yang, et al. 2025. Open-Source Multimodal Moxin Models with Moxin-VLM and Moxin-VLA. *arXiv preprint arXiv:2512.22208* (2025).
- [259] Pu Zhao, Juyi Lin, Timothy Rupprecht, Arash Akbari, Chence Yang, Rahul Chowdhury, Elaheh Motamedi, Arman Akbari, Yumei He, Chen Wang, et al. 2026. PhyWorld: Physics-Faithful World Model for Video Generation. *arXiv preprint arXiv:2605.19242* (2026).
- [260] Pu Zhao, Xuan Shen, Zhenglun Kong, Yixin Shen, Sung-En Chang, Timothy Rupprecht, Lei Lu, Enfu Nan, Changdi Yang, Yumei He, et al. 2024. Fully Open Source Moxin-7B Technical Report. *arXiv preprint arXiv:2412.06845* (2024).

- [261] Pu Zhao, Fei Sun, Xuan Shen, et al. 2024. Pruning Foundation Models for High Accuracy without Retraining. In *Findings of EMNLP 2024*. ACL.
- [262] Zhida Zhao, Talas Fu, Yifan Wang, Lijun Wang, and Huchuan Lu. 2026. From forecasting to planning: Policy world model for collaborative state-action prediction. *Advances in Neural Information Processing Systems* 38 (2026), 134585–134611.
- [263] Haoyu Zhen, Qiao Sun, Hongxin Zhang, Junyan Li, Siyuan Zhou, Yilun Du, and Chuang Gan. 2025. Tesseract: learning 4d embodied world models. *arXiv preprint arXiv:2504.20995* (2025).
- [264] Wenzhao Zheng, Weiliang Chen, Yuanhui Huang, Borui Zhang, Yueqi Duan, and Jiwen Lu. 2024. Occworld: Learning a 3d occupancy world model for autonomous driving. In *European conference on computer vision*. Springer, 55–72.
- [265] Wenzhao Zheng, Zetian Xia, Yuanhui Huang, Sicheng Zuo, Jie Zhou, and Jiwen Lu. 2024. Doe-1: Closed-loop autonomous driving with large world model. *arXiv preprint arXiv:2412.09627* (2024).
- [266] Siyuan Zhou, Yilun Du, Jiaben Chen, Yandong Li, Dit-Yan Yeung, and Chuang Gan. 2024. Robodreamer: Learning compositional world models for robot imagination. *arXiv preprint arXiv:2404.12377* (2024).
- [267] Chuning Zhu, Raymond Yu, Siyuan Feng, Benjamin Burchfiel, Paarth Shah, and Abhishek Gupta. 2025. Unified world models: Coupling video and action diffusion for pretraining on large robotic datasets. *arXiv preprint arXiv:2504.02792* (2025).
- [268] Fangqi Zhu, Hongtao Wu, Song Guo, Yuxiao Liu, Chilam Cheang, and Tao Kong. 2025. Irasim: A fine-grained world model for robot manipulation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 9834–9844.
- [269] Hongzhou Zhu, Min Zhao, Guande He, Hang Su, Chongxuan Li, and Jun Zhu. 2026. Causal Forcing: Autoregressive Diffusion Distillation Done Right for High-Quality Real-Time Interactive Video Generation. *arXiv:2602.02214* [cs.CV] <https://arxiv.org/abs/2602.02214>
- [270] Yixuan Zhu, Jiaqi Feng, Wenzhao Zheng, Yuan Gao, Xin Tao, Pengfei Wan, Jie Zhou, and Jiwen Lu. 2025. Astra: General Interactive World Model with Autoregressive Denoising. *arXiv preprint arXiv:2512.08931* (2025).
- [271] Ziyue Zhu, Shangyang Wu, Shuai Zhao, Zhiqiu Zhao, Shengjie Li, Yi Wang, Fang Li, and Haoran Luo. [n. d.]. NS-VLA: Towards Neuro-Symbolic Vision-Language-Action Models. ([n. d.]).
- [272] Shaobin Zhuang, Zhipeng Huang, Ying Zhang, Fangyikang Wang, Canmiao Fu, Binxin Yang, Chong Sun, Chen Li, and Yali Wang. 2025. Video-gpt via next clip diffusion. *arXiv preprint arXiv:2505.12489* (2025).