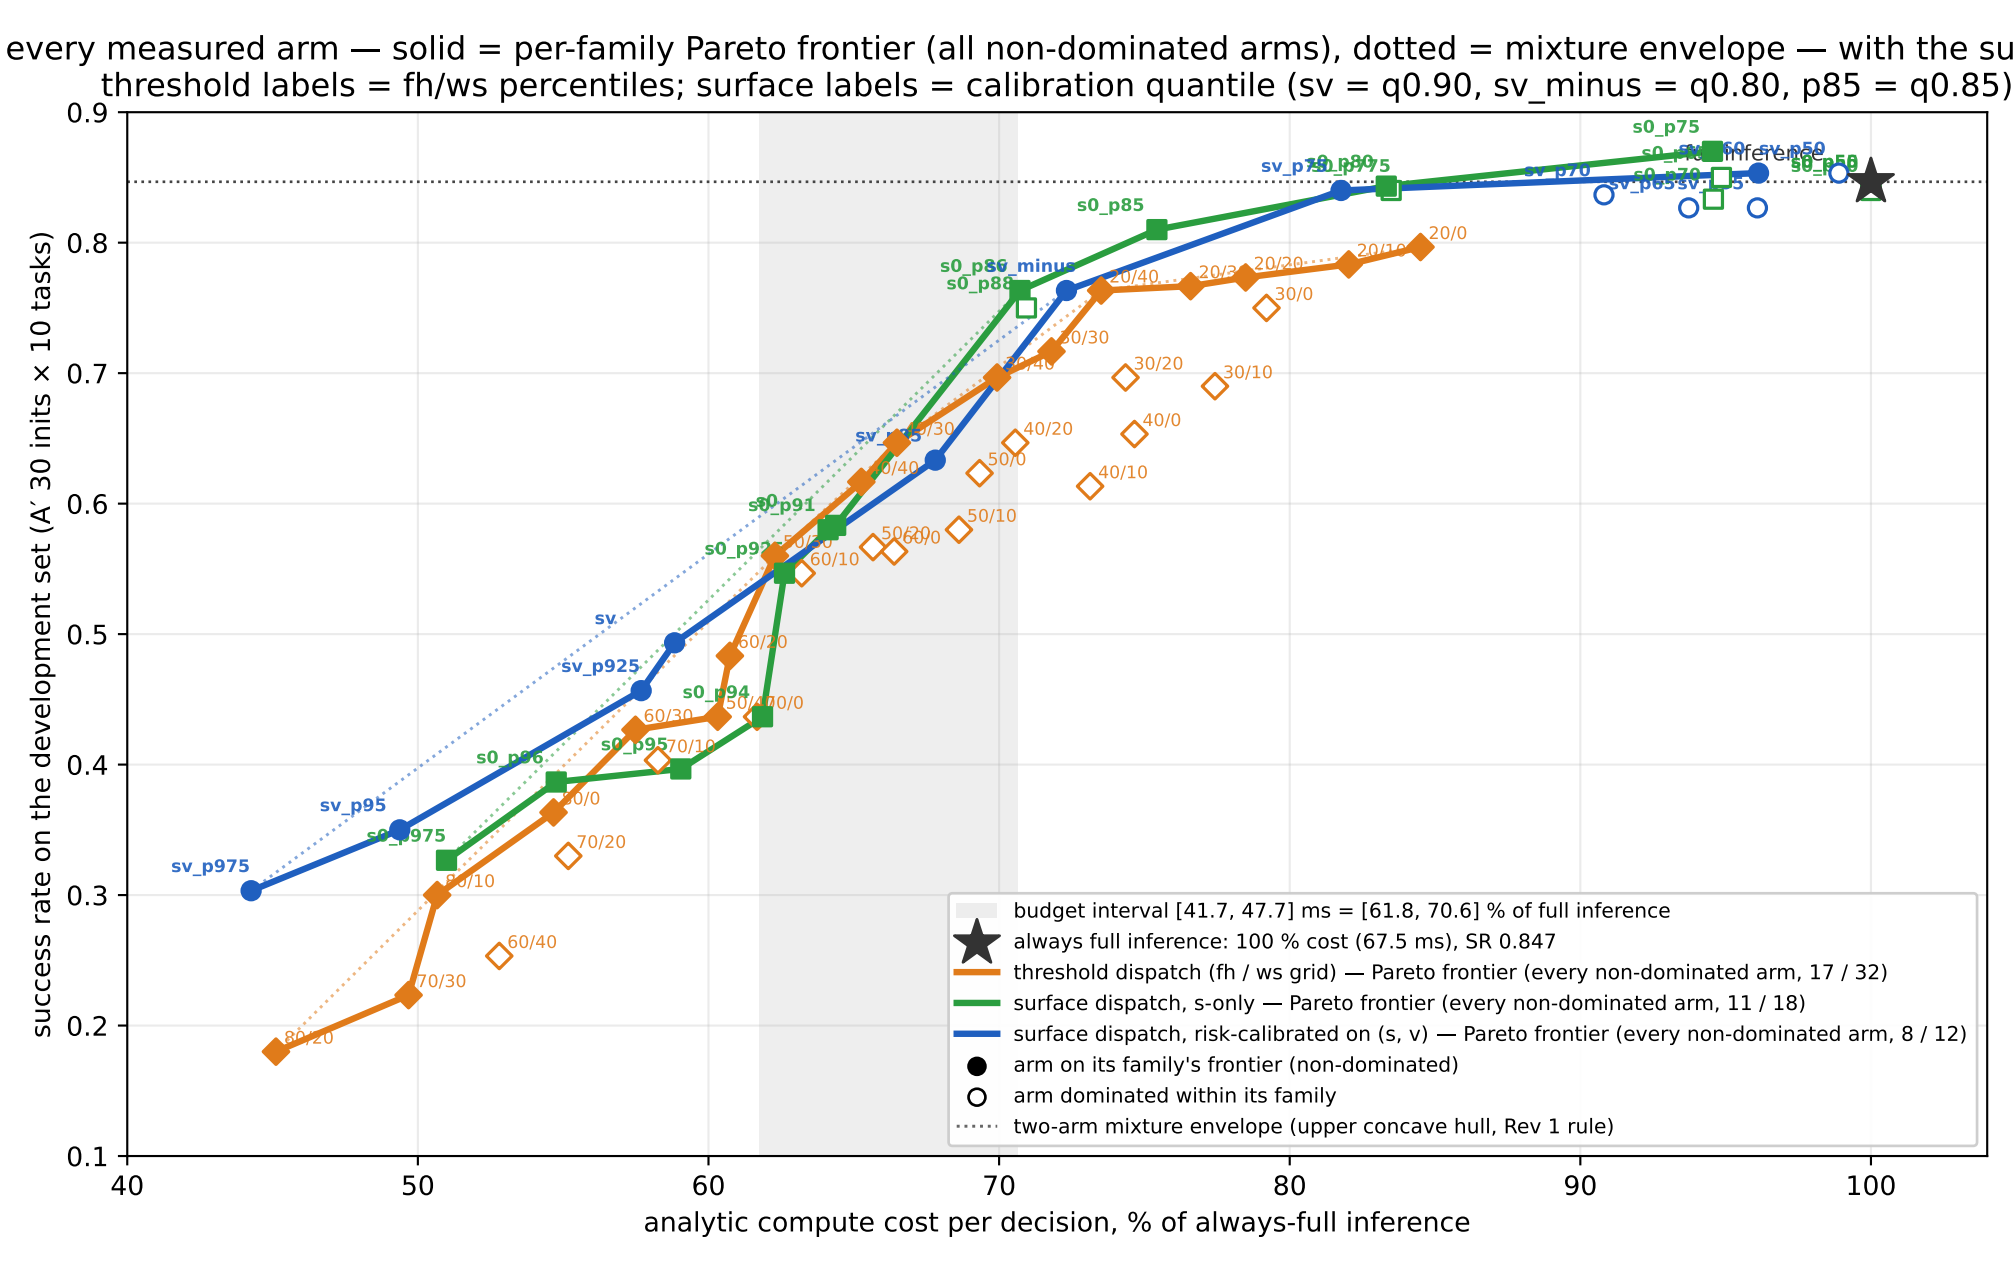

every measured arm — solid = per-family Pareto frontier (all non-dominated arms), dotted = mixture envelope — with the su
threshold labels = fh/ws percentiles; surface labels = calibration quantile (sv = q0.90, sv_minus = q0.80, p85 = q0.85)
success rate on the development set (A′ 30 inits × 10 tasks)
analytic compute cost per decision, % of always-full inference
budget interval [41.7, 47.7] ms = [61.8, 70.6] % of full inference
always full inference: 100 % cost (67.5 ms), SR 0.847
threshold dispatch (fh / ws grid) — Pareto frontier (every non-dominated arm, 17 / 32)
surface dispatch, s-only — Pareto frontier (every non-dominated arm, 11 / 18)
surface dispatch, risk-calibrated on (s, v) — Pareto frontier (every non-dominated arm, 8 / 12)
arm on its family's frontier (non-dominated)
arm dominated within its family
two-arm mixture envelope (upper concave hull, Rev 1 rule)