

Вариант 1

```
create table rols (  
    rol_id serial primary key,  
    name varchar(10) not null  
);
```

```
create table users (  
    user_id serial primary key,  
    name varchar(100) not null,  
    familia varchar(100) not null,  
    otchestvo varchar(100),  
    pfone varchar(30) not null,  
    rol_id int,  
    foreign key (rol_id) references rols(rol_id)  
);
```

```
create table op_pamit (  
    op_pamit_id serial primary key,  
    obem varchar(30) not null,  
    zena int not null  
);
```


```
create table nacopitel (  
    nacopitel_id serial primary key,  
    obem varchar(30) not null,  
    zena int not null  
);
```

```
create table models (  
    model_id serial primary key,  
    model_name varchar(100) not null,  
    op_pamit_id int not null,  
    nacopitel_id int not null,  
    zena int not null,  
    kolvo int,  
    foreign key (op_pamit_id) references op_pamit(op_pamit_id),  
    foreign key (nacopitel_id) references nacopitel(nacopitel_id)  
);
```

```

create table zakazi (
  zakaz_id serial primary key,
  user_id int not null,
  model_id int not null,
  kolvo int not null,
  zena int not null,
  data_zakaza date not null,
  foreign key (user_id) references users(user_id),
  foreign key (model_id) references models(model_id)
);

```

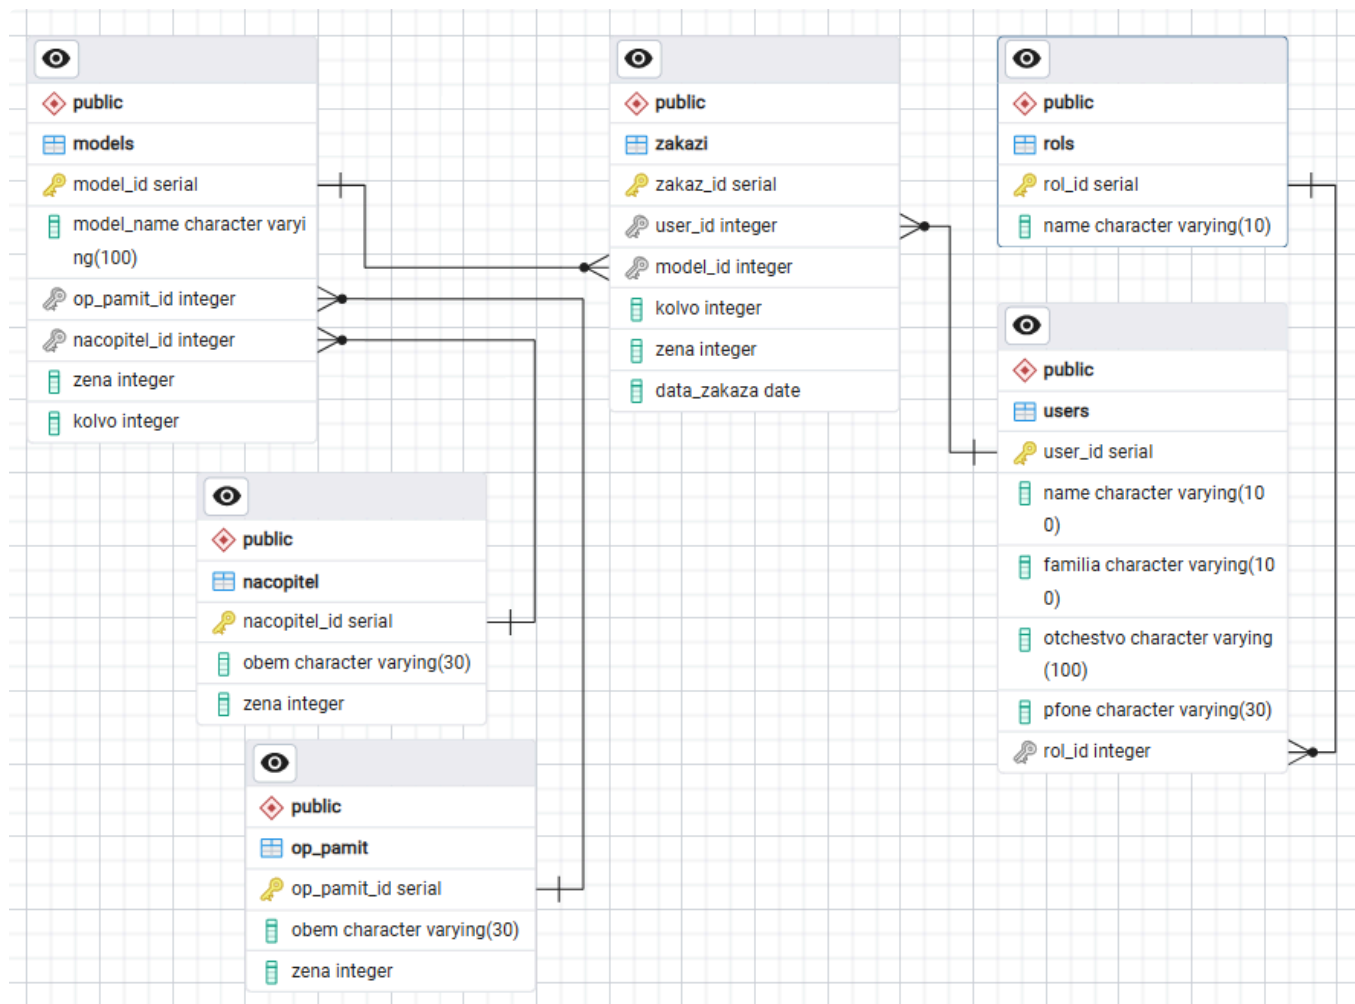

Вариант 2

```

create table rols (
  rol_id serial primary key,
  name varchar(10) not null
);

```

```
create table users (  
    user_id serial primary key,  
    name varchar(100) not null,  
    familia varchar(100) not null,  
    otchestvo varchar(100),  
    pfone varchar(30) not null,  
    rol_id int,  
    foreign key (rol_id) references rols(rol_id)  
);
```

```
create table razmer (  
    razmer_id serial primary key,  
    razmer_name varchar(5) not null  
);
```

```
create table komplekts (  
    komplekt_id serial primary key,  
    komplekt_name varchar(100) not null,  
    razmer_id int,  
    zena int not null,  
    kolvo int,  
    foreign key (razmer_id) references razmer(razmer_id)  
);
```


```
create table models (  
    model_id serial primary key,  
    komplekt_id int,  
    model_name varchar(100) not null,  
    razmer_id int,  
    zena int not null,  
    kolvo int,  
    foreign key (komplekt_id) references komplekts(komplekt_id),  
    foreign key (razmer_id) references razmer(razmer_id)  
);
```

```
create table zakazi (  
    zakaz_id serial primary key,  
    user_id int not null,  
    komplekt_id int not null,  
    model_id int,  
    kolvo int not null,  
    zena int not null,
```

```

data_zakaza date not null,
foreign key (user_id) references users(user_id),
foreign key (komplekt_id) references komplekts(komplekt_id),
foreign key (model_id) references models(model_id)
);

```

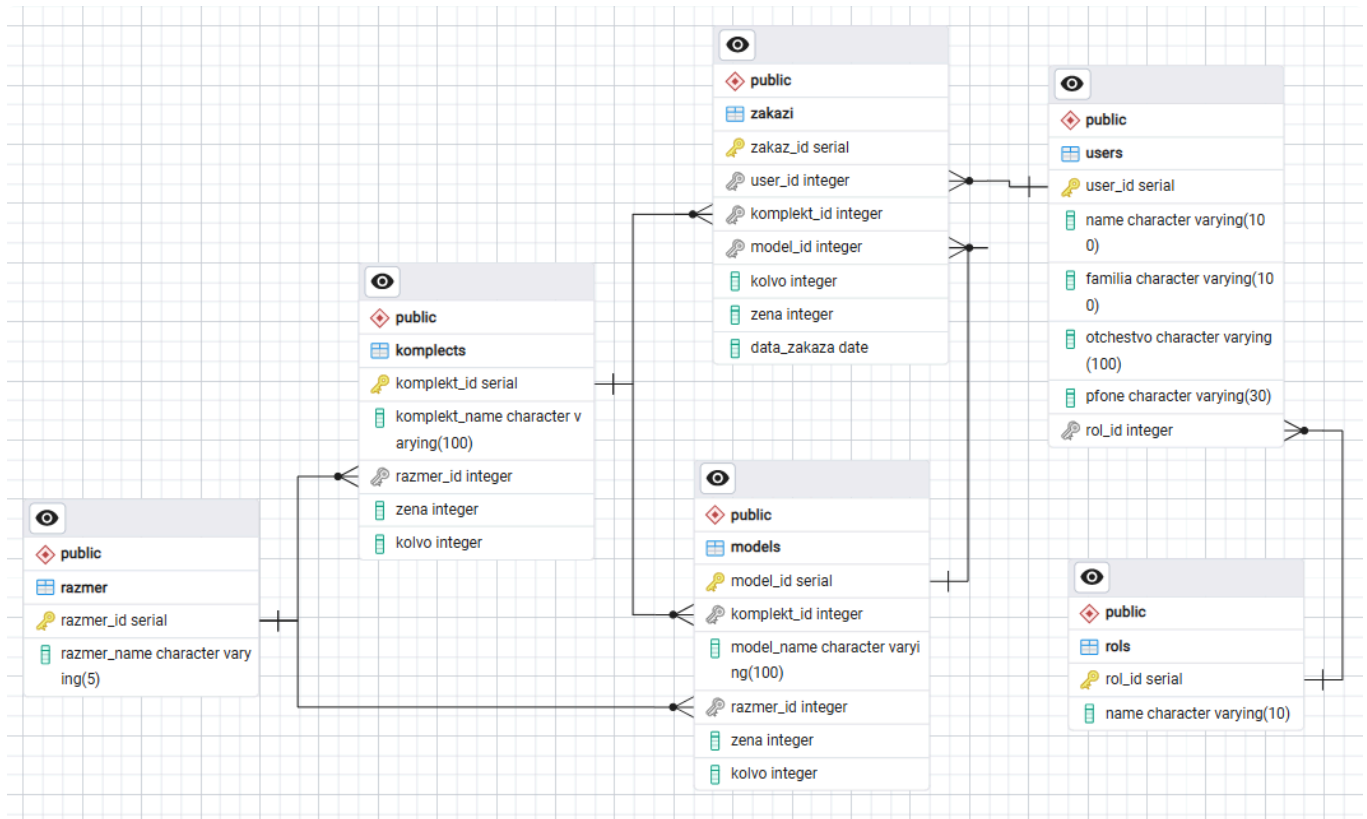

Вариант 3

```

create table rols (
    rol_id serial primary key,
    name varchar(10) not null
);

```

```


create table users (
    user_id serial primary key,
    name varchar(100) not null,
    familia varchar(100) not null,
    otchestvo varchar(100),
    pfone varchar(30) not null,
    rol_id int,
    foreign key (rol_id) references rols(rol_id)
);

```

```
create table rami (  
    ram_id serial primary key,  
    ram_name varchar(2) not null  
);
```

```
create table models (  
    model_id serial primary key,  
    model_name varchar(100) not null,  
    ram_id int,  
    kolvo int,  
    zena int,  
    foreign key (ram_id) references rami(ram_id)  
);
```

```
create table zakazi (  
    zakaz_id serial primary key,  
    user_id int not null,  
    model_id int not null,  
    kolvo int not null,  
    zena int not null,  
    data_zakaza date not null,  
    foreign key (user_id) references users(user_id),  
    foreign key (model_id) references models(model_id)  
);
```

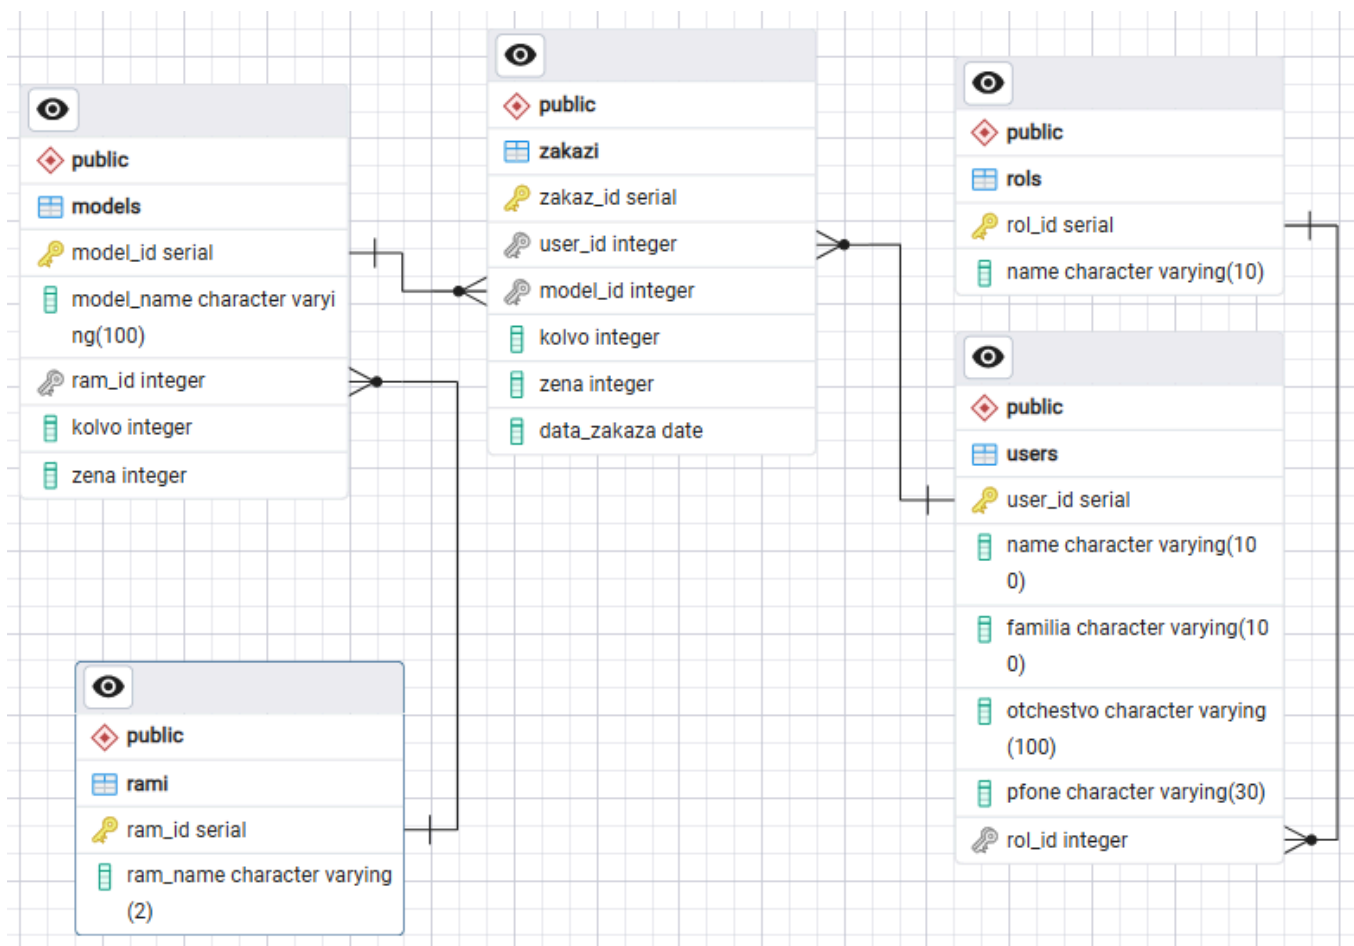

Вариант 4

```

create table rols (
    rol_id serial primary key,
    name varchar(10) not null
);
  
```

```

create table users (
    user_id serial primary key,
    name varchar(100) not null,
    familia varchar(100) not null,
    otchestvo varchar(100),
    pfone varchar(30) not null,
    rol_id int,
    foreign key (rol_id) references rols(rol_id)
);
  
```

```

create table vcusi (
    vcus_id serial primary key,
  
```

```
vcus_name varchar(100) not null  
);
```

```
create table models (  
  model_id serial primary key,  
  model_name varchar(100) not null,  
  vcus_id int,  
  ves varchar(20) not null,  
  kolvo int,  
  zena int not null,  
  foreign key (vcus_id) references vcusi(vcus_id)  
);
```

```
create table zakazi (  
  zakaz_id serial primary key,  
  user_id int not null,  
  model_id int not null,  
  kolvo int not null,  
  zena int not null,  
  data_zakaza date not null,  
  foreign key (user_id) references users(user_id),  
  foreign key (model_id) references models(model_id)  
);
```




```
material_name varchar(100) not null  
);
```

```
create table razmer (  
    razmer_id serial primary key,  
    razmer_name varchar(5) not null  
);
```

```
create table models (  
    model_id serial primary key,  
    model_name varchar(100) not null,  
    material_id int,  
    razmer_id int,  
    kolvo int,  
    zena int not null,  
    foreign key (material_id) references materials(material_id),  
    foreign key (razmer_id) references razmer(razmer_id)  
);
```

```
create table zakazi (  
    zakaz_id serial primary key,  
    user_id int not null,  
    model_id int not null,  
    kolvo int not null,  
    zena int not null,  
    data_zakaza date not null,  
    foreign key (user_id) references users(user_id),  
    foreign key (model_id) references models(model_id)  
);
```

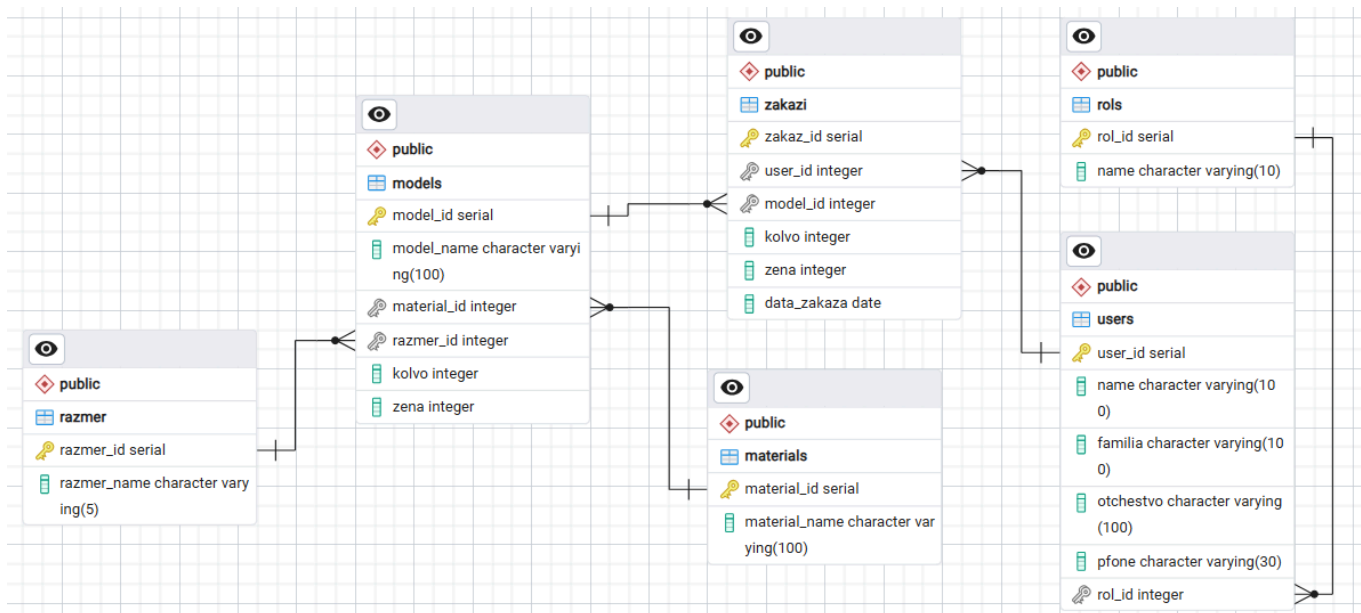

Вариант 6

```
create table rols (
    rol_id serial primary key,
    name varchar(10) not null
);
```

```
create table users (
    user_id serial primary key,
    name varchar(100) not null,
    familia varchar(100) not null,
    otchestvo varchar(100),
    pfone varchar(30) not null,
    rol_id int,
    foreign key (rol_id) references rols(rol_id)
);
```

```
create table hotels (
    hotel_id serial primary key,
    hotel_name varchar(100) not null,
    strana varchar(100) not null,
    gorod varchar(100) not null
);
```

```
create table kategorii (  
    kategoria_id serial primary key,
```

```
    kategoria_name varchar(100) not null  
);
```

```
create table nomera (  
    nomer_id serial primary key,  
    nomer_num int not null,  
    kategoria_id int,  
    zena int not null,  
    hotel_id int,  
    foreign key (hotel_id) references hotels(hotel_id),  
    foreign key (kategoria_id) references kategorii(kategoria_id)  
);
```

```
create table tip_pitania (  
    tip_pitania_id serial primary key,  
    tip_pitania_name varchar(2) not null,  
    zena int not null  
);
```

```
create table zakazi (  
    zakaz_id serial primary key,  
    user_id int not null,  
    manager_id int not null,  
    hotel_id int not null,  
    nomer_id int not null,  
    tip_pitania_id int not null,  
    kolvo int not null,  
    zena int not null,  
    data_zakaza date not null,  
    foreign key (user_id) references users(user_id),  
    foreign key (manager_id) references users(user_id),  
    foreign key (hotel_id) references hotels(hotel_id),  
    foreign key (nomer_id) references nomera(nomer_id),  
    foreign key (tip_pitania_id) references tip_pitania(tip_pitania_id)  
);
```

